




Table C020-23/E

Pressure relief valves type ARE

direct operated, in line mounting

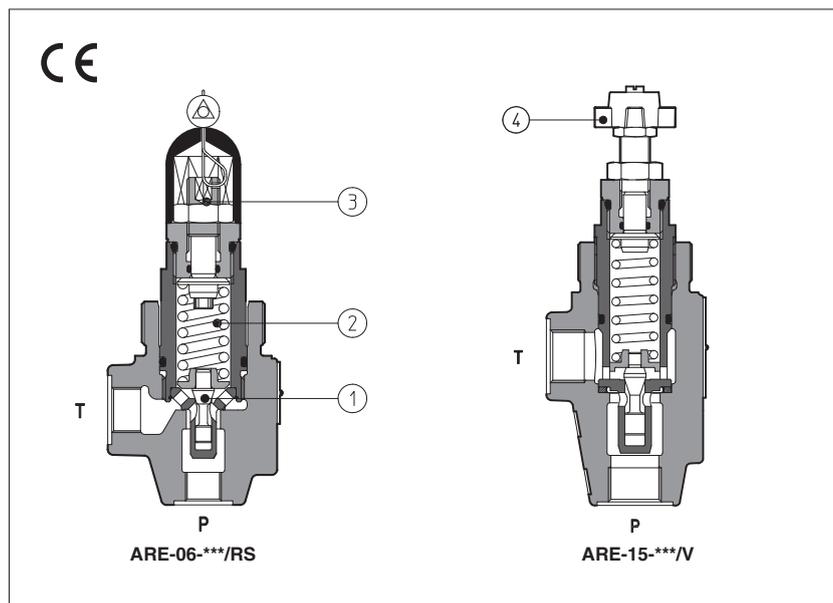

ARE are poppet type, directed operated pressure relief valves, with threaded ports for in line mounting.

The flow P→T is permitted when pressure force acting on the poppet (1) overcomes the force of the spring (2).

Regulation is operated by means of a screw (3) or optionally by means of a handwheel (4) acting on the spring.

Clockwise rotation increases the pressure.

These valves are available in two sizes, with port P=G 1/4" or G 1/2".

Option **RS**, conforms to the Machine Directive (2006/42/CE), with factory preset and lead sealed regulation.

The factory pressure setting required by the customer corresponds to the valve's cracking pressure.

Max flow: **100 l/min:**

Max pressure: ARE-06 up to **500 bar**

ARE-15 up to **420 bar**

1 MODEL CODE

ARE	-	06	/	350	/	RS	/	*	/	**	/	*
<p>ARE = pressure relief valve with thread connections</p> <p>Available also in cartridge execution, see tab. C010</p>										<p>Seals material, see section 4:</p> <p>- = NBR</p> <p>PE = FKM</p> <p>BT = HNBR</p>		
<p>Size:</p> <p>06 = port P G 1/4"</p> <p>15 = port P G 1/2"</p>										<p>Series number</p>		
<p>Max pressure: see section 3</p>										<p>Only for RS options:</p> <p>280 = factory pressure setting to be defined depending to the customer requirement (example 280 = 280 bar)</p>		
						<p>Options (2):</p> <p>R = leak free execution (2)</p> <p>RS = leak free execution plus lead sealed regulation conforming to 2006/42/CE</p>						
						<p>Manual override only for standard and /R option:</p> <p>V = regulating handwheel</p> <p>VF = regulating knob</p> <p>VS = regulating knob with safety locking</p>						

For **PED** version see technical table CY020

(1) Possible combined options:

RV = reduced leakages and regulating handwheel

RVF = reduced leakages and regulating knob

RVS = reduced leakages and regulating knob with safety locking

2 HYDRAULIC SYMBOLS



3 HYDRAULIC CHARACTERISTICS





Valve model		ARE-06					ARE-15						
Max pressure setting [bar]	Standard	50	100	210	350	500	15	50	75	150	250	350	420
	/R	50	100	210	350	500	15	50	75	150	250	420	
	/RS	220	270	330	350	150	190	230					
Pressure range [bar]	Standard	2÷50	3÷100	10÷210	15÷350	30÷500	2÷15	3÷50	4÷75	8÷150	8÷250	30÷350	30÷420
	/R (1)	2÷50	3÷100	10÷210	15÷350	30÷500	2÷15	3÷50	4÷75	8÷150	8÷250	30÷420	
	/RS (1)	200÷250	250÷290	290÷350	310÷370	130÷170	170÷210	210÷250					
Max pressure port T [bar]		50					50						
Max flow [l/min]	Standard, /R	40					75						
	/RS	60					100						

(1) The values correspond to the min and max regulation of the valve's craking pressure

4 MAIN CHARACTERISTICS, SEALS AND FLUIDS - for other fluids not included in below table, consult our technical office

Assembly position	Any position		
Compliance	RoHS Directive 2011/65/EU as last update by 2015/65/EU REACH Regulation (EC) n°1907/2006		
Ambient temperature	Standard execution = -30°C ÷ +70°C /PE option = -20°C ÷ +70°C /BT option = -40°C ÷ +70°C		
Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +60°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C		
Recommended viscosity	15÷100 mm ² /s - max allowed range 2,8 ÷ 500 mm ² /s		
Fluid contamination class	ISO 4406 class 21/19/16 NAS 1638 class 10, in line filters of 25 µm (β ₂₅ ≥75 recommended)		
	Hydraulic fluid	Suitable seals type	Classification
Mineral oils		NBR, FKM, HNBR	HL, HLP, HLPD, HVLP, HVLPD
Flame resistant without water		FKM	HFDU, HFDR
Flame resistant with water		NBR, HNBR	HFC
			Ref. Standard
			DIN 51524
			ISO 12922

5 REGULATED PRESSURE VERSUS FLOW DIAGRAMS (based on mineral oil ISO VG 46 at 50°C)

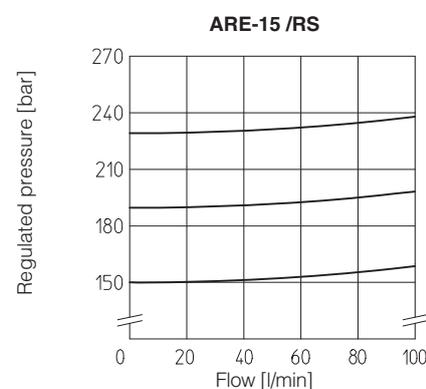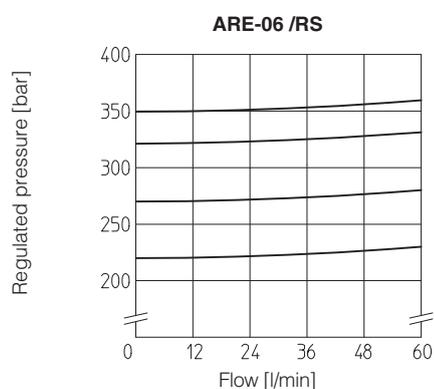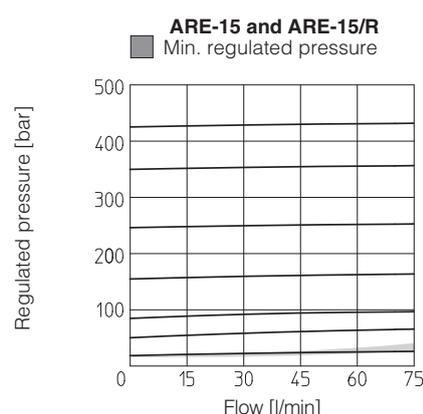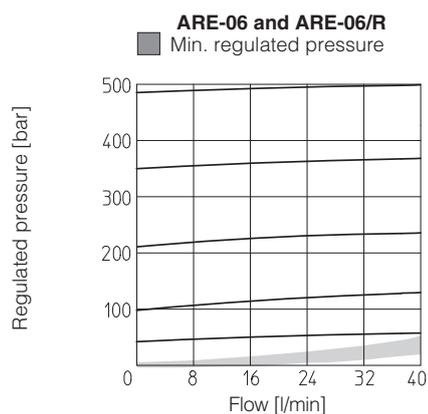

6 DIMENSIONS [mm]





ARE-06

P = INLET PORT G 1/4"


T = OUTLET PORT G 3/8"

Locking ring for fastening the valve.


Model code: SP-6-RE-310030

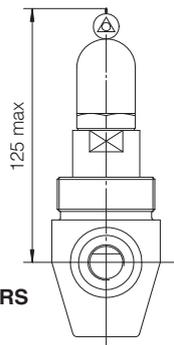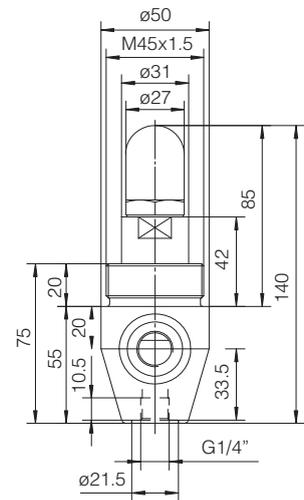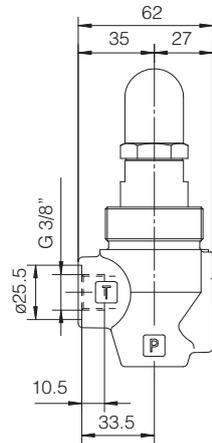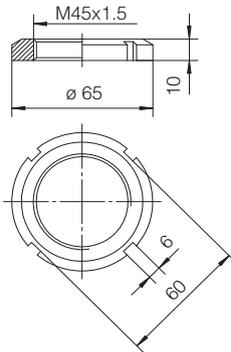

Option /RS

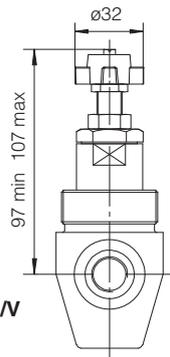

Option /V

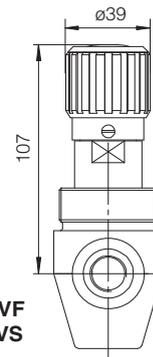

Option /VF
/VS

Mass: 1 Kg





ARE-15

P = INLET PORT G 1/2"


T = OUTLET PORT G 1/2"

Locking ring for fastening the valve.


Model code: SP-6-RE-310030

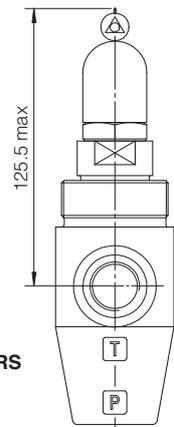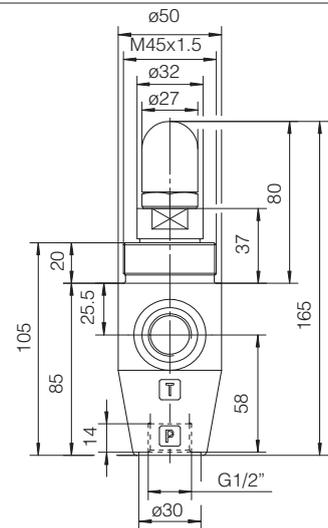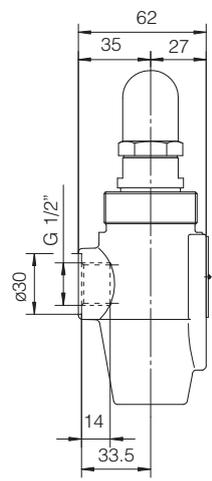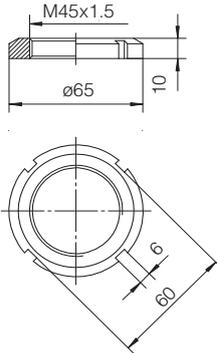

Option /RS

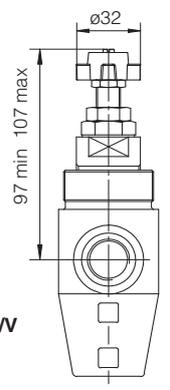

Option /V

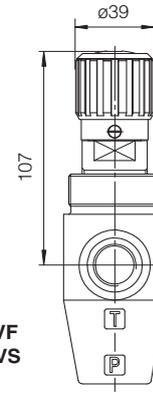

Option /VF
/VS

Mass: 1,3 Kg


Note:
For handwheel features, see technical table K150.



Table C045-22/E

Pressure relief valves type ARAM

two stage, in line mounting - G 3/4" and G 1 1/4" threaded ports

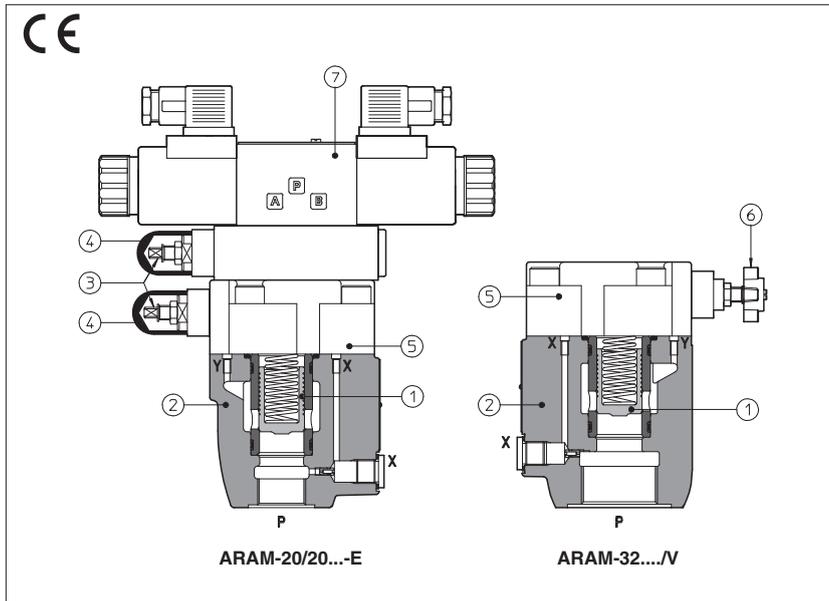

ARAM are two stage pressure relief valves with balanced poppet, designed with threaded ports for in-line mounting.

In standard versions the piloting pressure of the poppet (1) of the main stage (2) is regulated by means of a grub screw (3) protected by cap (4) installed in the cover (5).

Optional versions with setting adjustment by handwheel (6) instead of the grub screw are available on request. Clockwise rotation increases the pressure.

ARAM can be equipped with a pilot solenoid valve (7) for venting or for different pressure setting, type:

- DHI for AC and DC supply, with **cURus** certified solenoids
- DHE for AC and DC supply, high performances with **cURus** certified solenoids

Threaded ports: **G 3/4", G 1 1/4"**


Max flow: **350, 500 l/min**

Max pressure up to **350 bar**

1 MODEL CODE

ARAM	-	20	/	20	/	210	/	100/100	/	V	-	I	X	24DC	** /	*
<p>ARAM = pressure relief valve threaded port connections</p> <p>Size: 20= port P - G 3/4" 32= port P - G 1 1/4"</p> <p>Setting pressure and venting option (1): - = one setting pressure without option 10= one setting pressure with venting, with de-energized solenoid 11= one setting pressure with venting, with energized solenoid 20= two setting pressure with venting, with de-energized solenoid 21= two setting pressure with venting, with energized solenoid 22= two setting pressure without venting 32= three setting pressure without venting</p> <p>Setting: see section 3 for available setting</p> <p>Pressure range of second/third setting (1): 50 = 4÷50 bar 100 = 6÷100 bar 210 = 7÷210 bar 350 = 8÷350 bar</p> <p>For PED version see technical table CY045</p> <p>(1) Only for ARAM with solenoid valve for venting and/or for the selection of the setting pressure.</p>																
<p>X = without connector (1): See section 4 for available connectors, to be ordered separately -00 = solenoid valve without coils (for -I) -00-AC = AC solenoid valve without coils (for -E) -00-DC = DC solenoid valve without coils (for -E)</p> <p>Pilot valve (1): I = DHI for AC and DC supply, with cURus certified solenoids E = DHE for AC and DC supply, high performances with cURus certified solenoids</p> <p>Options, see section 5 E V WP Y</p>																
<p>Seals material, see section 4: - = NBR PE = FKM BT = HNBR</p> <p>Series number</p> <p>Voltage code, see section 7 (1):</p>																

2 HYDRAULIC SYMBOL

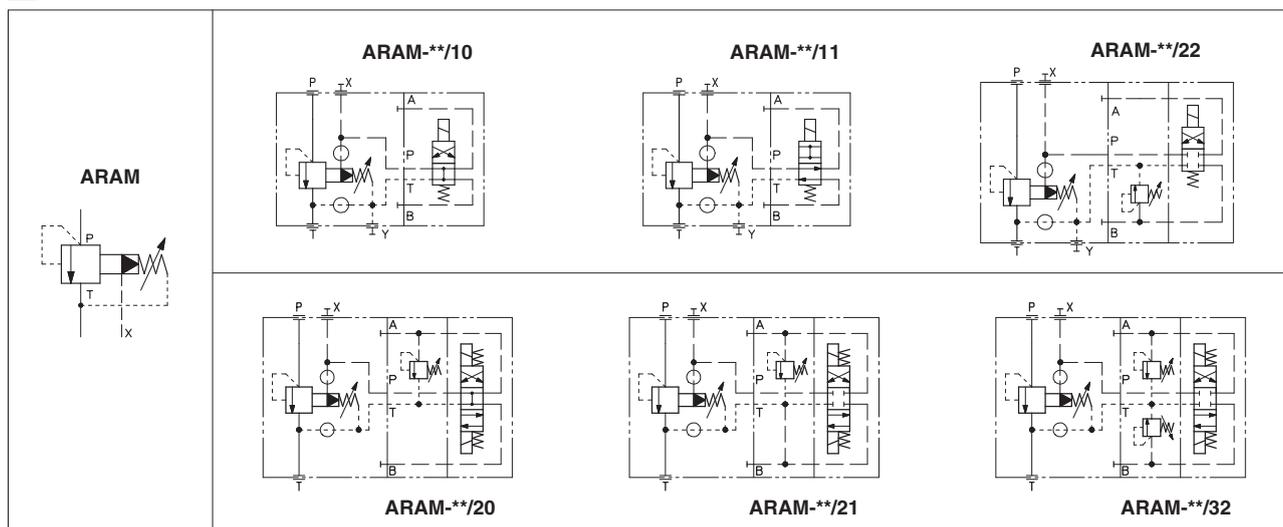

3 HYDRAULIC CHARACTERISTICS

Valve model	ARAM-20		ARAM-32	
Setting [bar]	50;	100;	210;	350
Pressure range [bar]	4÷50;	6÷100;	7÷210;	8÷350
Max pressure [bar]	ports P, X = 350 Ports T, Y = 210 (without pilot solenoid valve) For version with pilot solenoid valve, see technical tables E010 and E015			
Max flow [l/min]	350		500	

4 MAIN CHARACTERISTICS, SEALS AND FLUIDS - for other fluids not included in below table, consult our technical office

Assembly position	Any position		
Compliance	CE to Low Voltage Directive 2014/35/EU RoHS Directive 2011/65/EU as last update by 2015/65/EU REACH Regulation (EC) n°1907/2006		
Ambient temperature	Standard execution = -30°C ÷ +70°C /PE option = -20°C ÷ +70°C /BT option = -40°C ÷ +70°C		
Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +80°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C		
Recommended viscosity	15 ÷ 100 mm ² /s - max allowed range 2,8 ÷ 500 mm ² /s		
Fluid contamination class	ISO 4406 class 21/19/16 NAS 1638 class 10, in line filters of 25 µm (β ₂₅ ≥ 75 recommended)		
Hydraulic fluid	Suitable seals type	Classification	Ref. Standard
Mineral oils	NBR, FKM, HNBR	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HF DU, HF DR	ISO 12922
Flame resistant with water	NBR, HNBR	HFC	

4.1 Coils characteristics (for ARAM with pilot solenoid valve)

Insulation class	DHI pilot	H (180°C)	Due to the occurring surface temperatures of the solenoid coils, the European standards EN ISO 13732-1 and EN ISO 4413 must be taken into account
	DHE pilot	H (180°C) for DC coils F (155°C) for AC coils	
Protection degree to DIN EN 60529	IP 65 (with connectors 666, 667, 669 or E-SD correctly assembled)		
Relative duty factor	100%		
Supply voltage and frequency	See electric feature 7		
Supply voltage tolerance	± 10%		
Certification	cURus North American standard		

5 OPTIONS

- /E** = external pilot
- /V** = regulating handwheel instead of grub screw protected by cap (for handwheel features, see table K150)
- /WP** = prolonged manual override protected by rubber cap (only for ARAM with pilot solenoid valve)
- /Y** = external drain (only for ARAM with pilot solenoid valve)

6 ELECTRIC CONNECTORS ACCORDING TO DIN 43650 FOR ARAM WITH SOLENOID VALVE

The connectors must be ordered separately

Code of connector	Function
666	Connector IP-65, suitable for direct connection to electric supply source
667	As 666 connector IP-65 but with built-in signal led, suitable for direct connection to electric supply source



For other available connectors see tab. E010 and K500

7 ELECTRIC FEATURES FOR AGAM WITH SOLENOID VALVE



Solenoid valve type	External supply nominal voltage ± 10% (1)		Voltage code	Type of connector	Power consumption (3)		Code of spare coil DHI	Colour of coil label DHI	Code of spare coil DHE
					DHI	DHE			
DHI DHE	DC	12 DC 24 DC 110 DC 220 DC	12 DC 24 DC 110 DC 220 DC	666 or 667	33 W	30 W	COU-12DC COU-24DC COU-110DC COU-220DC	green red black black	COE-12DC COE-24DC COE-110DC COE-220DC
		AC	110/50 AC (2) 115/60 AC 120/60 AC 230/50 AC (2) 230/60 AC	110/50/60 AC 115/60 AC (5) 120/60 AC (6) 230/50/60 AC 230/60 AC	666 or 667	60 VA -	58 VA 80 VA	COI-110/50/60AC -	yellow -
60 VA 60 VA 60 VA 60 VA	- -		COI-120/60AC COI-230/50/60AC COI-230/60AC	white light blue silver	COE-230/50/60AC COE-230/60AC				

- (1) For other supply voltages available on request see technical tables E010, E015.
- (2) Coil can be supplied also with 60 Hz of voltage frequency: in this case the performances are reduced by 10 ÷ 15% and the power consumption is 55 VA (DHI) and 58 VA
- (3) Average values based on tests performed at nominal hydraulic condition and ambient/coil temperature of 20°C.
- (4) When solenoid is energized, the inrush current is approx 3 times the holding current.
- (5) Only for DHE
- (6) Only for DHI

8 REGULATED PRESSURE VERSUS FLOW DIAGRAMS based on mineral oil ISO VG 46 at 50°C

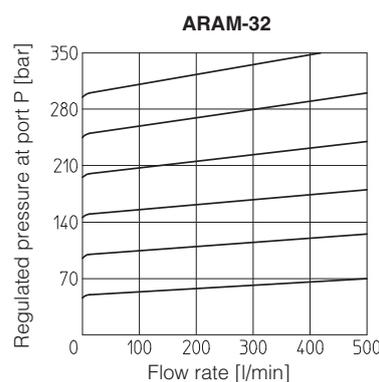
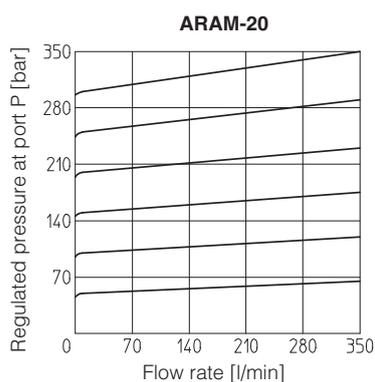


9 MINIMUM PRESSURE VERSUS FLOW DIAGRAMS based on mineral oil ISO VG 46 at 50°C

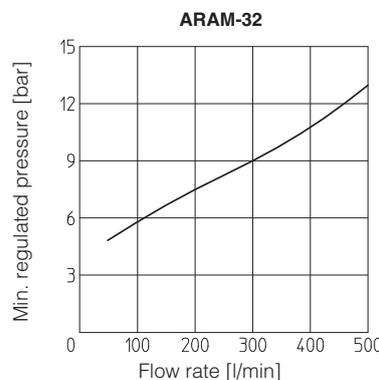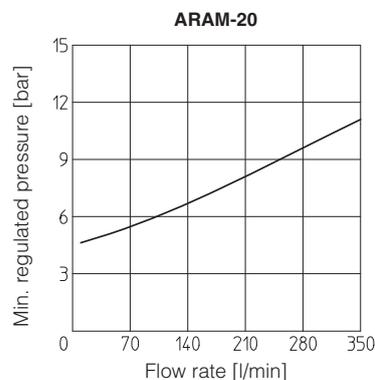


10 DIMENSIONS [mm]


ARAM-20

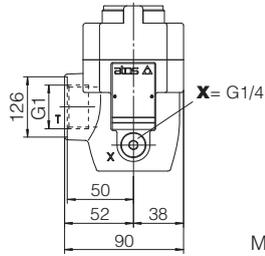

Mass: 3,9 Kg

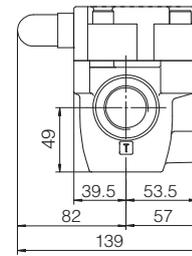


X = port connection for external pilot
Y = port connection for external drain

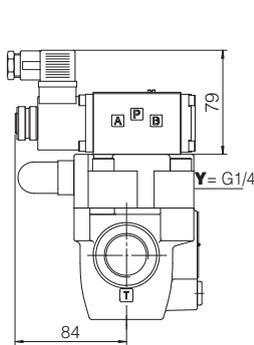


ARAM-20/10/**-IX
ARAM-20/11/**-IX

Mass: 5,4 Kg

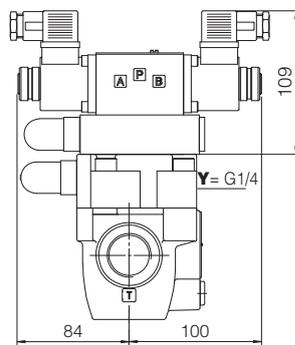


ARAM-20/20/**-IX
ARAM-20/21/**-IX

Mass: 7,1 Kg

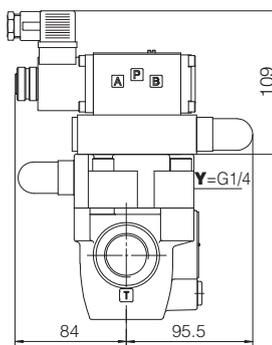


ARAM-20/22/**-IX

Mass: 6,8 Kg

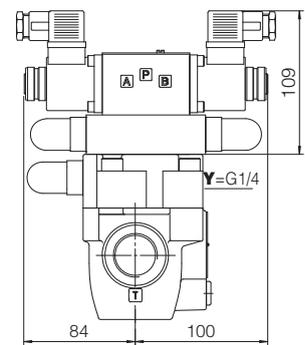


ARAM-20/32/**-IX

Mass: 7,4 Kg

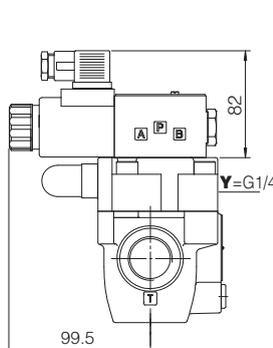


ARAM-20/10/**-EX
ARAM-20/11/**-EX

Mass: 5,7 Kg

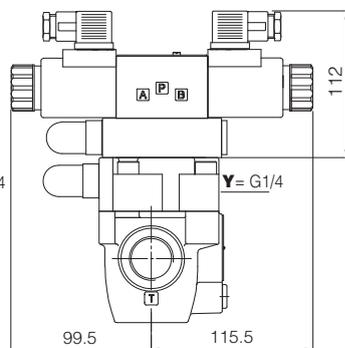


ARAM-20/20/**-EX
ARAM-20/21/**-EX

Mass: 7,7 Kg

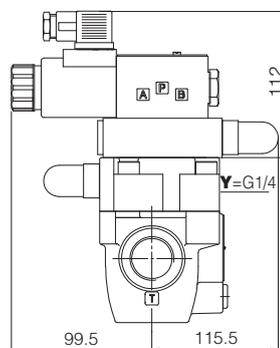

ARAM-20/22/**-EX

Mass: 7,2 Kg

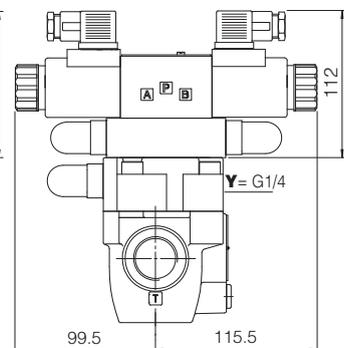


ARAM-20/32/**-EX

Mass: 8 Kg


Overall dimensions refer to valves with connectors type 666

ARAM-32

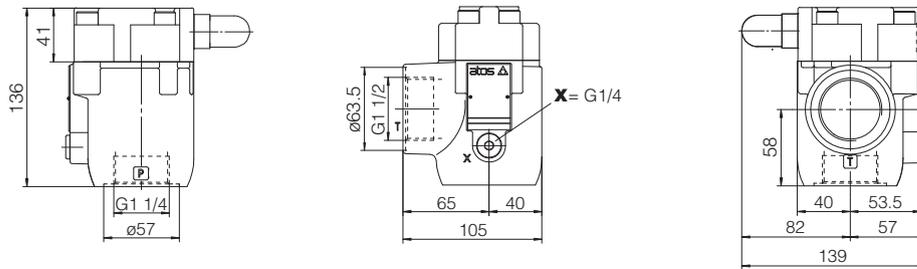


X = port connection for external pilot
Y = port connection for external drain

Mass: 4,7 Kg

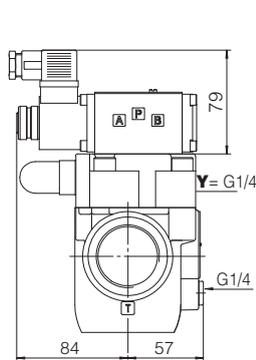


ARAM-32/10/-IX**
ARAM-32/11/-IX**

Mass: 6,2 Kg

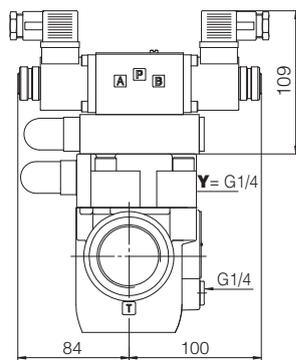


ARAM-32/20/-IX**
ARAM-32/21/-IX**

Mass: 7,9 Kg

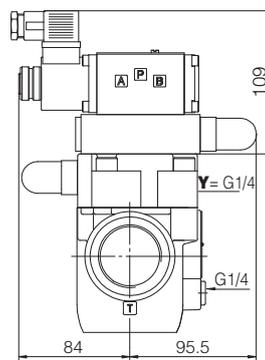


ARAM-32/22/-IX**

Mass: 7,6 Kg

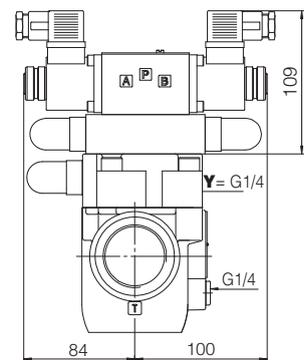


ARAM-32/32/-IX**

Mass: 8,2 Kg

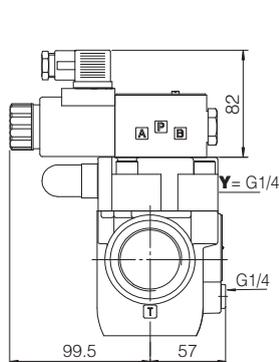


ARAM-32/10/-EX**
ARAM-32/11/-EX**

Mass: 6,5 Kg

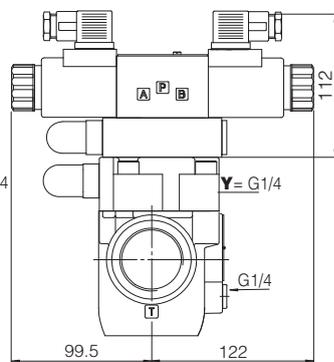


ARAM-32/20/-EX**
ARAM-32/21/-EX**

Mass: 8,5 Kg

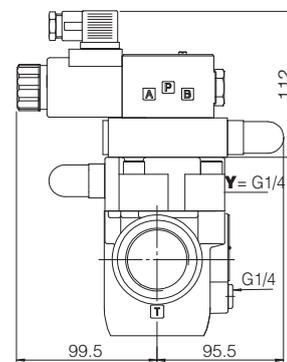

ARAM-32/22/-EX**

Mass: 7,9 Kg

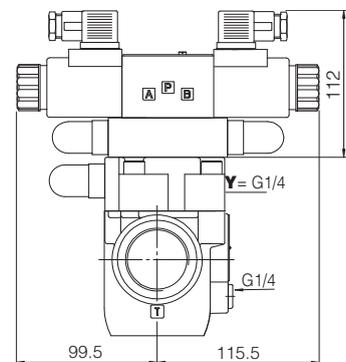

ARAM-32/32/-EX**

Mass: 8,8 Kg


Overall dimensions refer to valves with connectors type 666



Table C066-21/E

Pressure relief valves type AGAM

two stage, subplate mounting - ISO 6264 size 10, 20 and 32

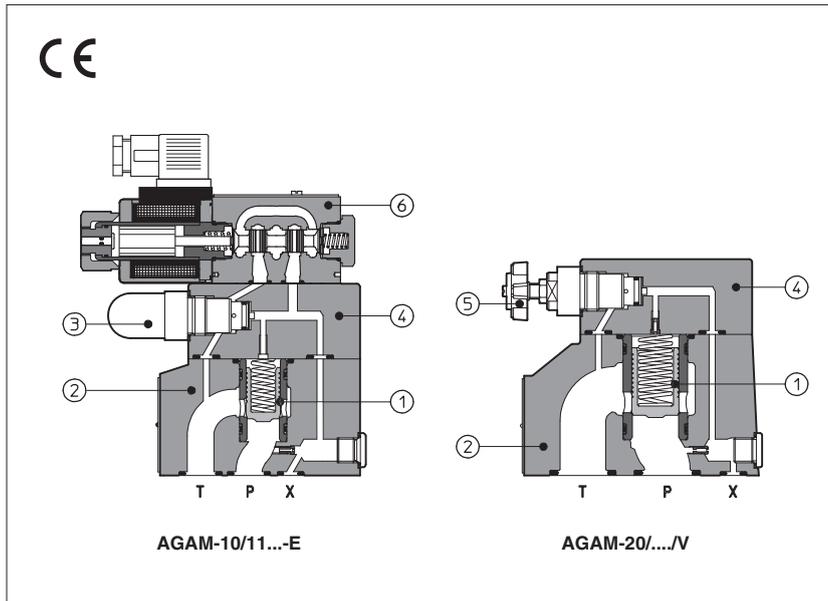

AGAM are two stage pressure relief valves with balanced poppet, designed to operate in oil hydraulic systems.

In standard versions the piloting pressure of the poppet (1) of the main stage (2) is regulated by means of a grub screw (2) in the cover (4).

Optional versions with setting adjustment by handwheel (5) instead of the grub screw are available on request.

Clockwise rotation increases the pressure.

AGAM can be equipped with a pilot solenoid valve (6) for venting or for different pressure setting type:

- DHI for AC and DC supply, with **cURus** certified solenoids
- DHE for AC and DC supply, high performances with **cURus** certified solenoids

Mounting surface: **ISO 6264 size 10, 20 and 32**

Max flow: **200, 400 and 600 l/min**

Max pressure up to **350 bar**


1 MODEL CODE

AGAM	-	20	/	20	/	210	/	100/100	/	V	-	I		X		24DC	**	/	*
<p>AGAM = pressure relief valve subplate mounting</p> <p>Size: 10 20 32</p> <p>Setting pressure and venting option: - = one setting pressure without option 10 = one setting pressure with venting, with de-energized solenoid 11 = one setting pressure with venting, with energized solenoid 20 = two setting pressure with venting, with de-energized solenoid 21 = two setting pressure with venting, with energized solenoid 22 = two setting pressure without venting 32 = three setting pressure without venting</p> <p>Setting: see section 3 for available setting (1)</p> <p>Pressure range of second/third setting (1): 50 = 4÷50 bar 100 = 6÷100 bar 210 = 7÷210 bar 350 = 8÷350 bar</p> <p>Setting pressure and venting option: - = one setting pressure without option 10 = one setting pressure with venting, with de-energized solenoid 11 = one setting pressure with venting, with energized solenoid 20 = two setting pressure with venting, with de-energized solenoid 21 = two setting pressure with venting, with energized solenoid 22 = two setting pressure without venting 32 = three setting pressure without venting</p> <p>Setting: see section 3 for available setting (1)</p> <p>Pressure range of second/third setting (1): 50 = 4÷50 bar 100 = 6÷100 bar 210 = 7÷210 bar 350 = 8÷350 bar</p> <p>Setting pressure and venting option: - = one setting pressure without option 10 = one setting pressure with venting, with de-energized solenoid 11 = one setting pressure with venting, with energized solenoid 20 = two setting pressure with venting, with de-energized solenoid 21 = two setting pressure with venting, with energized solenoid 22 = two setting pressure without venting 32 = three setting pressure without venting</p> <p>Setting: see section 3 for available setting (1)</p> <p>Pressure range of second/third setting (1): 50 = 4÷50 bar 100 = 6÷100 bar 210 = 7÷210 bar 350 = 8÷350 bar</p> <p>Setting pressure and venting option: - = one setting pressure without option 10 = one setting pressure with venting, with de-energized solenoid 11 = one setting pressure with venting, with energized solenoid 20 = two setting pressure with venting, with de-energized solenoid 21 = two setting pressure with venting, with energized solenoid 22 = two setting pressure without venting 32 = three setting pressure without venting</p> <p>Setting: see section 3 for available setting (1)</p> <p>Pressure range of second/third setting (1): 50 = 4÷50 bar 100 = 6÷100 bar 210 = 7÷210 bar 350 = 8÷350 bar</p>																			
																		<p>Seals material, see section 4:</p> <p>- = NBR PE = FKM BT = HNBR</p>	
																		<p>Series number</p>	
																		<p>Voltage code, see section 8 (1):</p>	
																		<p>X = without connector (1): See section 7 for available connectors, to be ordered separately</p> <p>-00 = solenoid valve without coils (for -I) -00-AC = AC solenoid valve without coils (for -E) -00-DC = DC solenoid valve without coils (for -E)</p>	
																		<p>Pilot valve (1): I = DHI for AC and DC supply, with cURus certified solenoids E = DHE for AC and DC supply, high performances with cURus certified solenoids</p>	
																		<p>Options, see section 5 E V WP Y</p>	

For **PED** version see technical table CY066

(1) Only for AGAM with solenoid valve for venting and/or for the selection of the setting pressure

2 HYDRAULIC SYMBOLS

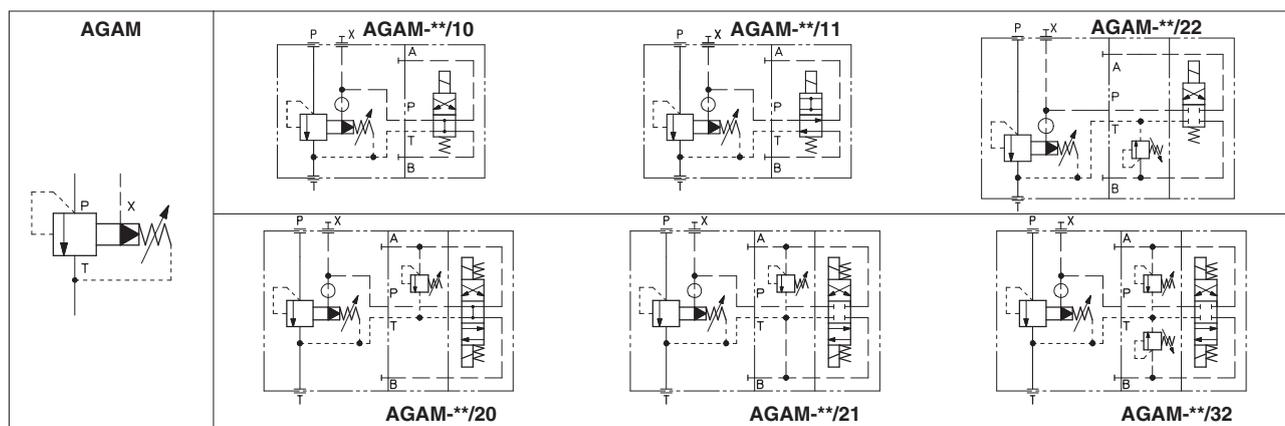

3 HYDRAULIC CHARACTERISTICS

Valve model	AGAM-10	AGAM-20	AGAM-32
Setting [bar]	50; 100; 210; 350		
Pressure range [bar]	4÷50; 6÷100; 7÷210; 8÷350		
Max pressure [bar]	ports P, X = 350 Ports T, Y = 210 (without pilot solenoid valve) For version with pilot solenoid valve, see technical tables E010 and E015		
Max flow [l/min]	200	400	600

4 MAIN CHARACTERISTICS, SEALS AND FLUIDS - for other fluids not included in below table, consult our technical office

Assembly position	Any position		
Subplate surface finishing	Roughness index Ra 0,4 - flatness ratio 0,01/100 (ISO 1101)		
Compliance	CE to Low Voltage Directive 2014/35/EU RoHS Directive 2011/65/EU as last update by 2015/65/EU REACH Regulation (EC) n°1907/2006		
Ambient temperature	Standard execution = -30°C ÷ +70°C /PE option = -20°C ÷ +70°C /BT option = -40°C ÷ +70°C		
Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +80°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C		
Recommended viscosity	15÷100 mm ² /s - max allowed range 2,8 ÷ 500 mm ² /s		
Max fluid contamination level	ISO4406 class 20/18/15 NAS1638 class 9, see also filter section at www.atos.com or KTF catalog		
Hydraulic fluid	Suitable seals type	Classification	Ref. Standard
Mineral oils	NBR, FKM, HNBR	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HFDU, HFDR	ISO 12922
Flame resistant with water	NBR, HNBR	HFC	

4.1 Coils characteristics (for AGAM with pilot solenoid valve)

Insulation class	DHI pilot	H (180°C)	Due to the occurring surface temperatures of the solenoid coils, the European standards EN ISO 13732-1 and EN ISO 4413 must be taken into account
	DHE pilot	H (180°C) for DC coils F (155°C) for AC coils	
Protection degree to DIN EN 60529	IP 65 (with connectors 666, 667, 669 or E-SD correctly assembled)		
Relative duty factor	100%		
Supply voltage and frequency	See electric feature		
Supply voltage tolerance	± 10%		
Certification	cURus North American standard		

5 OPTIONS

- /E** = external pilot
- /N** = regulating handwheel instead of grub screw protected by cap (for handwheel features, see table K150)
- /WP** = prolonged manual override protected by rubber cap (only for AGAM with pilot solenoid valve)

6 ELECTRIC CONNECTORS ACCORDING TO DIN 43650 FOR AGAM WITH SOLENOID VALVE

The connectors must be ordered separately

Code of connector	Function
666	Connector IP-65, suitable for direct connection to electric supply source
667	As 666 connector IP-65 but with built-in signal led, suitable for direct connection to electric supply source

For other available connectors, see tab. E010 and K500

7 ELECTRIC FEATURES FOR AGAM WITH SOLENOID VALVE

Solenoid valve type	External supply nominal voltage ± 10% (1)		Voltage code	Type of connector	Power consumption (3)		Code of spare coil DHI	Colour of coil label DHI	Code of spare coil DHE
					DHI	DHE			
DHI DHE	DC	12 DC 24 DC 110 DC 220 DC	12 DC 24 DC 110 DC 220 DC	666 or 667	33 W	30 W	COU-12DC COU-24DC COU-110DC COU-220DC	green red black black	COE-12DC COE-24DC COE-110DC COE-220DC
		AC	110/50 AC (2) 115/60 AC 120/60 AC 230/50 AC (2) 230/60 AC	110/50/60 AC 115/60 AC (5) 120/60 AC (6) 230/50/60 AC 230/60 AC	666 or 667	60 VA - 60 VA 60 VA 60 VA	58 VA 80 VA - 58 VA 80 VA	COI-110/50/60AC - COI-120/60AC COI-230/50/60AC COI-230/60AC	yellow - white light blue silver

(1) For other supply voltages available on request see technical tables E010, E015.

(2) Coil can be supplied also with 60 Hz of voltage frequency: in this case the performances are reduced by 10 ÷ 15% and the power consumption is 55 VA (DHI) and 58 VA




(3) Average values based on tests performed at nominal hydraulic condition and ambient/coil temperature of 20°C.

(4) When AC solenoid is energized, the inrush current is approx 3 times the holding current.




(5) Only for DHE

(6) Only for DHI




8 REGULATED PRESSURE VERSUS FLOW DIAGRAMS based on mineral oil ISO VG 46 at 50°C

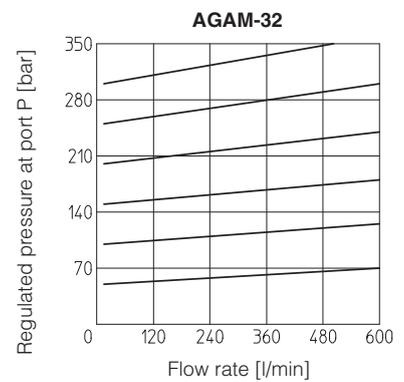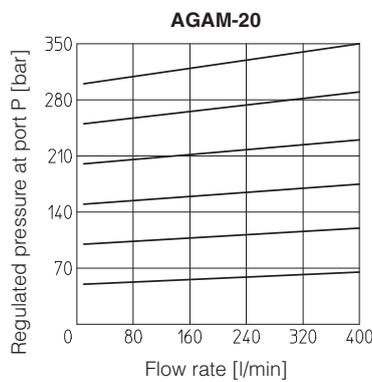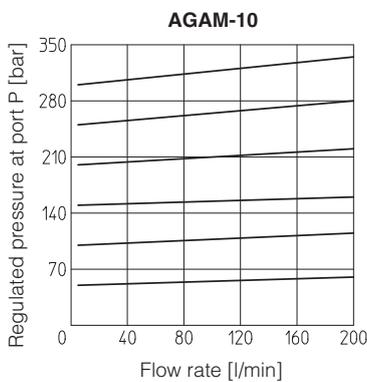

9 PERMISSIBLE RANGE (shared area) based on mineral oil ISO VG 46 at 50°C

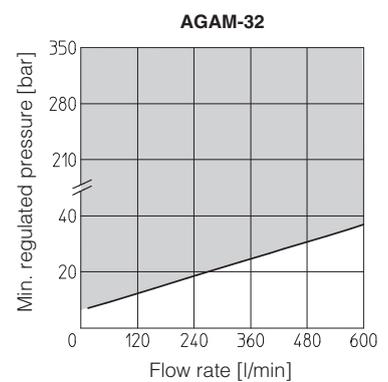
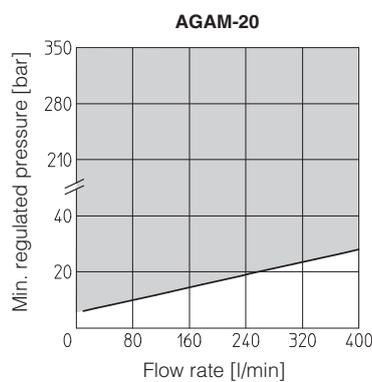
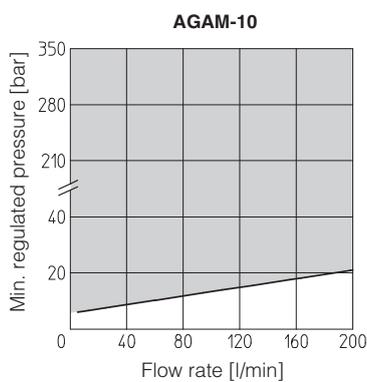


10 MINIMUM PRESSURE VERSUS FLOW DIAGRAMS based on mineral oil ISO VG 46 at 50°C

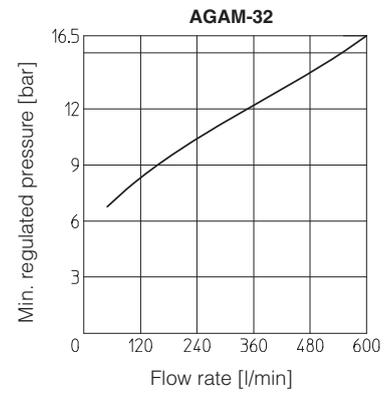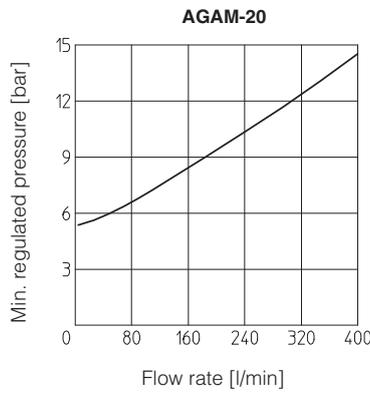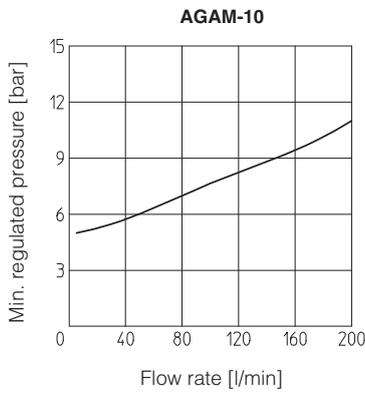


11 DIMENSIONS [mm]


AGAM-10

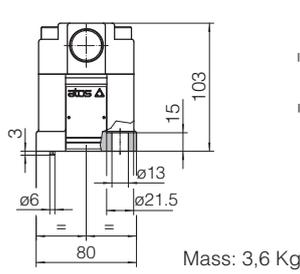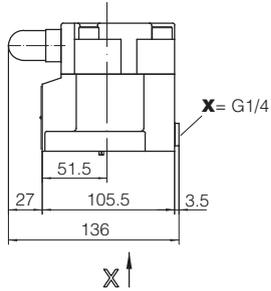


ISO 6264: 2007
Mounting surface: 6264-06-09-1-97
 Fastening bolts:
 4 socket head screws
 M12x35 class 12.9
 Tightening torque = 125 Nm
 Seals: 2 OR 123; 1 OR 109/70
 Ports P, T: Ø = 14,5 mm
 Ports X: Ø = 3,2 mm

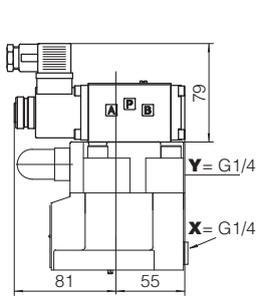


AGAM-10/10-IX**
AGAM-10/11-IX**
 Mass: 5,1 Kg

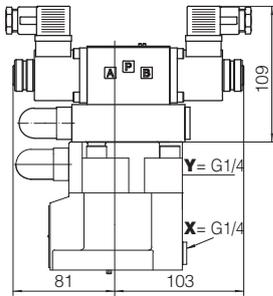


AGAM-10/20-IX**
AGAM-10/21-IX**
 Mass: 6,2 Kg

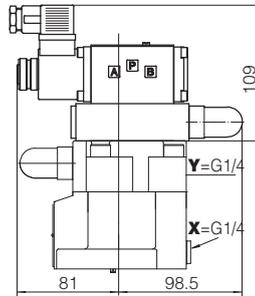


AGAM-10/22-IX**
 Mass: 5,9 Kg

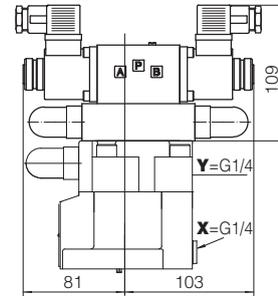


AGAM-10/32-IX**
 Mass: 6,3 Kg

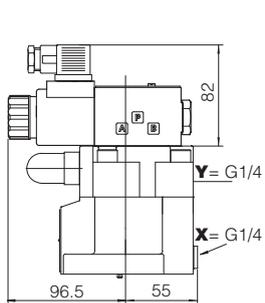


AGAM-10/10-EX**
AGAM-10/11-EX**
 Mass: 5,1 Kg

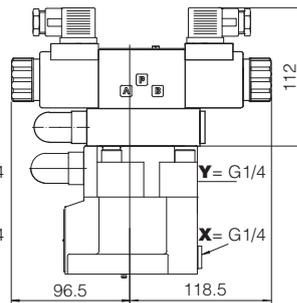

AGAM-10/20-EX**
AGAM-10/21-EX**
 Mass: 6,2 Kg

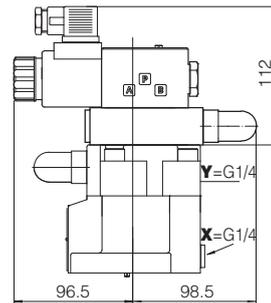



AGAM-10/22-EX**
 Mass: 5,9 Kg

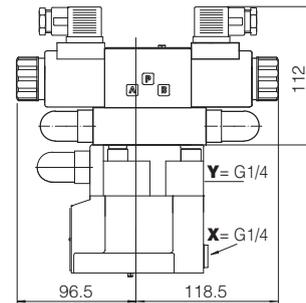


AGAM-10/32-EX**
 Mass: 6,3 Kg

Overall dimensions refer to valves with connectors type 666

AGAM-20

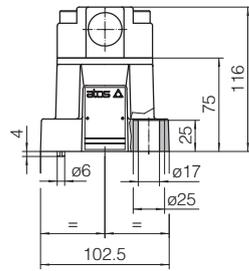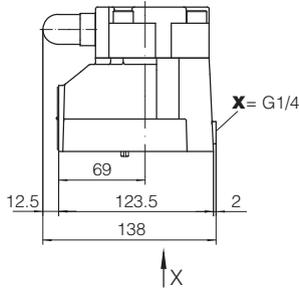

Mass: 4,8Kg

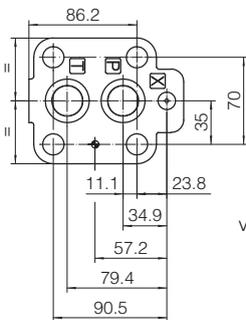

view from X

ISO 6264: 2007

Mounting surface: 6264-08-11-1-97

Fastening bolts:


4 socket head screws M16x50 class 12.9

Tightening torque = 300 Nm

Seals: 2 OR 4112; 1 OR 109/70


Ports P, T: Ø = 24 mm

Ports X: Ø = 3,2 mm

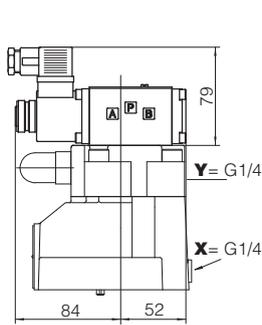


AGAM-20/10/-IX**
AGAM-20/11/-IX**

Mass: 6,3 Kg

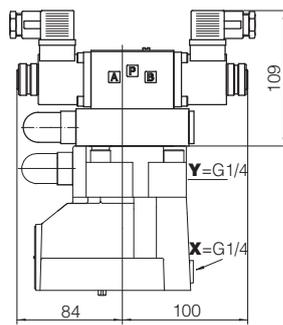


AGAM-20/20/-IX**
AGAM-20/21/-IX**

Mass: 7,4Kg

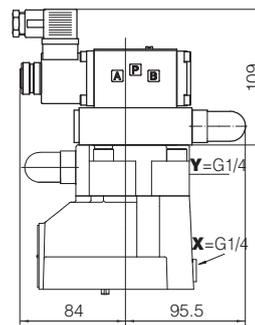


AGAM-20/22/-IX**

Mass: 7,1 Kg

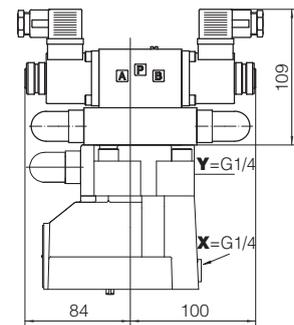


AGAM-20/32/-IX**

Mass: 7,5 Kg

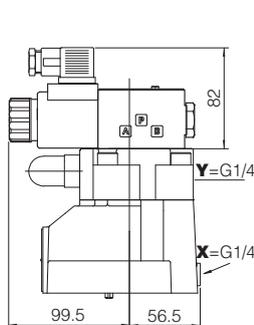


AGAM-20/10/-EX**
AGAM-20/11/-EX**

Mass: 6,3 Kg

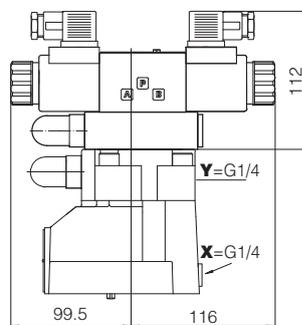


AGAM-20/20/-EX**
AGAM-20/21/-EX**

Mass: 7,4 Kg

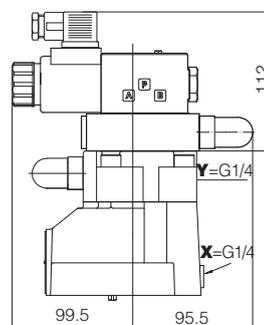

AGAM-20/22/-EX**

Mass: 7,1 Kg

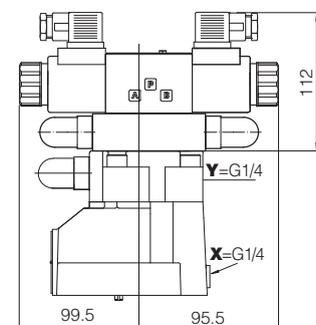

AGAM-20/32/-EX**

Mass: 7,5 Kg


Overall dimensions refer to valves with connectors type 666



Table C073-16/E

Pressure relief valves type REM

two stage, flange mounting SAE 3/4", 1", 1 1/4"

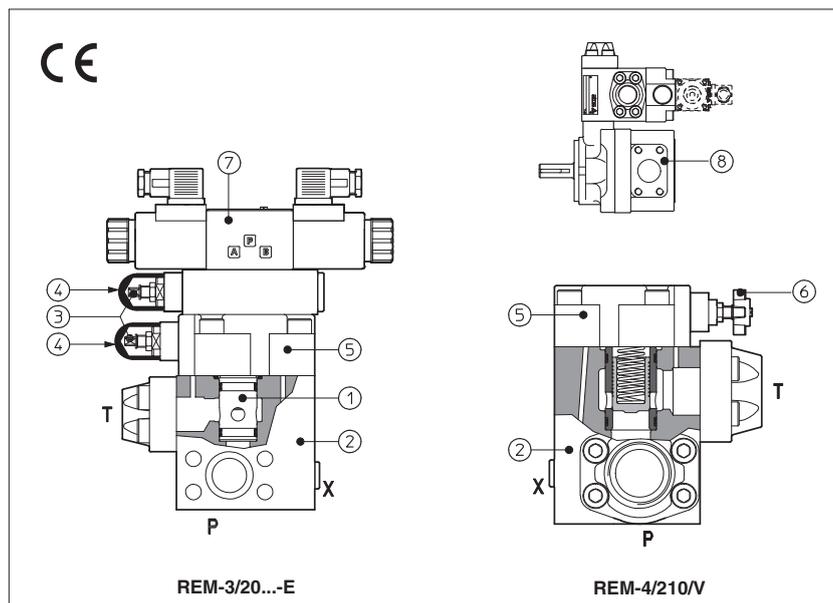

REM are two stage pressure relief valves with balanced poppet and SAE flange connection, designed to operate in oil hydraulic systems.

They can be directly mounted with SAE flange attachments on the pumps outlet ports ⑧ and, in particular, on the PFE pumps (see tab. A005, A007).

In standard versions the piloting pressure of the poppet ① of the main stage ② is regulated by means of a grub screw ③ protected by cap ④ in the cover ⑤.

Optional versions with setting adjustment by handwheel ⑥ instead of the grub screw are available on request.

Clockwise rotation increases the pressure.

REM can be equipped with a venting solenoid valve ⑦ type:

- DHI for AC and DC supply, with cURus certified solenoids
- DHE for AC and DC supply, high performances, with cURus certified solenoids

Mounting surface:

SAE flange connection: 3/4", 1", 1 1/4"








Max flow: 200, 400 and 600 l/min respectively
Pressure up to 350 bar (depending on models)

1 MODEL CODE

REM	-	4	/	20		210	/	100/100	/	V	-	I		X		24DC	**	/	*
REM = pressure relief valve SAE flange mounting																		Seals material, see section 4: - = NBR PE = FKM BT = HNBR	
Size: 3 = SAE 3/4" 4 = SAE 1" 5 = SAE 1 1/4"																		Series number	
Setting pressure and venting option (1): - = one setting pressure without option 10 = one setting pressure with venting, with de-energized solenoid 11 = one setting pressure with venting, with energized solenoid 20 = two setting pressure with venting, with de-energized solenoid 21 = two setting pressure with venting, with energized solenoid 22 = two setting pressure without venting 32 = three setting pressure without venting																		Voltage code, see section 7	
Pressure range: 50 = 4÷50 bar; 100 = 6÷100 bar; 210 = 7÷210 bar; 350 = 8÷350 bar (only for REM-3)																		X = without connector (1): See section 7 for available connectors, to be ordered separately -00 = solenoid valve without coils (for -I) -00-AC = AC solenoid valve without coils (for -E) -00-DC = DC solenoid valve without coils (for -E)	
Pressure range of second/third setting (1): 50 = 4÷50 bar; 100 = 6÷100 bar; 210 = 7÷210 bar; 350 = 8÷350 bar (only for REM-3)																		Pilot valve (1): -I = DHI for AC and DC supply with cURus certified solenoids -E = DHE for AC and DC supply, high performances with cURus certified solenoids	
																		Options (2): WP = prolonged manual override protected by rubber cap (1) V = regulating by handwheel instead of a grub screw protected by cap	

(1) Only for REM with solenoid valve for venting and/or for the selection of the setting pressure
(2) For handwheel features, see technical table K150

2 HYDRAULIC CHARACTERISTICS

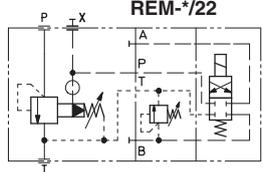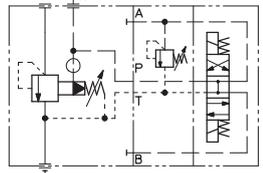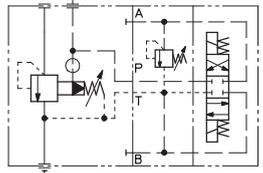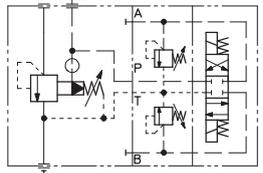			
			
Valve model	REM-3	REM-4	REM-5
Max flow [l/min]	200	400	600
Pressure range [bar]	4-50; 6-100; 7-210; 8-350	4-50; 6-100; 7-210	
Max pressure [bar]	ports P, X = 350 Port T = 210 (without pilot solenoid valve) For version with pilot solenoid valve, see technical tables E010 and E015		




3 MAIN CHARACTERISTICS, SEALS AND FLUIDS - for other fluids not included in above table, consult our technical office

Assembly position	Any position		
Compliance	RoHS Directive 2011/65/EU as last update by 2015/65/EU REACH Regulation (EC) n°1907/2006		
Ambient temperature	Standard execution = -30°C ÷ +70°C /PE option = -20°C ÷ +70°C /BT option = -40°C ÷ +70°C		
Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +80°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C		
Recommended viscosity	15÷100 mm²/s - max allowed range 2,8 ÷ 500 mm²/s		
Max fluid contamination level	ISO4406 class 20/18/15 NAS1638 class 9, see also filter section at www.atos.com or KTF catalog		
Hydraulic fluid	Suitable seals type	Classification	Ref. Standard
Mineral oils	NBR, FKM, HNBR	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HFDR, HFDR	ISO 12922
Flame resistant with water	NBR, HNBR	HFC	




3.1 Coils characteristics (for ARAM with pilot solenoid valve)

Insulation class	DHI pilot	H (180°C)	Due to the occurring surface temperatures of the solenoid coils, the European standards EN ISO 13732-1 and EN ISO 4413 must be taken into account
	DHE pilot	H (180°C) for DC coils F (155°C) for AC coils	
Protection degree to DIN EN 60529	IP 65 (with connectors 666, 667, 669 or E-SD correctly assembled)		
Relative duty factor	100%		
Supply voltage and frequency	See electric feature 		
Supply voltage tolerance	± 10%		
Certification	cURus North American standard		

4 REGULATED PRESSURE VERSUS FLOW DIAGRAMS based on fluid viscosity of 25 mm²/s at 40°

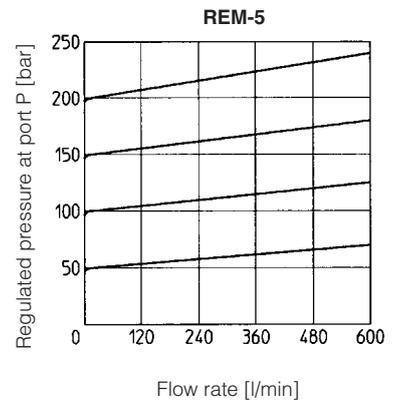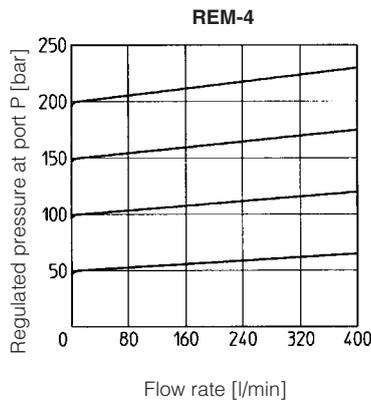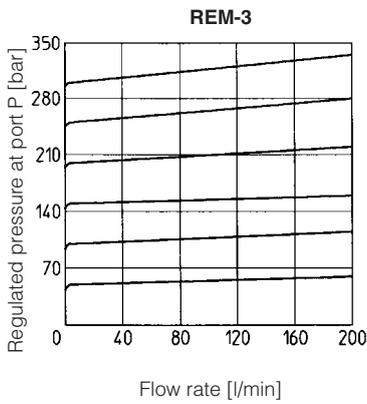

5 MINIMUM PRESSURE VERSUS FLOW DIAGRAMS based on fluid viscosity of 25 mm²/s at 40° C

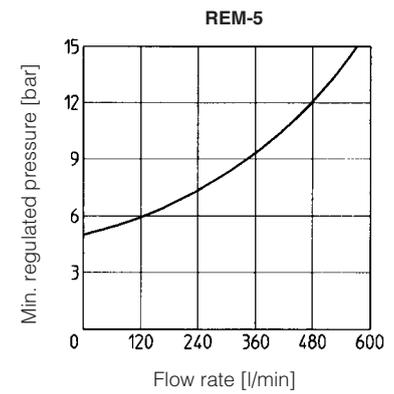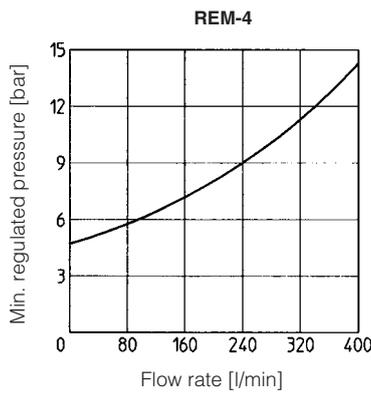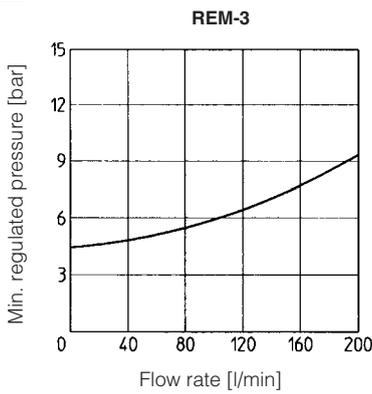

6 ELECTRIC CONNECTORS ACCORDING TO DIN 43650 FOR REM WITH SOLENOID VALVE

The connectors must be ordered separately

Code of connector	Function
666	Connector IP-65, suitable for direct connection to electric supply source
667	As 666 connector IP-65 but with built-in signal led, suitable for direct connection to electric supply source

For other available connectors, see tab. E010 and K500.

7 ELECTRIC FEATURES FOR AGAM WITH SOLENOID VALVE

Solenoid valve type	External supply nominal voltage ± 10% (1)		Voltage code	Type of connector	Power consumption (3)		Code of spare coil DHI	Colour of coil label DHI	Code of spare coil DHE
					DHI	DHE			
DHI DHE	DC	12 DC 24 DC 110 DC 220 DC	12 DC 24 DC 110 DC 220 DC	666 or 667	33 W	30 W	COU-12DC COU-24DC COU-110DC COU-220DC	green red black black	COE-12DC COE-24DC COE-110DC COE-220DC
		AC	110/50 AC (2) 115/60 AC 120/60 AC 230/50 AC (2) 230/60 AC	110/50/60 AC 115/60 AC (5) 120/60 AC (6) 230/50/60 AC 230/60 AC	666 or 667	60 VA - 60 VA 60 VA 60 VA	58 VA 80 VA - 58 VA 80 VA	COI-110/50/60AC - COI-120/60AC COI-230/50/60AC COI-230/60AC	yellow - white light blue silver

(1) For other supply voltages available on request see technical tables E010, E015.

(2) Coil can be supplied also with 60 Hz of voltage frequency: in this case the performances are reduced by 10 ÷ 15% and the power consumption is 55 VA (DHI) and 58 VA


(3) Average values based on tests performed at nominal hydraulic condition and ambient/coil temperature of 20°C.

(4) When solenoid is energized, the inrush current is approx 3 times the holding current.

(5) Only for DHE

(6) Only for DHI


8 DIMENSIONS [mm]

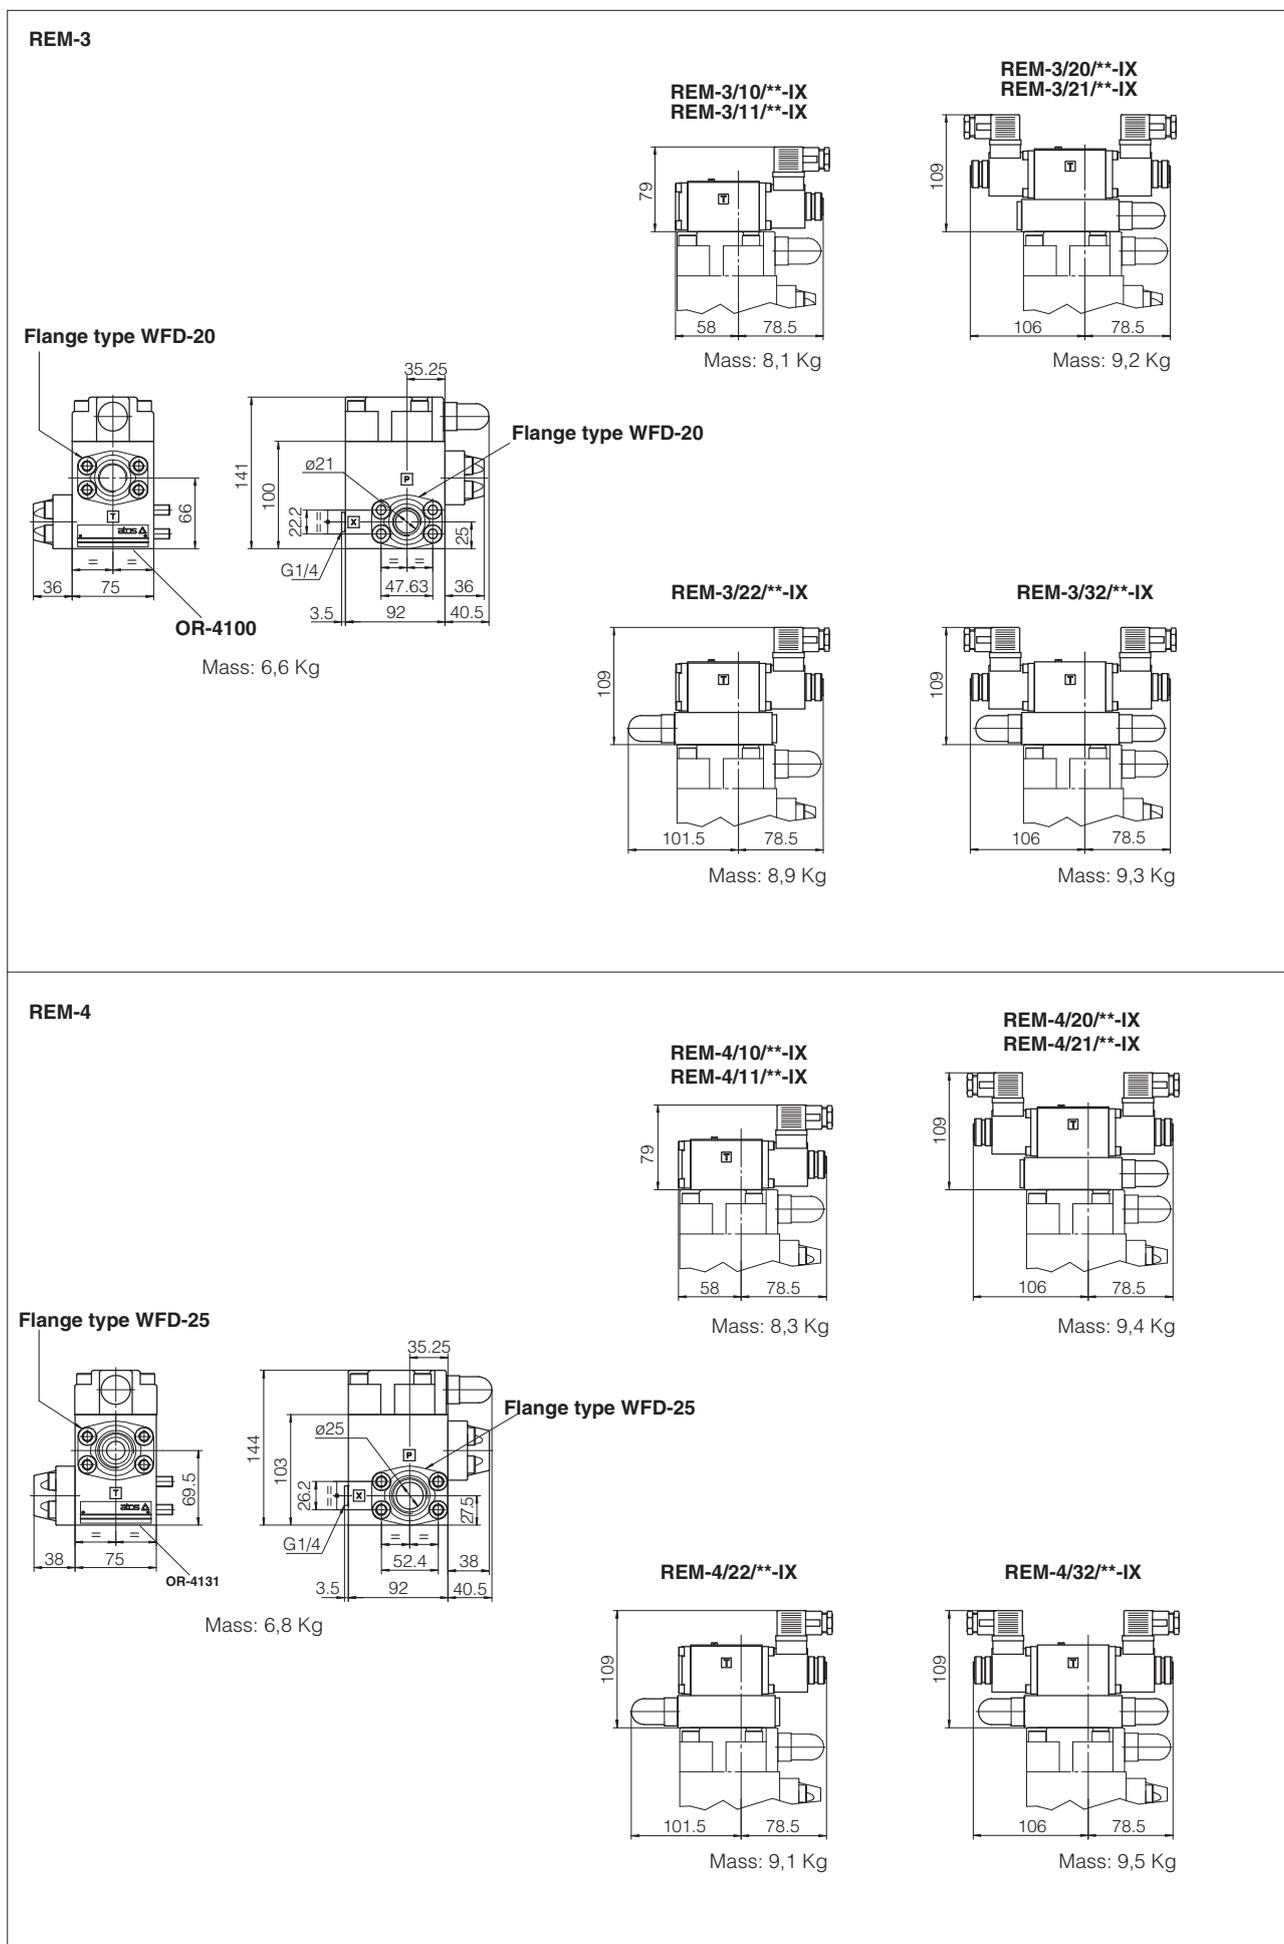

Overall dimensions refer to valves with connectors type 666.

REM-5

Flange type WFD-32

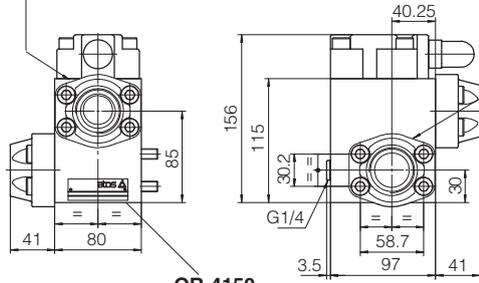


OR-4150

Mass: 8,2 Kg


Flange type WFD-32

REM-5/10/**-IX
REM-5/11/**-IX




Mass: 9,7 Kg

REM-5/20/**-IX
REM-5/21/**-IX

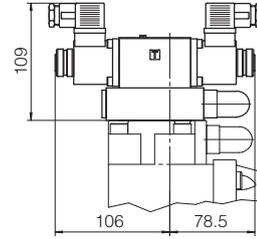


Mass: 10,8 Kg

REM-5/22/**-IX



Mass: 10,5 Kg


REM-5/32/**-IX

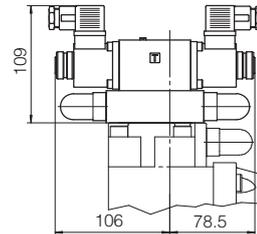

Mass: 10,9 Kg

REM-3

Flange type WFD-20

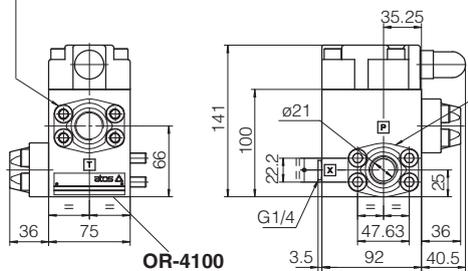


OR-4100

Mass: 6,6 Kg


Flange type WFD-20

REM-3/10/**-EX
REM-3/11/**-EX




Mass: 8,1 Kg

REM-3/20/**-EX
REM-3/21/**-EX

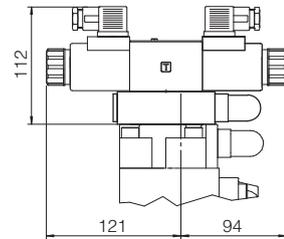


Mass: 9,2 Kg

REM-3/22/**-EX





Mass: 8,9 Kg

REM-3/32/**-EX

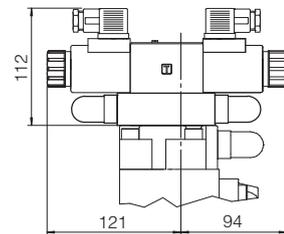

Mass: 9,3 Kg

9 DIMENSIONS [mm]

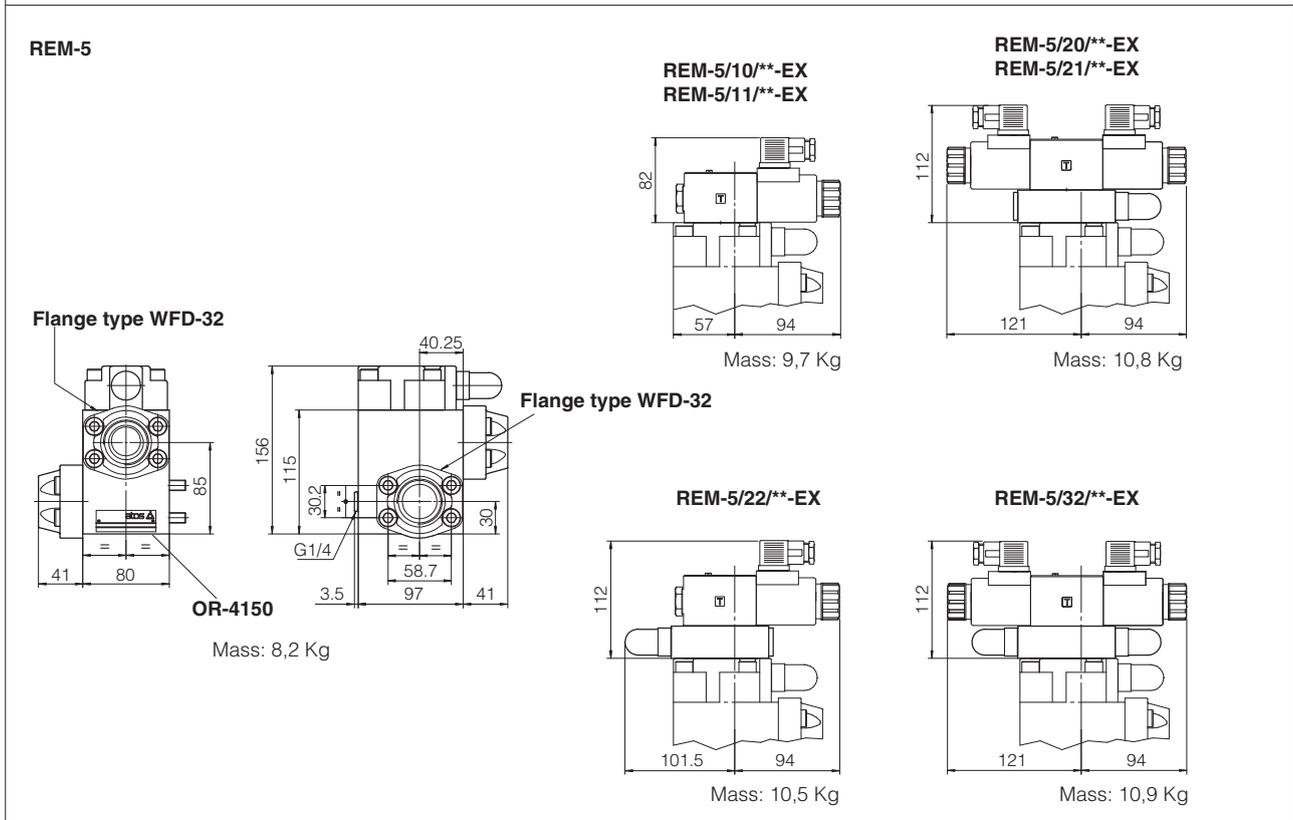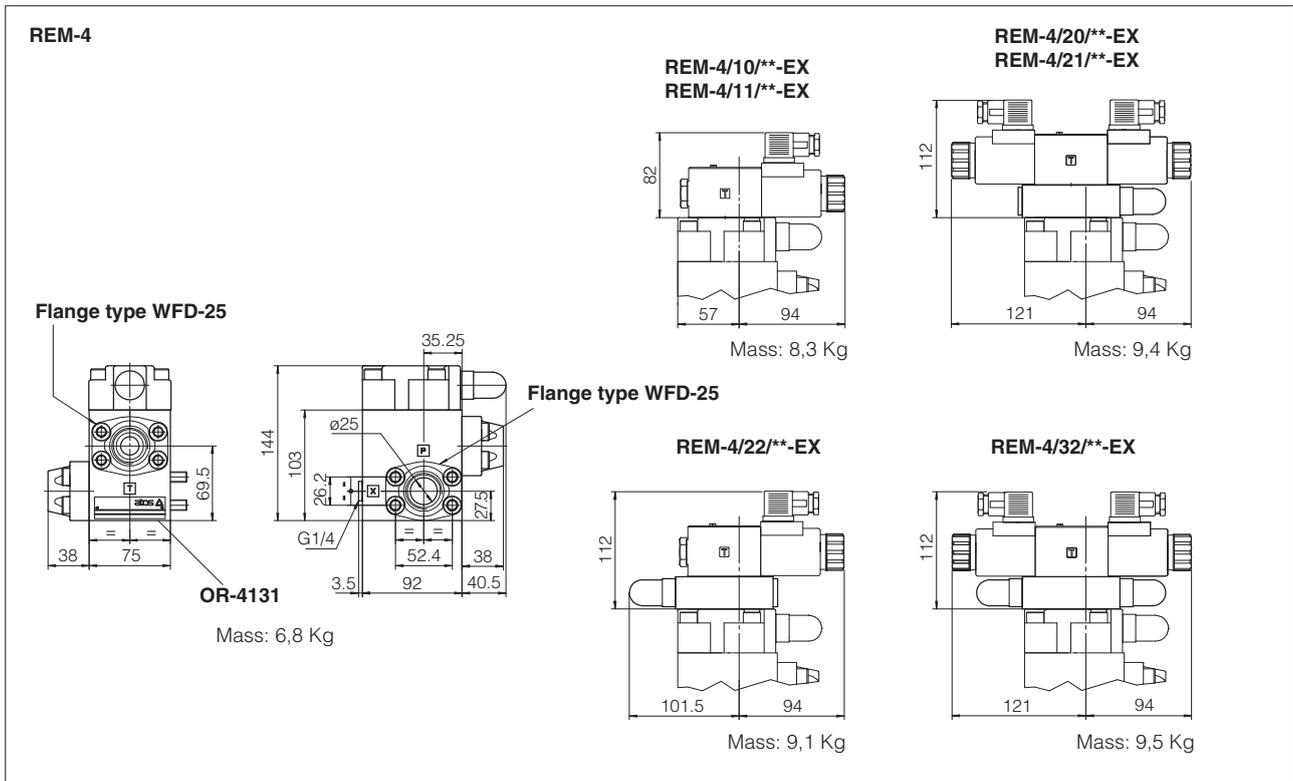

Overall dimensions refer to valves with connectors type 666

10 ASSEMBLY EXAMPLE OF A REM VALVE ON A PFE PUMP

