




Table **C280-6/E**

Flow restrictor valves type AQFR

in-line mounting - from G 3/8" to G 1 1/4" threaded ports

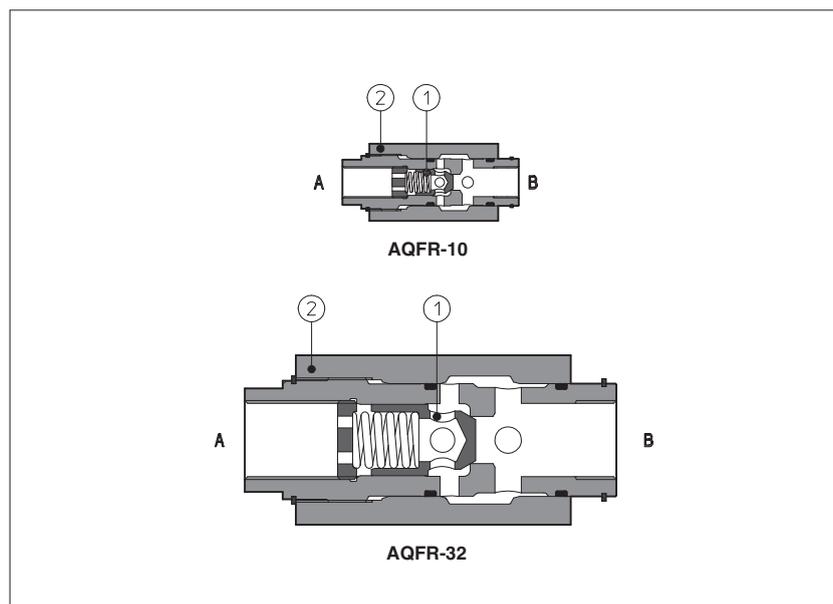

AQFR are not compensated flow throttling valves with a built-in check valve ① to allow the free flow in the opposite direction.

The flow adjustment is done by turning the external exagon ②. Clockwise rotation increases the throttling (reduced passage). The regulated flow is a function of the pressure drop existing between the inlet and outlet ports.

They are available in five sizes: from 3/8" to 1 1/4" GAS with flow up 30, 50, 80, 160, 250 l/min respectively and pressure up to 400/350 bar (depending on size).

Max pressure: **350 bar**

1 MODEL CODE

| | | | |
|---|--------------------|--------------------|---------------------------------------|
| AQF | R | - | 10 |
| Throttling valve in-line mounting | | | |
| R = with check valve for free reverse flow | | | |
| Size and ports dimensions: | | | |
| 10 = G 3/8" | 15 = G 1/2" | 20 = G 3/4" | 25 = G 1" 32 = G 1 1/4" |

| | | |
|--|---|----------|
| ** | / | * |
| Series number | | |
| Seals material, see section 3: - = NBR PE = FKM BT = HNBR | | |

2 HYDRAULIC CHARACTERISTICS

| | | | | | |
|------------------------------|----------------|----------------|----------------|----------------|----------------|
| Hydraulic symbol | | | | | |
| Valve model | AQFR-10 | AQFR-15 | AQFR-20 | AQFR-25 | AQFR-32 |
| Max recommended flow [l/min] | 30 | 50 | 80 | 160 | 250 |
| Max pressure [bar] | 400 | 350 | | | |






3 MAIN CHARACTERISTICS, SEALS AND FLUIDS - for other fluids not included in below table, consult our technical office

| | | | |
|--------------------------------------|---|----------------------------|----------------------|
| Assembly position | Any position | | |
| Compliance | RoHS Directive 2011/65/EU as last update by 2015/65/EU REACH Regulation (EC) n°1907/2006 | | |
| Ambient temperature | Standard execution = -30°C ÷ +70°C; /PE option = -20°C ÷ +70°C; /BT option = -40°C ÷ +70°C | | |
| Seals, recommended fluid temperature | NBR seals (standard) = -20°C ÷ +80°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C | | |
| Recommended viscosity | 15 ÷ 100 mm²/s - max allowed range 2,8 ÷ 500 mm²/s | | |
| Max fluid contamination level | ISO4406 class 20/18/15 NAS1638 class 9, see also filter section at www.atos.com or KTF catalog | | |
| Hydraulic fluid | Suitable seals type | Classification | Ref. Standard |
| Mineral oils | NBR, FKM, HNBR | HL, HLP, HLPD, HVLP, HVLPD | DIN 51524 |
| Flame resistant without water | FKM | HFDU, HFDR | ISO 12922 |
| Flame resistant with water | NBR, HNBR | HFC | |


4 DIAGRAMS based on mineral oil ISO VG 46 at 50°C

4.1 Q/Δp diagram through the check valve for free flow B→A with the throttle valve fully open and fully closed

- 1 = AQFR-10 fully closed
- 2 = AQFR-10 fully open
- 3 = AQFR-15 fully closed
- 4 = AQFR-15 fully open
- 5 = AQFR-20 fully closed
- 6 = AQFR-20 fully open
- 7 = AQFR-25 fully closed
- 8 = AQFR-25 fully open
- 9 = AQFR-32 fully closed
- 10 = AQFR-32 fully open

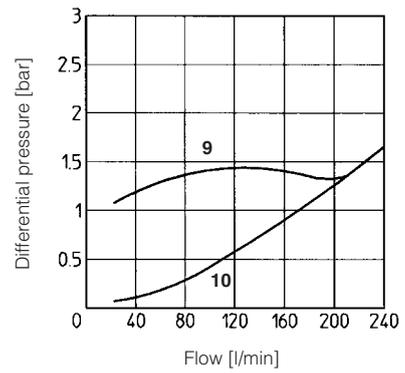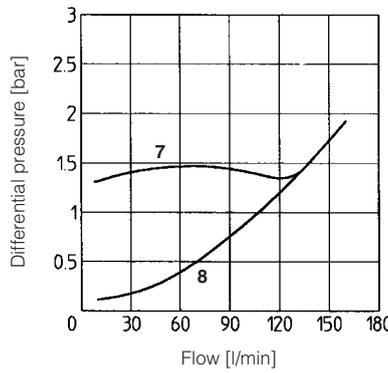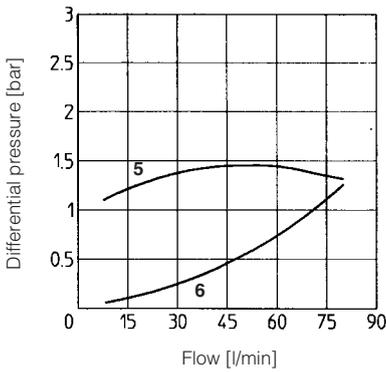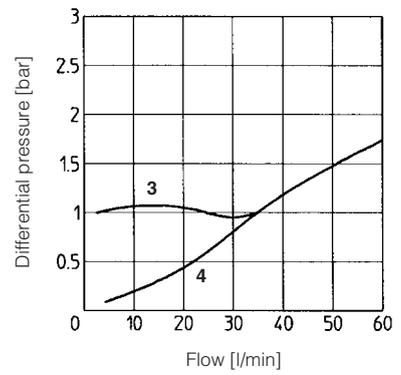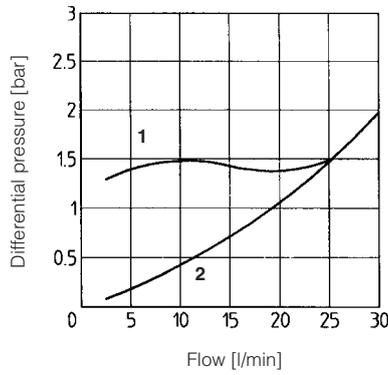

5 DIMENSIONS [mm]

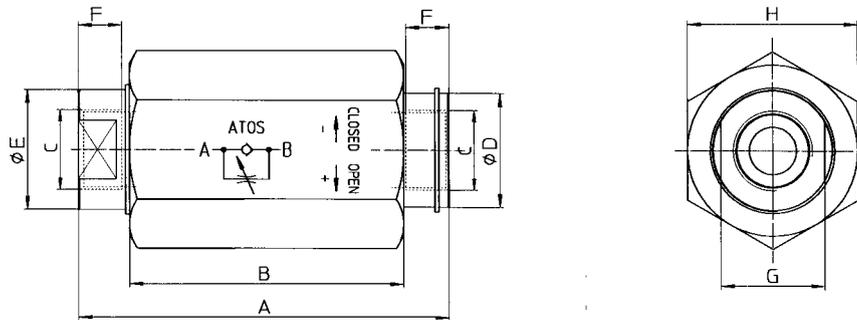

| Valve model | A | B | C | ØD | ØE | F | G | H | Mass [Kg] |
|----------------|-----|------|----------|----|----|----|----|----|-----------|
| AQFR-10 | 93 | 68 | G 3/8" | 28 | 25 | 13 | 24 | 41 | 0,7 |
| AQFR-15 | 105 | 78 | G 1/2" | 32 | 30 | 15 | 27 | 46 | 1 |
| AQFR-20 | 127 | 95,5 | G 3/4" | 36 | 34 | 17 | 32 | 55 | 1,6 |
| AQFR-25 | 153 | 112 | G 1" | 48 | 45 | 19 | 42 | 75 | 3,5 |
| AQFR-32 | 196 | 145 | G 1 1/4" | 63 | 60 | 21 | 55 | 90 | 6,5 |