

GOMMA / RUBBER


Ruote in gomma con nucleo in flange d'acciaio o in materiale termoplastico, disponibili anche in gomma grigia antimacchia e in gomma speciale antiolio, superelastica e bimescola.

Ruote in gomma elastica nera con nucleo in alluminio o in poliammide 6, disponibili anche con gomma grigia antimacchia e gomma blu antitaglio. Ruote con nucleo in ghisa meccanica o acciaio elettrosaldato. Queste ruote hanno una gamma di diametri che va da mm 80 a mm 400 e, abbinate alle diverse tipologie di supporti medi e pesanti, consentono portate comprese tra Kg 50 e Kg 2500.

Wheels with rubber tyre and steel flanges or with thermoplastic material centre, available also with no marking grey rubber and with special rubber tyres, oil proof, super elastic and two-component mix. Wheels with black elastic rubber tyre and aluminium centre or polyamide 6 centre, available also with grey no-marking rubber and blue cut resistant rubber. Wheels with mechanical cast iron centre or electrowelded steel centre.

These wheels are available in a range of diameters between mm 80 and mm 400 and combined with the various types of medium duty and heavy duty castors allow load capacities between Kg 50 and Kg 2500.

NOTE / NOTES

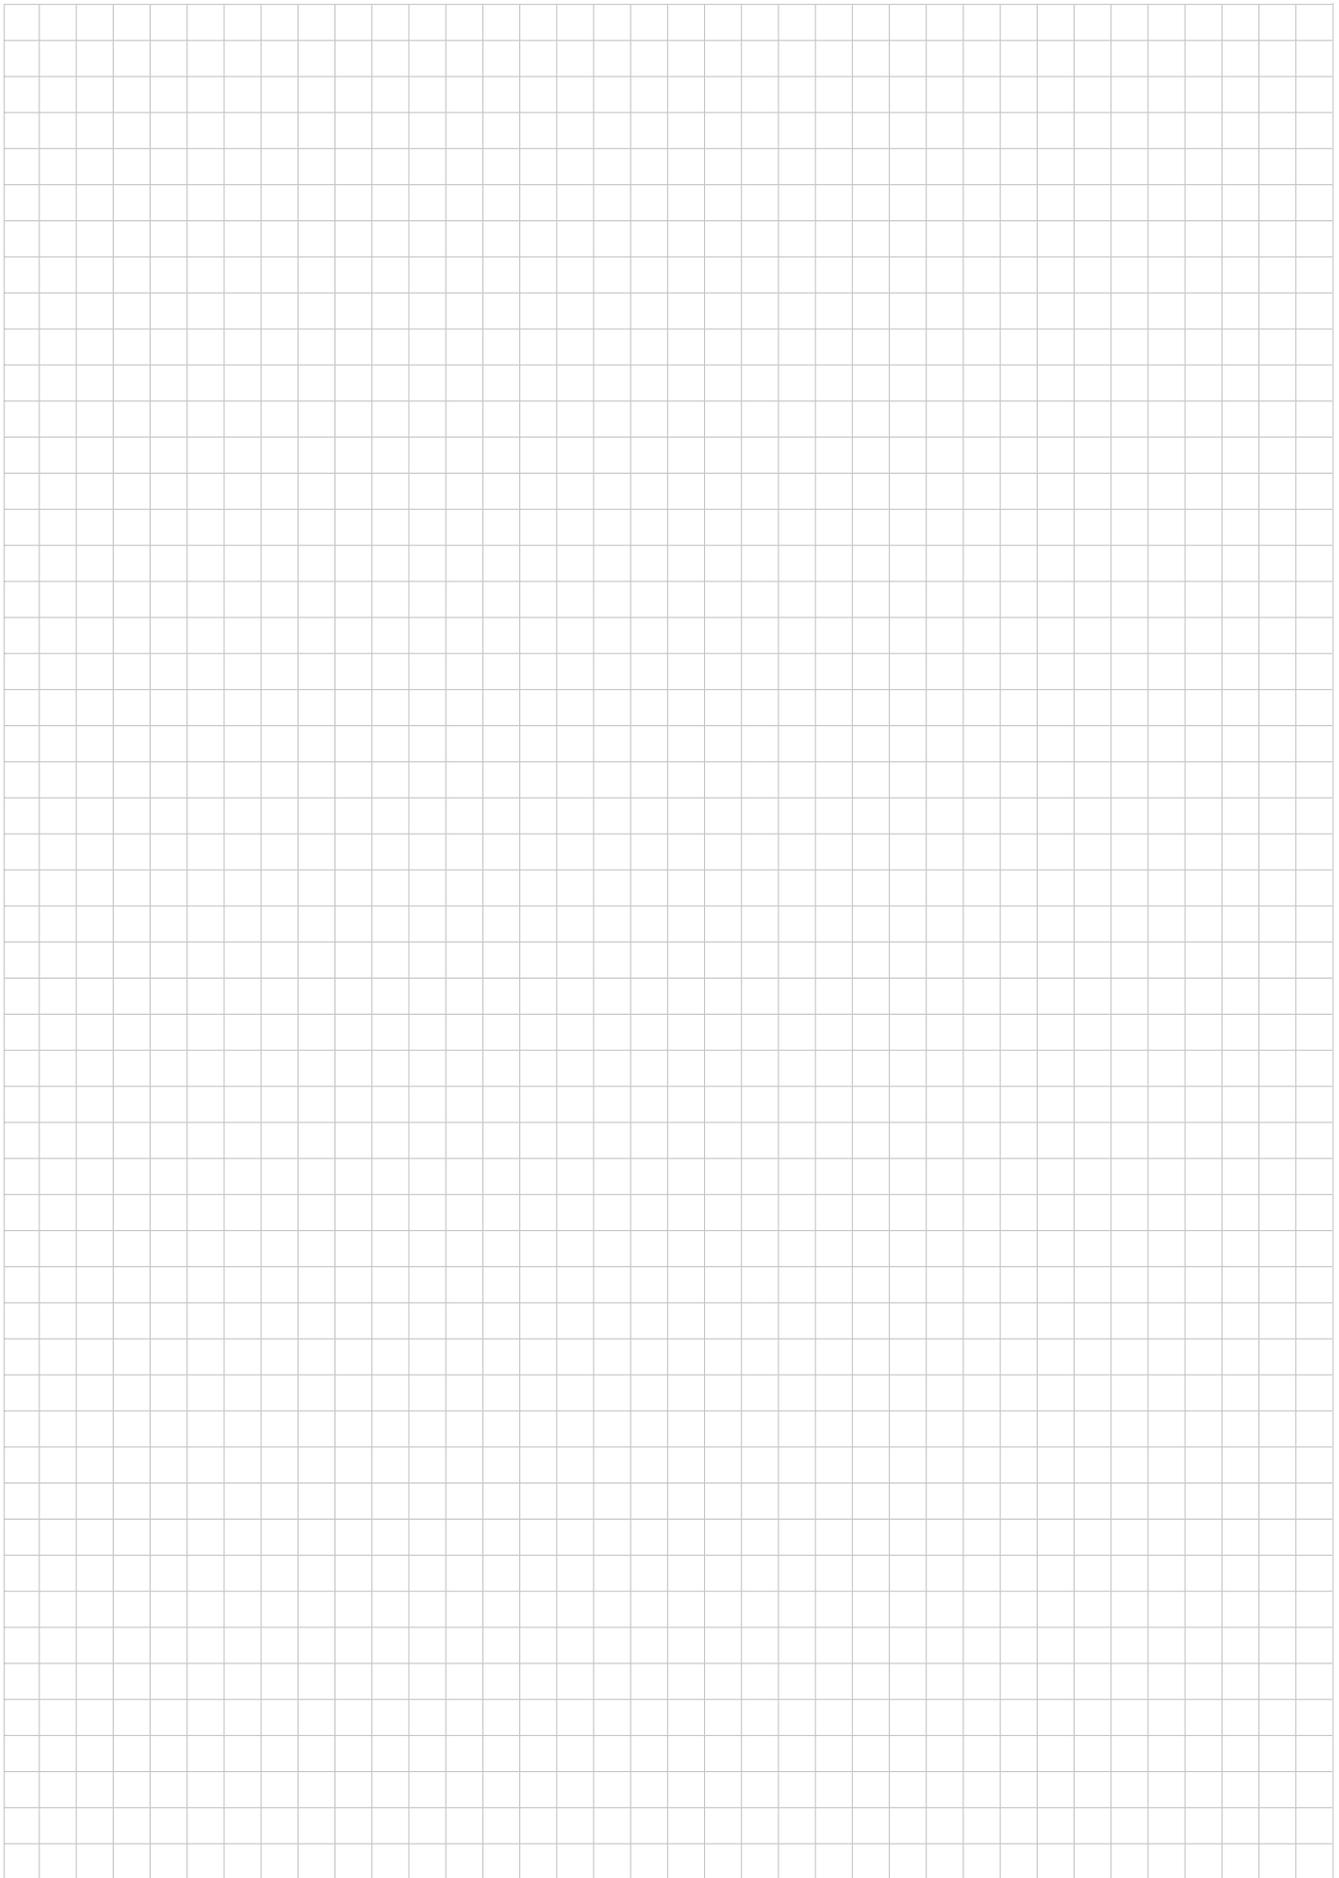

Gomma /
Rubber