



G-450
Red U-Bolt® Clip




- Each base has a Product Identification Code (PIC) for material traceability, the name Crosby or "CG," and a size forged into it.
- Based on the catalog breaking strength of wire rope, Crosby wire rope clips have an efficiency rating of 80% for 3mm through 22mm sizes, and 90% for sizes 24mm through 90mm.
- Entire clip is galvanized to resist corrosive and rusting action.
- Sizes 3mm through 62mm and 75mm have forged bases.
- All clips are individually bagged or tagged with proper application instructions and warning information.
- Clip sizes up through 38mm have rolled threads.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these wire rope clips meet other critical performance requirements, including fatigue life, impact properties, and material traceability not addressed by ASME B30.26.
- Look for the Red U-Bolt®, your assurance of genuine Crosby Clips.

WIRE ROPE END FITTINGS

APPLICATION AND WARNING INFORMATION
SECTION 17

G-450 Crosby Clips

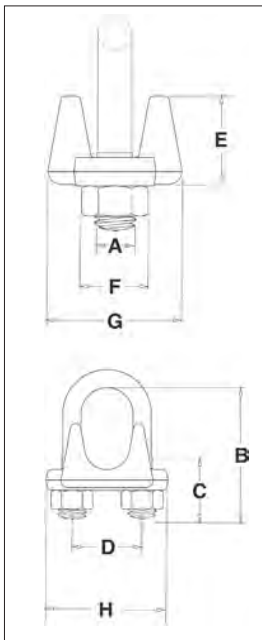

Rope Size		Stock No.	Std. Package Qty.	Weight Per 100 (kg)	Dimensions (mm)							
(in)	(mm)				A	B	C	D	E	F	G	H
1/8	3-4*	1010015	100	2.72	5.60	18.3	11.2	11.9	10.4	9.65	20.6	23.9
3/16*	5*	1010033	100	4.54	6.35	24.6	14.2	15.0	12.7	11.2	23.9	29.5
1/4	6-7	1010051	100	8.62	7.85	26.2	12.7	19.1	16.8	14.2	30.2	36.6
5/16	8	1010079	100	12.7	9.65	35.1	19.1	22.4	18.3	17.5	33.3	42.9
3/8	9-10	1010097	100	21.8	11.2	38.1	19.1	25.4	23.1	19.1	41.4	49.3
7/16 - 1/2	11-13	1010131	50	80	.50	1.88	1.00	1.19	1.13	.88	1.91	2.28
9/16 - 5/8	14-16	1010177	50	110	.56	2.25	1.25	1.31	1.34	.94	2.06	2.50
3/4	18-20	1010195	25	64	15.7	70.0	36.6	38.1	35.8	26.9	57.0	72.0
7/8	22	1010211	25	96	19.1	79.0	41.1	44.5	40.4	31.8	62.0	80.5
1	24-26	1010239	10	114	19.1	89.0	46.0	47.8	45.2	31.8	67.0	88.0
1-1/8	28-30	1010257	10	128	19.1	98.5	51.0	51.0	48.5	31.8	71.5	91.0
1-1/4	32-34	1010275	10	199	22.4	108	54.0	59.4	55.5	36.6	79.5	105
1-3/8	36	1010293	10	200	22.4	118	58.5	59.4	58.5	36.6	79.5	106
1-1/2	38	1010319	10	247	22.4	125	60.5	66.5	62.0	36.6	86.5	113
1-5/8	41-42	1010337	Bulk	319	25.4	135	66.5	70.0	67.5	41.4	92.0	121
1-3/4	44-46	1010355	Bulk	424	28.7	146	70.0	77.5	74.5	46.0	97.0	134
2	48-52	1010373	Bulk	590	31.8	164	76.0	86.0	77.0	51.0	113	149
2-1/4	56-58	1010391	Bulk	726	31.8	181	81.0	98.5	81.0	51.0	114	162
2-1/2	62-65	1010417	Bulk	862	31.8	195	87.5	105	93.5	51.0	119	168
** 2-3/4	** 68-72	1010435	Bulk	1043	31.8	211	90.5	111	124	51.0	127	175
3	75-78	1010453	Bulk	1406	38.1	233	98.5	121	119	60.5	149	194
** 3-1/2	** 85-90	1010426	Bulk	1814	38.1	273	114	140	152	60.5	157	213

*Electro-plated U-Bolt and Nuts. ** 70mm and 89mm base is made of cast steel.




WIRE ROPE END FITTINGS

G-429
Fist Grip® Clip
5mm - 16mm



5mm - 16mm

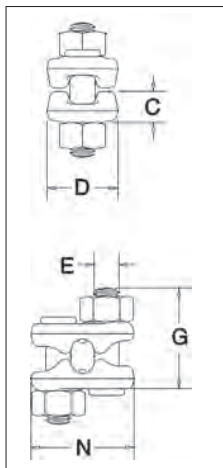

- Entire clip is galvanized to resist corrosive and rusting action.
- Based on the catalog breaking strength of wire rope, Crosby wire rope clips have an efficiency rating of 80% for 5mm through 22mm sizes, and 90% for sizes 24mm through 40mm.
- Bolts are an integral part of the saddle. Nuts can be installed in such a way as to enable the operator to swing the wrench in a full arc for fast installation.
- All sizes have forged steel saddles.
- All Clips are individually bagged or tagged with proper application instructions and warning information.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these wire rope clips meet other critical performance requirements, including fatigue life, impact properties, and material traceability not addressed by ASME B30.26.
- Assembled with standard heavy hex nuts.

G-429 Fist Grip® Clips


Rope Size		Stock No.	Std. Package Qty.	Weight Per 100 (kg)	Dimensions (mm)				
(in)*	(mm)				C	D	E	G	N
3/16 - 1/4	5-7	1010471	100	10.4	10.2	23.9	9.65	32.5	36.6
5/16	8	1010499	100	12.7	11.9	26.9	9.65	37.3	39.1
3/8	10	1010514	50	18.1	13.0	26.9	11.2	46.0	45.2
7/16 - 1/2	11-13	1010532	50	28.1	15.0	31.8	12.7	55.5	54.6
9/16 - 5/8	14-16	1010550	50	46.7	18.3	38.1	16.0	68.5	65.3
3/4	18-20	1010578	25	79.0	21.8	46.0	19.1	74.5	67.8
7/8	22	1010596	25	102	24.6	53.8	19.1	84.0	72.6
1	24-26	1010612	10	136	28.7	57.0	19.1	94.5	77.7
1-1/8	28-30	1010630	10	181	32.5	60.5	22.4	107	87.4
1-1/4	32-34	1010658	10	181	34.0	63.5	22.4	108	90.4
1-3/8 - 1-1/2	36-40	1010676	Bulk	318	39.6	76.0	25.4	141	105

* Sizes through 16mm incorporate new style design.

G-429
Fist Grip® Clip
19mm - 38mm




19mm - 38mm

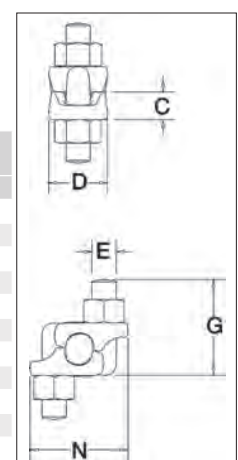


APPLICATION AND WARNING INFORMATION SECTION 17

G-460
Soft Eye
Bundle Clip
(For use without Thimble)

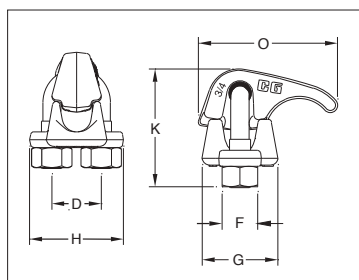

- Forged bases and bundle clip adapters.
- All bundle clips are individually bagged or tagged with proper application instructions and warning information.
- Bundle Clip Adapter for Soft Eye (G4460) and for Thimble Eye (G4461) kits available.
- Meets or exceeds all requirements of ASME B30.26 including manufacturing ID and size requirements. Importantly, these wire rope bundle clips meet material traceability not addressed by ASME B30.26.

G-461
Thimble
Eye Bundle Clip

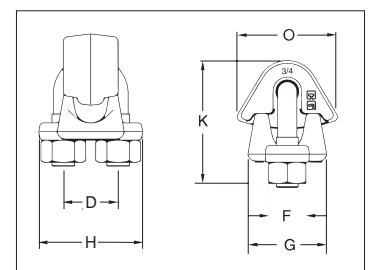

G-460 Soft Eye / G-461 Thimble Eye Bundle Clip

Rope Size		Bundle Clip Style	Stock No.	Dimensions (mm)						Weight each (kg)
(in)	(mm)			D	F	G	H	K	O	
3/4	18-20	G460	1010509	38.1	26.9	57.2	72.1	88.9	105	1.1
3/4	18-20	G461	1010619	38.1	26.9	57.2	72.1	88.9	72.4	1.1

