


Brazos de reaccion de par lineal y articulado

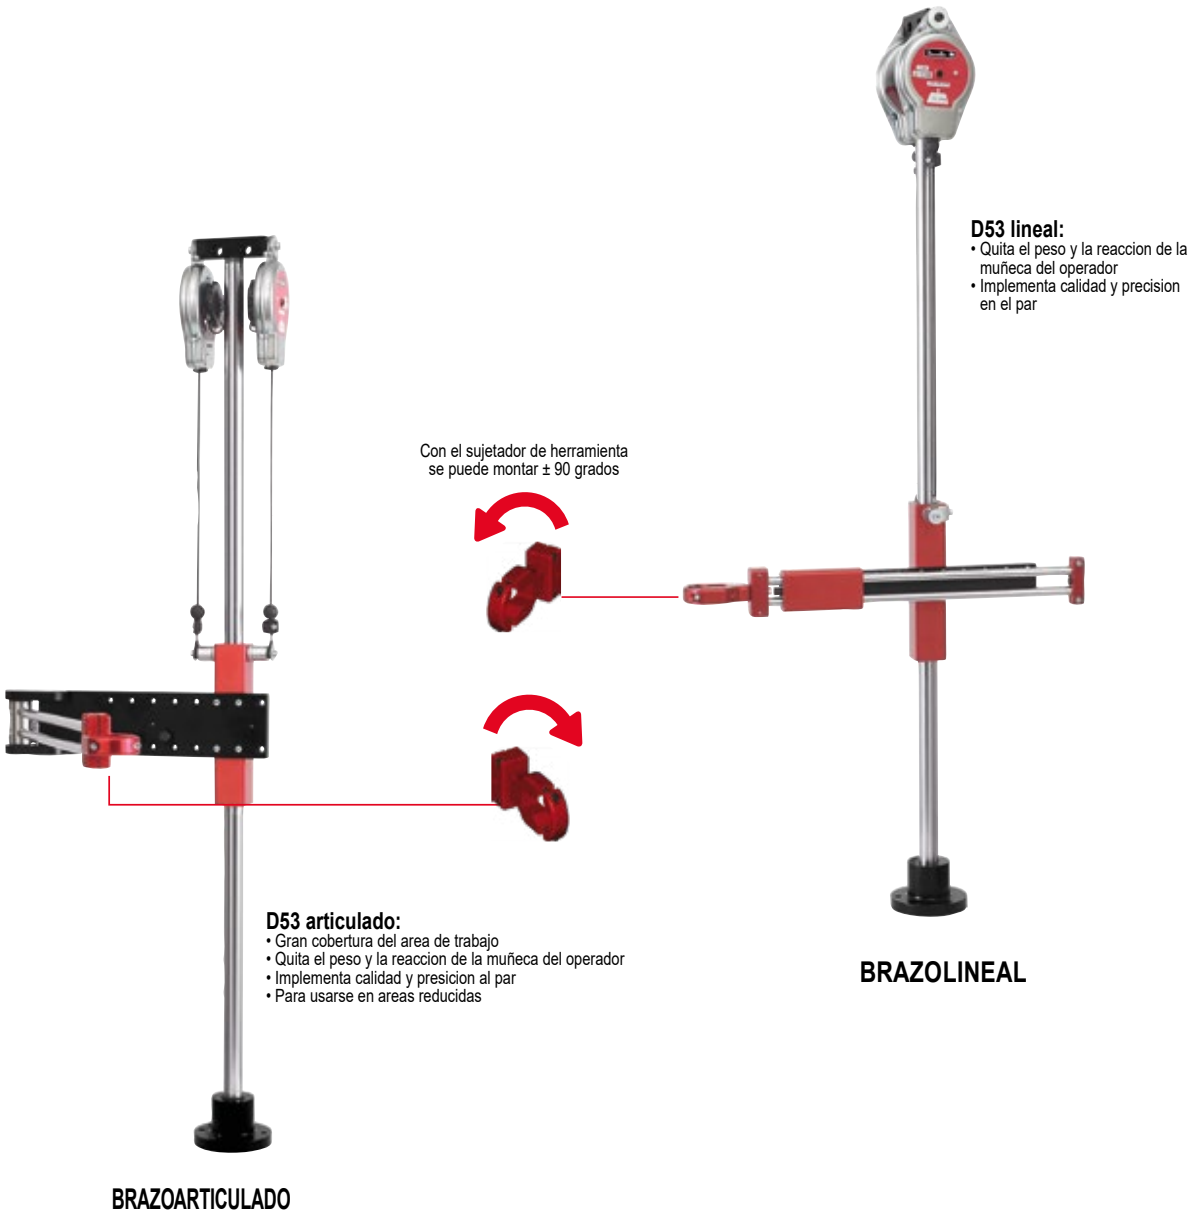


Gran variedad de sujetadores, para detalles ver pagina 194

MODELO	REFERENCIA	DE PAR MAXIMO		PESO MAXIMO HERRAMIENTA		BRAZO EQUIPADO CON	DIAMETRO SUJETADOR HERRAMIENTA (INCLUIDO CON EL BRAZO)	
		Nm	ft. lb	kg	lb.		mm	in.
BRAZO LINEAL								
D53-5*	615 810 700 0	5	3.7	0.8	1.8	1 x 5DU	28.5 - 41	1.12 - 1.62
D53-12*	615 810 701 0	12	8.8	1.5	3.3	2 x 5DU	28.5 - 41	1.12 - 1.62
D53-25*	615 810 702 0	25	18.4	2.5	5.5	2 x 5DU	28.5 - 41	1.12 - 1.62
D53-25X Alcance extendido*	615 810 703 0	25	18.4	2.2	4.8	2 x 5DU	28.5 - 41	1.12 - 1.62
D53-50	615 810 704 0	50	36.8	5.0	11.0	2 x 15D	Ordenar por separado	
D53-100	615 810 705 0	100	73.7	6.0	13.2	2 x 22D		
BRAZO ARTICULADO								
D53-5S*	615 810 706 0	5	3.7	0.8	1.8	1 x 5DU	28.5 - 41	1.12 - 1.62
D53-12S*	615 810 707 0	12	8.8	1.5	3.3	2 x 5DU	28.5 - 41	1.12 - 1.62
D53-25S*	615 810 708 0	25	18.4	2.5	5.5	2 x 5DU	28.5 - 41	1.12 - 1.62
D53-50S	615 810 709 0	50	36.8	5.0	11.0	2 x 15D	Ordenar por separado	
D53-100S	615 810 710 0	100	73.7	6.0	13.2	2 x 22D		

(*) Sujetador herramienta Universal D53


D53 - Dimensiones

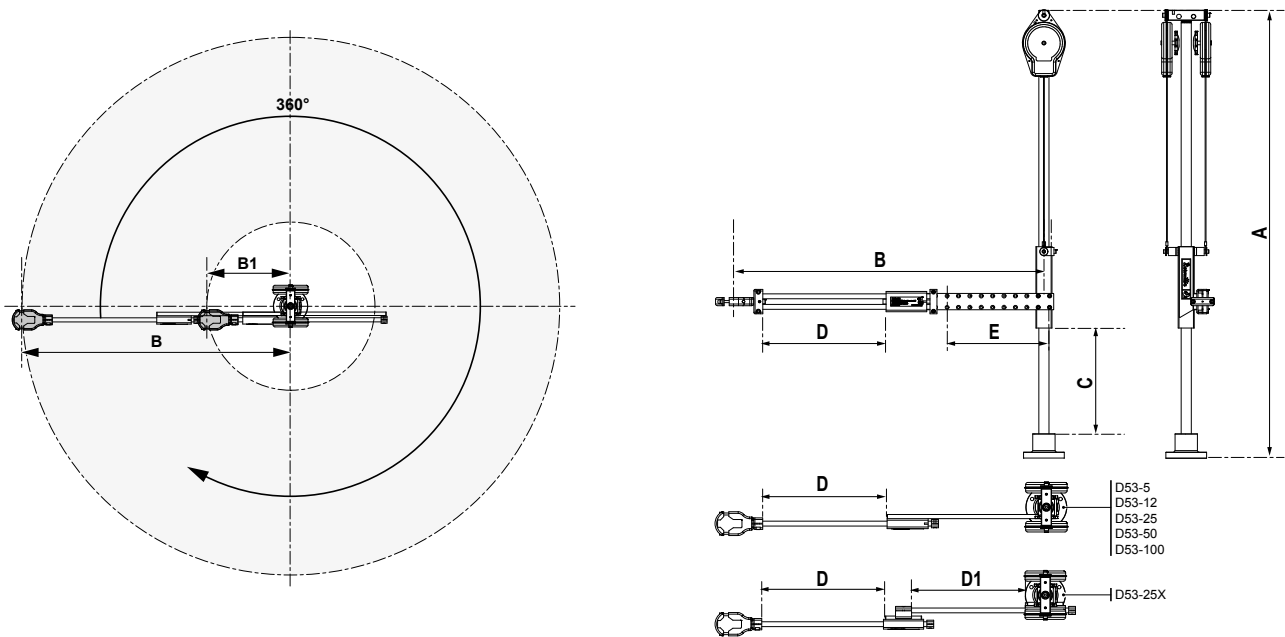

D53 lineal especificacion de producto y area de trabajo

MODELO	REFERENCIA	DE PAR MAXIMO		ALTURA A		ANCHO				CARRERA VERTICAL C		CARRERA HORIZONTAL				CARRERA FIJA E		PESO HERRAMIENTA	
						MAX. B		MIN. B				D		D1				MAXIMO	
		Nm	ft. lb	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in.	kg	lb		
D53-5	615 810 700 0	5	3.7	732	28.8	592*	23.3*	220*	8.7*	310	12.2	205	8.1	-	-	168	6.6	0.8	1.76
D53-12	615 810 701 0	12	8.9	888	35.0	710*	28*	260*	10.2*	465	18.3	255	10.0	-	-	196	7.7	1.5	3.3
D53-25	615 810 702 0	25	18.4	1132	44.6	779*	30.7*	231*	9.1*	615	24.2	290	11.4	-	-	252	9.9	2.5	5.5
D53-25X	615 810 703 0	25	18.4	1132	44.6	794*	31.2*	230*	9.0*	615	24.2	290	11.4	275	10.8	-	-	2.2	4.85
D53-50	615 810 704 0	50	36.9	1147	45.2	888*	35.0*	267**	10.5**	515	20.3	355	14.0	-	-	266	10.5	5.0	11.0
D53-100	615 810 705 0	100	73.8	1147	45.2	916*	36.0*	255**	10.0**	515	20.3	395	15.6	-	-	266	10.5	6.0	13.2

(*) Con sujetador - (**) Sin sujetador

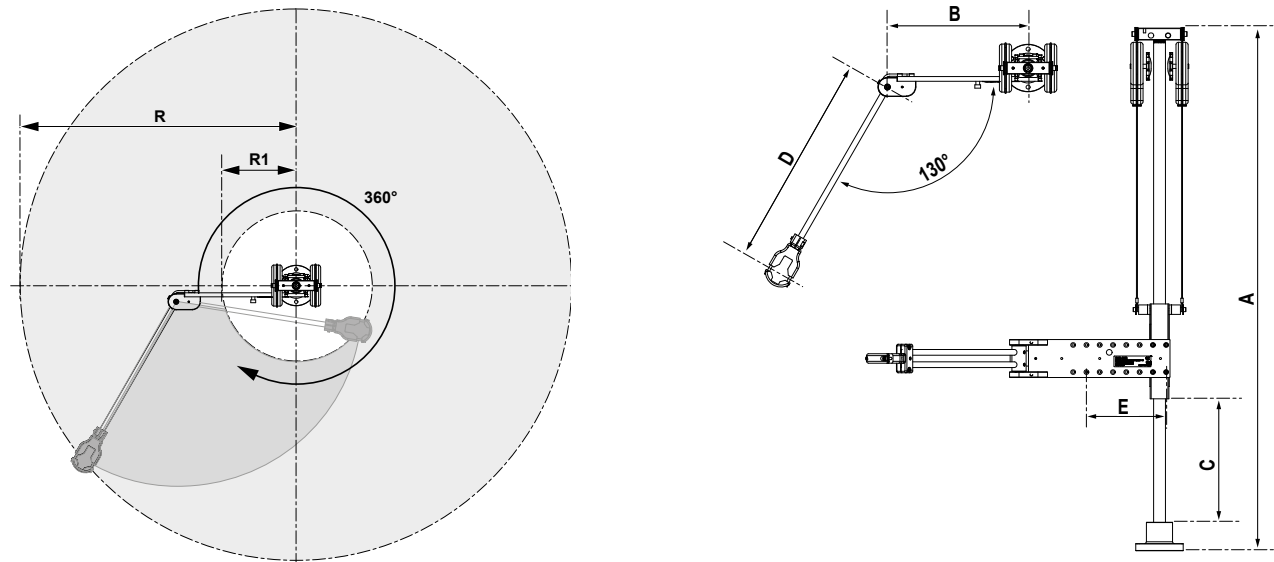

D53 articulado especificaciones y area de trabajo

MODELO	REFERENCIA	DE PAR MAXIMO		ALTURA A		ANCHO B		CARRERA VERTICAL C		RADIUS D		CARRERA FIJA E		RADIUS R		RADIUS R1		PESO HERRAMIENTA MAXIMO	
		Nm	ft. lb	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb
D53-5S	615 810 706 0	5	3.7	732	28.8	248	9.76	270	10.6	370*	14.6*	168	6.6	546	21.5	140	5.5	0.8	1.76
D53-12S	615 810 707 0	12	8.9	888	35.0	298	11.73	425	16.7	420*	16.5*	168	6.6	639	25.2	146	5.8	1.5	3.3
D53-25S	615 810 708 0	25	18.4	1132	44.6	296	11.65	580	22.8	470*	18.5*	168	6.6	685	27	183	7.2	2.5	5.5
D53-50S	615 810 709 0	50	36.9	1147	45.2	336	1.1	520	20.5	440**	17.3**	228	9.0	698	27.5	154	6.1	5.0	11.0
D53-100S	615 810 710 0	100	73.8	1147	45.2	391	15.4	500	19.7	490**	19.3**	228	9.0	788	31	158	6.2	6.0	13.2

(*) Con sujetador - (**) Sin sujetador