



Stop the Chain Reaction of Wear!

Characteristics

- A simple inline design with highly efficient flow dynamic minimizing pressure drop.
- Standard SAE-12 fittings SAE-10
- Built from Aluminum Alloy or Stainless Steel
- Small and efficient system protection
- Bi-directional
- Two core in-line unit
- Max. operating temperature 302° F (150 ° C)
Aluminum: 3,000 psi (200 bar)
Stainless: 6,000 psi (414 bar)
- Burst pressure
Aluminum: 16,000psi (1103 bar)
Stainless: 1655 bar (24,000psi)

Applications

- Hydraulics
- Engine Protection
- Lubrication Oils
- Fuel
- Transmissions
- Ideal for critical component protection in smaller transmissions, lines and hydraulic systems including auto-motive diesel.

Magnom filters can be used for various types of liquids (water, tar, oils, lubricants, coolants, cutting, fuel, hydraulic fluids and transmission), and working conditions characterized by different pressure, viscosity, temperature and flow rate.

Magnom CP

Bi-directional magnetic in-line filters for plant liquids, gases and greases

Built from Aluminum Alloy or Stainless Steel, the Circuit Protection Unit CP is a small 2 core Magnom™ in-line unit.

The CP has a very high pressure capability making it highly suitable for a variety of industrial and hydraulic applications. In particular it is designed to protect key components, such as pumps and valves in fluid circuits.

Magnom™ magnetic filters excel at extracting abrasive ferrous particles from fluid systems - thus removing the major cause of wear, performance drop, system failure or product damage




Why use a Magnom technology Magnetic Filters to eradicate microscopic ferrous particles?

Microscopic ferrous particles damage industrial fluid systems & degrade finished products. **Magnetic Filters** are the solution to ferrous contamination of industrial fluids.

Microscopic ferrous particles tend to be the hardest material found in industrial fluids, water or gas systems. In turn, they cause wear on softer materials in the system and this causes a chain reaction that results in larger non ferrous wear particles .

By eliminating the microscopic ferrous particles, the primary cause of all subsequent wear is removed and therefore system cleanliness is greatly increased.

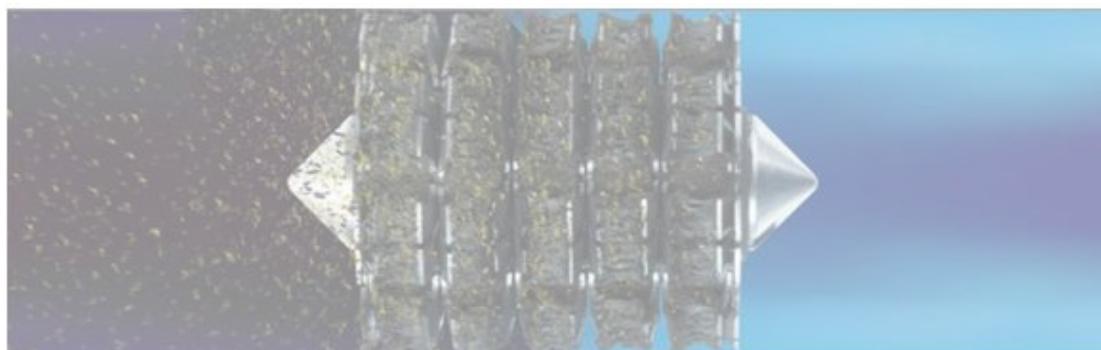



Stop the Chain Reaction of Wear!

Contacts

www.dropsa.com
sales@dropsa.com

ITALY

Dropsa SpA
t. +39 02-250791
f.+39 02-2507967

U.K.

Dropsa (UK) Ltd
t. +44 (0)1784-431177
f. +44 (0)1784-438598

GERMANY

Dropsa GmbH
t. +49 (0)211-394-011
f. +49 (0)211-394-013

FRANCE

Dropsa Ame
t. +33 (0)1-3993-0033
f. +33 (0)1-3986-2636

CHINA

Dropsa Lubrication Systems
(Shanghai) Co.,Ltd
t. +86 (021) 67740275
f. +86 (021) 67740205

U.S.A.

Dropsa Corporation
t. +1 586-566-1540
f. +1 586-566-1541

AUSTRALIA

Dropsa Australia Ltd.
t. +61 (0)2-9938-600644
f. +61 (0)2-9938-6611

BRAZIL

Dropsa do Brazil
t. +55 (0)11-563-10007
f. +55 (0)11-563-19408




Magnom™ core elements are comprised of an annular magnet and two innovatively formed steel plates. The steel plates direct the lubricant flow and magnetic flux through channels designed to bring all the ferrous contaminants in the lubricant within the range of the magnets.

The plates also multiply the force of the magnet increasing dramatically the capturing force of the core. Finally, the plates create a “collection zone” out of the normal flow path of the lubricant, preventing re-introduction of the contaminants into the flow stream.

TECHNICAL CHARACTERISTICS	
MOUNTING METHOD	In-line
FLOW DIRECTION	Bi-directional
CONSTRUCTION MATERIALS	
Housing	Stainless Steel or Aluminum Alloy
Mandrel	Aluminum Alloy
Flux Plate	Mild Steel
Magnet	Samarium Cobalt (SmCo)
FLUID COMPATIBILITY	
Compatible with a wide range of mobile hydraulic and lubricating fluids, petroleum oils, synthetic fluids, water-glycols, water emulsions.	
MAX. OPERATING TEMP.	302° F (150 °C)
PORT SIZE	SAE- 12 Standard – SAE - 10



Stop the Chain Reaction of Wear!

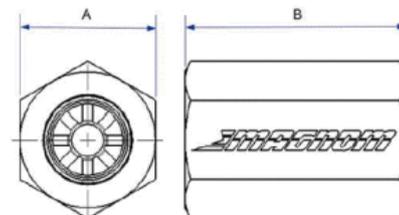

Order Information

INFORMATION ON WEIGHT AND DIMENSIONS						
PART NUMBER	WEIGHT	(A) mm	(B) mm	MATERIAL	BURST PRESSURE	MAX. OPERATING PRESSURE
1525195	5.6 oz (160 g)	33	65	CP-10 Aluminium	16,000 psi (1103 bar)	3000 psi (207 bar)
1525197	14.5 oz (410 g)	33	65	CP-10 Stainless Steel	24,000 psi (1655 bar)	6000 psi (414 bar)
1525196	16 oz (454 g)	44.5	72	CP-12 Aluminium	16,000 psi (1103 bar)	3000 psi (207 bar)
1525198	24 oz (681 g)	44.5	72	CP-12 Stainless Steel	24,000 psi (1655 bar)	6000psi (414 bar)



Stop the Chain Reaction of Wear!

Characteristics

- Mounted in line need a minimum space
- Compact and efficient
- Bi-directional flow
- Two core unit
- Max. Operating pressure: 1,500psi (104bar)
- Burst Pressure: 10,000psi (695 bar)

Applications

- Hydraulics
- Engine Protection
- Lubrication Oils
- Fuel
- Ideal for critical component protection in smaller transmissions, lines and hydraulic systems including auto-motive diesel.

Magnom MINI – MIDI - MAXI

Bi-directional magnetic in-line filters for plant liquids, gases and greases

The bi-directional unit **mini, midi and max** is a compact small unit in-line adapted to very high pressure for hydraulic transmissions and fuels.

Consists of a double magnetic element threaded on both sides.

There are three units:

MINI: It is the ideal choice for critical component protection in smaller transmissions, for use on hydraulic lines, and "on vehicle" automotive systems, including fuel lines.

MIDI: Built from Aluminum Alloy, is a 2 core Magnom™ in-line unit that has a high pressure capability making it suitable for a variety of industrial and hydraulic applications.

MAXI: Has been specifically designed for the needs of the off highway vehicle market. It is the Magnom™ of choice for fitment to many larger off highway vehicle transmissions and hydraulic systems, where it uses the patented Magnom™ technology to provide critical component protection.



Why use a Magnom technology Magnetic Filters to eradicate microscopic ferrous particles?

Microscopic ferrous particles damage industrial fluid systems & degrade finished products. **Magnetic Filters** are the solution to ferrous contamination of industrial fluids.

Microscopic ferrous particles tend to be the hardest material found in industrial fluids, water or gas systems. In turn, they cause wear on softer materials in the system and this causes a chain reaction that results in larger non ferrous wear particles .

By eliminating the microscopic ferrous particles, the primary cause of all subsequent wear is removed and therefore system cleanliness is greatly increased.

Magnom filters can be used for various types of liquids (water, tar, oils, lubricants, coolants, cutting, fuel, hydraulic fluids and transmission), and working conditions characterized by different pressure, viscosity, temperature and flow rate.





Stop the Chain Reaction of Wear!

Contacts

www.dropsa.com
sales@dropsa.com

ITALY
Dropsa SpA
t. +39 02-250791
f. +39 02-25079767

U.K.
Dropsa (UK) Ltd
t. +44 (0)1784-431177
f. +44 (0)1784-438598

GERMANY
Dropsa GmbH
t. +49 (0)211-394-011
f. +49 (0)211-394-013

FRANCE
Dropsa Ame
t. +33 (0)1-3993-0033
f. +33 (0)1-3986-2636

CHINA
Dropsa Lubrication Systems
(Shanghai) Co.,Ltd
t. +86 (021) 67740275
f. +86 (021) 67740205

U.S.A.
Dropsa Corporation
t. +1 586-566-1540
f. +1 586-566-1541

AUSTRALIA
Dropsa Australia Ltd.
t. +61 (0)2-9938-600644
f. +61 (0)2-9938-6611

BRAZIL
Dropsa do Brazil
t. +55 (0)11-563-10007
f. +55 (0)11-563-19408




Magnom™ core elements are comprised of an annular magnet and two innovatively formed steel plates. The steel plates direct the lubricant flow and magnetic flux through channels designed to bring all the ferrous contaminants in the lubricant within the range of the magnets.

The plates also multiply the force of the magnet increasing dramatically the capturing force of the core. Finally, the plates create a “collection zone” out of the normal flow path of the lubricant, preventing re-introduction of the contaminants into the flow stream.

TECHNICAL CHARACTERISTICS	
MOUNTING METHOD	In-line
FLOW DIRECTION	Bi-direzionale
CONSTRUCTION MATERIALS	
Housing	Aluminum Alloy
Mandrel	Aluminum Alloy
Flux Plate	Mild Steel
Magnet	Ceramic Ferrite
C-Clip	Steel
O-ring	Viton
Back up -ring	PTFE
FLUID COMPATIBILITY	Compatible with a wide range of mobile hydraulic and lubricating fluids, petroleum oils, synthetic fluids, water-glycols, water emulsions.
MAX. OPERATING PRESSURE	1500psi (100 bar)
BURST PRESSURE	Mini - 10.000 psi(690 bar)
	Midi - 7000 psi (480 bar)
	Maxi – 6000 psi (410 bar)
MAX. OPERATING TEMP.	248 °F (120°C)



Stop The Chain Reaction Of Wear!



Order Information

INFORMATION ON WEIGHT AND DIMENSIONS						
PART NUMBER	UNIT	WEIGHT	(A)	(B)	PORT CONNECTIONS	SPARE PARTS
1525187	Mini	8oz (210 g)	1 7/8" (48 mm)	3" (78 mm)	SAE - 8	1525204
1525188	Midi	1 lb 2oz (480 g)	2 7/8" (73 mm)	3 7/8" (98 mm)	SAE – 12	1525205
1525199	Maxi	2 lb 10oz (1170 g)	4 1/4" (108 mm)	4 1/4" (107mm)	SAE - 20	1525206

C2128PE WK3/09