



## Linear Cylinder with NAMUR-interface




# Linear Cylinder with NAMUR-interface

Technical information	
Diameter	Ø80 - Ø100 - Ø125 - Ø160 - Ø200 - Ø250 - Ø320 mm
Stroke	25 - 50 - 80 - 100 - 125 - 160 - 200 - 250 - 320 - 400 - 500 - 600 - 700 - 800 - 900 - 1000 mm
Medium	Air
Pressure range	1 ... 10 bar
Temperature range	-20°C ... +80°C
	Below 0°C air has to be dried.

### Cylinder series designed to automate knife gate valves:

- Interface to solenoid valve according to VDI/VDE 3845 (NAMUR 1 - 1/4").
- Mounting port pattern at cylinder head according to DIN 3358/ISO 5210 for direct mounting to knife gates valves.

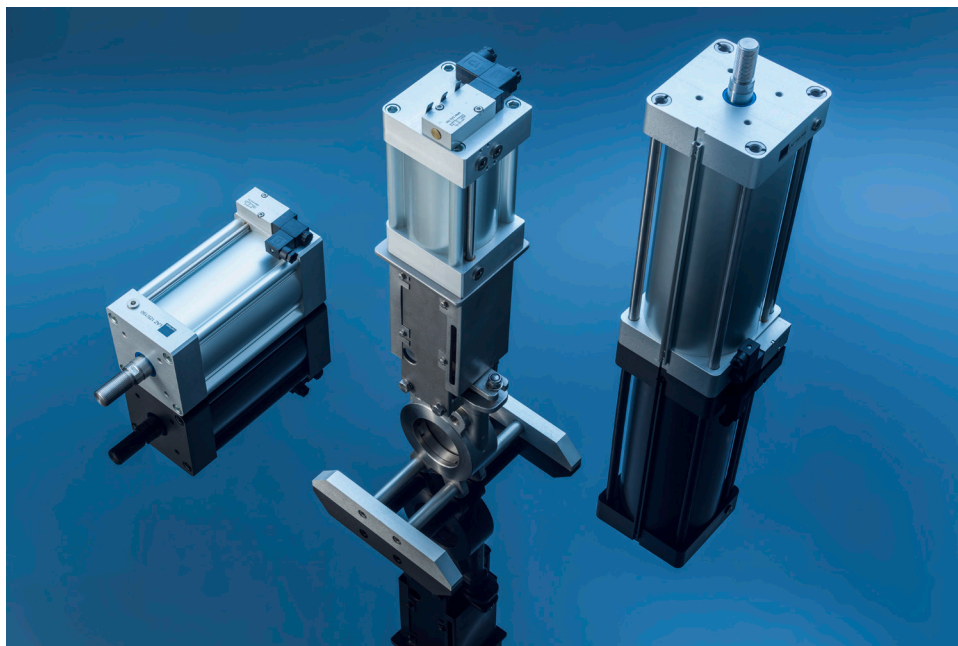

L	A	Z	80	/	200
			<b>DIAMETER</b>	<b>STROKE</b>	
			80	25	
			100	50	
			125	80	
			160	100	
			200	125	
			250	160	
			320	200	
				250	
				320	
				400	
				500	
				600	
				700	
				800	
				900	
				1000	



