

# Mini Filters




## Main features

Centrifugal collector with sinter filter cartridge, filter element 20 µm – others on request, please refer to page 3.14 – semi-automatic condensate discharge.

## Technical information

Operating pressure in p1: Max. 15 bar at 20° C  
 Operating medium: Compressed air  
 Operating temperature: -10° C ... + 50° C  
 Installation positioning: Vertical  
 Materials:  
     Body and Shell: Technopolymer  
     Gaskets: NBR  
     Filter: Sintered bronze  
     End parts: Die-cast zinc

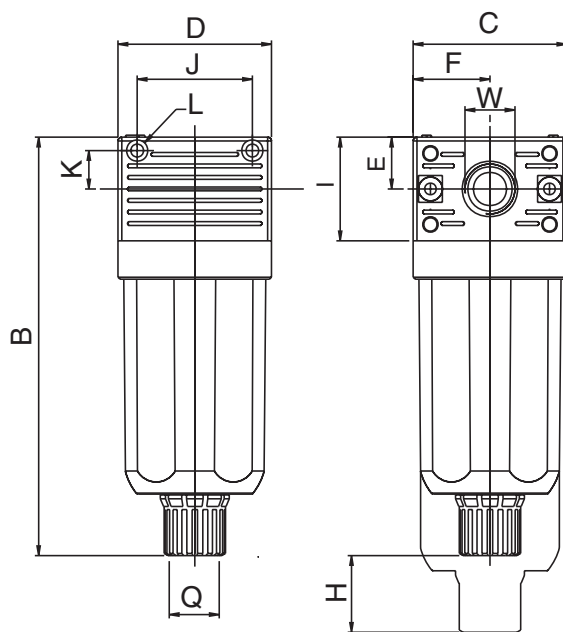

F-0	
A	
B	109
C	40
D	40
E	13,5
F	20
H	11
I	27
J	30
K	9,25
L	DX M3
W	1/8"-1/4"

Family	Port Size	Flow Rate qnN*	Bowl Capacity	Part Number
Mini (0)	G 1/8"	1200 l/min	17,5 cm <sup>3</sup>	F-0-1/8
Mini (0)	G 1/4"	1200 l/min	17,5 cm <sup>3</sup>	F-0-1/4

\* Measured at p1=10 bar, p2=6 bar, Δp=1 bar according to CETOP RP 50P

