


# Lubricators

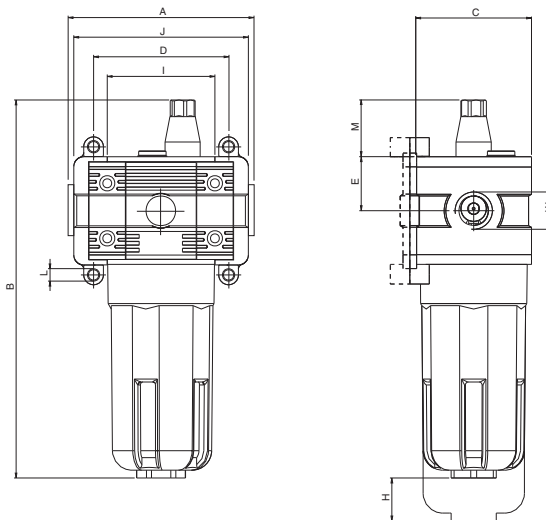

### Main features

Direct-proportional lubricator, recommended types of oil: Mineral oils of viscosity class VG 22 a (ISO 3448).  
Recommended consumption: 1-2 drops / m<sup>3</sup> air.

### Technical information

Operating pressure in p1: Max. 15 bar at 20° C  
 Operating medium: Compressed air  
 Operating temperature: -10° C ... + 50° C  
 Installation positioning: Vertical  
 Materials:  
     Body and Shell: Technopolymer  
     Gaskets: Perbunan  
     End parts: Die-casted zinc

	L-1	L-2	L-3
A	72	89	100
B	162	195	214
C	45	59	70
D	76	89	106 *
E	21	27,5	32,5
H	39	48	50,5
I	43	55	65
J	54	69	79
K	17,25	22	27
L	D X M4	D X M5	D X M6
M	29	29	29
W	(1/8")-1/4"-3/8"(1/4")-3/8"-1/2"1/2"-3/4"-1"		

\*) Variante G1" plus 5 mm

Family	Port Size	Flow Rate qnN*	Bowl Capacity	Oil Load	Part Number
1	G 1/4 "	2600 l/min	22 cm <sup>3</sup>	Manual	L-1-1/4
1	G 3/8"	2600 l/min	22 cm <sup>3</sup>	Manual	L-1-3/8
1	G 3/8"	2600 l/min	22 cm <sup>3</sup>	Auto	L-1-3/8-A
2	G 3/8"	5600 l/min	46 cm <sup>3</sup>	Manual	L-2-3/8
2	G 1/2"	5600 l/min	46 cm <sup>3</sup>	Manual	L-2-1/2
2	G 1/2"	5600 l/min	46 cm <sup>3</sup>	Auto	L-2-1/2-A
3	G 3/4"	8200 l/min	89,5 cm <sup>3</sup>	Manual	L-3-3/4
3	G 1"	8200 l/min	89,5 cm <sup>3</sup>	Manual	L-3-1
3	G 1"	8200 l/min	89,5 cm <sup>3</sup>	Auto	L-3-1-A

\* Measured at p1=10 bar, p2=6 bar, Δp=1 bar according to CETOP RP 50P

