


Soft Start Valve

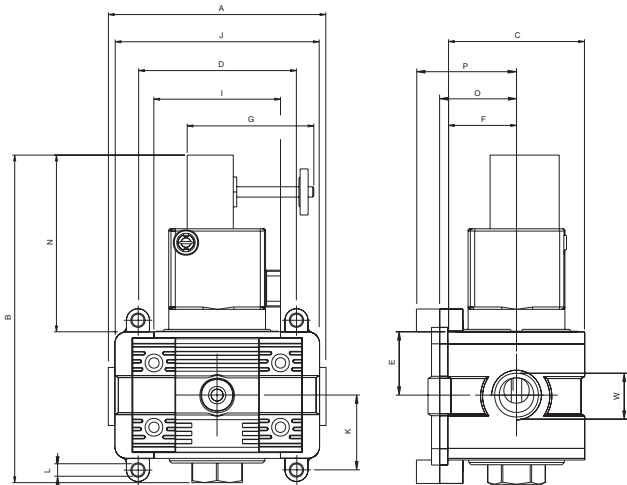

Main features

Soft start valve with quick exhaust, electropneumatic operation.

Technical information

Operating pressure in p1: Max. 10 bar at 20° C
 Operating medium: Compressed air
 Operating temperature: -10° C ... + 50° C
 Installation positioning: Vertical
 Materials:
 Body: Technopolymer
 Gaskets: NBR
 End parts: Die-cast zinc

	SSV-2	SSV-3
A	104	115
B	142	131,5
C	59	70
D	89	106 106 111
E	27,5	32,5
F	28,5	35
G	55,5	55,5
I	55	65
J	97	109
K	22	27
L	D X M5	D X M5
N	76,5	76,5
W	1/4" - 3/8" - 1/2"	1/2" - 3/4" - 1"

Family	Port Size	Voltage	Part Number
2	G 3/8"	24VDC	SSV-2-3/8
2	G 1/2"	24VDC	SSV-2-1/2
3	G 3/4"	24VDC	SSV-3-3/4
3	G 1"	24VDC	SSV-3-1

