

BROCAS PARA PARED
FORETS BÉTON / MASONRY DRILL-BITS

1226 Compaqplus (SDS+)



	Ø mm	L mm	l mm	clip		pack	
				Ref. 1226		Ref. 1226/1	
	5,00	115	50		1	5	
	6,00	115	50		1	5	
	6,50	115	50		1	-	
	7,00	115	50		1	-	
	8,00	115	50		1	5	
	10,00	115	50		1	5	
	5,00	165	100		1	5	
	6,00	165	100		1	5	
	6,50	165	100		1	-	
	7,00	165	100		1	-	
	8,00	165	100		1	5	
	10,00	165	100		1	5	
	12,00	165	100		1	5	
	14,00	165	100		1	5	
	6,00	215	150		1	5	
	7,00	215	150		1	-	
	8,00	215	150		1	5	
	10,00	215	150		1	5	
	12,00	215	150		1	5	
	14,00	215	150		1	5	
	16,00	215	150		1	-	
	6,00	315	250		1	-	
	8,00	315	250		1	-	
	10,00	315	250		1	-	
	12,00	315	250		1	-	
	14,00	315	250		1	-	
	16,00	315	250		1	-	
	8,00	465	400		1	-	
	10,00	465	400		1	-	
	12,00	465	400		1	-	
	14,00	465	400		1	-	
	16,00	465	400		1	-	

> Ref. 1217/2



	Ø mm	L mm	
	6,00	110	1
	8,00	110	1
	6,00	160	1
	8,00	160	1
	10,00	160	1
	12,00	160	1
TOTAL			6

APLICACIONES
APPLICATIONS



Hormigón armado
Béton armé
Reinforced concrete



Granito
Granit
Granite



Hormigón
Béton
Concrete



Ladrillo
Brique
Brick

Características
Caractéristiques
Features



Mango
SDS+
Queue SDS+
SDS+ shank



Punta
6 cortes
Pointe
6 dents
6-cut tip



Percusión
y rotación
Percussion
et rotation
Percussion
and rotation



PGM

BROCAS PARA PARED
FORETS BÉTON / MASONRY DRILL-BITS

1223 Quatroplus (SDS+)



Ref. 1223

Ref. 1223/1

Ø mm	L mm	l mm		
5,00	115	50	1	5
6,00	115	50	1	5
8,00	115	50	1	5
10,00	115	50	1	5
5,00	165	100	1	5
6,00	165	100	1	5
8,00	165	100	1	5
10,00	165	100	1	5
12,00	165	100	1	5
6,00	215	150	1	5
8,00	215	150	1	5
10,00	215	150	1	5
12,00	215	150	1	5
14,00	215	150	1	
16,00	215	150	1	
6,00	265	200	1	
8,00	265	200	1	
10,00	265	200	1	
12,00	265	200	1	
14,00	265	200	1	
16,00	265	200	1	
18,00	265	200	1	
20,00	265	200	1	
22,00	265	200	1	
8,00	315	250	1	
10,00	315	250	1	
12,00	315	250	1	
14,00	315	250	1	
16,00	315	250	1	
8,00	465	400	1	
10,00	465	400	1	
12,00	465	400	1	
14,00	465	400	1	
16,00	465	400	1	
18,00	450	400	1	
20,00	450	400	1	
22,00	450	400	1	
24,00	450	400	1	
25,00	450	400	1	
28,00	450	400	1	
30,00	450	400	1	



APLICACIONES
APPLICATIONS



Hormigón armado
Béton armé
Reinforced concrete



Granito
Granit
Granite



Ladrillo
hormigón
Brique béton
Concrete brick



Ladrillo
Brique
Brick

Características
Caractéristiques
Features



Mango
SDS+
Queue SDS+
SDS+ shank



Ø > 12 mm



Percusión
y rotación
Percussion
et rotation
Percussion
and rotation




Punta
4 cortes
Pointe
4 dents
4-cut tip



PGM

BROCAS PARA PARED
FORETS BÉTON / MASONRY DRILL-BITS

1222 Performax (SDS MAX)

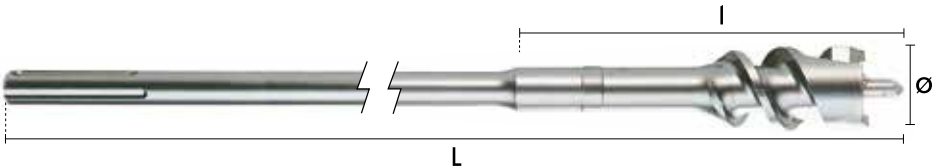

Ref. 1222

Ø mm	L mm	l mm		
45,00	590	450		1
55,00	590	450		1
65,00	590	450		1
80,00	590	450		1
45,00	990	850		1
55,00	990	850		1
65,00	990	850		1
80,00	990	850		1

APLICACIONES
APPLICATIONS



Hormigón armado
Béton armé
Reinforced concrete



Granito
Granit
Granite



Ladrillo
hormigón
Brique béton
Concrete brick



Ladrillo
Brique
Brick

Características
Caractéristiques
Features



Mango
SDS MAX
Queue
SDS MAX
SDS Max
shank



Punta
perforadora
Pointe
perforatrice
Drilling tip



Percusión
y rotación
Percussion
et rotation
Percussion
and rotation

BROCAS PARA PARED
FORETS BÉTON / MASONRY DRILL-BITS

1203 **Fastermx (SDS MAX)**



Ref. 1203

Ø mm	L mm	l mm		
12,00	340	200		1
14,00	340	200		1
15,00	340	200		1
16,00	340	200		1
18,00	340	200		1
20,00	340	200		1
22,00	340	200		1
24,00	340	200		1
25,00	340	200		1
26,00	340	200		1
28,00	340	200		1
30,00	340	200		1
32,00	340	200		1
12,00	540	360		1
14,00	540	360		1
15,00	540	360		1
16,00	540	360		1
18,00	540	360		1
20,00	540	360		1
22,00	540	360		1
24,00	540	360		1
25,00	540	360		1
26,00	540	360		1
28,00	540	360		1
30,00	540	360		1
32,00	540	360		1
35,00	540	360		1
38,00	540	360		1
40,00	540	360		1
45,00	540	360		1
16,00	690	550		1
18,00	690	550		1
20,00	690	550		1
22,00	690	550		1
25,00	690	550		1
28,00	690	550		1
32,00	690	550		1
35,00	690	550		1
38,00	690	550		1



APLICACIONES
APPLICATIONS



Hormigón armado
Béton armé
Reinforced concrete



Granito
Granit
Granite



Ladrillo
hormigón
Brique béton
Concrete brick



Ladrillo
Brique
Brick

Características
Caractéristiques
Features



Mango
SDS MAX
Queue
SDS MAX
SDS Max
shank



Punta
4 cortes
Pointe
4 dents
4-cut tip




Percusión
y rotación
Percussion
et rotation
Percussion
and rotation



2 cortes
2 pointe
2 cut tip

BROCAS PARA PARED
FORETS BÉTON / MASONRY DRILL-BITS

1203 Fastermax (SDS MAX)



Ref. 1203

Ø mm	L mm	l mm		
40,00	690	550		1
16,00	920	780		1
18,00	920	780		1
19,00*	920	780		1
20,00	920	780		1
22,00	920	780		1
24,00*	920	780		1
25,00	920	780		1
26,00*	920	780		1
28,00	920	780		1
29,00*	920	780		1
30,00*	920	780		1
32,00	920	780		1
35,00	920	780		1
36,00*	920	780		1
40,00	920	780		1
42,00*	920	780		1
45,00*	920	780		1
20,00	1500	1360		1
25,00	1500	1360		1
28,00	1500	1360		1
32,00	1500	1360		1
36,00*	1500	1360		1
40,00	1500	1360		1
42,00*	1500	1360		1
45,00*	1500	1360		1

(Hasta fin de existencias / Jusqu'à épuisement des stocks / While supplies last)



APLICACIONES
APPLICATIONS



Hormigón armado
Béton armé
Reinforced concrete



Granito
Granit
Granite



Ladrillo hormigón
Brique béton
Concrete brick



Ladrillo
Brique
Brick

Características
Caractéristiques
Features



Mango
SDS MAX
Queue
SDS MAX
SDS Max
shank



Punta
4 cortes
Pointe
4 dents
4-cut tip



Percusión
y rotación
Percussion
et rotation
Percussion
and rotation



APLICACIONES
APPLICATIONS



Gres / Grès / Stoneware



Hormigón
Béton
Concrete



Ladrillo
Brique
Brick



Acero <80Kg
Acier <80Kg
Steel <80Kg



Maderas blandas
Bois tendre
Softwoods



Plástico
Plastique
Plastic

Características
Caractéristiques
Features



Punta
2 cortes
Pointe 2 dents
2-cut tip




Fresado
tipo S
Fraisage type S
S-type milling



Percusión
y rotación
Percussion
et rotation
Percussion
and rotation

BROCAS PARA PARED
FORETS BÉTON / MASONRY DRILL-BITS

1207 > Óptima



	Ø mm	L mm	l mm	tubo		pack	
				Ref. 1207		Ref. 1207/1	
	3,00	70	40		1		10
	4,00	75	40		1		10
	5,00	85	50		1		10
	6,00	100	60		1		10
	7,00	100	60		1		-
	8,00	120	80		1		10
	9,00	120	80		1		-
	10,00	120	80		1		5
	11,00	150	90		1		-
	12,00	150	90		1		5
	14,00	150	90		1		-
	5,00	150	90		1		-
	6,00	150	90		1		-
	8,00	200	150		1		-
	10,00	200	150		1		-
	12,00	200	150		1		-

Estuches / Coffrets / Cases

> Ref. 8128/4



Ø mm	
3,00 - 4,00 - 5,00 - 6,00 - 7,00 - 8,00 - 9,00 - 10,00	8


> Ref. 8130/4



Ø mm	
4,00 - 5,00 - 6,00 - 8,00 - 10,00	5

BROCAS PARA PARED
FORETS BÉTON / MASONRY DRILL-BITS

1225 Perfecta



	Ø mm	L mm	l mm	tubo		pack	
				Ref. 1225		Ref. 1225/1	
	3,00	70	35		1		10
	3,50	70	35		1		-
	4,00	75	40		1		10
	5,00	85	50		1		10
	6,00	100	60		1		10
	7,00	100	60		1		-
	8,00	120	70		1		10
	9,00	120	70		1		-
	10,00	120	80		1		5
	11,00*	150	80		1		-
	12,00	150	80		1		5
	13,00*	150	80		1		-
	14,00	150	80		1		-
	15,00*	160*	80		1		-
	16,00	160	80		1		-
	18,00	160	80		1		-
	20,00	160	80		1		-
	6,00	150	80		1		-
	8,00*	150	80		1		-
	8,00	250	170		1		-
	10,00	250	170		1		-
	12,00	250	170		1		-
	14,00	250	170		1		-

(Hasta fin de existencias / Jusqu'à épuisement des stocks / While supplies last)

Estuches / Coffrets / Cases

> Ref. 8130/5

	Ø mm	
	4,00-5,00-6,00-8,00-10,00	5



APLICACIONES
APPLICATIONS



Granito / Granit / Granite



Hormigón
Béton
Concrete



Ladrillo
hormigón
Brique béton
Concrete brick



Ladrillo
Brique
Brick



Cerámica
Céramique
Ceramic



Gres
Grès
Stoneware



Mármol
Marbre
Marble

Características
Caractéristiques
Features



Punta
2 cortes
Pointe 2 dents
2-cut tip



Fresado
tipo U
Fraisage type U
U-type milling



Percusión
y rotación
Percussion
et rotation
Percussion
and rotation



Punta soldada
a 1100°
Pointe soudée à 1100°
Tip soldered at 1100°



BROCAS PARA PARED
FORETS BÉTON / MASONRY DRILL-BITS

1208 Diamond



APLICACIONES
APPLICATIONS



Hormigón
Béton
Concrete



Ladrillo
hormigón
Brique béton
Concrete brick



Ladrillo
Brique
Brick



Gres
Grès
Stoneware



Cerámica
Céramique
Ceramic



Mármol
Marbre
Marble

Características
Caractéristiques
Features



Punta
2 cortes
Pointe 2 dents
2-cut tip



Fresado
tipo U
Fraisage type U
U-type milling



Percusión
y rotación
Percussion
et rotation
Percussion
and rotation



Punta soldada
a 1100°
Pointe soudée à 1100°
Tip soldered at 1100°



Ref. 1208

Ref. 1208/1

Ø mm	L mm	I mm	tubo	pack
3,00	70	40	1	10
3,50	70	40	1	-
4,00	75	40	1	10
4,50	80	50	1	-
5,00	85	50	1	10
5,50	85	50	1	-
6,00	100	60	1	10
6,50	100	60	1	-
7,00	100	60	1	-
8,00	120	80	1	10
9,00	120	80	1	-
10,00	120	80	1	5
11,00	150	90	1	-
12,00	150	90	1	5
13,00	150	90	1	-
14,00	150	90	1	-
15,00	160	100	1	-
16,00	160	100	1	-
18,00	160	100	1	-
20,00	160	100	1	-
22,00	160	100	1	-
25,00	160	100	1	-
5,00	150	90	1	-
5,50	150	90	1	-
6,00	150	90	1	-
6,50	150	90	1	-
7,00	150	90	1	-
8,00	150	90	1	-
10,00	150	90	1	-
8,00	200	150	1	-
10,00	200	150	1	-
12,00	200	150	1	-
10,00	300	250	1	-
12,00	300	250	1	-
14,00	300	250	1	-
8,00	400	350	1	-
10,00	400	350	1	-
12,00	400	350	1	-
14,00	400	350	1	-
16,00	400	350	1	-
18,00	400	350	1	-
20,00	400	350	1	-
22,00	400	350	1	-
24,00	400	350	1	-
10,00	600	550	1	-
12,00	600	550	1	-
14,00	600	550	1	-
16,00	600	550	1	-
18,00	600	550	1	-
20,00	600	550	1	-

BROCAS PARA PARED
FORETS BÉTON / MASONRY DRILL-BITS

1208 Diamond

Estuches / Coffrets / Cases

> Ref. 8128/3



Ø mm	
3,00 - 4,00 - 5,00 - 6,00 - 7,00 - 8,00 - 9,00 - 10,00	8

> Ref. 8130/3



Ø mm	
4,00 - 5,00 - 6,00 - 8,00 - 10,00	5



APLICACIONES
APPLICATIONS



Hormigón
Béton
Concrete



Ladrillo
hormigón
Brique béton
Concrete brick



Ladrillo
Brique
Brick



Gres
Grès
Stoneware



Cerámica
Céramique
Ceramic



Mármol
Marbre
Marble

Características
Caractéristiques
Features



Punta
2 cortes
Pointe 2 dents
2-cut tip



Fresado
tipo U
Fraisage type U
U-type milling



Percusión
y rotación
Percussion
et rotation
Percussion
and rotation



Punta soldada
a 1100°
Pointe soudée à 1100°
Tip soldered at 1100°



BROCAS PARA PARED
FORETS BÉTON / MASONRY DRILL-BITS

1209 Marmolit



funda Ref. 1209				
Ø mm	L mm	l mm		
3,00	60	40		1
3,50	60	40		1
4,00	75	40		1
4,50	85	50		1
5,00	85	50		1
5,50	85	50		1
6,00	100	60		1
7,00	100	60		1
8,00	120	80		1
9,00	120	80		1
10,00	120	80		1
11,00	150	90		1
12,00	150	90		1
13,00	150	90		1
14,00	150	90		1
15,00	150	100		1
16,00	150	100		1
18,00	160	100		1
20,00	160	100		1
24,00*	160	100		1
25,00*	160	100		1
5,00	150	90		1
6,00	150	90		1
7,00*	150	90		1
6,00	200	150		1
7,00*	200	150		1
8,00	200	150		1
9,00*	200	150		1
10,00	200	150		1
11,00*	200	150		1
12,00	200	150		1
6,00	300	250		1
7,00*	300	250		1
8,00	300	250		1
9,00*	300	250		1
10,00	300	250		1
12,00	300	250		1
13,00*	300	250		1
14,00	300	250		1
16,00	300	250		1
18,00	300	250		1
20,00	300	250		1
6,00	400	350		1
7,00*	400	350		1
8,00	400	350		1

(Hasta fin de existencias / Jusqu'à épuisement des stocks / While supplies last)

APLICACIONES
APPLICATIONS



Ladrillo / Brique / Brick



Cerámica
Céramique
Ceramic



Ladrillo
hormigón
Brique béton
Concrete brick



Hormigón
Béton
Concrete

Características
Caractéristiques
Features



Punta
2 cortos
Pointe 2 dents
2-cut tip



Percusión
y rotación
Percussion
et rotation
Percussion
and rotation



APLICACIONES
APPLICATIONS



Ladrillo / Brique / Brick



Cerámica
Céramique
Ceramic



Ladrillo hormigón
Brique béton
Concrete brick



Hormigón
Béton
Concrete

Características
Caractéristiques
Features



Punta 2 cortes
Pointe 2 dents
2-cut tip



Percusión y rotación
Percussion et rotation
Percussion and rotation

BROCAS PARA PARED
FORETS BÉTON / MASONRY DRILL-BITS

1209 Marmolit



Ref. 1209

Ø mm	L mm	l mm		
10,00	400	350		1
12,00	400	350		1
14,00	400	350		1
15,00	400	350		1
16,00	400	350		1
18,00	400	350		1
20,00	400	350		1
22,00 *	400	350		1
8,00	600	550		1
10,00	600	550		1
12,00	600	550		1
14,00	600	550		1
16,00	600	550		1
18,00	600	550		1
20,00	600	550		1
22,00 *	600	550		1
28,00 *	600	550		1

(Hasta fin de existencias / Jusqu'à épuisement des stocks / While supplies last)

Estuches / Coffrets / Cases

> Ref. 8128/2



> Ref. 8130/2



Ø mm		
3,00 - 4,00 - 5,00 - 6,00 - 7,00 - 8,00 - 9,00 - 10,00		8

Ø mm		
4,00 - 5,00 - 6,00 - 8,00 - 10,00		5

BROCAS PARA PARED
FORETS BÉTON / MASONRY DRILL-BITS

1227 Porceline



Ref. 1227

Ø mm	L mm		
5,00	55		1
6,00	55		1
7,00	55		1
8,00	55		1
10,00	55		1
12,00	55		1
15,00	55		1
20,00	55		1
25,00	55		1
35,00	55		1

> Ref. 1227/1 Dispensador de agua / Réservoir d'eau / Water dispenser



Ø mm		
5,00 - 10,00		1
12,00 - 25,00		1

> Ref. 8138



Ref.	Ø mm		
8138	5,00 - 6,00 - 7,00 - 8,00 - 10,00 + dispensador		1



APLICACIONES
APPLICATIONS



Porcelanato
Céramique dur / Hard tile



Gres
Grès
Stoneware



Cerámica
Céramique
Ceramic



Granito
Granit
Granite



Vidrio
Verre
Glass

Características
Caractéristiques
Features



Diamante
Diamant
Diamond



Rotación
Rotation
Rotation



1
Refrigerar de manera abundante la zona a perforar.
Refroidir abondamment la zone à perforeur.
Cool the area to be drilled.



2
Comenzar a perforar en un ángulo de 45° hasta realizar una pequeña muesca.
Commencer à perforeur à un angle de 45° jusqu'à obtenir une petite encoche.
Start to drill at a 45° angle until you make a small notch.



3
Perforar de forma perpendicular hasta realizar el orificio.
Perforeur perpendiculairement jusqu'à réalisation de l'orifice.
Drill at a right angle until you make a hole.



BROCAS PARA PARED
FORETS BÉTON / MASONRY DRILL-BITS

1228 Porceline Widia



Ref. 1228

Ø mm	L mm	l mm		
3,00 *	85	40		1
4,00	85	50		1
5,00	85	50		1
6,00	100	65		1
7,00 *	125	75		1
8,00	126	75		1
9,00 *	150	90		1
10,00	150	90		1

(Hasta fin de existencias / Jusqu'à épuisement des stocks / While supplies last)



APLICACIONES
APPLICATIONS



Porcelanato
Céramique dur / Hard tile



Gres
Grès
Stoneware



Cerámica
Céramique
Ceramic

Características
Caractéristiques
Features



Rotación
Rotation
Rotation



APLICACIONES
APPLICATIONS



Vidrio / Verre / Glass



Cerámica
Céramique
Ceramic



Gres
Grès
Stoneware

Características
Caractéristiques
Features



Punta Ojiva
Pointe Ogive
Pointed tip



Rotación
Rotation
Rotation

1212 Vidrio



Ref. 1212

Ø mm	L mm		
3,00	65		1
4,00	65		1
5,00	65		1
6,00	65		1
7,00	70		1
8,00	70		1
9,00	70		1
10,00	80		1
12,00	80		1