Cordless compact drill driver SF 2-A

APPLICATIONS

- Installation of electrical switches, sockets, pipe rings and other equipment
- Driving screws up to 6 mm diameter in wood
- Driving self-tapping screws up to 4.8 mm diameter in metal
- Drilling with HSS bits up to 8 mm diameter in metal
- Drilling with auger and spade bits up to 14 mm diameter in wood
- Hole sawing up to 35 mm diameter in metal

ADVANTAGES

- Precision clutch provides fine control for delicate screwdriving jobs
- High productivity thanks to a drilling speed of up to 1,500 /min
- Optional belt hook or holster for extra mobility and convenience
- Ultra-compact design for good access in tight corners
- Ergonomic grip and perfect balance for maximum working comfort
- Built-in double LED in the foot of the tool for ideal illumination of the work area

No costs for maximum 1 time replacement within the first year
This tool cannot be repaired

Technical data	
Rated voltage	10.8 V
Rotation speed	Gear 1: 400 rpm; Gear 2: 1500 rpm
Max. torque	12 Nm (soft joint), 24 Nm (hard joint)
Torque range	0.5 - 3.5 Nm
Weight according to EPTA Procedure 01/2003	1.0 kg
Dimensions (LxWxH)	178 x 70 x 206 mm
Tool chuck type	3-jaw chuck, 0.8 - 10 mm

Order Now Watch Video

Package contents

	Inserts HSS Co / Bit Set	Item Number
SF 2-A Body	3MM MP10	3553357
	6MM MP10	3553358
	6.5MM MP10	3579314
	1 - 13MM Kit	3579315
	3MM MP10	3553361
	6MM MP10	3553362
	6.5MM MP10	3579316
	1 - 13MM Kit	3579317
	3MM MP10	3553359
	6MM MP10	3553360
	6.5MM MP10	3579318
	1 - 13MM Kit	3579319

Please visit Hilti website for the latest item numbers and related products

www.rodavigo.net +34 986 288118
Servicio de Att. al Cliente

Cordless compact drill driver SF 2H-A NEW

APPLICATIONS

- Installation of electrical switches, sockets, pipe rings and other equipment
- Driving screws up to 6 mm diameter in wood
- Driving self-tapping screws up to 4.8 mm diameter in metal
- Drilling with HSS bits up to 8 mm diameter in metal
- Drilling with auger and spade bits up to 14 mm diameter in wood
- Hole sawing up to 35 mm diameter in metal

ADVANTAGES

- Precision clutch provides fine control for delicate screwdriving jobs
- High productivity thanks to a drilling speed of up to 1,500 /min
- Optional belt hook or holster for extra mobility and convenience
- Ultra-compact design for good access in tight corners
- Ergonomic grip and perfect balance for maximum working comfort
- Built-in double LED in the foot of the tool for ideal illumination of the work area

Technical data	
Rated voltage	10.8 V
Rotation speed	Gear 1: 400 rpm; Gear 2: 1500 rpm
Max. torque	12 Nm (soft joint), 24 Nm (hard joint)
Torque range	0.5 - 3.5 Nm
Weight according to EPTA Procedure 01/2003	0.9 kg
Dimensions (LxWxH)	196 x 70 x 206 mm
Tool chuck type	3-jaw chuck, 0.8 - 10 mm

HILTI TOOL SERVICE 1 YEAR NO COST WARRANTY
HILTI TOOL SERVICE 3 MONTHS REPAIR WARRANTY
HILTI TOOL SERVICE 3 DAYS ON FREE REPAIR SERVICE

No costs for maximum 1 time replacement within the first year
This tool cannot be repaired

Order Now Watch Video

Package contents

	Inserts HSS Co / Bit Set	Item Number
SF 2H-A Body	3MM MP10	3584284
	6MM MP10	3584219
	6.5MM MP10	3584220
	1 - 13MM Kit	3584221
	3MM MP10	3584222
	6MM MP10	3584273
	6.5MM MP10	3584274
	1 - 13MM Kit	3584275
	3MM MP10	3584276
	6MM MP10	3584277
	6.5MM MP10	3584278
	1 - 13MM Kit	3584279

Please visit Hilti website for the latest item numbers and related products

Polígono Industrial O Rebullón s/n. 36416 - Mos - España - rodavigo@rodavigo.com

Cordless drill driver SFD 2-A

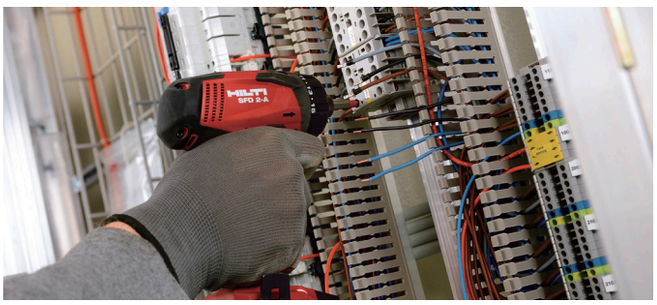

APPLICATIONS

- Installation of electrical switches, sockets and other equipment
- Driving screws up to 6 mm diameter in wood
- Drilling with HSS bits up to 8 mm diameter in metal
- Driving screws up to 6 mm diameter in plastic anchors
- Drilling with auger and spade bits up to 14 mm diameter in wood

ADVANTAGES

- 144 mm length and ultra-compact design for maximum accessibility
- Quick-release chuck optimized for 25 mm bit length for maximum convenience and minimum overall tool length with the bit fitted
- Built-in double LED for almost shadowless illumination of the work area
- Ergonomic grip and perfect balance for maximum working comfort
- Precision clutch provides fine control for delicate screwdriving job
- Side rubber contact points for improved ruggedness and protection of the work surface

HILTI TOOL SERVICE 1 YEAR NO COST WARRANTY
HILTI TOOL SERVICE 3 MONTHS REPAIR WARRANTY
HILTI TOOL SERVICE 3 YEARS ON FREE REPAIR SERVICE

No costs for maximum 1 time replacement within the first year
This tool cannot be repaired

Technical data	
Rated voltage	10.8 V
Rotation speed	Gear 1: 400 rpm; Gear 2: 1500 rpm
Max. torque	12 Nm (soft joint), 24 Nm (hard joint)
Torque range	0.5 - 3.5 Nm
Weight according to EPTA Procedure 01/2003	1.1 kg
Dimensions (LxWxH)	144 x 70 x 206 mm
Tool chuck type	1/4” in hexagonal

Order Now **Watch Video**

Package contents

	Inserts HSS Co / Bit Set	Item Number
SFD 2-A Body	N/A	**2093386**
	Bit Set S-BSC UNI 50/2" T (6)	**3579374**
	N/A	**3533391**
	Bit Set S-BSC UNI 50/2" T (6)	**3579375**
	N/A	**3532506**
	Bit Set S-BSC UNI 50/2" T (6)	**3579376**

Please visit Hilti website for the latest item numbers and related products

Cordless impact screwdriver SID 2-A

APPLICATIONS

- Setting HUS 6 screw and frame anchors in masonry and concrete
- Driving screws in HRD frame anchors up to 8 mm in masonry and concrete
- Drilling in wood with WDB-S spade bits
- Driving lag bolts up to 6 mm diameter in wood

ADVANTAGES

- High productivity thanks to driving speeds of up to 2,500 /min
- Ultra-compact design for easy use wherever space is limited
- Ideal illumination thanks to double LEDs incorporated in the foot of the tool
- Optional belt hook or holster for extra mobility and convenience
- Perfect grip and balance for unmatched productivity
- Rapid switch reaction for full control of the drilling or driving operation

No costs for maximum 1 time replacement within the first year
This tool cannot be repaired

Technical data	
Rated voltage	10.8 V
Rotation speed	2500rpm
Max. torque	110 Nm
Full hammering frequency	3,410 impacts /minute
Weight according to EPTA Procedure 01/2003	1.1 kg
Dimensions (LxWxH)	157 x 70 x 206 mm
Tool chuck type	1/4" in hexagonal

Order Now Watch Video

Package contents

	Inserts HSS Co / Bit Set	Item Number
SID 2-A Body	N/A	**2081472**
	Bit Set S-BSC UNI 50/2" T (6)	**3579377**
	N/A	**3533392**
	Bit Set S-BSC UNI 50/2" T (6)	**3579378**
	N/A	**3532507**
	Bit Set S-BSC UNI 50/2" T (6)	**3579379**

Please visit Hilti website for the latest item numbers and related products

Cordless reciprocating saw SR 2-A12 NEW

APPLICATIONS

- Cutting metal pipes and conduit
- Cutting plastic pipes and conduit
- Cutting isolation material
- Cutting sandwich material

ADVANTAGES

- Light and mobile sub-compact design for working overhead and or in difficult-to-access areas
- Brushless motor – lasts up to three times longer while delivering cutting performance similar to that of a corded tool
- Built-in LED light for shadow-free illumination of the cutting area
- Compatible with all Hilti 12V Li-ion batteries
- Keyless blade clamp

Technical data	
Base material	Wood, Metal, Plastic, Drywall, Sandwich panel
Stroke length	16 mm
Stroke rate	2900 strokes/minute
A-weighted emission sound pressure level[1)]	75 dB (A)
Triaxial vibration value for cutting board (ah,B)[2)]	5.3 m/s²

[1)] according to EN 60745
[2)] according to EN 60745-2-11

Order Now Watch Video

Package contents

	Inserts	Item Number
SR 2-A12 Body	SAW BLADE WD 15 6 (5)	**3621429**
	SAW BLADE WD 1014 (5)	**3621430**
	SAW BLADE WD 15 6 (5)	**3622100**
	SAW BLADE WD 1014 (5)	**3622101**
	SAW BLADE WD 15 6 (5)	**3621431**
	SAW BLADE WD 1014 (5)	**3621432**

Please visit Hilti website for the latest item numbers and related products

Cordless task light SL 2-A12 NEW

APPLICATIONS

- Illumination of unlit and poorly lit work areas
- Inspection of painted and other finished surfaces

ADVANTAGES

- LED panel provides a light output of 500 lumens while staying cool to the touch
- Natural white light clearly illuminates dark work areas with high color accuracy
- Up to a full working day of light on a single battery charge

Technical data	
Rated voltage	10.8 V
LED lamp power	6.4 W
Lumens	500 lm

Order Now

Package contents

Ordering designation	Sales pack quantity	Item number
SL 2-A12 Body	1 pc	**2163833**

Please visit Hilti website for the latest item numbers and related products