


Características de selección

Modelo	I (A)		P2		I/min	0	25	50	75	100	125	150	167	200	225
	1~230V	3~400V	kW	HP	m³/h	0	1,5	3	4,5	6	7,5	9	10	12	13,5
WUP6-025	1,7	—	0,25	0,3	mca	9	9	8	8	7	6	3	1	—	—
WUP6-055	5	—	0,55	0,75		18	18	17	16	14	13	12	10	6	2
WUP11-075	5,4	2	0,75	1		14	14	14	13	13	12	11	11	8	2

Modelo	I (A)		P2		I/min	0	200	400	450	500	550	600	650	700	800
	1~230V	3~400V	kW	HP	m³/h	0	12	24	27	30	33	36	39	42	48
WUP25-075	5,4	2	0,75	1	mca	10	9	7	5	4	1	—	—	—	—
WUP25-110	6,5	2,6	1,1	1,5		12	11	9	8	8	6	4	2	—	—
WUP40-110	6,5	2,6	1,1	1,5		10	10	9	9	8	8	7	6	5	3
WUP16-110	6,5	2,6	1,1	1,5		17	15	10	6	—	—	—	—	—	—

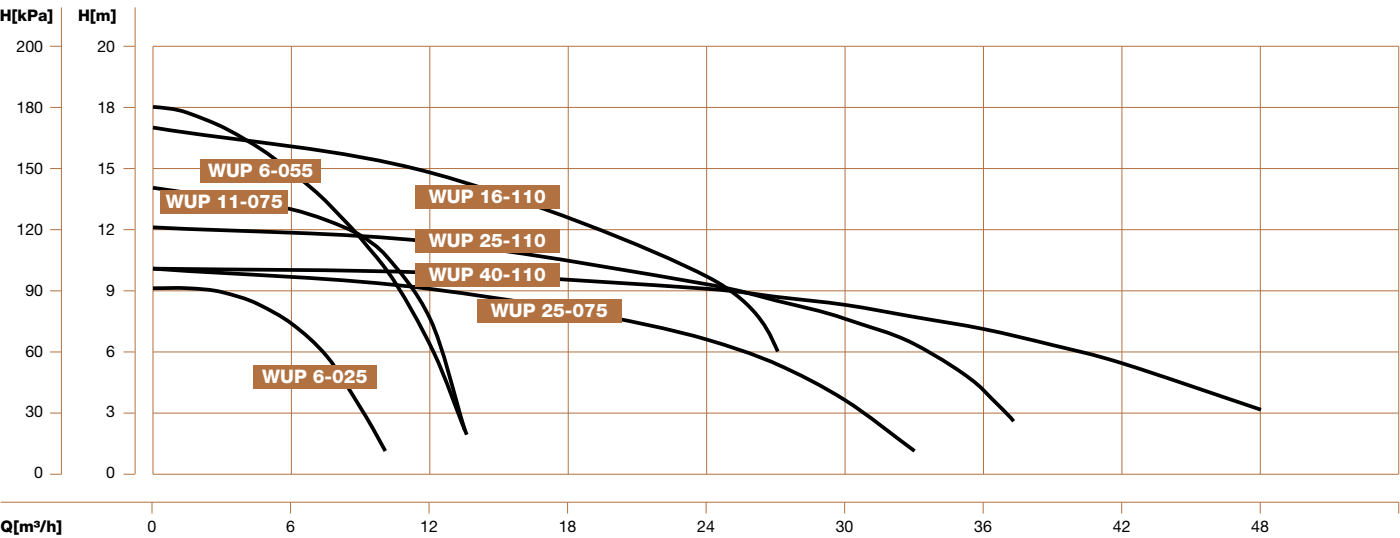

Modelo	A	B	DN	Embalaje	Kg
	mm				
WUP6-025	152	350	40	165 x 165 x 375	8
WUP6-055	176	320	50	220 x 220 x 445	12
WUP11-075	176	330	50	220 x 220 x 445	13

Modelo	A	B	DN	Embalaje	Kg
	mm				
WUP25-075	186	325	65	220 x 220 x 455	14
WUP25-110	186	335	65	220 x 220 x 470	15
WUP40-110	186	335	65	220 x 220 x 465	14
WUP16-110	180	350	50	220 x 220 x 465	14

