

IKO

MACHINED TYPE NEEDLE ROLLER BEARINGS

- Machined Type Caged Needle Roller Bearings
- Machined Type Guide Needle Roller Bearings



D1


IKO

■ Structure and Features


IKO Machined Type Needle Roller Bearings are bearings with a low sectional height and large load ratings. The outer ring has high rigidity and can easily be used even for light alloy housings. These bearings are available in metric series and inch series, both of which have the caged type and the full complement type. It is therefore possible to select a suitable bearing for use under various conditions such as heavy loads and high-speed or low-speed rotations. In addition, there are bearings with and without an inner ring. As the type without inner ring uses a shaft as the raceway surface, a compact design is possible.

Structures of Machined Type Needle Roller Bearings


RNA49

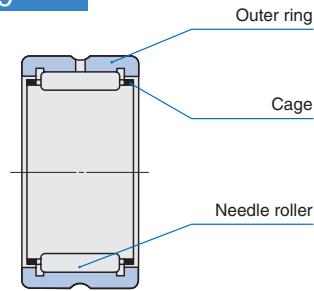


NA49

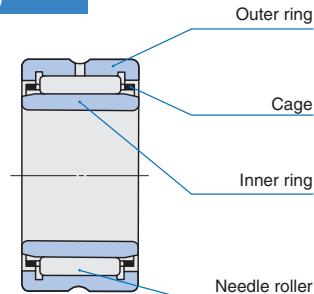

RNA49··UU

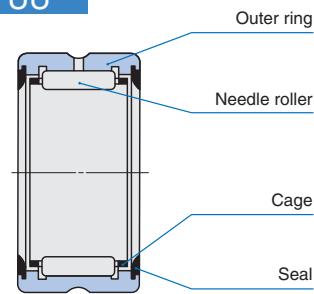

GTR

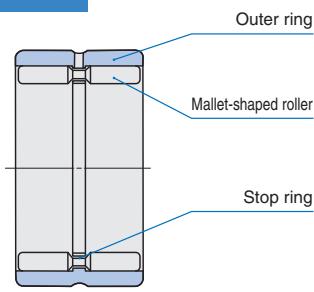

D

NA
TAFI
TRI
BRI

D2



Types

Machined Type Needle Roller Bearings are available in various types shown in Table 1.

Table 1.1 Type of bearing (Standard type)

Type		Caged Needle Roller Bearings		Guide Needle Roller Bearings	
		Without inner ring	With inner ring	Without inner ring	With inner ring
Metric series	Dimension series 49	RNA 49	NA 49	GTR	GTRI
	Dimension series 69	RNA 69	NA 69		
	Dimension series 48	RNA 48	NA 48		
	For heavy duty	TR	TRI		
	For light duty	TAF	TAFI		
Inch series		BR	BRI	—	—

Table 1.2 Type of bearing (With seal)

Type		Caged Needle Roller Bearings		Guide Needle Roller Bearings	
		Without inner ring	With inner ring	Without inner ring	With inner ring
Metric series	Dimension series 49	RNA 49··UU	NA 49··UU	—	—
	One side seal	RNA 49··U	NA 49··U		
	Dimension series 69	RNA 69··UU	NA 69··UU		
	One side seal	RNA 69··U	NA 69··U		
	Inch series	Two side seals	BR ···UU	BRI ···UU	—
		—	—	—	—

Caged Needle Roller Bearings

This type of bearing combines a collared outer ring with the IKO's unique lightweight rigid cage and needle rollers. During operation, needle rollers are guided precisely by the cage, and an ideal load distribution is obtained.

The metric series consists of the NA48 and NA49 series of ISO Standard, NA69 and TAFI series which are based on the international dimension series, and the heavy duty TRI series which is widely used in Japan. The TAFI series has a sectional height as low as that of the shell type and is used for light loads.

The inch series or BRI series is based on the specifications of ANSI Standard of USA.

Caged Needle Roller Bearings without Inner Ring

As shown in the section "Design of shaft and housing" on page A44, any desired radial clearance can be selected by assembling this type of bearing with a shaft which is heat-treated and finished by grinding.

These bearings are free from the effects on dimensional accuracy caused by assembling an inner ring,

so that the rotational accuracy is improved. Also, the shaft rigidity can be improved as the shaft diameter can be increased by an amount corresponding to the inner ring thickness.

Caged Needle Roller Bearings with Inner Ring

This type of bearing is used when the shaft cannot be heat-treated and finished by grinding. The outer and inner rings are separable and a small relief clearance is provided on both sides of the inner ring raceway to facilitate bearing mounting. In the TRI and BRI series, the width of the inner ring is larger than that of the outer ring.

Due to heat expansion during operation or mounting errors, the inner or outer ring may be shifted axially and the whole length of the rollers may not be in contact with the raceway. Therefore, attention should be paid to the allowable axial shift S as shown in the table of dimensions.

Needle Roller Bearings with Seal

These bearings are sealed types of the NA49, NA69 and BRI series bearings, in which a seal is installed on one side (type with one seal) or both sides (type with two seals) of the bearing. The seal is made of special synthetic rubber and effectively prevents dust penetration and grease leakage.

Guide Needle Roller Bearings


These bearings are full complement type bearings and use mallet-shaped rollers which are guided accurately by the guide rail located at the center of the outer ring raceway and the guide groove of the mallet-shaped roller. This minimizes skewing (tilting of the roller from its rotating axis), which is normally a weak point of full complement bearings, and improves the rotational accuracy. This type of bearing is especially suitable for heavy loads, shock loads and oscillating motions.

Bearings with and without inner rings are available. In bearings with an inner ring, the width of the inner ring is larger than that of the outer ring.



■ Identification Number

The identification number of Machined Type Needle Roller Bearings consists of a model code, dimensions, any supplemental codes and a classification symbol. Examples are shown below.

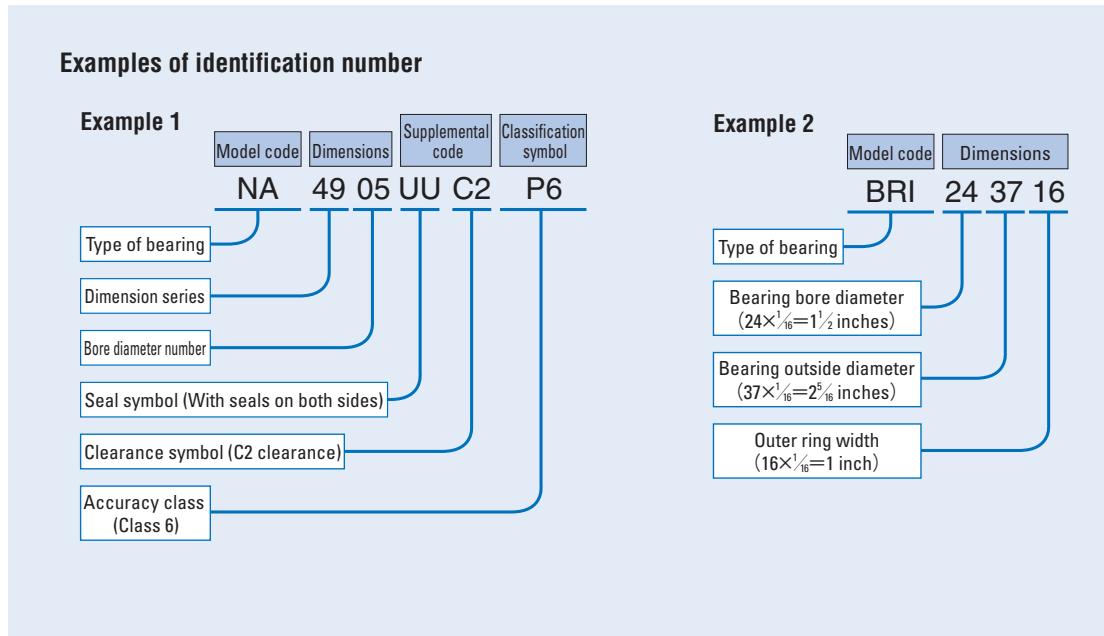

■ Accuracy

Machined Type Needle Roller Bearings are manufactured based on JIS (See page A31.). The tolerances for the smallest single roller set bore diameter of bearings without inner ring are based on Table 14 on page A33. For BR and BRI series, the accuracy is based on Table 2 and the tolerances for the smallest single roller set bore diameter are based on Table 3.

Table 2 Accuracy of inner and outer rings of inch series BR and BRII

unit: μ m

d or D Nominal bearing bore dia. or outside dia. mm		Δ_{dmp} Single plane mean bore diameter deviation		Δ_{Dmp} Single plane mean outside diameter deviation		Δ_{Bs} (Δ_{Cs}) Deviation of a single inner (or outer) ring width		K_{ia} Radial runout of assembled bearing inner ring	K_{ea} Radial runout of assembled bearing outer ring
Over	Incl.	High	Low	High	Low	High	Low	Max.	Max.
—	19.050	0	— 10	—	—	0	— 130	10	—
19.050	30.162	0	— 13	0	— 13	0	— 130	13	15
30.162	50.800	0	— 13	0	— 13	0	— 130	15	20
50.800	82.550	0	— 15	0	— 15	0	— 130	20	25
82.550	120.650	0	— 20	0	— 20	0	— 130	25	35
120.650	184.150	—	—	0	— 25	0	— 130	30	45

Remark d for Δ_{dmp} , Δ_{Bs} , Δ_{Cs} and K_{ia} , and D for Δ_{Dmp} and K_{ea}

1N=0.102kgf=0.2248lbs.

1mm=0.03937inch

D4



Table 3 Tolerances for smallest single roller set bore diameter $F_{ws\ min}$ of inch series BR unit: μm

F_w Nominal roller set bore diameter mm		$\Delta F_{ws\ min}$ Deviation of smallest single roller set bore diameter	
Over	Incl.	High	Low
—	18.034	+ 43	+ 20
18.034	30.226	+ 46	+ 23
30.226	41.910	+ 48	+ 25
41.910	50.038	+ 51	+ 25
50.038	70.104	+ 53	+ 28
70.104	80.010	+ 58	+ 28
80.010	102.108	+ 61	+ 31

■ Clearance

Radial internal clearances of Machined Type Needle Roller Bearings are made to the CN clearance shown in Table 18 on page A37. Radial internal clearances of BRI series are based on Table 4.

Table 4 Radial internal clearance of inch series BRI unit: μm

F_w Nominal roller set bore diameter mm		Radial internal clearance	
Over	Incl.	Min.	Max.
—	18.034	33	66
18.034	25.908	41	76
25.908	30.226	46	82
30.226	35.052	48	86
35.052	41.910	50	89
41.910	50.038	50	92
50.038	70.104	56	99
70.104	80.010	56	104
80.010	100.076	63	117
100.076	102.108	68	127

Table 6.1 Number of oil holes of the outer ring

Bearing type			Nominal roller set bore diameter F_w mm	Number of oil holes of the outer ring		
		Standard type		With seals on both sides	With a seal on one side	
Caged Needle Roller Bearings	Metric series	RNA, NA	1	1	1	
		TR, TRI	1	—	—	
		TAF, TAFI	0	—	—	
	Inch series	$F_w \leq 26$	1	—	—	
		$26 < F_w$	1	—	—	
		$F_w \leq 69.850$	1	1	—	
Guide Needle Roller Bearings	Metric series	$69.850 < F_w$	2	1	—	
		GTR, GTRI	1	—	—	

Remark The type with an oil hole(s) is provided with an oil groove.

■ Fit

The recommended fits for Machined Type Needle Roller Bearings are shown in Tables 22 to 24 on pages A41 and A42.

■ Lubrication

Bearings with prepacked grease are shown in Table 5. ALVANIA GREASE S2 (Shell Lubricants Japan K.K.) is prepacked as the lubricating grease.

In the case of bearings without prepacked grease, perform proper lubrication. Operating them without lubrication will increase the wear of the rolling contact surfaces and shorten their lives.

Table 5 Bearings with prepacked grease O: With prepacked grease X: Without prepacked grease

Bearing type		Standard type	With seals on both sides	With a seal on one side
Caged Needle Roller Bearings	Metric series	RNA, NA	×	O
		TR, TRI	×	—
		TAF, TAFI	×	—
	Inch series	BR, BRI	×	O
Guide Needle Roller Bearings	Metric series	GTR, GTRI	×	—

■ Oil Hole

Table 6.1 shows the number of oil holes of the outer ring and Table 6.2 shows the number of oil holes of the inner ring.

When an outer ring with an oil hole is especially required for the type without an oil hole, add "—OH" before the clearance symbol in the identification number. When an outer ring with an oil hole and an oil groove is required for the type without an oil hole, attach "—OG" before the clearance symbol.

Example: TAFI 203216 — OH C2 P6

When an outer ring with multiple oil holes or an inner ring with an oil hole(s) is required, please consult IKO.

Table 6.2 Number of oil holes of the inner ring

Bearing type			Nominal bearing bore diameter d mm	Number of oil holes of the inner ring		
				Standard type	With seals on both sides	With a seal on one side
Caged Needle Roller Bearings	Metric series	NA		0	0	0
		TRI		0	0	0
		TAFI		0	—	—
	Inch series	BRI	$d \leq 76.200$	1	1	—
			$76.200 < d$	2	1	—
Guide Needle Roller Bearings	Metric series	GTRI		0	—	—

Remark The type with an oil hole(s) is provided with an oil groove.

D

 NA
TAFI
TRI
BRI

Matched Set Bearings

When using two or more Machined Type Needle Roller Bearings adjacent to each other on the same shaft, it is necessary to obtain an even load distribution. On request, a set of bearings is available, in which bearings are matched to obtain an even load distribution.

Mounting


Mounting dimensions for Machined Type Needle Roller Bearings are shown in the table of dimensions.

Extended Life Specification Machined Type Needle Roller Bearings

Extended Life Specification Machined Type Needle Roller Bearings are treated with a newly developed special heat treatment that enhances the bearing's surface hardness and toughness, and suppresses the generation and growth of damage on the surface. Significant life extension can be achieved under high load or under the condition of lubrication contaminated with foreign substances.


In a life comparison test, as shown in Figure 1, IKO's special heat treated Extended Life Specification products lasted 5 times longer than standard heat-treated products.

Extended Life Specification Machined Type Needle Roller Bearings, available according to the "Applicable Production Size" shown in Table 7, are made to order upon request.

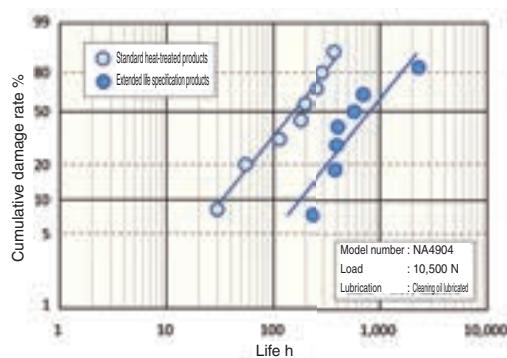**Fig. 1 Life Test Result**

Remark This table shows the result of life testing under load conditions at 50% of the basic dynamic rating. The Extended Life Specification with special heat treatment lasted 5 times longer or more in L10 life compared to the standard heat-treated products.

1N=0.102kgf=0.2248lbs. D6
1mm=0.03937inch

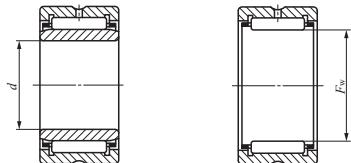Table 7 Applicable Production Size

With inner ring	Without inner ring
$d=10 \sim 75\text{mm}$	$F_w=14 \sim 85\text{mm}$
NA 4900 ~ 4915	RNA 4900 ~ 4915
NA 6901 ~ 6915	RNA 6901 ~ 6915
TAFI 102216 ~ 7510535	TAFI 142216 ~ 8510535
TRI 153320 ~ 7510845	TR 203320 ~ 8310845

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**


Without Inner Ring

**Shaft dia. 5 – 15mm**


Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
5	—	—	—	TAF 51010 TAF 51012	—	—	3.4
	—	—	—	—	—	—	4.2
	RNA 493	—	—	—	—	—	4.6
6	RNA 494	—	—	—	—	—	5.3
	—	—	—	TAF 61212	—	—	6.4
7	RNA 495	—	—	—	—	—	5.9
	—	—	—	TAF 71410 TAF 71412	—	—	6.9
	—	—	—	—	—	—	8.3
8	RNA 496	—	—	—	—	—	7.4
	—	—	—	TAF 81512 TAF 81516	—	—	9.1
	—	—	—	—	—	—	12.9
9	—	—	—	TAF 91612 TAF 91616	—	—	9.8
	—	—	—	—	—	—	13.2
	RNA 497	—	—	—	—	—	9.3
10	—	—	—	TAF 101712 TAF 101716	—	—	10.7
	—	—	—	—	—	—	14.3
	RNA 498	—	—	—	—	—	12.6
12	—	—	—	TAF 121912 TAF 121916	—	—	12.2
	—	—	—	—	—	—	16.3
	RNA 499	—	—	—	—	—	13.6
14	RNA 4900	—	—	—	—	—	16.5
	—	—	—	TAF 142216 TAF 142220	—	—	21
	—	—	—	—	—	—	26.5
15	—	—	—	TAF 152316 TAF 152320	—	—	22.5
	—	—	—	—	—	—	28

Notes⁽¹⁾ Minimum allowable value of chamfer dimension *r*⁽²⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.Remarks 1. TAF series with a roller set bore diameter F_w of 26 mm or less have no oil hole. In others, the outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.



RNA49 TAF
RNA69 ($F_w \leq 35$)

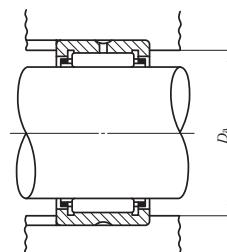

D

NA
TAFI
TRI
BRI

F_w	Boundary dimensions mm			Standard mounting dimension D_a Max. mm	C N	C_0 N	Allowable rotational speed ⁽²⁾ min ⁻¹
	D	C	r_s min ⁽¹⁾				
5	10	10	0.2	8.4	2 420	1 950	80 000
5	10	12	0.2	8.4	3 080	2 660	80 000
5	11	10	0.15	9.8	2 420	1 950	80 000
6	12	10	0.15	10.8	2 700	2 320	70 000
6	12	12	0.2	10.4	3 440	3 170	70 000
7	13	10	0.15	11.8	2 960	2 690	60 000
7	14	10	0.2	12.4	3 600	2 960	60 000
7	14	12	0.2	12.4	4 610	4 050	60 000
8	15	10	0.15	13.8	3 960	3 420	50 000
8	15	12	0.2	13.4	5 060	4 690	50 000
8	15	16	0.2	13.4	7 080	7 220	50 000
9	16	12	0.2	14.4	5 490	5 330	45 000
9	16	16	0.2	14.4	7 680	8 210	45 000
9	17	10	0.15	15.8	4 530	3 650	45 000
10	17	12	0.2	15.4	5 880	5 970	40 000
10	17	16	0.2	15.4	8 230	9 190	40 000
10	19	11	0.2	17.4	6 180	5 030	40 000
12	19	12	0.3	17	6 610	7 260	35 000
12	19	16	0.3	17	9 250	11 200	35 000
12	20	11	0.3	18	6 600	6 310	35 000
14	22	13	0.3	20	9 230	10 100	30 000
14	22	16	0.3	20	11 700	13 700	30 000
14	22	20	0.3	20	14 800	18 600	30 000
15	23	16	0.3	21	12 300	14 900	30 000
15	23	20	0.3	21	15 600	20 200	30 000

1N=0.102kgf=0.2248lbs.

1mm=0.03937inch

D8

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**


Without Inner Ring

**Shaft dia. 16 – 22mm**


Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
16	RNA 4901	—	—	—	—	—	18.1
	—	—	—	TAF 162416	—	—	23
	—	—	—	TAF 162420	—	—	29
	—	RNA 6901	—	—	—	—	30
17	—	—	—	TAF 172516	—	—	24.5
	—	—	—	TAF 172520	—	—	30.5
18	RNA 49/14	—	—	—	—	—	19.9
	—	—	—	TAF 182616	—	—	25.5
	—	—	—	TAF 182620	—	—	32
19	—	—	—	TAF 192716	—	—	27
	—	—	—	TAF 192720	—	—	34
20	RNA 4902	—	—	—	—	—	21.5
	—	—	—	TAF 202816	—	—	27.5
	—	—	—	TAF 202820	—	—	35.5
	—	RNA 6902	—	—	—	—	37
21	—	—	—	—	TR 203320	—	59.5
	—	—	—	—	—	GTR 203320	69
	—	—	—	TAF 212916	—	—	29
	—	—	—	TAF 212920	—	—	36
22	RNA 4903	—	—	—	—	—	23.5
	—	—	—	TAF 223016	—	—	30
	—	—	—	TAF 223020	—	—	37.5
	—	RNA 6903	—	—	—	—	40.5
	—	—	—	—	TR 223425	—	73.5
	—	—	—	—	—	GTR 223425	87

Notes⁽¹⁾ Minimum allowable value of chamfer dimension r ⁽²⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.Remarks 1. TAF series with a roller set bore diameter F_w of 26 mm or less have no oil hole. In others, the outer ring has an oil groove and an oil hole.


2. No grease is prepacked. Perform proper lubrication.



RNA49 TAF TR
RNA69 ($F_w \leq 35$)



GTR

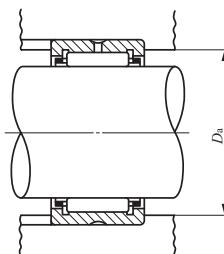

D

NA
TAFI
TRI
BRI

F_w	Boundary dimensions mm			Standard mounting dimension D_a Max. mm	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed ⁽²⁾ min ⁻¹
	D	C	r_s min ⁽¹⁾				
16	24	13	0.3	22	9 660	11 100	25 000
16	24	16	0.3	22	12 300	15 100	25 000
16	24	20	0.3	22	15 500	20 400	25 000
16	24	22	0.3	22	17 100	23 000	25 000
17	25	16	0.3	23	12 900	16 300	25 000
17	25	20	0.3	23	16 300	22 000	25 000
18	26	13	0.3	24	10 600	12 800	20 000
18	26	16	0.3	24	13 400	17 500	20 000
18	26	20	0.3	24	17 000	23 600	20 000
19	27	16	0.3	25	14 000	18 700	20 000
19	27	20	0.3	25	17 700	25 300	20 000
20	28	13	0.3	26	10 900	13 800	20 000
20	28	16	0.3	26	13 900	18 800	20 000
20	28	20	0.3	26	17 600	25 400	20 000
20	28	23	0.3	26	19 300	28 800	20 000
20	33	20	0.3	31	24 300	26 500	20 000
20	33	20	0.3	31	29 200	37 200	7 500
21	29	16	0.3	27	14 400	20 000	19 000
21	29	20	0.3	27	18 200	27 100	19 000
22	30	13	0.3	28	11 700	15 600	18 000
22	30	16	0.3	28	14 900	21 200	18 000
22	30	20	0.3	28	18 900	28 700	18 000
22	30	23	0.3	28	20 800	32 500	18 000
22	34	25	0.3	32	29 100	36 800	18 000
22	34	25	0.3	32	37 900	57 800	7 000

1N=0.102kgf=0.2248lbs. D10
1mm=0.03937inch

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**

Without Inner Ring


**Shaft dia. 24 – 30mm**

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
24	—	—	—	TAF 243216 TAF 243220	—	—	32 40.5
25	—	—	—	TAF 253316 TAF 253320	—	—	33.5
	—	—	—	—	—	—	42
	RNA 4904	RNA 6904	—	—	—	—	55.5
	—	—	—	—	—	—	95.5
	—	—	—	—	TR 253820 TR 253825	—	71 89 81.5 GTR 253820 GTR 253825 104
26	—	—	—	TAF 263416 TAF 263420	—	—	34.5 43.5
28	—	—	—	TAF 283720 TAF 283730	—	—	51.5
	RNA 49/22	RNA 69/22	—	—	—	—	83.5
	—	—	—	—	—	—	56.5
	—	—	—	—	—	—	97.5
29	—	—	—	TAF 293820 TAF 293830	—	—	57 85
30	—	—	—	TAF 304020 TAF 304030	—	—	64.5
	—	—	—	—	—	—	97.5
	RNA 4905	RNA 6905	—	—	—	—	64
	—	—	—	—	—	—	111
	—	—	—	—	TR 304425	—	115 GTR 304425 133


Notes⁽¹⁾ Minimum allowable value of chamfer dimension r ⁽²⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.Remarks1. TAF series with a roller set bore diameter F_w of 26 mm or less have no oil hole. In others, the outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.


IKO



RNA49 TAF TR
RNA69 ($F_w \leq 35$)



GTR

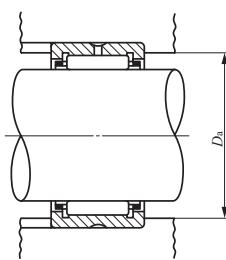

D

NA
TAFI
TRI
BRI

F_w	Boundary dimensions mm			Standard mounting dimension D_a Max. mm	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed ⁽²⁾ min ⁻¹
	D	C	r_s min				
24	32	16	0.3	30	15 300	22 500	17 000
24	32	20	0.3	30	19 400	30 500	17 000
25	33	16	0.3	31	15 800	23 700	16 000
25	33	20	0.3	31	20 000	32 100	16 000
25	37	17	0.3	35	21 000	25 000	16 000
25	37	30	0.3	35	35 400	48 900	16 000
25	38	20	0.3	36	28 900	35 000	16 000
25	38	25	0.3	36	34 800	44 400	16 000
25	38	20	0.3	36	33 300	46 500	6 000
25	38	25	0.3	36	42 400	63 700	6 000
26	34	16	0.3	32	16 300	24 900	15 000
26	34	20	0.3	32	20 600	33 800	15 000
28	37	20	0.3	35	21 700	37 100	14 000
28	37	30	0.3	35	31 100	58 900	14 000
28	39	17	0.3	37	21 400	28 900	14 000
28	39	30	0.3	37	36 300	56 900	14 000
29	38	20	0.3	36	21 600	37 200	14 000
29	38	30	0.3	36	30 900	59 100	14 000
30	40	20	0.3	38	25 100	40 100	13 000
30	40	30	0.3	38	36 000	63 900	13 000
30	42	17	0.3	40	23 700	30 700	13 000
30	42	30	0.3	40	42 100	64 300	13 000
30	44	25	0.3	42	37 900	52 100	13 000
30	44	25	0.3	42	47 000	76 500	5 000

1N=0.102kgf=0.2248lbs. D12
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring




Shaft dia. 32 – 40mm

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
32	—	—	—	TAF 324220 TAF 324230	—	—	68
	—	—	—	—	—	—	102
	RNA 49/28	—	—	—	—	—	76.5
	—	RNA 69/28	—	—	—	—	133
35	—	—	—	—	—	GTR 324530	152
	—	—	—	TAF 354520 TAF 354530	—	—	73.5
	—	—	—	—	—	—	112
	RNA 4906	—	—	—	—	—	72.5
37	—	—	—	TAF 374720 TAF 374730	—	—	125
	—	—	—	—	—	—	139
	—	—	—	—	TR 354830	—	163
	—	—	—	—	—	GTR 354830	139
38	—	—	—	TAF 384820 TAF 384830	—	—	117
	—	—	—	—	—	—	77.5
	—	—	—	—	TR 385230	—	119
	—	—	—	—	—	GTR 385230	79
40	—	—	—	TAF 405020 TAF 405030	—	—	168
	—	—	—	—	—	—	195
	RNA 49/32	—	—	—	—	—	83
	—	RNA 69/32	—	—	—	—	125
40	—	—	—	—	—	—	96
	—	—	—	—	—	—	172
	—	—	—	—	TR 405520	—	129
	—	—	—	—	—	GTR 405520	144

Notes⁽¹⁾ Minimum allowable value of chamfer dimension *r*

⁽²⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

- Remarks 1. The outer ring has an oil groove and an oil hole.
2. No grease is prepacked. Perform proper lubrication.

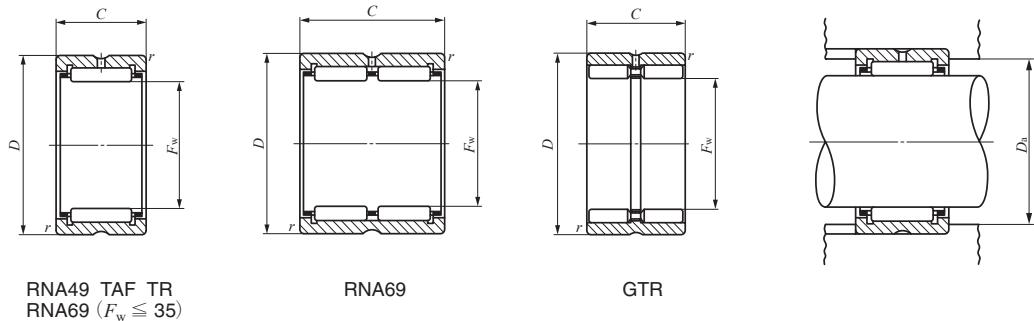

D

NA
TAFI
TRI
BRI

F_w	Boundary dimensions mm			Standard mounting dimension D_a Max. mm	C N	C_0 N	Allowable rotational speed ⁽²⁾ min ⁻¹
	D	C	r_s min ⁽¹⁾				
32	42	20	0.3	40	25 700	42 200	12 000
32	42	30	0.3	40	36 800	67 200	12 000
32	45	17	0.3	43	24 500	32 700	12 000
32	45	30	0.3	43	41 800	64 800	12 000
32	45	30	0.3	43	58 000	101 000	4 500
35	45	20	0.3	43	26 900	46 200	11 000
35	45	30	0.3	43	38 600	73 600	11 000
35	47	17	0.3	45	25 200	34 700	11 000
35	47	30	0.3	45	43 000	69 000	11 000
35	48	30	0.3	46	47 400	72 300	11 000
35	48	30	0.3	46	61 100	110 000	4 500
37	47	20	0.3	45	28 200	50 100	11 000
37	47	30	0.3	45	40 500	79 800	11 000
38	48	20	0.3	46	28 100	50 200	11 000
38	48	30	0.3	46	40 300	80 000	11 000
38	52	30	0.6	48	50 800	81 100	11 000
38	52	30	0.6	48	64 200	121 000	4 000
40	50	20	0.3	48	29 400	54 100	10 000
40	50	30	0.3	48	42 300	86 200	10 000
40	52	20	0.6	48	31 200	47 800	10 000
40	52	36	0.6	48	53 500	95 700	10 000
40	55	20	0.6	51	37 400	55 700	10 000
40	55	20	0.6	51	44 300	73 600	3 500

1N=0.102kgf=0.2248lbs. D14
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring



Shaft dia. 42 – 50mm


Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
42	—	—	—	TAF 425220 TAF 425230	—	—	86.5
	—	—	—	—	—	—	130
	RNA 4907	—	—	—	—	—	113
	—	RNA 6907	—	—	—	—	200
43	—	—	—	—	TR 425630	—	183
	—	—	—	—	—	GTR 425630	210
45	—	—	—	TAF 435320 TAF 435330	—	—	88.5
	—	—	—	—	—	—	133
45	—	—	—	TAF 455520 TAF 455530	—	—	92
	—	—	—	—	—	—	138
	RNA 49/38	—	—	—	—	—	120
	—	—	—	—	TR 455930	—	193
47	—	—	—	TAF 475720 TAF 475730	—	—	225
	—	—	—	—	—	—	95
48	RNA 4908	—	—	—	—	—	144
	—	—	—	—	TR 486230	—	152
	—	RNA 6908	—	—	—	—	205
	—	—	—	—	—	—	275
50	—	—	—	TAF 506225 TAF 506235	—	—	240
	—	—	—	—	—	—	159
	—	—	—	—	—	—	225
	—	RNA 49/42	—	—	TR 506430	—	210
	—	—	—	—	—	—	174
	—	—	—	—	—	GTR 506430	245

Notes⁽¹⁾ Minimum allowable value of chamfer dimension r

⁽²⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

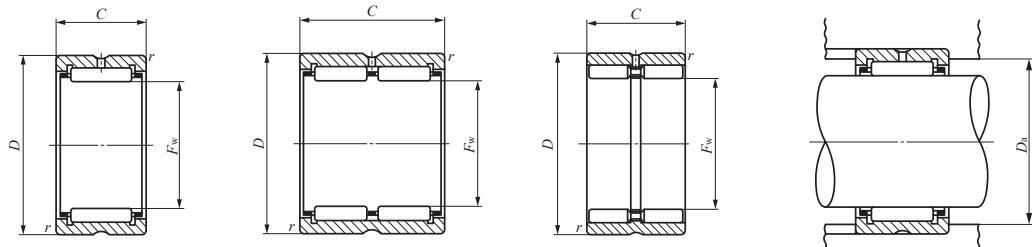

RNA49 TAF TR

RNA69

GTR

D

NA
TAFI
TRI
BRI

Boundary dimensions mm				Standard mounting dimension	Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽²⁾
F_w	D	C	r_s min ⁽¹⁾	D_a Max. mm	C N	C_0 N	min ⁻¹
42	52	20	0.3	50	29 900	56 200	9 500
42	52	30	0.3	50	43 000	89 400	9 500
42	55	20	0.6	51	32 000	50 100	9 500
42	55	36	0.6	51	54 900	100 000	9 500
42	56	30	0.6	52	53 800	90 100	9 500
42	56	30	0.6	52	67 500	133 000	3 500
43	53	20	0.3	51	30 500	58 200	9 500
43	53	30	0.3	51	43 800	92 600	9 500
45	55	20	0.3	53	31 000	60 200	9 000
45	55	30	0.3	53	44 600	95 800	9 000
45	58	20	0.6	54	33 600	54 600	9 000
45	59	30	0.6	55	55 100	94 800	9 000
45	59	30	0.6	55	70 300	142 000	3 500
47	57	20	0.3	55	31 500	62 200	8 500
47	57	30	0.3	55	45 200	99 100	8 500
48	62	22	0.6	58	41 600	67 400	8 500
48	62	30	0.6	58	56 300	99 500	8 500
48	62	40	0.6	58	71 300	135 000	8 500
48	62	30	0.6	58	72 700	154 000	3 000
50	62	25	0.3	60	43 000	85 300	8 000
50	62	35	0.3	60	58 000	125 000	8 000
50	64	30	0.6	60	57 700	104 000	8 000
50	65	22	0.6	61	42 500	70 300	8 000
50	64	30	0.6	60	74 600	158 000	3 000

1N=0.102kgf=0.2248lbs. D16
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring



Shaft dia. 52 – 68mm

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
52	RNA 4909 —	— RNA 6909	—	—	—	—	197 355
55	— — RNA 49/48	— — —	— — —	TAF 556825 TAF 556835	— — —	— — —	193 255 188
58	RNA 4910 —	— RNA 6910	— —	— —	— —	— —	179 320
	— —	— —	— —	— —	TR 587745 —	— GTR 587745	515 590
60	— — RNA 49/52	— — —	— — —	TAF 607225 TAF 607235	— — —	— — —	187 260 205
62	— —	— —	— —	— —	TR 628138 —	— GTR 628138	460 520
63	RNA 4911 —	— RNA 6911	— —	— —	— —	— —	265 475
65	— — RNA 49/58	— — —	— — —	TAF 657825 TAF 657835	— — —	— — —	225 315 275
68	— — RNA 4912	— — RNA 6912	— — —	TAF 688225 TAF 688235	— — —	— — —	250 350 285 510


Notes⁽¹⁾ Minimum allowable value of chamfer dimension *r*

⁽²⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

IKO

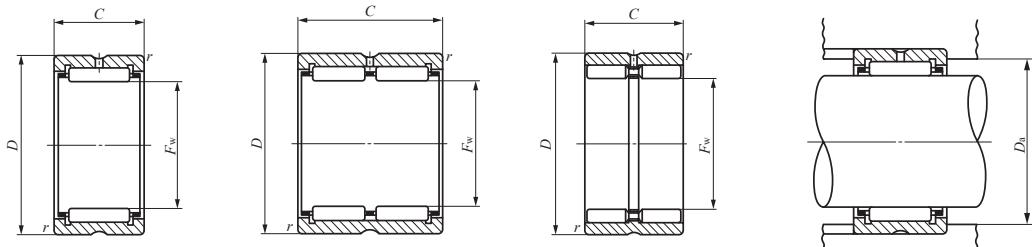

RNA49 TAF TR

RNA69

GTR

D

NA
TAFI
TRI
BRI

Boundary dimensions mm				Standard mounting dimension D_a Max. mm	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed ⁽²⁾ min ⁻¹
F_w	D	C	r_s min ⁽¹⁾				
52	68	22	0.6	64	43 500	73 300	7 500
52	68	40	0.6	64	74 600	147 000	7 500
55	68	25	0.3	66	45 400	94 000	7 500
55	68	35	0.3	66	61 200	138 000	7 500
55	70	22	0.6	66	44 300	76 300	7 500
58	72	22	0.6	68	46 200	82 100	7 000
58	72	40	0.6	68	79 200	164 000	7 000
58	77	45	1	72	104 000	191 000	7 000
58	77	45	1	72	135 000	280 000	2 500
60	72	25	0.3	70	47 500	103 000	6 500
60	72	35	0.3	70	64 100	151 000	6 500
60	75	22	0.6	71	47 100	85 100	6 500
62	81	38	1	76	92 000	166 000	6 500
62	81	38	1	76	118 000	241 000	2 500
63	80	25	1	75	57 600	97 200	6 500
63	80	45	1	75	98 700	194 000	6 500
65	78	25	0.6	74	49 600	112 000	6 000
65	78	35	0.6	74	67 000	164 000	6 000
65	82	25	1	77	58 900	101 000	6 000
68	82	25	0.6	78	54 800	117 000	6 000
68	82	35	0.6	78	72 000	166 000	6 000
68	85	25	1	80	60 200	105 000	6 000
68	85	45	1	80	103 000	211 000	6 000

1N=0.102kgf=0.2248lbs. D18
1mm=0.03937inch

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**

Without Inner Ring



Shaft dia. 70 – 85mm


Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
70	—	—	—	TAF 708525	—	—	280
	—	—	—	TAF 708535	—	—	395
	RNA 49/62	—	—	—	—	—	320
	—	—	—	—	TR 708945	—	605
72	RNA 4913	—	—	—	—	—	325
	—	RNA 6913	—	—	—	—	585
73	—	—	—	TAF 739025	—	—	335
—	—	—	—	TAF 739035	—	—	475
75	—	—	—	TAF 759225	—	—	345
	—	—	—	TAF 759235	—	—	485
	RNA 49/68	—	—	—	—	—	470
	—	—	—	—	—	—	—
80	—	—	—	TAF 809525	—	—	315
	—	—	—	TAF 809535	—	—	445
	RNA 4914	—	—	—	—	—	495
	—	RNA 6914	—	—	—	—	910
83	—	—	—	—	TR 8310845	—	995
	—	—	—	—	—	GTR 8310845	1 090
85	—	—	—	TAF 8510525	—	—	435
	—	—	—	—	—	—	525
	RNA 4915	—	—	TAF 8510535	—	—	610
	—	—	—	—	—	—	960

Notes⁽¹⁾ Minimum allowable value of chamfer dimension *r*⁽²⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

IKO

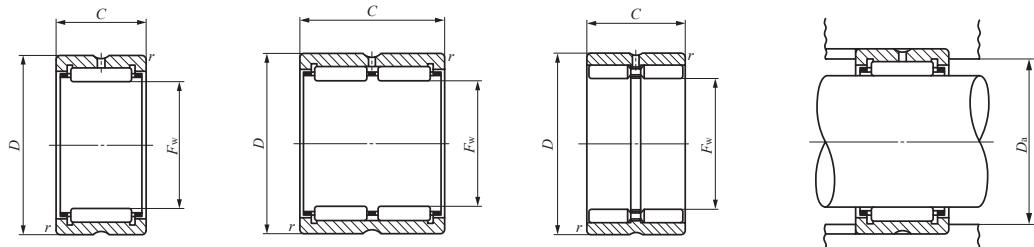

RNA49 TAF TR

RNA69

GTR

D

NA
TAFI
TRI
BRI

Boundary dimensions mm				Standard mounting dimension	Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽²⁾
F_w	D	C	r_s min ⁽¹⁾	D_a Max. mm	C N	C_0 N	min ⁻¹
70	85	25	0.6	81	55 500	120 000	5 500
70	85	35	0.6	81	73 000	171 000	5 500
70	88	25	1	83	61 500	109 000	5 500
70	89	45	1	84	114 000	228 000	5 500
70	89	45	1	84	147 000	336 000	2 000
72	90	25	1	85	62 700	113 000	5 500
72	90	45	1	85	108 000	227 000	5 500
73	90	25	1	85	61 100	127 000	5 500
73	90	35	1	85	80 400	181 000	5 500
75	92	25	1	87	62 100	131 000	5 500
75	92	35	1	87	81 700	186 000	5 500
75	95	30	1	90	79 900	147 000	5 500
80	95	25	1	90	59 400	137 000	5 000
80	95	35	1	90	78 100	195 000	5 000
80	100	30	1	95	83 200	158 000	5 000
80	100	54	1	95	134 000	311 000	5 000
83	108	45	1	103	146 000	270 000	5 000
83	108	45	1	103	190 000	396 000	1 800
85	105	25	1	100	76 300	145 000	4 500
85	105	30	1	100	86 200	169 000	4 500
85	105	35	1	100	102 000	210 000	4 500
85	105	54	1	100	138 000	331 000	4 500

1N=0.102kgf=0.2248lbs. D20
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring



Shaft dia. 90 – 105mm

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
90	—	—	—	TAF 9011025	—	—	455
	RNA 4916	—	—	—	—	—	550
	—	—	—	TAF 9011035	—	—	640
	—	RNA 6916	—	—	—	—	1 010
93	—	—	—	—	TR 9311850	—	1 210
	—	—	—	—	—	GTR 9311850	1 340
95	—	—	—	TAF 9511526	—	—	495
	RNA 49/82	—	—	—	—	—	575
	—	—	—	TAF 9511536	—	—	690
	—	—	—	—	TR 9512045	—	1 120
100	—	—	—	TAF 10012026	—	—	525
	RNA 4917	—	—	—	—	—	705
	—	—	—	TAF 10012036	—	—	725
	—	RNA 6917	—	—	—	—	1 300
	—	—	—	—	TR 10012550	—	1 290
	—	—	—	—	—	GTR 10012550	1 440
105	—	—	—	TAF 10512526	—	—	545
	RNA 4918	—	—	—	—	—	740
	—	—	—	TAF 10512536	—	—	760
	—	RNA 6918	—	—	—	—	1 360


Notes⁽¹⁾ Minimum allowable value of chamfer dimension r

⁽²⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

IKO

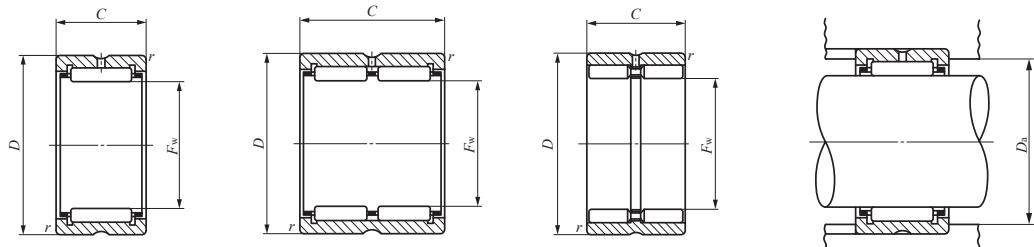

RNA49 TAF TR

RNA69

GTR

D

NA
TAFI
TRI
BRI

Boundary dimensions mm				Standard mounting dimension D_a Max. mm	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed ⁽²⁾ min ⁻¹
F_w	D	C	r_s min ⁽¹⁾				
90	110	25	1	105	77 300	150 000	4 500
90	110	30	1	105	87 300	175 000	4 500
90	110	35	1	105	103 000	217 000	4 500
90	110	54	1	105	143 000	351 000	4 500
93	118	50	1	113	165 000	329 000	4 500
93	118	50	1	113	224 000	509 000	1 600
95	115	26	1	110	79 700	159 000	4 000
95	115	30	1	110	90 000	186 000	4 000
95	115	36	1	110	106 000	231 000	4 000
95	120	45	1.5	112	155 000	305 000	4 000
95	120	45	1.5	112	204 000	455 000	1 600
100	120	26	1	115	82 400	168 000	4 000
100	120	35	1.1	113.5	110 000	244 000	4 000
100	120	36	1	115	110 000	244 000	4 000
100	120	63	1.1	113.5	173 000	467 000	4 000
100	125	50	1.5	117	172 000	355 000	4 000
100	125	50	1.5	117	234 000	549 000	1 500
105	125	26	1	120	84 700	178 000	4 000
105	125	35	1.1	118.5	113 000	258 000	4 000
105	125	36	1	120	113 000	258 000	4 000
105	125	63	1.1	118.5	178 000	490 000	4 000

1N=0.102kgf=0.2248lbs. D22
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring



Shaft dia. 110 – 170mm

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
110	—	—	—	TAF 11013030	—	—	660
	RNA 4919	—	—	—	—	—	770
	—	—	—	TAF 11013040	—	—	880
	—	RNA 6919	—	—	—	—	1 420
115	—	—	—	—	TR 11013550	—	1 400
	RNA 4920	—	—	—	—	GTR 11013550	1 560
	—	—	—	—	TR 11515350	—	1 190
120	—	—	RNA 4822	—	—	—	2 350
	RNA 4922	—	—	—	—	—	2 600
125	—	—	RNA 4824	—	—	—	790
130	—	—	RNA 4924	—	—	—	1 280
135	—	—	RNA 4924	—	—	—	850
140	—	—	RNA 4924	—	—	—	1 930
145	—	—	RNA 4926	—	—	—	3 320
150	—	—	RNA 4926	—	—	—	3 730
	—	—	RNA 4926	—	TR 14017860	—	2 360
	—	—	RNA 4926	—	—	GTR 14017860	3 540
155	—	—	RNA 4928	—	—	—	3 970
160	RNA 4928	—	—	—	—	—	1 170
165	—	—	RNA 4930	—	—	—	2 500
170	RNA 4930	—	—	—	—	—	1 750
				—	—	—	4 090


Notes⁽¹⁾ Minimum allowable value of chamfer dimension *r*

⁽²⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

IKO

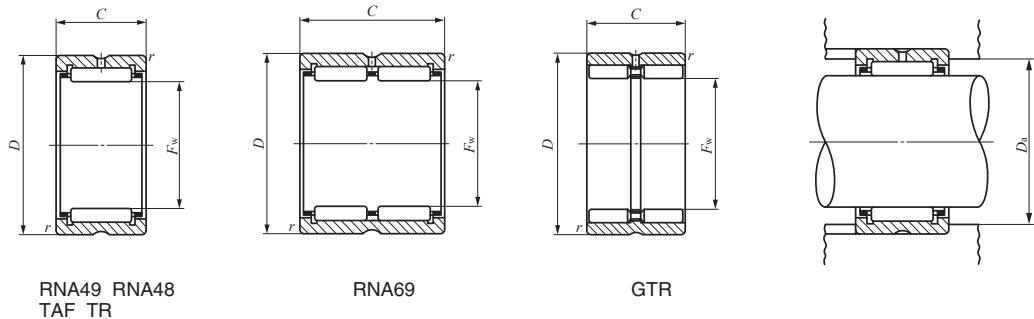

D

NA
TAI
TRI
BRI

Boundary dimensions mm				Standard mounting dimension D_a Max. mm	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed ⁽²⁾ min ⁻¹
F_w	D	C	r_s min ⁽¹⁾				
110	130	30	1	125	106 000	240 000	3 500
110	130	35	1.1	123.5	116 000	271 000	3 500
110	130	40	1	125	134 000	324 000	3 500
110	130	63	1.1	123.5	182 000	514 000	3 500
110	135	50	1.5	127	183 000	395 000	3 500
110	135	50	1.5	127	245 000	603 000	1 400
115	140	40	1.1	133.5	145 000	329 000	3 500
115	153	50	1.5	145	233 000	414 000	3 500
115	153	50	1.5	145	315 000	614 000	1 300
120	140	30	1	135	93 200	239 000	3 500
125	150	40	1.1	143.5	152 000	357 000	3 000
130	150	30	1	145	96 900	259 000	3 000
135	165	45	1.1	158.5	187 000	435 000	3 000
140	178	60	1.5	170	307 000	625 000	3 000
140	178	60	1.5	170	409 000	923 000	1 100
145	165	35	1.1	158.5	116 000	340 000	3 000
150	180	50	1.5	172	215 000	540 000	2 500
150	188	60	1.5	180	320 000	675 000	2 500
150	188	60	1.5	180	423 000	989 000	1 000
155	175	35	1.1	168.5	120 000	363 000	2 500
160	190	50	1.5	182	224 000	580 000	2 500
165	190	40	1.1	183.5	168 000	446 000	2 500
170	210	60	2	201	324 000	712 000	2 500

1N=0.102kgf=0.2248lbs. D24
1mm=0.03937inch

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**

Without Inner Ring

**Shaft dia. 175 – 350mm**


Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
175	—	—	RNA 4832	—	—	—	1 850
180	RNA 4932	—	—	—	—	—	4 310
185	—	—	RNA 4834	—	—	—	2 700
190	RNA 4934	—	—	—	—	—	4 530
195	—	—	RNA 4836	—	—	—	2 840
205	RNA 4936	—	—	—	—	—	6 250
210	—	—	RNA 4838	—	—	—	3 380
215	RNA 4938	—	—	—	—	—	6 500
220	—	—	RNA 4840	—	—	—	3 520
225	RNA 4940	—	—	—	—	—	10 400
240	—	—	RNA 4844	—	—	—	3 820
245	RNA 4944	—	—	—	—	—	11 200
265	—	—	RNA 4848	—	—	—	5 670
	RNA 4948	—	—	—	—	—	12 000
285	—	—	RNA 4852	—	—	—	6 070
290	RNA 4952	—	—	—	—	—	21 200
305	—	—	RNA 4856	—	—	—	9 750
310	RNA 4956	—	—	—	—	—	22 500
330	—	—	RNA 4860	—	—	—	13 200
340	RNA 4960	—	—	—	—	—	33 400
350	—	—	RNA 4864	—	—	—	14 100

Notes⁽¹⁾ Minimum allowable value of chamfer dimension r' ⁽²⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

D25



RNA49 RNA48

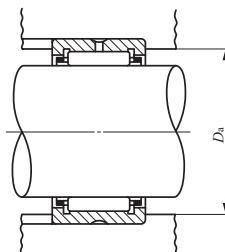

D

NA
TAFI
TRI
BRI

Boundary dimensions mm				Standard mounting dimension D_a Max. mm	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed ⁽²⁾ min ⁻¹
F_w	D	C	r_s min ⁽¹⁾				
175	200	40	1.1	193.5	173 000	474 000	2 500
180	220	60	2	211	337 000	761 000	1 900
185	215	45	1.1	208.5	211 000	567 000	1 900
190	230	60	2	221	347 000	810 000	1 900
195	225	45	1.1	218.5	218 000	602 000	1 900
205	250	69	2	241	434 000	989 000	1 900
210	240	50	1.5	232	249 000	726 000	1 800
215	260	69	2	251	440 000	1 020 000	1 700
220	250	50	1.5	242	255 000	766 000	1 600
225	280	80	2.1	269	518 000	1 120 000	1 600
240	270	50	1.5	262	266 000	833 000	1 500
245	300	80	2.1	289	536 000	1 200 000	1 400
265	300	60	2	291	345 000	1 150 000	1 300
265	320	80	2.1	309	565 000	1 320 000	1 300
285	320	60	2	311	354 000	1 220 000	1 100
290	360	100	2.1	349	847 000	1 900 000	1 100
305	350	69	2	341	486 000	1 550 000	950
310	380	100	2.1	369	877 000	2 040 000	950
330	380	80	2.1	369	610 000	1 900 000	900
340	420	118	3	407	1 130 000	2 650 000	850
350	400	80	2.1	389	635 000	2 040 000	750

1N=0.102kgf=0.2248lbs. D26
1mm=0.03937inch

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**

Without Inner Ring



Shaft dia. 360 – 490mm


Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
360	RNA 4964	—	—	—	—	—	35 200
370	—	—	RNA 4868	—	—	—	14 800
380	RNA 4968	—	—	—	—	—	37 000
390	—	—	RNA 4872	—	—	—	15 600
400	RNA 4972	—	—	—	—	—	38 700
415	—	—	RNA 4876	—	—	—	27 900
430	RNA 4976	—	—	—	—	—	56 400
450	RNA 4980	—	—	—	—	—	58 800
470	RNA 4984	—	—	—	—	—	61 200
490	RNA 4988	—	—	—	—	—	86 900

Notes⁽¹⁾ Minimum allowable value of chamfer dimension r ⁽²⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

IKO



RNA49 RNA48

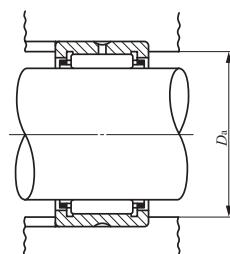

D

NA
TAFI
TRI
BRI

F_w	Boundary dimensions mm			Standard mounting dimension D_a Max. mm	C N	C_0 N	Allowable rotational speed ⁽²⁾ min ⁻¹
	D	C	r_s min ⁽¹⁾				
360	440	118	3	427	1 170 000	2 830 000	750
370	420	80	2.1	409	651 000	2 140 000	700
380	460	118	3	447	1 220 000	3 020 000	700
390	440	80	2.1	429	680 000	2 320 000	650
400	480	118	3	467	1 260 000	3 200 000	600
415	480	100	2.1	469	951 000	2 860 000	600
430	520	140	4	504	1 540 000	4 030 000	500
450	540	140	4	524	1 590 000	4 270 000	500
470	560	140	4	544	1 640 000	4 510 000	500
490	600	160	4	584	1 910 000	5 140 000	400

1N=0.102kgf=0.2248lbs. D28
1mm=0.03937inch

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**


With Inner Ring

**Shaft dia. 5 – 12mm**



Shaft dia. mm	Identification number						Mass (Ref.) g	<i>d</i>
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
5	NA 495	—	—	—	—	—	7.3	5
	—	—	—	TAFI 51512	—	—	11.9	5
	—	—	—	TAFI 51516	—	—	16.7	5
6	NA 496	—	—	—	—	—	9.1	6
	—	—	—	TAFI 61612	—	—	13	6
	—	—	—	TAFI 61616	—	—	17.5	6
7	NA 497	—	—	—	—	—	11.2	7
	—	—	—	TAFI 71712	—	—	14.3	7
	—	—	—	TAFI 71716	—	—	19.2	7
8	NA 498	—	—	—	—	—	15	8
9	—	—	—	TAFI 91912	—	—	16.7	9
	—	—	—	TAFI 91916	—	—	22.5	9
	NA 499	—	—	—	—	—	16.7	9
10	NA 4900	—	—	—	—	—	24	10
	—	—	—	TAFI 102216	—	—	30	10
	—	—	—	TAFI 102220	—	—	38	10
12	NA 4901	—	—	—	—	—	26.5	12
	—	—	—	TAFI 122416	—	—	33.5	12
	—	—	—	TAFI 122420	—	—	42.5	12
	NA 6901	—	—	—	—	—	44.5	12

Notes⁽¹⁾ Minimum allowable value of chamfer dimension *r*⁽²⁾ Allowable axial shift amount of inner ring to outer ring⁽³⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.Remarks 1. TAFI series with a bore diameter *d* of 22 mm or less have no oil hole. In others, the outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.



NA49 TAFI
NA69 ($d \leq 30$)

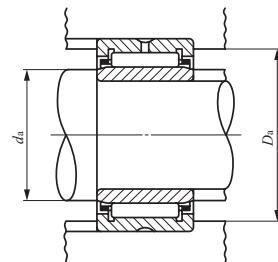

D

NA
TAFI
TRI
BRI


Boundary dimensions mm						Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽³⁾ min ⁻¹	Assembled inner ring
<i>D</i>	<i>C</i>	<i>B</i>	<i>r_s min</i>	⁽¹⁾ <i>F_w</i>	⁽²⁾ <i>S</i>	Min.	<i>d_a</i>	Max.	<i>D_a</i> Max.			
13	10	—	0.15	7	0.5	6.2	6.7	11.8	2 960	2 690	60 000	LRT 5710
15	12	—	0.2	8	0.5	6.6	7.7	13.4	5 060	4 690	50 000	LRT 5812
15	16	—	0.2	8	0.5	6.6	7.7	13.4	7 080	7 220	50 000	LRT 5816
15	10	—	0.15	8	0.5	7.2	7.7	13.8	3 960	3 420	50 000	LRT 6810
16	12	—	0.2	9	0.5	7.6	8.7	14.4	5 490	5 330	45 000	LRT 6912
16	16	—	0.2	9	0.5	7.6	8.7	14.4	7 680	8 210	45 000	LRT 6916
17	10	—	0.15	9	0.5	8.2	8.7	15.8	4 530	3 650	45 000	LRT 7910
17	12	—	0.2	10	0.5	8.6	9.7	15.4	5 880	5 970	40 000	LRT 71012
17	16	—	0.2	10	0.5	8.6	9.7	15.4	8 230	9 190	40 000	LRT 71016
19	11	—	0.2	10	0.5	9.6	9.9	17.4	6 180	5 030	40 000	LRT 81011
19	12	—	0.3	12	0.5	11	11.5	17	6 610	7 260	35 000	LRT 91212
19	16	—	0.3	12	0.5	11	11.5	17	9 250	11 200	35 000	LRT 91216
20	11	—	0.3	12	0.5	11	11.5	18	6 600	6 310	35 000	LRT 91211
22	13	—	0.3	14	0.5	12	13	20	9 230	10 100	30 000	LRT 101413
22	16	—	0.3	14	0.5	12	13	20	11 700	13 700	30 000	LRT 101416
22	20	—	0.3	14	0.5	12	13	20	14 800	18 600	30 000	LRT 101420
24	13	—	0.3	16	0.5	14	15	22	9 660	11 100	25 000	LRT 121613
24	16	—	0.3	16	0.5	14	15	22	12 300	15 100	25 000	LRT 121616
24	20	—	0.3	16	0.5	14	15	22	15 500	20 400	25 000	LRT 121620
24	22	—	0.3	16	0.5	14	15	22	17 100	23 000	25 000	LRT 121622

1N=0.102kgf=0.2248lbs. D30
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring



NA49 TAFI
NA69 ($d \leq 30$)

Shaft dia. 15 – 22mm

Shaft dia. mm	Identification number						Mass (Ref.) g	d
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
15	—	—	—	TAFI 152716	—	—	39.5	15
	—	—	—	TAFI 152720	—	—	50	15
	NA 4902	—	—	—	—	—	35	15
	—	—	—	—	—	—	61	15
	—	NA 6902	—	—	TRI 153320	—	81	15
17	—	—	—	—	—	GTRI 153320	90.5	15
	—	—	—	—	—	—	43.5	17
	NA 4903	—	—	TAFI 172916	—	—	54	17
	—	NA 6903	—	TAFI 172920	—	—	39	17
	—	—	—	—	TRI 173425	—	67	17
20	—	—	—	TAFI 203216	—	—	104	17
	—	—	—	TAFI 203220	—	—	117	17
	NA 4904	—	—	—	—	—	48.5	20
	—	NA 6904	—	—	—	—	61	20
	—	—	—	—	TRI 203820	—	78.5	20
22	—	—	—	—	TRI 203825	—	136	20
	—	—	—	—	—	—	99	20
	—	—	—	—	—	—	124	20
	NA 49/22	—	—	TAFI 223416	—	—	110	20
	—	NA 69/22	—	TAFI 223420	—	—	138	20


Notes⁽¹⁾ Minimum allowable value of chamfer dimension r

⁽²⁾ Allowable axial shift amount of inner ring to outer ring

⁽³⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks 1. TAFI series with a bore diameter d of 22 mm or less have no oil hole. In others, the outer ring has an oil groove and an oil hole.

2. No grease is prepakced. Perform proper lubrication.

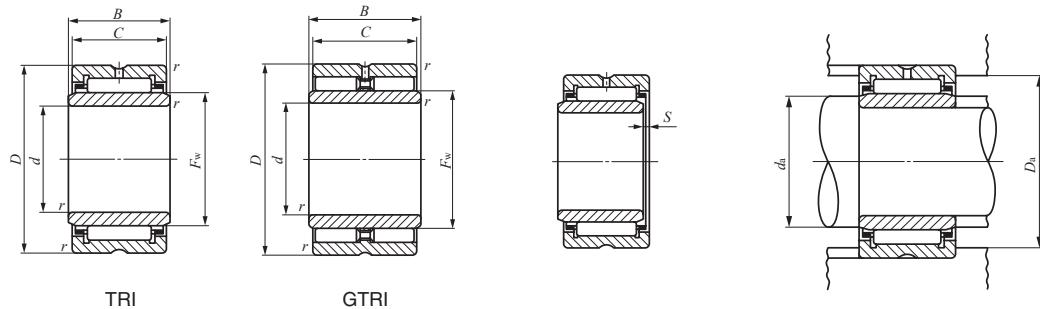

D

NA
TAFI
TRI
BRI



Boundary dimensions mm						Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽³⁾ min ⁻¹	Assembled inner ring
<i>D</i>	<i>C</i>	<i>B</i>	<i>r_{s min}</i>	<i>F_w</i>	<i>S</i>	Min.	<i>d_a</i> Max.	<i>D_a</i> Max.				
27	16	—	0.3	19	0.5	17	18	25	14 000	18 700	20 000	LRT 151916
27	20	—	0.3	19	0.5	17	18	25	17 700	25 300	20 000	LRT 151920
28	13	—	0.3	20	0.3	17	19	26	10 900	13 800	20 000	LRT 152013
28	23	—	0.3	20	0.3	17	19	26	19 300	28 800	20 000	LRT 152023
33	20	20.5	0.3	20	0.3	17	19	31	24 300	26 500	20 000	LRT 152020
33	20	20.5	0.3	20	—	17	19	31	29 200	37 200	7 500	LRTZ 152020
29	16	—	0.3	21	0.5	19	20	27	14 400	20 000	19 000	LRT 172116
29	20	—	0.3	21	0.5	19	20	27	18 200	27 100	19 000	LRT 172120
30	13	—	0.3	22	0.3	19	21	28	11 700	15 600	18 000	LRT 172213
30	23	—	0.3	22	0.3	19	21	28	20 800	32 500	18 000	LRT 172223
34	25	25.5	0.3	22	0.5	19	21	32	29 100	36 800	18 000	LRT 172225
34	25	25.5	0.3	22	—	19	21	32	37 900	57 800	7 000	LRTZ 172225
32	16	—	0.3	24	0.5	22	23	30	15 300	22 500	17 000	LRT 202416
32	20	—	0.3	24	0.5	22	23	30	19 400	30 500	17 000	LRT 202420
37	17	—	0.3	25	0.5	22	24	35	21 000	25 000	16 000	LRT 202517
37	30	—	0.3	25	0.5	22	24	35	35 400	48 900	16 000	LRT 202530
38	20	20.5	0.3	25	0.3	22	24	36	28 900	35 000	16 000	LRT 202520
38	25	25.5	0.3	25	0.5	22	24	36	34 800	44 400	16 000	LRT 202525
38	20	20.5	0.3	25	—	22	24	36	33 300	46 500	6 000	LRTZ 202520
38	25	25.5	0.3	25	—	22	24	36	42 400	63 700	6 000	LRTZ 202525
34	16	—	0.3	26	0.5	24	25	32	16 300	24 900	15 000	LRT 222616
34	20	—	0.3	26	0.5	24	25	32	20 600	33 800	15 000	LRT 222620
39	17	—	0.3	28	1	24	27	37	21 400	28 900	14 000	LRT 222817
39	30	—	0.3	28	0.5	24	27	37	36 300	56 900	14 000	LRT 222830

1N=0.102kgf=0.2248lbs. D32
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring

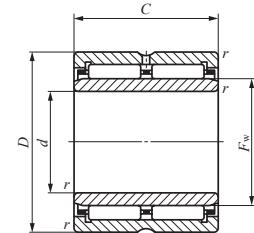

NA49 TAFI
NA69 ($d \leq 30$)

NA69

Shaft dia. 25 – 32mm

Shaft dia. mm	Identification number						Mass (Ref.) g	d
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
25	—	—	—	TAFI 253820	—	—	82	25
	—	—	—	TAFI 253830	—	—	123	25
	NA 4905	—	—	—	—	—	92.5	25
	—	NA 6905	—	—	—	—	160	25
	—	—	—	—	TRI 254425	—	157	25
28	—	—	—	TAFI 284220	—	—	96.5	28
	—	—	—	TAFI 284230	—	—	145	28
	NA 49/28	—	—	—	—	—	101	28
	—	NA 69/28	—	—	—	—	176	28
	—	—	—	—	—	GTRI 284530	196	28
30	—	—	—	TAFI 304520	—	—	112	30
	—	—	—	TAFI 304530	—	—	171	30
	NA 4906	—	—	—	—	—	106	30
	—	NA 6906	—	—	—	—	184	30
	—	—	—	—	TRI 304830	—	199	30
32	—	—	—	TAFI 324720	—	—	225	32
	—	—	—	TAFI 324730	—	—	121	32
	NA 49/32	—	—	—	—	—	180	32
	—	NA 69/32	—	—	TRI 325230	—	165	32
	—	—	—	—	—	GTRI 325230	245	32
							295	32
							270	32


Notes⁽¹⁾ Minimum allowable value of chamfer dimension r

⁽²⁾ Allowable axial shift amount of inner ring to outer ring

⁽³⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepakced. Perform proper lubrication.

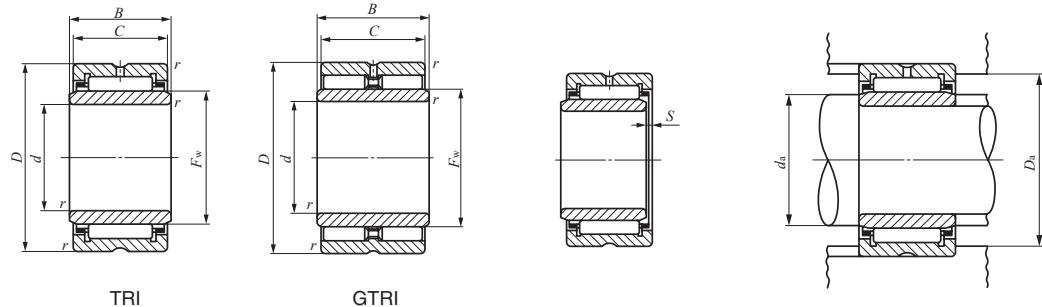

D

NA
TAFI
TRI
BRI



Boundary dimensions mm						Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽³⁾ min ⁻¹	Assembled inner ring
D	C	B	r _{s min} ⁽¹⁾	F _w	S ⁽²⁾	Min.	d _a	Max.	D _a Max.			
38	20	—	0.3	29	0.5	27	28	36	21 600	37 200	14 000	LRT 252920
38	30	—	0.3	29	1	27	28	36	30 900	59 100	14 000	LRT 252930
42	17	—	0.3	30	0.5	27	29	40	23 700	30 700	13 000	LRT 253017
42	30	—	0.3	30	0.5	27	29	40	42 100	64 300	13 000	LRT 253030
44	25	25.5	0.3	30	0.5	27	29	42	37 900	52 100	13 000	LRT 253025
44	25	25.5	0.3	30	—	27	29	42	47 000	76 500	5 000	LRTZ 253025
42	20	—	0.3	32	0.5	30	31	40	25 700	42 200	12 000	LRT 283220
42	30	—	0.3	32	1	30	31	40	36 800	67 200	12 000	LRT 283230
45	17	—	0.3	32	1	30	31	43	24 500	32 700	12 000	LRT 283217
45	30	—	0.3	32	1	30	31	43	41 800	64 800	12 000	LRT 283230
45	30	30.5	0.3	32	—	30	31	43	58 000	101 000	4 500	LRTZ 283230
45	20	—	0.3	35	0.3	32	34	43	26 900	46 200	11 000	LRT 303520
45	30	—	0.3	35	0.5	32	34	43	38 600	73 600	11 000	LRT 303530
47	17	—	0.3	35	0.5	32	34	45	25 200	34 700	11 000	LRT 303517
47	30	—	0.3	35	0.5	32	34	45	43 000	69 000	11 000	LRT 303530
48	30	30.5	0.3	35	1	32	34	46	47 400	72 300	11 000	LRT 303530-1
48	30	30.5	0.3	35	—	32	34	46	61 100	110 000	4 500	LRTZ 303530
47	20	—	0.3	37	0.3	34	36	45	28 200	50 100	11 000	LRT 323720
47	30	—	0.3	37	0.5	34	36	45	40 500	79 800	11 000	LRT 323730
52	20	—	0.6	40	0.5	36	39	48	31 200	47 800	10 000	LRT 324020
52	30	30.5	0.6	38	0.5	36	37	48	50 800	81 100	11 000	LRT 323830
52	36	—	0.6	40	0.3	36	39	48	53 500	95 700	10 000	LRT 324036
52	30	30.5	0.6	38	—	36	37	48	64 200	121 000	4 000	LRTZ 323830

1N=0.102kgf=0.2248lbs. D34
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring



NA49 TAFI

NA69

Shaft dia. 35 – 45mm

Shaft dia. mm	Identification number						Mass (Ref.) g	<i>d</i>
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
35	—	—	—	TAFI 355020	—	—	129	35
	—	—	—	TAFI 355030	—	—	192	35
	NA 4907	—	—	—	—	—	178	35
		NA 6907	—	—	—	—	320	35
	—	—	—	—	TRI 355630	—	280	35
	—	—	—	—	—	GTRI 355520	191	35
38	—	—	—	TAFI 385320	—	—	310	35
	—	—	—	TAFI 385330	—	—	136	38
	—	—	—	TAFI 405520	—	—	205	38
	—	—	—	TAFI 405530	—	—	143	40
	NA 4908	—	—	—	TRI 405930	—	215	40
		NA 6908	—	—	—	—	270	40
40	—	—	—	TAFI 425720	—	—	245	40
	—	—	—	TAFI 425730	—	—	440	40
	—	—	—	—	TRI 426230	—	300	40
	—	—	—	—	—	GTRI 426230	149	42
	—	—	—	—	—	—	225	42
	—	—	—	—	—	—	305	42
42	—	—	—	TAFI 456225	—	—	340	42
	—	—	—	TAFI 456235	—	—	230	45
	NA 4909	—	—	—	TRI 456430	—	320	45
		NA 6909	—	—	—	—	300	45
	—	—	—	—	—	—	285	45
	—	—	—	—	—	—	520	45
45	—	—	—	—	—	GTRI 456430	335	45

Notes⁽¹⁾ Minimum allowable value of chamfer dimension *r*


⁽²⁾ Allowable axial shift amount of inner ring to outer ring

⁽³⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepakced. Perform proper lubrication.

D35

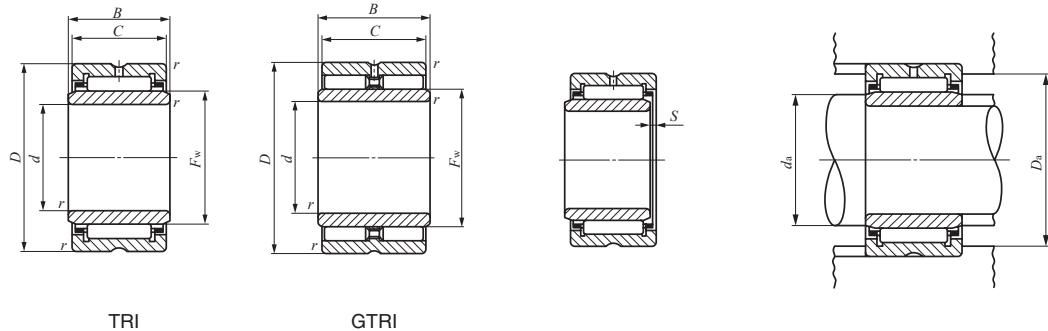

D

NA
TAFI
TRI
BRI



Boundary dimensions mm						Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽³⁾ min ⁻¹	Assembled inner ring
<i>D</i>	<i>C</i>	<i>B</i>	<i>r_{s min}</i>	<i>F_w</i>	<i>S</i>	Min.	<i>d_a</i>	Max.	<i>D_a</i> Max.			
50	20	—	0.3	40	0.3	37	39	48	29 400	54 100	10 000	LRT 354020
50	30	—	0.3	40	0.5	37	39	48	42 300	86 200	10 000	LRT 354030
55	20	—	0.6	42	0.5	39	41	51	32 000	50 100	9 500	LRT 354220
55	36	—	0.6	42	0.3	39	41	51	54 900	100 000	9 500	LRT 354236
56	30	30.5	0.6	42	0.5	39	41	52	53 800	90 100	9 500	LRT 354230
55	20	20.5	0.6	40	—	39	39.5	51	44 300	73 600	3 500	LRTZ 354020
56	30	30.5	0.6	42	—	39	41	52	67 500	133 000	3 500	LRTZ 354230
53	20	—	0.3	43	0.3	40	42	51	30 500	58 200	9 500	LRT 384320
53	30	—	0.3	43	0.5	40	42	51	43 800	92 600	9 500	LRT 384330
55	20	—	0.3	45	0.3	42	44	53	31 000	60 200	9 000	LRT 404520
55	30	—	0.3	45	0.5	42	44	53	44 600	95 800	9 000	LRT 404530
59	30	30.5	0.6	45	1	44	44.5	55	55 100	94 800	9 000	LRT 404530-1
62	22	—	0.6	48	0.5	44	47	58	41 600	67 400	8 500	LRT 404822
62	40	—	0.6	48	0.3	44	47	58	71 300	135 000	8 500	LRT 404840
59	30	30.5	0.6	45	—	44	44.5	55	70 300	142 000	3 500	LRTZ 404530
57	20	—	0.3	47	0.3	44	46	55	31 500	62 200	8 500	LRT 424720
57	30	—	0.3	47	0.5	44	46	55	45 200	99 100	8 500	LRT 424730
62	30	30.5	0.6	48	0.5	46	47	58	56 300	99 500	8 500	LRT 424830
62	30	30.5	0.6	48	—	46	47	58	72 700	154 000	3 000	LRTZ 424830
62	25	—	0.3	50	0.5	47	49	60	43 000	85 300	8 000	LRT 455025
62	35	—	0.3	50	1	47	49	60	58 000	125 000	8 000	LRT 455035
64	30	30.5	0.6	50	1	49	49.5	60	57 700	104 000	8 000	LRT 455030
68	22	—	0.6	52	0.5	49	51	64	43 500	73 300	7 500	LRT 455222
68	40	—	0.6	52	0.3	49	51	64	74 600	147 000	7 500	LRT 455240
64	30	30.5	0.6	50	—	49	49.5	60	74 600	158 000	3 000	LRTZ 455030

1N=0.102kgf=0.2248lbs. D36
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring

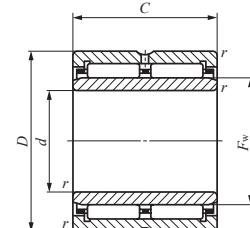

NA49 TAFI

NA69

Shaft dia. 50 – 70mm

Shaft dia. mm	Identification number						Mass (Ref.) g	d
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
50	—	—	—	TAFI 506825	—	—	270	50
	—	—	—	TAFI 506835	—	—	365	50
	NA 4910	—	—	—	—	—	295	50
	—	NA 6910	—	—	—	—	530	50
	—	—	—	—	TRI 507745	—	755	50
55	—	—	—	TAFI 557225	—	—	825	50
	—	—	—	TAFI 557235	—	—	275	55
	NA 4911	—	—	—	—	—	380	55
	—	NA 6911	—	—	—	—	410	55
	—	—	—	—	TRI 558138	—	650	55
60	—	—	—	TAFI 608225	—	—	710	55
	—	—	—	TAFI 608235	—	—	275	60
	NA 4912	—	—	—	—	—	560	60
	—	NA 6912	—	—	—	—	440	60
	—	—	—	—	TRI 608945	—	785	60
65	NA 4913	—	—	—	—	—	960	60
	—	—	—	TAFI 659035	—	—	470	65
	—	NA 6913	—	—	—	—	710	65
70	NA 4914	—	—	TAFI 709525	—	—	840	65
	—	—	—	TAFI 709535	—	—	540	70
	—	—	—	—	—	—	755	70
	—	NA 6914	—	—	—	—	765	70
						—	1 400	70


Notes⁽¹⁾ Minimum allowable value of chamfer dimension *r*

⁽²⁾ Allowable axial shift amount of inner ring to outer ring

⁽³⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepakced. Perform proper lubrication.

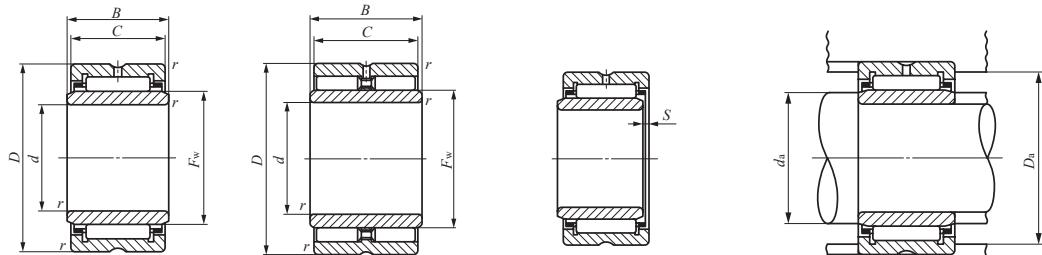

TRI

GTRI

D

NA
TAFI
TRI
BRI



Boundary dimensions mm						Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽³⁾ min ⁻¹	Assembled inner ring
<i>D</i>	<i>C</i>	<i>B</i>	<i>r_s min</i>	⁽¹⁾ <i>F_w</i>	⁽²⁾ <i>S</i>	Min.	<i>d_a</i>	Max.	<i>D_a</i> Max.			
68	25	—	0.3	55	0.5	52	54	66	45 400	94 000	7 500	LRT 505525
68	35	—	0.3	55	1	52	54	66	61 200	138 000	7 500	LRT 505535
72	22	—	0.6	58	0.5	54	57	68	46 200	82 100	7 000	LRT 505822
72	40	—	0.6	58	0.3	54	57	68	79 200	164 000	7 000	LRT 505840
77	45	45.5	1	58	2	55	57	72	104 000	191 000	7 000	LRT 505845
77	45	45.5	1	58	—	55	57	72	135 000	280 000	2 500	LRTZ 505845
72	25	—	0.3	60	0.5	57	59	70	47 500	103 000	6 500	LRT 556025
72	35	—	0.3	60	1	57	59	70	64 100	151 000	6 500	LRT 556035
80	25	—	1	63	1	60	61	75	57 600	97 200	6 500	LRT 556325
80	45	—	1	63	0.5	60	61	75	98 700	194 000	6 500	LRT 556345
81	38	38.5	1	62	1.5	60	60.5	76	92 000	166 000	6 500	LRT 556238
81	38	38.5	1	62	—	60	60.5	76	118 000	241 000	2 500	LRTZ 556238
82	25	—	0.6	68	0.3	64	66	78	54 800	117 000	6 000	LRT 606825
82	35	—	0.6	68	1	64	66	78	72 000	166 000	6 000	LRT 606835
85	25	—	1	68	1	65	66	80	60 200	105 000	6 000	LRT 606825-1
85	45	—	1	68	0.5	65	66	80	103 000	211 000	6 000	LRT 606845
89	45	45.5	1	70	2	65	68	84	114 000	228 000	5 500	LRT 607045
89	45	45.5	1	70	—	65	68	84	147 000	336 000	2 000	LRTZ 607045
90	25	—	1	72	1	70	70.5	85	62 700	113 000	5 500	LRT 657225
90	35	—	1	73	1	70	71	85	80 400	181 000	5 500	LRT 657335
90	45	—	1	72	0.5	70	70.5	85	108 000	227 000	5 500	LRT 657245
95	25	—	1	80	0.3	75	78	90	59 400	137 000	5 000	LRT 708025
95	35	—	1	80	1	75	78	90	78 100	195 000	5 000	LRT 708035
100	30	—	1	80	1.5	75	78	95	83 200	158 000	5 000	LRT 708030
100	54	—	1	80	1	75	78	95	134 000	311 000	5 000	LRT 708054

1N=0.102kgf=0.2248lbs. D38
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring

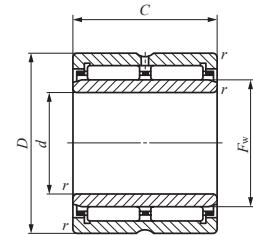

NA49 TAFI

NA69

Shaft dia. 75 – 90mm

Shaft dia. mm	Identification number						Mass (Ref.) g	<i>d</i>
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
75	—	—	—	TAFI 7510525	—	—	675	75
	NA 4915	—	—	—	—	—	810	75
	—	—	—	TAFI 7510535	—	—	945	75
	—	—	—	—	—	—	1 480	75
	—	—	—	—	TRI 7510845	—	1 340	75
80	—	—	—	TAFI 8011025	—	—	710	80
	NA 4916	—	—	—	—	—	855	80
	—	—	—	TAFI 8011035	—	—	995	80
	—	NA 6916	—	—	—	—	1 560	80
85	—	—	—	TAFI 8511526	—	—	775	85
	NA 4917	—	—	TAFI 8511536	—	—	1 080	85
	—	—	—	—	—	—	1 280	85
	—	NA 6917	—	—	—	—	2 340	85
90	—	—	—	TRI 8511850	—	—	1 640	85
	—	—	—	TRI 8512045	—	—	1 610	85
	—	—	—	—	GTRI 8511850	—	1 780	85
	—	—	—	—	GTRI 8512045	—	1 720	85
	NA 4918	—	—	TAFI 9012026	—	—	820	90
	—	—	—	TAFI 9012036	—	—	1 140	90
	—	—	—	—	—	—	1 350	90
	—	NA 6918	—	—	TRI 9012550	—	1 870	90
	—	—	—	—	—	—	2 460	90
	—	—	—	—	—	GTRI 9012550	2 020	90


Notes⁽¹⁾ Minimum allowable value of chamfer dimension *r*

⁽²⁾ Allowable axial shift amount of inner ring to outer ring

⁽³⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepakced. Perform proper lubrication.

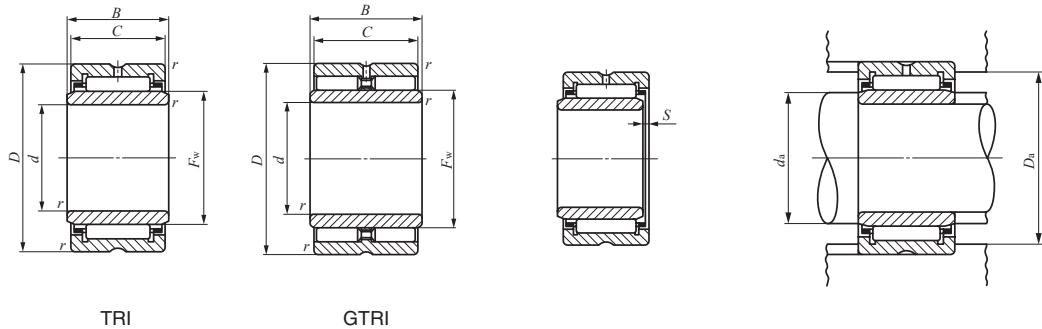

D

NA
TAFI
TRI
BRI



D	C	B	Boundary dimensions mm		Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed⁽³⁾ min⁻¹	Assembled inner ring	
			$r_{s\ min}$	F_w	d_a Min.	d_a Max.	D_a Max.					
105	25	—	1	85	0.5	80	83	100	76 300	145 000	4 500	LRT 758525
105	30	—	1	85	1.5	80	83	100	86 200	169 000	4 500	LRT 758530
105	35	—	1	85	1.5	80	83	100	102 000	210 000	4 500	LRT 758535
105	54	—	1	85	1	80	83	100	138 000	331 000	4 500	LRT 758554
108	45	45.5	1	83	2.5	80	81	103	146 000	270 000	5 000	LRT 758345
108	45	45.5	1	83	—	80	81	103	190 000	396 000	1 800	LRTZ 758345
110	25	—	1	90	0.5	85	88	105	77 300	150 000	4 500	LRT 809025
110	30	—	1	90	1.5	85	88	105	87 300	175 000	4 500	LRT 809030
110	35	—	1	90	1.5	85	88	105	103 000	217 000	4 500	LRT 809035
110	54	—	1	90	1	85	88	105	143 000	351 000	4 500	LRT 809054
115	26	—	1	95	1	90	93	110	79 700	159 000	4 000	LRT 859526
115	36	—	1	95	2	90	93	110	106 000	231 000	4 000	LRT 859536
120	35	—	1.1	100	1	91.5	98	113.5	110 000	244 000	4 000	LRT 8510035
120	63	—	1.1	100	0.5	91.5	98	113.5	173 000	467 000	4 000	LRT 8510063
118	50	50.5	1	93	3	90	91	113	165 000	329 000	4 500	LRT 859350
120	45	45.5	1.5	95	2.5	93	93.5	112	155 000	305 000	4 000	LRT 859545
118	50	50.5	1	93	—	90	91	113	224 000	509 000	1 600	LRTZ 859350
120	45	45.5	1.5	95	—	93	93.5	112	204 000	455 000	1 600	LRTZ 859545
120	26	—	1	100	1	95	98	115	82 400	168 000	4 000	LRT 9010026
120	36	—	1	100	2	95	98	115	110 000	244 000	4 000	LRT 9010036
125	35	—	1.1	105	1	96.5	103	118.5	113 000	258 000	4 000	LRT 9010535
125	50	50.5	1.5	100	3	98	98.5	117	172 000	355 000	4 000	LRT 9010050
125	63	—	1.1	105	0.5	96.5	103	118.5	178 000	490 000	4 000	LRT 9010563
125	50	50.5	1.5	100	—	98	98.5	117	234 000	549 000	1 500	LRTZ 9010050

1N=0.102kgf=0.2248lbs. D40
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring

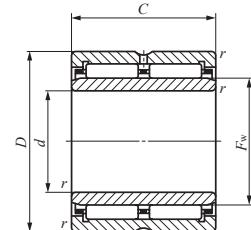

NA49 TAFI
NA48

NA69

Shaft dia. 95 – 150mm

Shaft dia. mm	Identification number						Mass (Ref.) g	<i>d</i>
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
95	—	—	—	TAFI 9512526	—	—	860	95
	—	—	—	TAFI 9512536	—	—	1 190	95
	NA 4919	—	—	—	—	—	1 420	95
	—	NA 6919	—	—	—	—	2 580	95
100	—	—	—	TAFI 10013030	—	—	1 040	100
	—	—	—	TAFI 10013040	—	—	1 380	100
	—	NA 4920	—	—	TRI 10013550	—	2 040	100
	—	—	—	—	—	GTRI 10013550	1 960	100
105	—	—	—	—	TRI 10515350	—	2 200	100
110	—	—	NA 4822	—	—	—	3 020	105
	NA 4922	—	—	—	—	GTRI 10515350	3 270	105
120	—	—	NA 4824	—	—	—	1 200	110
	NA 4924	—	—	—	—	—	2 120	110
125	—	—	—	—	TRI 12517860	—	1 300	120
	—	—	—	—	—	GTRI 12517860	2 960	120
130	—	—	NA 4826	—	—	—	4 780	125
	NA 4926	—	—	—	—	GTRI 12517860	5 180	125
135	—	—	—	—	TRI 13518860	—	1 960	130
	—	—	—	—	—	GTRI 13518860	4 030	130
140	—	—	NA 4828	—	—	—	5 100	135
	NA 4928	—	—	—	—	GTRI 13518860	5 530	135
150	—	—	NA 4830	—	—	—	2 100	140
	NA 4930	—	—	—	—	—	4 290	140


Notes⁽¹⁾ Minimum allowable value of chamfer dimension *r*

⁽²⁾ Allowable axial shift amount of inner ring to outer ring

⁽³⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepakced. Perform proper lubrication.

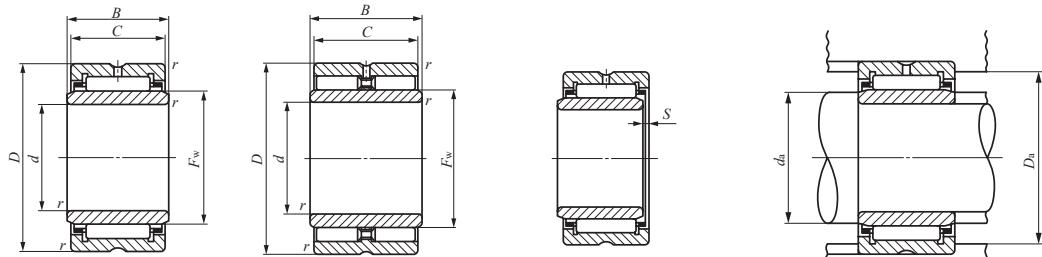

TRI

GTRI

D

NA
TAFI
TRI
BRI

D	C	B	Boundary dimensions mm		Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽³⁾ min ⁻¹	Assembled inner ring	
			r _{s min}	F _w	(¹) Min.	d _a	Max.					
125	26	—	1	105	1	100	103	120	84 700	178 000	4 000	LRT 9510526
125	36	—	1	105	2	100	103	120	113 000	258 000	4 000	LRT 9510536
130	35	—	1.1	110	1	101.5	108	123.5	116 000	271 000	3 500	LRT 9511035
130	63	—	1.1	110	0.5	101.5	108	123.5	182 000	514 000	3 500	LRT 9511063
130	30	—	1	110	0.5	105	108	125	106 000	240 000	3 500	LRT 10011030
130	40	—	1	110	1.5	105	108	125	134 000	324 000	3 500	LRT 10011040
135	50	50.5	1.5	110	3	108	108.5	127	183 000	395 000	3 500	LRT 10011050
140	40	—	1.1	115	1	106.5	113	133.5	145 000	329 000	3 500	LRT 10011540
135	50	50.5	1.5	110	—	108	108.5	127	245 000	603 000	1 400	LRTZ 10011050
153	50	50.5	1.5	115	3	113	113.5	145	233 000	414 000	3 500	LRT 10511550
153	50	50.5	1.5	115	—	113	113.5	145	315 000	614 000	1 300	LRTZ 10511550
140	30	—	1	120	1	115	118	135	93 200	239 000	3 500	LRT 11012030
150	40	—	1.1	125	1	116.5	123	143.5	152 000	357 000	3 000	LRT 11012540
150	30	—	1	130	1	125	128	145	96 900	259 000	3 000	LRT 12013030
165	45	—	1.1	135	2	126.5	133	158.5	187 000	435 000	3 000	LRT 12013545
178	60	60.5	1.5	140	2.5	133	138	170	307 000	625 000	3 000	LRT 12514060
178	60	60.5	1.5	140	—	133	138	170	409 000	923 000	1 100	LRTZ 12514060
165	35	—	1.1	145	1	136.5	143	158.5	116 000	340 000	3 000	LRT 13014535
180	50	—	1.5	150	2.5	138	148	172	215 000	540 000	2 500	LRT 13015050
188	60	60.5	1.5	150	2.5	143	148	180	320 000	675 000	2 500	LRT 13515060
188	60	60.5	1.5	150	—	143	148	180	423 000	989 000	1 000	LRTZ 13515060
175	35	—	1.1	155	1	146.5	153	168.5	120 000	363 000	2 500	LRT 14015535
190	50	—	1.5	160	2.5	148	158	182	224 000	580 000	2 500	LRT 14016050
190	40	—	1.1	165	1.5	156.5	163	183.5	168 000	446 000	2 500	LRT 15016540
210	60	—	2	170	3	159	168	201	324 000	712 000	2 500	LRT 15017060

1N=0.102kgf=0.2248lbs. D42
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring



Shaft dia. 160 – 340mm

Shaft dia. mm	Identification number						Mass (Ref.) g	<i>d</i>
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
160 NA 4932	— —	— —	NA 4832 —	— —	— —	— —	3 050 6 750	160 160
170 NA 4934	— —	— —	NA 4834 —	— —	— —	— —	4 120 7 110	170 170
180 NA 4936	— —	— —	NA 4836 —	— —	— —	— —	4 340 10 200	180 180
190 NA 4938	— —	— —	NA 4838 —	— —	— —	— —	5 760 10 700	190 190
200 NA 4940	— —	— —	NA 4840 —	— —	— —	— —	6 040 15 400	200 200
220 NA 4944	— —	— —	NA 4844 —	— —	— —	— —	6 570 16 700	220 220
240 NA 4948	— —	— —	NA 4848 —	— —	— —	— —	10 200 18 000	240 240
260 NA 4952	— —	— —	NA 4852 —	— —	— —	— —	11 000 31 100	260 260
280 NA 4956	— —	— —	NA 4856 —	— —	— —	— —	15 800 33 100	280 280
300 NA 4960	— —	— —	NA 4860 —	— —	— —	— —	22 300 51 400	300 300
320 NA 4964	— —	— —	NA 4864 —	— —	— —	— —	23 700 54 400	320 320
340 NA 4968	— —	— —	NA 4868 —	— —	— —	— —	25 000 57 300	340 340




Notes⁽¹⁾ Minimum allowable value of chamfer dimension *r*

⁽²⁾ Allowable axial shift amount of inner ring to outer ring

⁽³⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepakced. Perform proper lubrication.

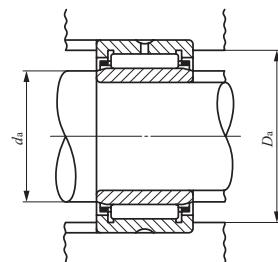

NA49 NA48

D

NA
TAFI
TRI
BRI

Boundary dimensions mm						Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C</i> ₀ N	Allowable rotational speed ⁽³⁾ min ⁻¹	Assembled inner ring
<i>D</i>	<i>C</i>	<i>B</i>	<i>r</i> _{s min}	⁽¹⁾ <i>F</i> _w	⁽²⁾ <i>S</i>	Min.	<i>d</i> _a	Max.	<i>D</i> _a Max.			
200	40	—	1.1	175	1.5	166.5	173	193.5	173 000	474 000	2 500	LRT 16017540
220	60	—	2	180	3	169	178	211	337 000	761 000	1 900	LRT 16018060
215	45	—	1.1	185	1.5	176.5	183	208.5	211 000	567 000	1 900	LRT 17018545
230	60	—	2	190	3	179	188	221	347 000	810 000	1 900	LRT 17019060
225	45	—	1.1	195	1.5	186.5	193	218.5	218 000	602 000	1 900	LRT 18019545
250	69	—	2	205	3	189	203	241	434 000	989 000	1 900	LRT 18020569
240	50	—	1.5	210	1.5	198	208	232	249 000	726 000	1 800	LRT 19021050
260	69	—	2	215	3	199	213	251	440 000	1 020 000	1 700	LRT 19021569
250	50	—	1.5	220	1.5	208	218	242	255 000	766 000	1 600	LRT 20022050
280	80	—	2.1	225	4	211	223	269	518 000	1 120 000	1 600	LRT 20022580
270	50	—	1.5	240	1.5	228	238	262	266 000	833 000	1 500	LRT 22024050
300	80	—	2.1	245	4	231	243	289	536 000	1 200 000	1 400	LRT 22024580
300	60	—	2	265	2	249	262	291	345 000	1 150 000	1 300	LRT 24026560
320	80	—	2.1	265	4	251	262	309	565 000	1 320 000	1 300	LRT 24026580
320	60	—	2	285	2	269	282	311	354 000	1 220 000	1 100	LRT 26028560
360	100	—	2.1	290	4	271	287	349	847 000	1 900 000	1 100	LRT 260290100
350	69	—	2	305	2.5	289	302	341	486 000	1 550 000	950	LRT 28030569
380	100	—	2.1	310	4	291	307	369	877 000	2 040 000	950	LRT 280310100
380	80	—	2.1	330	2.5	311	327	369	610 000	1 900 000	900	LRT 30033080
420	118	—	3	340	4	313	337	407	1 130 000	2 650 000	850	LRT 300340118
400	80	—	2.1	350	2.5	331	347	389	635 000	2 040 000	750	LRT 32035080
440	118	—	3	360	4	333	357	427	1 170 000	2 830 000	750	LRT 320360118
420	80	—	2.1	370	2.5	351	367	409	651 000	2 140 000	700	LRT 34037080
460	118	—	3	380	4	353	377	447	1 220 000	3 020 000	700	LRT 340380118

1N=0.102kgf=0.2248lbs. D44
1mm=0.03937inch

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**

With Inner Ring

**Shaft dia. 360 – 440mm**




Shaft dia. mm	Identification number						Mass (Ref.)	<i>d</i>
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI	g	
360	—	—	NA 4872	—	—	—	26 400	360
	NA 4972	—	—	—	—	—	60 200	360
380	—	—	NA 4876	—	—	—	44 600	380
	NA 4976	—	—	—	—	—	90 300	380
400	NA 4980	—	—	—	—	—	94 400	400
420	NA 4984	—	—	—	—	—	98 500	420
440	NA 4988	—	—	—	—	—	131 000	440

Notes⁽¹⁾ Minimum allowable value of chamfer dimension *r*⁽²⁾ Allowable axial shift amount of inner ring to outer ring⁽³⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepakced. Perform proper lubrication.

D45

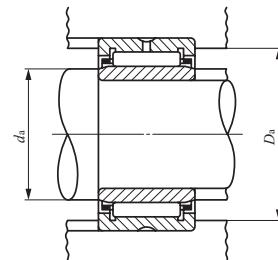

NA49 NA48

D

NA
TAFI
TRI
BRI

D	C	B	Boundary dimensions mm		Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽³⁾ min ⁻¹	Assembled inner ring	
			r _{s min} ⁽¹⁾	F _w ⁽²⁾	Min.	d _a	Max.					
440	80	—	2.1	390	2.5	371	387	429	680 000	2 320 000	650	LRT 36039080
480	118	—	3	400	4	373	397	467	1 260 000	3 200 000	600	LRT 360400118
480	100	—	2.1	415	3	391	412	469	951 000	2 860 000	600	LRT 380415100
520	140	—	4	430	5	396	427	504	1 540 000	4 030 000	500	LRT 380430140
540	140	—	4	450	5	416	447	524	1 590 000	4 270 000	500	LRT 400450140
560	140	—	4	470	5	436	467	544	1 640 000	4 510 000	500	LRT 420470140
600	160	—	4	490	5	456	487	584	1 910 000	5 140 000	400	LRT 440490160

1N=0.102kgf=0.2248lbs. D46
1mm=0.03937inch

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**

Without Inner Ring, Inch Series

**Shaft dia. 15.875 – 47.625mm**


Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch)			Standard mounting dimensions mm	
			F_w	D	C	D_a Max.	$r_{as\ max}^{(1)}$
15.875 (5/8)	BR 101812	49	15.875(5/8)	28.575(1 1/8)	19.050(3/4)	24.5	0.6
19.050 (3/4)	BR 122012	56	19.050(3/4)	31.750(1 1/4)	19.050(3/4)	26.5	1
	BR 122016	75	19.050(3/4)	31.750(1 1/4)	25.400(1)	26.5	1
22.225 (7/8)	BR 142212	63	22.225(7/8)	34.925(1 3/8)	19.050(3/4)	29.7	1
	BR 142216	84.5	22.225(7/8)	34.925(1 3/8)	25.400(1)	29.7	1
25.400 (1)	BR 162412	69	25.400(1)	38.100(1 1/2)	19.050(3/4)	32.9	1
	BR 162416	92.5	25.400(1)	38.100(1 1/2)	25.400(1)	32.9	1
28.575 (1 1/8)	BR 182616	102	28.575(1 1/8)	41.275(1 5/8)	25.400(1)	36	1
	BR 182620	128	28.575(1 1/8)	41.275(1 5/8)	31.750(1 1/4)	36	1
31.750 (1 1/4)	BR 202816	110	31.750(1 1/4)	44.450(1 3/4)	25.400(1)	39.2	1
	BR 202820	138	31.750(1 1/4)	44.450(1 3/4)	31.750(1 1/4)	39.2	1
34.925 (1 3/8)	BR 223016	119	34.925(1 3/8)	47.625(1 7/8)	25.400(1)	42.4	1
	BR 223020	149	34.925(1 3/8)	47.625(1 7/8)	31.750(1 1/4)	42.4	1
38.100 (1 1/2)	BR 243316	149	38.100(1 1/2)	52.388(2 5/16)	25.400(1)	45.1	1.5
	BR 243320	187	38.100(1 1/2)	52.388(2 5/16)	31.750(1 1/4)	45.1	1.5
41.275 (1 5/8)	BR 263516	158	41.275(1 5/8)	55.562(2 3/16)	25.400(1)	48.3	1.5
	BR 263520	199	41.275(1 5/8)	55.562(2 3/16)	31.750(1 1/4)	48.3	1.5
44.450 (1 3/4)	BR 283716	170	44.450(1 3/4)	58.738(2 5/16)	25.400(1)	51.5	1.5
	BR 283720	215	44.450(1 3/4)	58.738(2 5/16)	31.750(1 1/4)	51.5	1.5
	BR 283820	250	44.450(1 3/4)	60.325(2 3/8)	31.750(1 1/4)	53.1	1.5
47.625 (1 7/8)	BR 303920	225	47.625(1 7/8)	61.912(2 7/16)	31.750(1 1/4)	54.7	1.5

Notes⁽¹⁾ Maximum permissible corner radius of the housing⁽²⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

IKO



BR



D

NA
TAFI
TRI
BRI

Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽²⁾ min ⁻¹
18 900	19 700	25 000
21 700	24 400	20 000
27 600	33 100	20 000
23 000	27 100	18 000
29 100	36 800	18 000
25 300	31 900	16 000
32 100	43 300	16 000
34 900	49 900	14 000
43 200	65 600	14 000
36 000	53 500	13 000
44 600	70 300	13 000
38 500	60 000	11 000
47 700	78 900	11 000
43 700	66 900	11 000
54 200	88 200	11 000
44 800	70 900	9 500
55 600	93 400	9 500
47 500	78 200	9 000
58 900	103 000	9 000
58 900	103 000	9 000
60 100	108 000	8 500

1N=0.102kgf=0.2248lbs. D48
1mm=0.03937inch

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**

Without Inner Ring, Inch Series



**Shaft dia. 50.800 – 101.600mm**

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch)			Standard mounting dimensions mm	
			F_w	D	C	D_a Max.	$r_{as\ max}^{(1)}$
50.800 (2)	BR 324116	190	50.800(2)	65.088(2 $\frac{9}{16}$)	25.400(1)	57.8	1.5
	BR 324120	240	50.800(2)	65.088(2 $\frac{9}{16}$)	31.750(1 $\frac{1}{4}$)	57.8	1.5
57.150 (2 $\frac{1}{4}$)	BR 364824	435	57.150(2 $\frac{1}{4}$)	76.200(3)	38.100(1 $\frac{1}{2}$)	69	1.5
	BR 364828	510	57.150(2 $\frac{1}{4}$)	76.200(3)	44.450(1 $\frac{3}{4}$)	69	1.5
63.500 (2 $\frac{1}{2}$)	BR 405224	475	63.500(2 $\frac{1}{2}$)	82.550(3 $\frac{1}{4}$)	38.100(1 $\frac{1}{2}$)	74.3	2
	BR 405228	555	63.500(2 $\frac{1}{2}$)	82.550(3 $\frac{1}{4}$)	44.450(1 $\frac{3}{4}$)	74.3	2
69.850 (2 $\frac{3}{4}$)	BR 445624	510	69.850(2 $\frac{3}{4}$)	88.900(3 $\frac{1}{2}$)	38.100(1 $\frac{1}{2}$)	80.7	2
	BR 445628	600	69.850(2 $\frac{3}{4}$)	88.900(3 $\frac{1}{2}$)	44.450(1 $\frac{3}{4}$)	80.7	2
76.200 (3)	BR 486024	555	76.200(3)	95.250(3 $\frac{3}{4}$)	38.100(1 $\frac{1}{2}$)	87	2
	BR 486028	650	76.200(3)	95.250(3 $\frac{3}{4}$)	44.450(1 $\frac{3}{4}$)	87	2
82.550 (3 $\frac{1}{4}$)	BR 526828	990	82.550(3 $\frac{1}{4}$)	107.950(4 $\frac{1}{4}$)	44.450(1 $\frac{3}{4}$)	99.7	2
	BR 526832	1 140	82.550(3 $\frac{1}{4}$)	107.950(4 $\frac{1}{4}$)	50.800(2)	99.7	2
88.900 (3 $\frac{1}{2}$)	BR 567232	1 220	88.900(3 $\frac{1}{2}$)	114.300(4 $\frac{1}{2}$)	50.800(2)	106.1	2
95.250 (3 $\frac{3}{4}$)	BR 607632	1 290	95.250(3 $\frac{3}{4}$)	120.650(4 $\frac{3}{4}$)	50.800(2)	111.4	2.5
101.600 (4)	BR 648032	1 370	101.600(4)	127.000(5)	50.800(2)	117.8	2.5

Notes⁽¹⁾ Maximum permissible corner radius of the housing⁽²⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.Remarks1. In bearings with a roller set bore diameter F_w of 69.850 mm or less, the outer ring has an oil groove and an oil hole. In others, the outer ring has an oil groove and two oil holes.

2. No grease is prepakced. Perform proper lubrication.

IKO

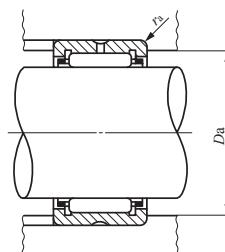

D

NA
TAFI
TRI
BRI

Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C</i> ₀ N	Allowable rotational speed ⁽²⁾ min ⁻¹
51 000	89 400	8 000
63 200	118 000	8 000
90 300	158 000	7 000
105 000	191 000	7 000
94 600	174 000	6 500
110 000	210 000	6 500
98 700	189 000	5 500
114 000	228 000	5 500
105 000	211 000	5 500
122 000	255 000	5 500
141 000	259 000	5 000
154 000	290 000	5 000
162 000	316 000	4 500
169 000	342 000	4 000
176 000	368 000	4 000

1N=0.102kgf=0.2248lbs. D50
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring, Inch Series



Shaft dia. 9.525 – 41.275mm

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch)						⁽¹⁾ <i>S</i>
			<i>d</i>	<i>D</i>	<i>C</i>	<i>B</i>	<i>F_w</i>		
9.525 (3/8)	BRI 61812	67.5	9.525 (3/8)	28.575 (1 1/8)	19.050 (3/4)	19.300	15.875 (5/8)	0.3	
12.700 (1/2)	BRI 82012	79.5	12.700 (1/2)	31.750 (1 1/4)	19.050 (3/4)	19.300	19.050 (3/4)	0.3	
	BRI 82016	106	12.700 (1/2)	31.750 (1 1/4)	25.400 (1)	25.650	19.050 (3/4)	0.5	
15.875 (5/8)	BRI 102212	91	15.875 (5/8)	34.925 (1 3/8)	19.050 (3/4)	19.300	22.225 (7/8)	0.3	
	BRI 102216	122	15.875 (5/8)	34.925 (1 3/8)	25.400 (1)	25.650	22.225 (7/8)	0.5	
19.050 (3/4)	BRI 122412	102	19.050 (3/4)	38.100 (1 1/2)	19.050 (3/4)	19.300	25.400 (1)	0.3	
	BRI 122416	136	19.050 (3/4)	38.100 (1 1/2)	25.400 (1)	25.650	25.400 (1)	0.5	
22.225 (7/8)	BRI 142616	152	22.225 (7/8)	41.275 (1 5/8)	25.400 (1)	25.650	28.575 (1 1/8)	0.5	
	BRI 142620	190	22.225 (7/8)	41.275 (1 5/8)	31.750 (1 1/4)	32.000	28.575 (1 1/8)	0.5	
25.400 (1)	BRI 162816	166	25.400 (1)	44.450 (1 3/4)	25.400 (1)	25.650	31.750 (1 1/4)	0.5	
	BRI 162820	210	25.400 (1)	44.450 (1 3/4)	31.750 (1 1/4)	32.000	31.750 (1 1/4)	0.5	
28.575 (1 1/8)	BRI 183016	182	28.575 (1 1/8)	47.625 (1 1/8)	25.400 (1)	25.650	34.925 (1 3/8)	0.5	
	BRI 183020	225	28.575 (1 1/8)	47.625 (1 1/8)	31.750 (1 1/4)	32.000	34.925 (1 3/8)	0.5	
31.750 (1 1/4)	BRI 203316	220	31.750 (1 1/4)	52.388 (2 1/16)	25.400 (1)	25.650	38.100 (1 1/2)	0.5	
	BRI 203320	275	31.750 (1 1/4)	52.388 (2 1/16)	31.750 (1 1/4)	32.000	38.100 (1 1/2)	0.5	
34.925 (1 3/8)	BRI 223516	235	34.925 (1 3/8)	55.562 (2 3/16)	25.400 (1)	25.650	41.275 (1 5/8)	0.5	
	BRI 223520	295	34.925 (1 3/8)	55.562 (2 3/16)	31.750 (1 1/4)	32.000	41.275 (1 5/8)	0.5	
38.100 (1 1/2)	BRI 243716	250	38.100 (1 1/2)	58.738 (2 5/16)	25.400 (1)	25.650	44.450 (1 3/4)	0.5	
	BRI 243720	315	38.100 (1 1/2)	58.738 (2 5/16)	31.750 (1 1/4)	32.000	44.450 (1 3/4)	0.5	
	BRI 243820	350	38.100 (1 1/2)	60.325 (2 3/8)	31.750 (1 1/4)	32.000	44.450 (1 3/4)	0.5	
	BRI 243920	380	38.100 (1 1/2)	61.912 (2 7/16)	31.750 (1 1/4)	32.000	47.625 (1 7/8)	0.5	
41.275 (1 5/8)	BRI 264116	325	41.275 (1 5/8)	65.088 (2 9/16)	25.400 (1)	25.650	50.800 (2)	0.5	
	BRI 264120	410	41.275 (1 5/8)	65.088 (2 9/16)	31.750 (1 1/4)	32.000	50.800 (2)	0.5	


Notes⁽¹⁾ Allowable axial shift amount of inner ring to outer ring

⁽²⁾ Maximum permissible corner radius of the shaft or housing

⁽³⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks 1. The inner ring and the outer ring each have an oil groove and an oil hole.

2. No grease is prepakced. Perform proper lubrication.

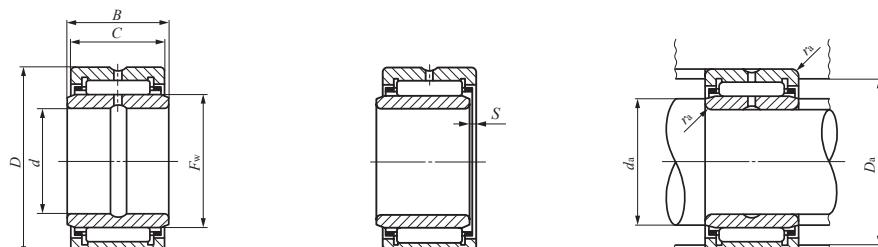

BRI

D

NA
TAFI
TRI
BRI

Standard mounting dimensions mm				Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽³⁾ min ⁻¹	Assembled inner ring
Min.	<i>d_a</i> Max.	<i>D_a</i> Max.	<i>r_{as max}</i> ⁽²⁾				
14	14.5	24.5	0.6	18 900	19 700	25 000	LRB 61012
17.5	18	26.5	1	21 700	24 400	20 000	LRB 81212
17.5	18	26.5	1	27 600	33 100	20 000	LRB 81216
21	21.2	29.7	1	23 000	27 100	18 000	LRB 101412
21	21.2	29.7	1	29 100	36 800	18 000	LRB 101416
24	24.4	32.9	1	25 300	31 900	16 000	LRB 121612
24	24.4	32.9	1	32 100	43 300	16 000	LRB 121616
27	27.5	36	1	34 900	49 900	14 000	LRB 141816
27	27.5	36	1	43 200	65 600	14 000	LRB 141820
30.5	30.7	39.2	1	36 000	53 500	13 000	LRB 162016
30.5	30.7	39.2	1	44 600	70 300	13 000	LRB 162020
33.5	33.9	42.4	1	38 500	60 000	11 000	LRB 182216
33.5	33.9	42.4	1	47 700	78 900	11 000	LRB 182220
37	37.1	45.1	1.5	43 700	66 900	11 000	LRB 202416
37	37.1	45.1	1.5	54 200	88 200	11 000	LRB 202420
40.2	40.2	48.3	1.5	44 800	70 900	9 500	LRB 222616
40.2	40.2	48.3	1.5	55 600	93 400	9 500	LRB 222620
43.3	43.4	51.5	1.5	47 500	78 200	9 000	LRB 242816
43.3	43.4	51.5	1.5	58 900	103 000	9 000	LRB 242820
43.3	43.4	53.1	1.5	58 900	103 000	9 000	LRB 242820
43.3	43.4	54.7	1.5	60 100	108 000	8 500	LRB 243020
48	49	57.8	1.5	51 000	89 400	8 000	LRB 263216
48	49	57.8	1.5	63 200	118 000	8 000	LRB 263220

1N=0.102kgf=0.2248lbs. D52
1mm=0.03937inch

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**


With Inner Ring, Inch Series

**Shaft dia. 44.450 – 88.900mm**

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch)						S ⁽¹⁾
			d	D	C	B	F_w		
44.450 (1 ³ / ₄)	BRI 284824	735	44.450 (1 ³ / ₄)	76.200 (3)	38.100 (1 ¹ / ₂)	38.350	57.150 (2 ¹ / ₄)	1	
	BRI 284828	855	44.450 (1 ³ / ₄)	76.200 (3)	44.450 (1 ³ / ₄)	44.700	57.150 (2 ¹ / ₄)	1	
50.800 (2)	BRI 325224	810	50.800 (2)	82.550 (3 ¹ / ₄)	38.100 (1 ¹ / ₂)	38.350	63.500 (2 ¹ / ₂)	1	
	BRI 325228	945	50.800 (2)	82.550 (3 ¹ / ₄)	44.450 (1 ³ / ₄)	44.700	63.500 (2 ¹ / ₂)	1	
57.150 (2 ¹ / ₄)	BRI 365624	885	57.150 (2 ¹ / ₄)	88.900 (3 ¹ / ₂)	38.100 (1 ¹ / ₂)	38.350	69.850 (2 ³ / ₄)	1	
	BRI 365628	1 040	57.150 (2 ¹ / ₄)	88.900 (3 ¹ / ₂)	44.450 (1 ³ / ₄)	44.700	69.850 (2 ³ / ₄)	1	
63.500 (2 ¹ / ₂)	BRI 406024	965	63.500 (2 ¹ / ₂)	95.250 (3 ³ / ₄)	38.100 (1 ¹ / ₂)	38.350	76.200 (3)	1	
	BRI 406028	1 130	63.500 (2 ¹ / ₂)	95.250 (3 ³ / ₄)	44.450 (1 ³ / ₄)	44.700	76.200 (3)	1	
69.850 (2 ³ / ₄)	BRI 446828	1 520	69.850 (2 ³ / ₄)	107.950 (4 ¹ / ₄)	44.450 (1 ³ / ₄)	44.700	82.550 (3 ¹ / ₄)	1.5	
	BRI 446832	1 740	69.850 (2 ³ / ₄)	107.950 (4 ¹ / ₄)	50.800 (2)	51.050	82.550 (3 ¹ / ₄)	3	
76.200 (3)	BRI 487232	1 860	76.200 (3)	114.300 (4 ¹ / ₂)	50.800 (2)	51.050	88.900 (3 ¹ / ₂)	3	
82.550 (3 ¹ / ₄)	BRI 527632	1 980	82.550 (3 ¹ / ₄)	120.650 (4 ³ / ₄)	50.800 (2)	51.050	95.250 (3 ³ / ₄)	3	
88.900 (3 ¹ / ₂)	BRI 568032	2 120	88.900 (3 ¹ / ₂)	127.000 (5)	50.800 (2)	51.050	101.600 (4)	3	

Notes⁽¹⁾ Allowable axial shift amount of inner ring to outer ring⁽²⁾ Maximum permissible corner radius of the shaft or housing⁽³⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.Remarks1. In bearings with a bearing bore diameter, d , of 57.150 mm or less, the outer ring has an oil groove and an oil hole. In bearings with a bearing bore diameter, d , of 76.200 mm or less, the inner ring has an oil groove and an oil hole. In others, the inner ring and the outer ring each have an oil groove and two oil holes.

2. No grease is prepakced. Perform proper lubrication.

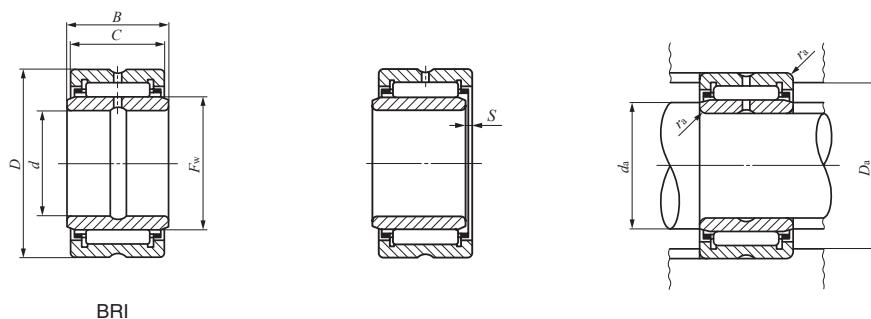

D

NA
TAFI
TRI
BRI


Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽³⁾ min ⁻¹	Assembled inner ring
<i>d_a</i> Min.	<i>d_a</i> Max.	<i>D_a</i> Max.	<i>r_{as max}</i> ⁽²⁾			
52.5	55	69	1.5	90 300	158 000	7 000 LRB 283624
52.5	55	69	1.5	105 000	191 000	7 000 LRB 283628
58	61	74.3	2	94 600	174 000	6 500 LRB 324024
58	61	74.3	2	110 000	210 000	6 500 LRB 324028
65	67	80.7	2	98 700	189 000	5 500 LRB 364424
65	67	80.7	2	114 000	228 000	5 500 LRB 364428
71	73	87	2	105 000	211 000	5 500 LRB 404824
71	73	87	2	122 000	255 000	5 500 LRB 404828
77	79	99.7	2	141 000	259 000	5 000 LRB 445228
77	79	99.7	2	154 000	290 000	5 000 LRB 445232
83.5	86	106.1	2	162 000	316 000	4 500 LRB 485632
91	93	111.4	2.5	169 000	342 000	4 000 LRB 526032
97	99	117.8	2.5	176 000	368 000	4 000 LRB 566432

1N=0.102kgf=0.2248lbs. D54
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

With Seal, Without Inner Ring



RNA49 ... UU
RNA69 ... UU($F_w \leq 35$)

Shaft dia. 14 – 45mm

Shaft dia. mm	Identification number				Mass (Ref.) g	Boundary dimensions mm			
	With two seals	With one seal	With two seals	With one seal		F_w	D	C	$r_{s\ min}$ ⁽¹⁾
14	RNA 4900UU	RNA 4900U	—	—	16.3	14	22	13	0.3
16	RNA 4901UU	RNA 4901U	—	RNA 6901UU	17.9 30	16 16	24 24	13 22	0.3
18	RNA 49/14UU	RNA 49/14U	—	—	19.7	18	26	13	0.3
20	RNA 4902UU	RNA 4902U	—	RNA 6902UU	21.5 37.5	20 20	28 28	13 23	0.3
22	RNA 4903UU	RNA 4903U	—	RNA 6903UU	23 40.5	22	30	13	0.3
25	RNA 4904UU	RNA 4904U	—	RNA 6904UU	54.5 95.5	25	37	17	0.3
28	RNA 49/22UU	RNA 49/22U	—	RNA 69/22UU	55.5 97.5	28	39	17	0.3
30	RNA 4905UU	RNA 4905U	—	RNA 6905UU	63 111	30	42	17	0.3
32	RNA 49/28UU	RNA 49/28U	—	RNA 69/28UU	75.5 133	32	45	17	0.3
35	RNA 4906UU	RNA 4906U	—	RNA 6906UU	71 125	35	47	17	0.3
40	RNA 49/32UU	RNA 49/32U	—	RNA 69/32UU	94.5 170	40	52	20	0.6
42	RNA 4907UU	RNA 4907U	—	RNA 6907UU	112 200	42	55	20	0.6
45	RNA 49/38UU	RNA 49/38U	—	—	119	45	58	20	0.6


Notes⁽¹⁾ Minimum allowable value of chamfer dimension r

⁽²⁾ Allowable rotational speed applies to grease lubrication.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. Bearings are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

IKO

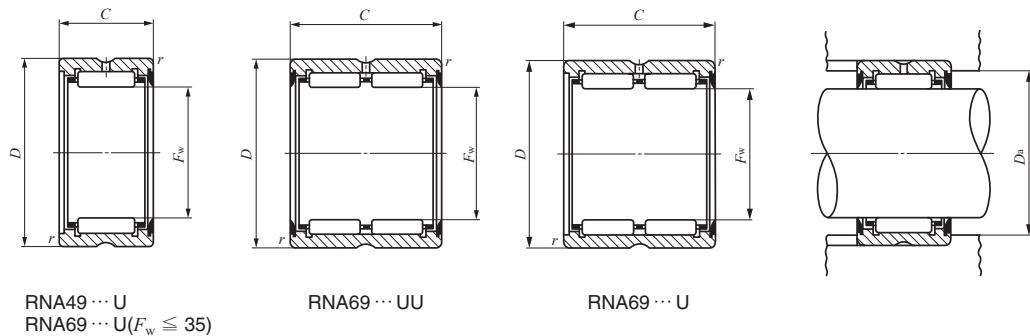

D

NA
TAFI
TRI
BRI


Standard mounting dimension D_a Max. mm	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed ⁽²⁾ min ⁻¹
20	8 080	8 490	14 000
22	8 470	9 320	12 000
22	15 500	20 400	12 000
24	9 260	10 800	11 000
26	9 570	11 600	9 500
26	18 500	27 100	9 500
28	10 300	13 100	8 500
28	19 800	30 600	8 500
35	18 000	20 500	7 500
35	33 000	44 600	7 500
37	18 300	23 700	7 000
37	33 800	52 000	7 000
40	20 300	25 100	6 500
40	39 200	58 700	6 500
43	21 000	26 800	6 000
43	38 900	59 100	6 000
45	21 500	28 400	5 500
45	40 100	63 000	5 500
48	29 400	44 200	5 000
48	50 300	88 300	5 000
51	30 100	46 300	4 500
51	51 600	92 600	4 500
54	31 600	50 400	4 000

1N=0.102kgf=0.2248lbs. D56
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

With Seal, Without Inner Ring



RNA49 ... UU

Shaft dia. 48 — 85mm

Shaft dia. mm	Identification number				Mass (Ref.) g	Boundary dimensions mm			
	With two seals	With one seal	With two seals	With one seal		F_w	D	C	r_s min ⁽¹⁾
48	RNA 4908UU	RNA 4908U	—	RNA 6908UU	150 270	48 48	62 62	22 40	0.6 0.6
50	RNA 49/42UU	RNA 49/42U	—	—	173	50	65	22	0.6
52	RNA 4909UU	RNA 4909U	—	RNA 6909UU	197 355	52 52	68 68	22 40	0.6 0.6
55	RNA 49/48UU	RNA 49/48U	—	—	187	55	70	22	0.6
58	RNA 4910UU	RNA 4910U	—	RNA 6910UU	177 320	58 58	72 72	22 40	0.6 0.6
60	RNA 49/52UU	RNA 49/52U	—	—	200	60	75	22	0.6
63	RNA 4911UU	RNA 4911U	—	RNA 6911UU	265 470	63 63	80 80	25 45	1 1
65	RNA 49/58UU	RNA 49/58U	—	—	275	65	82	25	1
68	RNA 4912UU	RNA 4912U	—	RNA 6912UU	285 505	68 68	85 85	25 45	1 1
70	RNA 49/62UU	RNA 49/62U	—	—	320	70	88	25	1
72	RNA 4913UU	RNA 4913U	—	RNA 6913UU	325 580	72 72	90 90	25 45	1 1
75	RNA 49/68UU	RNA 49/68U	—	—	465	75	95	30	1
80	RNA 4914UU	RNA 4914U	—	RNA 6914UU	495 910	80 80	100 100	30 54	1 1
85	RNA 4915UU	RNA 4915U	—	RNA 6915UU	520 960	85 85	105 105	30 54	1 1


Notes⁽¹⁾ Minimum allowable value of chamfer dimension r

⁽²⁾ Allowable rotational speed applies to grease lubrication.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. Bearings are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

IKO

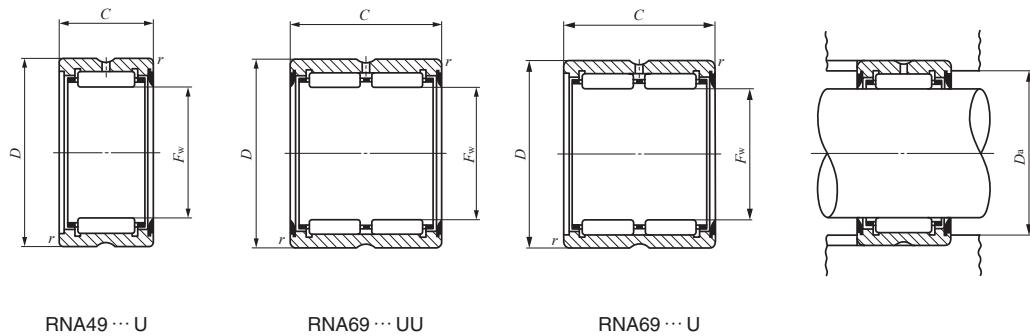

RNA49...U

RNA69...UU

RNA69...U

D

NA
TAFI
TRI
BRI


Standard mounting dimension D_a Max. mm	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed ⁽²⁾ min ⁻¹
58	37 200	58 400	4 000
58	63 700	117 000	4 000
61	38 000	60 900	4 000
64	38 900	63 400	3 500
64	66 600	127 000	3 500
66	39 600	66 100	3 500
68	41 300	71 100	3 500
68	70 800	142 000	3 500
71	42 100	73 600	3 000
75	52 200	85 700	3 000
75	89 400	171 000	3 000
77	53 400	89 200	3 000
80	54 500	92 800	3 000
80	93 400	186 000	3 000
83	55 700	96 300	2 500
85	56 800	99 800	2 500
85	97 400	200 000	2 500
90	73 900	133 000	2 500
95	76 900	143 000	2 500
95	124 000	281 000	2 500
100	79 600	153 000	2 000
100	128 000	299 000	2 000

1N=0.102kgf=0.2248lbs. D58
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

With Seal, Without Inner Ring



RNA49 ... UU

Shaft dia. 90 – 160mm

Shaft dia. mm	Identification number				Mass (Ref.) g	Boundary dimensions mm			
	With two seals	With one seal	With two seals	With one seal		F_w	D	C	$r_s^{(1)}$ $r_s \text{ min}$
90	RNA 4916UU	RNA 4916U	—	RNA 6916UU	545 1 010	90 90	110 110	30 54	1 1
95	RNA 49/82UU	RNA 49/82U	—	—	570	95	115	30	1
100	RNA 4917UU	RNA 4917U	—	RNA 6917UU	695 1 300	100 100	120 120	35 63	1.1 1.1
105	RNA 4918UU	RNA 4918U	—	RNA 6918UU	730 1 360	105 105	125 125	35 63	1.1 1.1
110	RNA 4919UU	RNA 4919U	—	RNA 6919UU	760 1 420	110 110	130 130	35 63	1.1 1.1
115	RNA 4920UU	RNA 4920U	—	—	1 200	115	140	40	1.1
125	RNA 4922UU	RNA 4922U	—	—	1 280	125	150	40	1.1
135	RNA 4924UU	RNA 4924U	—	—	1 940	135	165	45	1.1
150	RNA 4926UU	RNA 4926U	—	—	2 360	150	180	50	1.5
160	RNA 4928UU	RNA 4928U	—	—	2 510	160	190	50	1.5


Notes⁽¹⁾ Minimum allowable value of chamfer dimension r

⁽²⁾ Allowable rotational speed applies to grease lubrication.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. Bearings are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

IKO

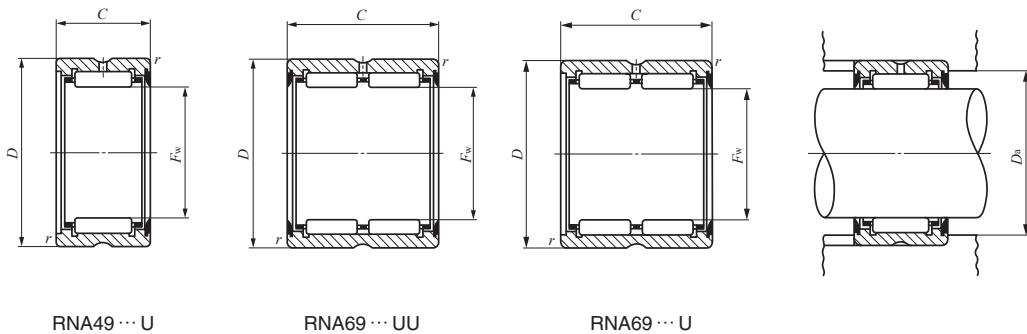

D

NA
TAFI
TRI
BRI


Standard mounting dimension <i>D_a</i> Max. mm	Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽²⁾ min ⁻¹
105	80 700	158 000	2 000
105	132 000	317 000	2 000
110	83 200	168 000	2 000
113.5	103 000	225 000	1 900
113.5	168 000	448 000	1 900
118.5	106 000	238 000	1 800
118.5	172 000	471 000	1 800
123.5	109 000	250 000	1 700
123.5	177 000	493 000	1 700
133.5	134 000	297 000	1 700
143.5	140 000	322 000	1 500
158.5	178 000	410 000	1 400
172	206 000	511 000	1 300
182	214 000	549 000	1 200

1N=0.102kgf=0.2248lbs. D60
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

With Seal, With Inner Ring

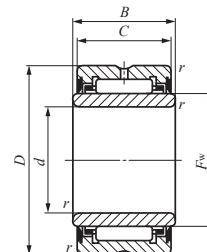

NA49 ... UU
NA69 ... UU ($d \leq 30$)

Shaft dia. 10 – 40mm


Shaft dia. mm	Identification number				Mass (Ref.) g	Boundary dimensions mm			
	With two seals	With one seal	With two seals	With one seal		<i>d</i>	<i>D</i>	<i>C</i>	<i>B</i>
10	NA 4900UU	NA 4900U	—	—	24.5	10	22	13	14
12	NA 4901UU	NA 4901U	—	—	27.5	12	24	13	14
	—	—	NA 6901UU	NA 6901U	45.5	12	24	22	23
15	NA 4902UU	NA 4902U	—	—	36	15	28	13	14
	—	—	NA 6902UU	NA 6902U	62.5	15	28	23	24
17	NA 4903UU	NA 4903U	—	—	39.5	17	30	13	14
	—	—	NA 6903UU	NA 6903U	68.5	17	30	23	24
20	NA 4904UU	NA 4904U	—	—	78.5	20	37	17	18
	—	—	NA 6904UU	NA 6904U	137	20	37	30	31
22	NA 49/22UU	NA 49/22U	—	—	87.5	22	39	17	18
	—	—	NA 69/22UU	NA 69/22U	153	22	39	30	31
25	NA 4905UU	NA 4905U	—	—	92.5	25	42	17	18
	—	—	NA 6905UU	NA 6905U	162	25	42	30	31
28	NA 49/28UU	NA 49/28U	—	—	101	28	45	17	18
	—	—	NA 69/28UU	NA 69/28U	177	28	45	30	31
30	NA 4906UU	NA 4906U	—	—	106	30	47	17	18
	—	—	NA 6906UU	NA 6906U	185	30	47	30	31
32	NA 49/32UU	NA 49/32U	—	—	167	32	52	20	21
	—	—	NA 69/32UU	NA 69/32U	300	32	52	36	37
35	NA 4907UU	NA 4907U	—	—	179	35	55	20	21
	—	—	NA 6907UU	NA 6907U	320	35	55	36	37
40	NA 4908UU	NA 4908U	—	—	245	40	62	22	23
	—	—	NA 6908UU	NA 6908U	440	40	62	40	41

Notes⁽¹⁾ Minimum allowable value of chamfer dimension *r*

⁽²⁾ Allowable rotational speed applies to grease lubrication.

Remarks1. The outer ring has an oil groove and an oil hole.

2. Bearings are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

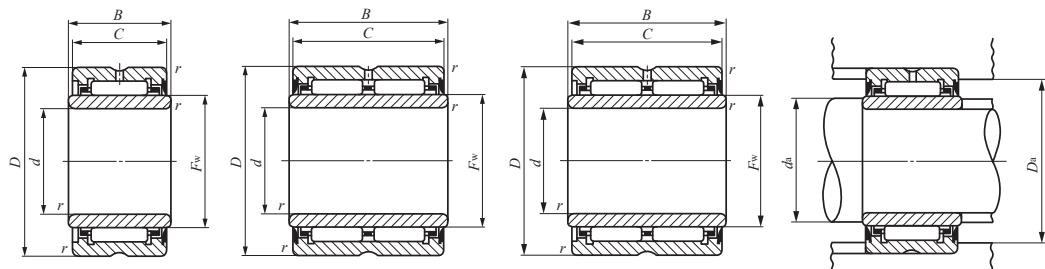

NA49 ... U
NA69 ... U ($d \leq 30$)

NA69 ... UU

NA69 ... U

D

NA
TAFI
TRI
BRI


r_s min ⁽¹⁾	F_w	Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed ⁽²⁾ min ⁻¹	Assembled inner ring
		d_a Min.	d_a Max.	D_a Max.				
0.3	14	12	13	20	8 080	8 490	14 000	LRTZ 101414
0.3	16	14	15	22	8 470	9 320	12 000	LRTZ 121614
0.3	16	14	15	22	15 500	20 400	12 000	LRTZ 121623
0.3	20	17	19	26	9 570	11 600	9 500	LRTZ 152014
0.3	20	17	19	26	18 500	27 100	9 500	LRTZ 152024
0.3	22	19	21	28	10 300	13 100	8 500	LRTZ 172214
0.3	22	19	21	28	19 800	30 600	8 500	LRTZ 172224
0.3	25	22	24	35	18 000	20 500	7 500	LRTZ 202518
0.3	25	22	24	35	33 000	44 600	7 500	LRTZ 202531
0.3	28	24	27	37	18 300	23 700	7 000	LRTZ 222818
0.3	28	24	27	37	33 800	52 000	7 000	LRTZ 222831
0.3	30	27	29	40	20 300	25 100	6 500	LRTZ 253018
0.3	30	27	29	40	39 200	58 700	6 500	LRTZ 253031
0.3	32	30	31	43	21 000	26 800	6 000	LRTZ 283218
0.3	32	30	31	43	38 900	59 100	6 000	LRTZ 283231
0.3	35	32	34	45	21 500	28 400	5 500	LRTZ 303518
0.3	35	32	34	45	40 100	63 000	5 500	LRTZ 303531
0.6	40	36	39	48	29 400	44 200	5 000	LRTZ 324021
0.6	40	36	39	48	50 300	88 300	5 000	LRTZ 324037
0.6	42	39	41	51	30 100	46 300	4 500	LRTZ 354221
0.6	42	39	41	51	51 600	92 600	4 500	LRTZ 354237
0.6	48	44	47	58	37 200	58 400	4 000	LRTZ 404823
0.6	48	44	47	58	63 700	117 000	4 000	LRTZ 404841

1N=0.102kgf=0.2248lbs. D62
1mm=0.03937inch



MACHINED TYPE NEEDLE ROLLER BEARINGS

With Seal, With Inner Ring



NA49 ... UU

Shaft dia. 45 – 110mm


Shaft dia. mm	Identification number				Mass (Ref.) g	Boundary dimensions mm			
	With two seals	With one seal	With two seals	With one seal		d	D	C	B
45	NA 4909UU —	NA 4909U —	— NA 6909UU	— NA 6909U	290 520	45 45	68 68	22 40	23 41
50	NA 4910UU —	NA 4910U —	— NA 6910UU	— NA 6910U	295 530	50 50	72 72	22 40	23 41
55	NA 4911UU —	NA 4911U —	— NA 6911UU	— NA 6911U	415 730	55 55	80 80	25 45	26 46
60	NA 4912UU —	NA 4912U —	— NA 6912UU	— NA 6912U	445 785	60 60	85 85	25 45	26 46
65	NA 4913UU —	NA 4913U —	— NA 6913UU	— NA 6913U	475 845	65 65	90 90	25 45	26 46
70	NA 4914UU —	NA 4914U —	— NA 6914UU	— NA 6914U	770 1 400	70 70	100 100	30 54	31 55
75	NA 4915UU —	NA 4915U —	— NA 6915UU	— NA 6915U	815 1 480	75 75	105 105	30 54	31 55
80	NA 4916UU —	NA 4916U —	— NA 6916UU	— NA 6916U	860 1 570	80 80	110 110	30 54	31 55
85	NA 4917UU —	NA 4917U —	— NA 6917UU	— NA 6917U	1 300 2 360	85 85	120 120	35 63	36 64
90	NA 4918UU —	NA 4918U —	— NA 6918UU	— NA 6918U	1 360 2 480	90 90	125 125	35 63	36 64
95	NA 4919UU —	NA 4919U —	— NA 6919UU	— NA 6919U	1 420 2 600	95 95	130 130	35 63	36 64
100	NA 4920UU	NA 4920U	—	—	1 980	100	140	40	41
110	NA 4922UU	NA 4922U	—	—	2 150	110	150	40	41

Notes⁽¹⁾ Minimum allowable value of chamfer dimension r

⁽²⁾ Allowable rotational speed applies to grease lubrication.

Remarks 1. The outer ring has an oil groove and an oil hole.

2. Bearings are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

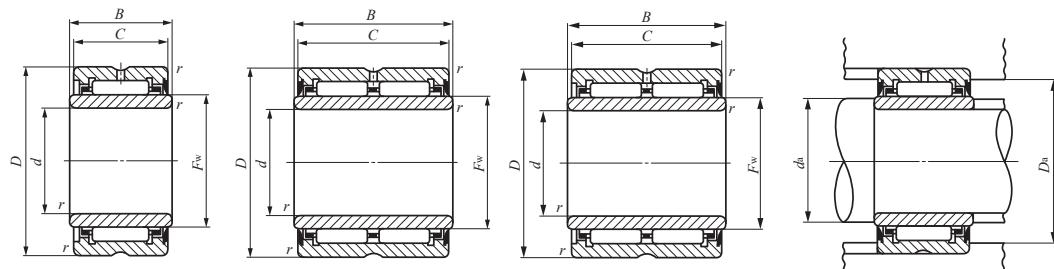

NA49...U

NA69...UU

NA69...U

D

NA
TAFI
TRI
BRI

r_s min ⁽¹⁾	F_w	Standard mounting dimensions mm		Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed ⁽²⁾ min ⁻¹	Assembled inner ring	
		d_a Min.	d_a Max.					
0.6	52	49	51	38 900	63 400	3 500	LRTZ 455223	
0.6	52	49	51	66 600	127 000	3 500	LRTZ 455241	
0.6	58	54	57	41 300	71 100	3 500	LRTZ 505823	
0.6	58	54	57	70 800	142 000	3 500	LRTZ 505841	
1	63	60	61	52 200	85 700	3 000	LRTZ 556326	
1	63	60	61	89 400	171 000	3 000	LRTZ 556346	
1	68	65	66	54 500	92 800	3 000	LRTZ 606826	
1	68	65	66	93 400	186 000	3 000	LRTZ 606846	
1	72	70	70.5	56 800	99 800	2 500	LRTZ 657226	
1	72	70	70.5	97 400	200 000	2 500	LRTZ 657246	
1	80	75	78	76 900	143 000	2 500	LRTZ 708031	
1	80	75	78	124 000	281 000	2 500	LRTZ 708055	
1	85	80	83	79 600	153 000	2 000	LRTZ 758531	
1	85	80	83	128 000	299 000	2 000	LRTZ 758555	
1	90	85	88	80 700	158 000	2 000	LRTZ 809031	
1	90	85	88	132 000	317 000	2 000	LRTZ 809055	
1.1	100	91.5	98	113.5	103 000	225 000	1 900	LRTZ 8510036
1.1	100	91.5	98	113.5	168 000	448 000	1 900	LRTZ 8510064
1.1	105	96.5	103	118.5	106 000	238 000	1 800	LRTZ 9010536
1.1	105	96.5	103	118.5	172 000	471 000	1 800	LRTZ 9010564
1.1	110	101.5	108	123.5	109 000	250 000	1 700	LRTZ 9511036
1.1	110	101.5	108	123.5	177 000	493 000	1 700	LRTZ 9511064
1.1	115	106.5	113	133.5	134 000	297 000	1 700	LRTZ 10011541
1.1	125	116.5	123	143.5	140 000	322 000	1 500	LRTZ 11012541

1N=0.102kgf=0.2248lbs. D64
1mm=0.03937inch

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**

With Seal, With Inner Ring

**Shaft dia. 120 – 140mm**

Shaft dia. mm	Identification number				Mass (Ref.) g	Boundary dimensions mm			
	With two seals	With one seal	With two seals	With one seal		<i>d</i>	<i>D</i>	<i>C</i>	<i>B</i>
120	NA 4924UU	NA 4924U	—	—	2 990	120	165	45	46
130	NA 4926UU	NA 4926U	—	—	4 080	130	180	50	51
140	NA 4928UU	NA 4928U	—	—	4 340	140	190	50	51


Notes⁽¹⁾ Minimum allowable value of chamfer dimension *r*⁽²⁾ Allowable rotational speed applies to grease lubrication.

Remarks 1. The outer ring has an oil groove and an oil hole.


2. Bearings are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

D65


IKO

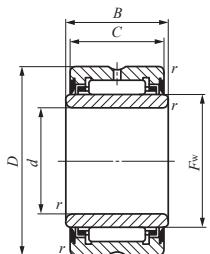

NA49...UU

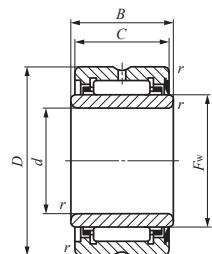

NA49...U

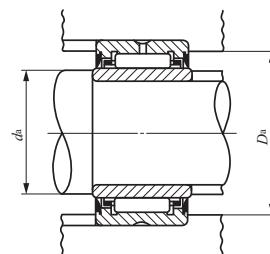

D

NA
TAFI
TRI
BRI

r_s min ⁽¹⁾	F_w	Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed ⁽²⁾ min ⁻¹	Assembled inner ring
		d_a Min.	d_a Max.	D_a Max.				
1.1	135	126.5	133	158.5	178 000	410 000	1 400	LRTZ 12013546
1.5	150	138	148	172	206 000	511 000	1 300	LRTZ 13015051
1.5	160	148	158	182	214 000	549 000	1 200	LRTZ 14016051

1N=0.102kgf=0.2248lbs. D66
1mm=0.03937inch

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**

With Seal, Without Inner Ring, Inch Series

**Shaft dia. 15.875 – 50.800mm**

Shaft dia. mm (inch)	Identification number	Mass (Ref.)	Boundary dimensions mm(inch)			Standard mounting dimensions mm	
			F_w	D	C	D_a Max.	$r_{as\ max}^{(1)}$
15.875 (5/8)	BR 101816 UU	54	15.875 (5/8)	28.575 (1 1/8)	25.400 (1)	24.5	0.6
19.050 (3/4)	BR 122016 UU	68	19.050 (3/4)	31.750 (1 1/4)	25.400 (1)	26.5	1.0
22.225 (7/8)	BR 142216 UU	76	22.225 (7/8)	34.925 (1 3/8)	25.400 (1)	29.7	1.0
25.400 (1)	BR 162416 UU	83	25.400 (1)	38.100 (1 1/2)	25.400 (1)	32.9	1.0
28.575 (1 1/8)	BR 182620 UU	115	28.575 (1 1/8)	41.275 (1 5/8)	31.750 (1 1/4)	36.0	1.0
31.750 (1 1/4)	BR 202820 UU	124	31.750 (1 1/4)	44.450 (1 3/4)	31.750 (1 1/4)	39.2	1.0
34.925 (1 3/8)	BR 223020 UU	134	34.925 (1 3/8)	47.625 (1 7/8)	31.750 (1 1/4)	42.4	1.0
38.100 (1 1/2)	BR 243320 UU	168	38.100 (1 1/2)	52.388 (2 1/16)	31.750 (1 1/4)	45.1	1.5
41.275 (1 5/8)	BR 263520 UU	179	41.275 (1 5/8)	55.562 (2 3/16)	31.750 (1 1/4)	48.3	1.5
44.450 (1 3/4)	BR 283720 UU	193	44.450 (1 3/4)	58.738 (2 5/16)	31.750 (1 1/4)	51.5	1.5
47.625 (1 7/8)	BR 303920 UU	202	47.625 (1 7/8)	61.912 (2 7/16)	31.750 (1 1/4)	54.7	1.5
50.800 (2)	BR 324120 UU	216	50.800 (2)	65.088 (2 9/16)	31.750 (1 1/4)	57.8	1.5


Notes⁽¹⁾ Maximum permissible corner radius of the housing⁽²⁾ Allowable rotational speed applies to grease lubrication.

Remarks 1. The outer ring has an oil groove and an oil hole.


2. Bearings are provided with prepacked grease.

3. If one side sealed type are needed, please contact IKO.

IKO

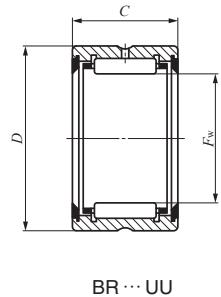

BR ... UU

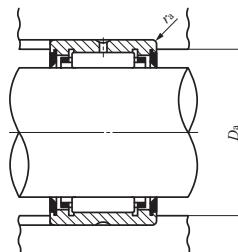

D

NA
TAFI
TRI
BRI

Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽²⁾ min ⁻¹
18 300	20 000	12 000
20 700	24 400	10 000
21 600	26 900	9 000
23 600	31 300	8 000
34 900	49 900	7 000
36 000	53 500	6 500
38 500	60 000	5 500
43 700	66 900	5 500
44 800	70 900	4 500
47 500	78 200	4 500
48 500	82 100	4 000
51 000	89 400	4 000

1N=0.102kgf=0.2248lbs. D68
1mm=0.03937inch

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**

With Seal, Without Inner Ring, Inch Series

**Shaft dia. 57.150 – 95.250mm**

Shaft dia. mm (inch)	Identification number With two seals	Mass (Ref.) g	Boundary dimensions mm(inch)			Standard mounting dimensions mm	
			F_w	D	C	D_a Max.	$r_{as\ max}^{(1)}$
57.150 (2 1/4)	BR 364828 UU	459	57.150 (2 1/4)	76.200 (3)	44.450 (1 3/4)	69.0	1.5
63.500 (2 1/2)	BR 405228 UU	499	63.500 (2 1/2)	82.550 (3 1/4)	44.450 (1 3/4)	74.3	2.0
69.850 (2 3/4)	BR 445628 UU	540	69.850 (2 3/4)	88.900 (3 1/2)	44.450 (1 3/4)	80.7	2.0
76.200 (3)	BR 486028 UU	585	76.200 (3)	95.250 (3 3/4)	44.450 (1 3/4)	87.0	2.0
82.550 (3 1/4)	BR 526828 UU	891	82.550 (3 1/4)	107.950 (4 1/4)	44.450 (1 3/4)	99.7	2.0
88.900 (3 1/2)	BR 567232 UU	1 098	88.900 (3 1/2)	114.300 (4 1/2)	50.800 (2)	106.1	2.0
95.250 (3 3/4)	BR 607632 UU	1 161	95.250 (3 3/4)	120.650 (4 3/4)	50.800 (2)	111.4	2.5


Notes⁽¹⁾ Maximum permissible corner radius of the housing⁽²⁾ Allowable rotational speed applies to grease lubrication.

Remarks 1. The outer ring has an oil groove and an oil hole.


2. Bearings are provided with prepacked grease.

3. If one side sealed type are needed, please contact IKO.

IKO



BR ··· UU

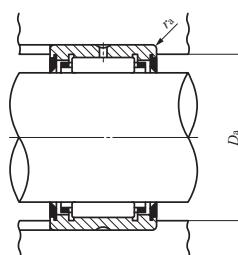

D

NA
TAFI
TRI
BRI

Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽²⁾ min ⁻¹
90 300	158 000	3 500
94 600	174 000	3 000
98 700	189 000	2 500
105 000	211 000	2 500
109 000	227 000	2 500
142 000	265 000	2 000
148 000	287 000	2 000

1N=0.102kgf=0.2248lbs. D70
1mm=0.03937inch

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**

With Seal, With Inner Ring, Inch Series

**Shaft dia. 9.525 – 44.450mm**


Shaft dia. mm (inch)	Identification number With two seals	Mass (Ref.) g	Boundary dimensions mm(inch)				F_w
			d	D	C	B	
9.525 ($\frac{3}{8}$)	BRI 61816 UU	79	9.525($\frac{3}{8}$)	28.575($1\frac{1}{8}$)	25.400($1\frac{1}{8}$)	25.650	15.875($\frac{5}{8}$)
12.700 ($\frac{1}{2}$)	BRI 82016 UU	99	12.700($\frac{1}{2}$)	31.750($1\frac{1}{4}$)	25.400($1\frac{1}{8}$)	25.650	19.050($\frac{3}{4}$)
15.875 ($\frac{5}{8}$)	BRI 102216 UU	113.5	15.875($\frac{5}{8}$)	34.925($1\frac{3}{8}$)	25.400($1\frac{1}{8}$)	25.650	22.225($\frac{7}{8}$)
19.050 ($\frac{3}{4}$)	BRI 122416 UU	127	19.050($\frac{3}{4}$)	38.100($1\frac{1}{2}$)	25.400($1\frac{1}{8}$)	25.650	25.400($1\frac{1}{8}$)
22.225 ($\frac{7}{8}$)	BRI 142620 UU	177	22.225($\frac{7}{8}$)	41.275($1\frac{5}{8}$)	31.750($1\frac{1}{4}$)	32.000	28.575($1\frac{1}{8}$)
25.400 (1)	BRI 162820 UU	196	25.400($1\frac{1}{8}$)	44.450($1\frac{3}{4}$)	31.750($1\frac{1}{4}$)	32.000	31.750($1\frac{1}{4}$)
28.575 ($1\frac{1}{8}$)	BRI 183020 UU	211	28.575($1\frac{1}{8}$)	47.625($1\frac{1}{8}$)	31.750($1\frac{1}{4}$)	32.000	34.925($1\frac{3}{8}$)
31.750 ($1\frac{1}{4}$)	BRI 203320 UU	254	31.750($1\frac{1}{4}$)	52.388($2\frac{5}{16}$)	31.750($1\frac{1}{4}$)	32.000	38.100($1\frac{1}{2}$)
34.925 ($1\frac{3}{8}$)	BRI 223520 UU	275	34.925($1\frac{3}{8}$)	55.562($2\frac{3}{16}$)	31.750($1\frac{1}{4}$)	32.000	41.275($1\frac{5}{8}$)
38.100 ($1\frac{1}{2}$)	BRI 243720 UU	293	38.100($1\frac{1}{2}$)	58.738($2\frac{5}{16}$)	31.750($1\frac{1}{4}$)	32.000	44.450($1\frac{3}{4}$)
	BRI 243920 UU	362	38.100($1\frac{1}{2}$)	61.912($2\frac{7}{16}$)	31.750($1\frac{1}{4}$)	32.000	47.625($1\frac{7}{8}$)
41.275 ($1\frac{5}{8}$)	BRI 264120 UU	386	41.275($1\frac{5}{8}$)	65.088($2\frac{9}{16}$)	31.750($1\frac{1}{4}$)	32.000	50.800($2\frac{1}{8}$)
44.450 ($1\frac{3}{4}$)	BRI 284828 UU	804	44.450($1\frac{3}{4}$)	76.200($3\frac{1}{8}$)	44.450($1\frac{3}{4}$)	44.700	57.150($2\frac{1}{4}$)

Notes⁽¹⁾ Maximum permissible corner radius of the shaft or housing.⁽²⁾ Allowable rotational speed applies to grease lubrication.

Remarks 1. The inner ring and the outer ring each have an oil groove and an oil hole.

2. Bearings are provided with prepacked grease.

3. If one side sealed type are needed, please contact IKO.

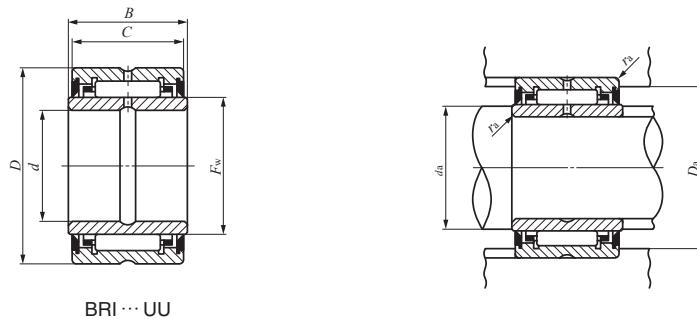

D

NA
TAFI
TRI
BRI

Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽²⁾ min ⁻¹	Assembled inner ring
Min.	<i>d_a</i> Max.	<i>D_a</i> Max.	<i>r_{as max}</i> ⁽¹⁾			
14	14.5	24.5	0.6	18 300	20 000	12 000 LRBZ 61016 B
17.5	18	26.5	0.6	20 700	24 400	10 000 LRBZ 81216 B
21	21.2	29.7	0.6	21 600	26 900	9 000 LRBZ 101416 B
24	24.4	32.9	0.6	23 600	31 300	8 000 LRBZ 121616 B
27	27.5	36.0	0.6	34 900	49 900	7 000 LRBZ 141820 B
30.5	30.7	39.2	0.6	36 000	53 500	6 500 LRBZ 162020 B
33.5	33.9	42.4	0.6	38 500	60 000	5 500 LRBZ 182220 B
37	37.1	45.1	0.6	43 700	66 900	5 500 LRBZ 202420 B
40.2	40.2	48.3	0.6	44 800	70 900	4 500 LRBZ 222620 B
43.3	43.4	51.5	0.6	47 500	78 200	4 500 LRBZ 242820 B
43.3	45	54.7	1	48 500	82 100	4 000 LRBZ 243020 B
48	49	57.8	1	51 000	89 400	4 000 LRBZ 263220 B
52.5	55	69.0	1.5	90 300	158 000	3 500 LRBZ 283628 B

1N=0.102kgf=0.2248lbs. D72
1mm=0.03937inch

IKO**MACHINED TYPE NEEDLE ROLLER BEARINGS**

With Seal, With Inner Ring, Inch Series

**Shaft dia. 50.800 – 82.550mm**

Shaft dia. mm (inch)	Identification number	Mass (Ref.)	Boundary dimensions mm(inch)					
			<i>d</i>	<i>D</i>	<i>C</i>	<i>B</i>	<i>F_w</i>	
50.800 (2)	BRI 325228 UU	889	50.800(2)	82.550(3 1/4)	44.450(1 3/4)	44.700	63.500(2 1/2)	
57.150 (2 1/4)	BRI 365628 UU	980	57.150(2 1/4)	88.900(3 1/2)	44.450(1 3/4)	44.700	69.850(2 3/4)	
63.500 (2 1/2)	BRI 406028 UU	1 065	63.500(2 1/2)	95.250(3 3/4)	44.450(1 3/4)	44.700	76.200(3)	
69.850 (2 3/4)	BRI 446828 UU	1 421	69.850(2 3/4)	107.950(4 1/4)	44.450(1 3/4)	44.700	82.550(3 1/4)	
76.200 (3)	BRI 487232 UU	1 738	76.200(3)	114.300(4 1/2)	50.800(2)	51.050	88.900(3 1/2)	
82.550 (3 1/4)	BRI 527632 UU	1 851	82.550(3 1/4)	120.650(4 3/4)	50.800(2)	51.050	95.250(3 3/4)	

Notes⁽¹⁾ Maximum permissible corner radius of the shaft or housing.⁽²⁾ Allowable rotational speed applies to grease lubrication.


Remarks 1. The inner ring and the outer ring each have an oil groove and an oil hole.

2. Bearings are provided with prepacked grease.


3. If one side sealed type are needed, please contact IKO.

D73

IKO

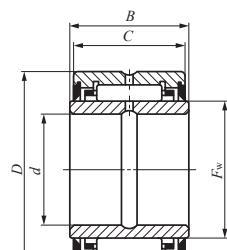

BRI ... UU

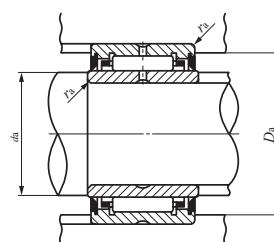

D

NA
TAFI
TRI
BRI

Standard mounting dimensions mm				Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽²⁾ min ⁻¹	Assembled inner ring
Min.	<i>d_a</i> Max.	<i>D_a</i> Max.	<i>r_{as max}</i> ⁽¹⁾				
58	61	74.3	1.5	94 600	174 000	3 000	LRBZ 324028 B
65	67	80.7	1.5	98 700	189 000	2 500	LRBZ 364428 B
71	73	87.0	1.5	105 000	211 000	2 500	LRBZ 404828 B
77	79	99.7	1.5	109 000	227 000	2 500	LRBZ 445228 B
83.5	86	106.1	1.5	142 000	265 000	2 000	LRBZ 485632 B
91	93	111.4	1.5	148 000	287 000	2 000	LRBZ 526032 B

1N=0.102kgf=0.2248lbs. D74
1mm=0.03937inch

IKO

C-LUBE MACHINED TYPE NEEDLE ROLLER BEARINGS

■ Structure and features


C-Lube Machined Type Needle Roller Bearing is a bearing that is lubricated with a newly developed thermosetting solid-type lubricant. A large amount of lubricating oil and fine particles of ultra high molecular weight polyolefin resin are solidified by heat treatment to fill the inner space of the bearing. As the bearing rotates, the lubricating oil oozes out onto the raceway in proper quantities, maintaining the lubrication performance for a long period of time.

C-Lube Machined Type Needle Roller Bearings are bearings with a low sectional height and large load ratings. The outer ring has high rigidity and can easily be used even for light alloy housings.



Structure of C-Lube Machined Type Needle Roller Bearing

TAF···/SG(1)

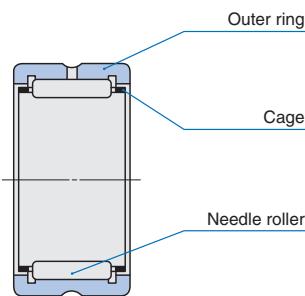

Note⁽¹⁾ Thermosetting solid-type lubricant fills inner space of the bearing.

■ Type

C-Lube Machined Type Needle Roller Bearing is available in type shown in Table 1.


Table 1 Type of bearing

Series	Metric series	Type	
		Needle bearing with cage	
		For light duty	Without inner ring
		TAF···/SG	

■ Identification number

The identification number of C-Lube Machined Type Needle Roller Bearing consists of model code, dimensions and classification symbol. Example is shown below.

D75

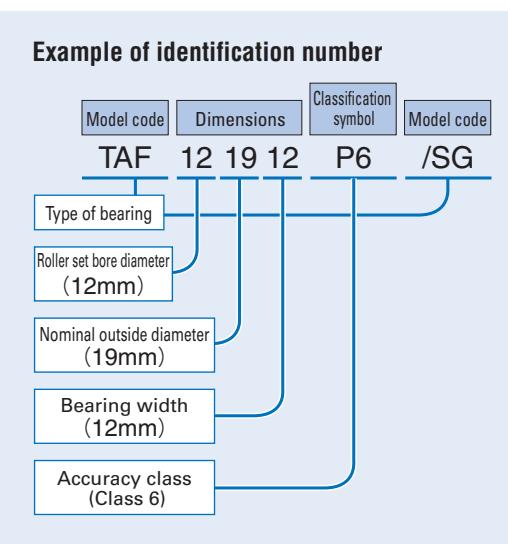

■ Oil hole

Table 2 shows the number of oil holes on the outer ring.

Table 2 Number of oil holes of outer ring

Nominal roller set bore diameter F_w mm	Number of hole holes of outer ring
$F_w \leq 26$	0
$26 < F_w$	1

Remark If there is oil hole on the outer ring, care must be exercised not to let oil holes within the load range.

D

TAF.../SG

■ Mounting

- Mounting dimensions for C-Lube Machined Type Needle Roller Bearings are shown in the table of dimensions.
- When mounting, pay special attention to avoid locating the oil hole within the loading zone. This may lead to a short bearing life.

■ Precaution for Use

- Do not wash C-Lube Machined Type Needle Roller Bearing with organic solvent and/or white kerosene, which have the ability of removing fat nor leave them in contact with the above agents.
- To ensure normal rotation of the C-Lube Machined Type Needle Roller Bearing, apply a load of 1% or over of the dynamic load rating at use.
- The operating temperature range is -15~+80°C. For continuous operation, the recommended operating temperature is +60°C or less.
- When using two or more C-Lube Machined Type Needle Roller Bearings adjacent to each other on the same shaft, it is necessary to obtain an even load distribution. On request, a set of bearings is available, in which bearings are matched to obtain an even load distribution.

Further, C-Lube Machined Type Needle Roller Bearing for food machinery is also available. If needed, please contact IKO.

■ Accuracy

C-Lube Machined Type Needle Roller Bearings are manufactured based on JIS (See page A31.). The tolerances for the smallest single roller set bore diameter of bearings without inner ring are based on Table 14 on page A33.

■ Fit

The recommended fits for C-Lube Machined Type Needle Roller Bearings are shown in Tables 21 to 23 on pages A41 and A42.

■ Allowable Rotational Speed

The allowable rotational speed of C-Lube Machined Type Needle Roller Bearing is affected by mounting and operating conditions. The reference d_{mn} value (1) is 20,000.

Note(1) d_{mn} value = {(Bore diameter of bearing [mm] + Outside diameter of bearing [mm])/2} x rotational speed [min⁻¹]



■ Lubrication

As the internal space of C-Lube Machined Type Needle Roller Bearing is filled with thermosetting solid-type lubricant C-Lube, regreasing is not possible due to the structure.



C-LUBE MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring



TAF ... /SG
 $F_w \leq 26$

TAF ... /SG
 $F_w > 26$

Shaft dia. 10–45mm


Shaft dia.	Identification number	Mass (Ref.) g	Boundary dimensions mm				Standard mounting dimension D_a Max. mm	Basic dynamic load rating C N	Basic static load rating C_0 N
10	TAF 101712/SG	11	10	17	12	0.2	15.4	5 880	5 970
	TAF 101716/SG	14.7	10	17	16	0.2	15.4	8 230	9 190
12	TAF 121912/SG	12.5	12	19	12	0.3	17	6 610	7 260
	TAF 121916/SG	16.8	12	19	16	0.3	17	9 250	11 200
14	TAF 142216/SG	22	14	22	16	0.3	20	11 700	13 700
	TAF 142220/SG	27.5	14	22	20	0.3	20	14 800	18 600
15	TAF 152316/SG	23.5	15	23	16	0.3	21	12 300	14 900
	TAF 152320/SG	29	15	23	20	0.3	21	15 600	20 200
16	TAF 162416/SG	24	16	24	16	0.3	22	12 300	15 100
	TAF 162420/SG	30	16	24	20	0.3	22	15 500	20 400
18	TAF 182616/SG	26.5	18	26	16	0.3	24	13 400	17 500
	TAF 182620/SG	33	18	26	20	0.3	24	17 000	23 600
19	TAF 192716/SG	28	19	27	16	0.3	25	14 000	18 700
	TAF 192720/SG	35.5	19	27	20	0.3	25	17 700	25 300
20	TAF 202816/SG	28.5	20	28	16	0.3	26	13 900	18 800
	TAF 202820/SG	37	20	28	20	0.3	26	17 600	25 400
21	TAF 212916/SG	30	21	29	16	0.3	27	14 400	20 000
	TAF 212920/SG	37.5	21	29	20	0.3	27	18 200	27 100
22	TAF 223016/SG	31	22	30	16	0.3	28	14 900	21 200
	TAF 223020/SG	39	22	30	20	0.3	28	18 900	28 700
24	TAF 243216/SG	33	24	32	16	0.3	30	15 300	22 500
	TAF 243220/SG	42	24	32	20	0.3	30	19 400	30 500
25	TAF 253316/SG	35	25	33	16	0.3	31	15 800	23 700
	TAF 253320/SG	43.5	25	33	20	0.3	31	20 000	32 100

Note⁽¹⁾ Minimum allowable value of chamfer dimension r .

Remarks1. Models with a nominal roller set bore diameter F_w of 26mm or less are provided without oil holes. other models are provided with one oil hole and oil groove.

2. This bearing can not be re-lubricated as thermosetting solid-type lubricant C-Lube fills inner space of the bearing.

IKO

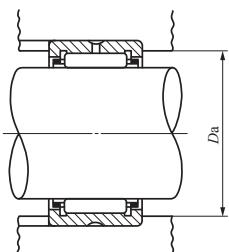

D

TAF.../SG

Shaft dia.	Identification number	Mass (Ref.) g	Boundary dimensions mm				Standard mounting dimension <i>D_a</i> Max. mm	Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N
			<i>F_w</i>	<i>D</i>	<i>C</i>	<i>r_{s min}⁽¹⁾</i>			
29	TAF 293820/SG	59	29	38	20	0.3	36	21 600	37 200
	TAF 293830/SG	88	29	38	30	0.3	36	30 900	59 100
30	TAF 304020/SG	67	30	40	20	0.3	38	25 100	40 100
	TAF 304030/SG	101	30	40	30	0.3	38	36 000	63 900
35	TAF 354520/SG	76.5	35	45	20	0.3	43	26 900	46 200
	TAF 354530/SG	116.5	35	45	30	0.3	43	38 600	73 600
40	TAF 405020/SG	86	40	50	20	0.3	48	29 400	54 100
	TAF 405030/SG	130	40	50	30	0.3	48	42 300	86 200
45	TAF 455520/SG	95.5	45	55	20	0.3	53	31 000	60 200
	TAF 455530/SG	144	45	55	30	0.3	53	44 600	95 800

1N=0.102kgf=0.2248lbs. D78
1mm=0.03937inch