




Linear Way F

LWF

Linear Way F

LWFF

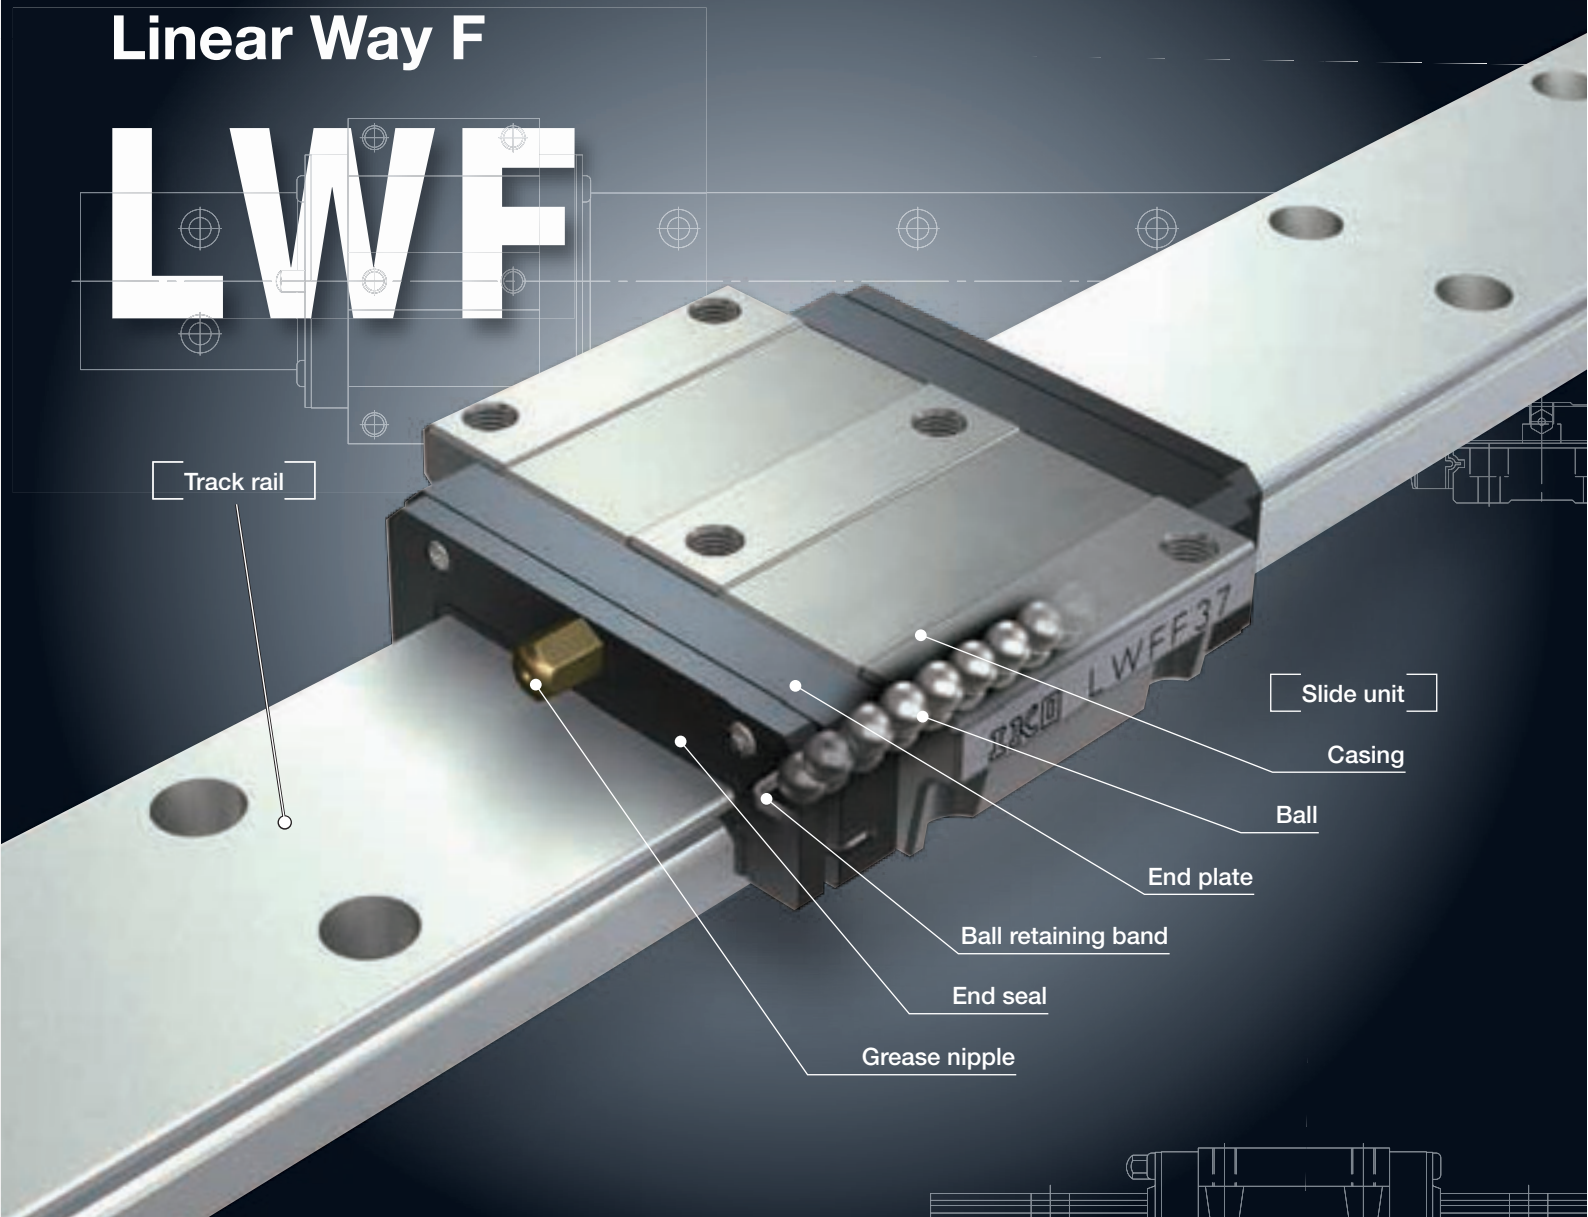

Points

1 ● Wide rail type series resistant to moment load

As track rail width is wide and distance between moment load points is long, this is a linear motion rolling guide resistant to moment load and complex load and suitable for serial use.

2 ● Slide unit shapes for various usage

As the lineup of three types of slide unit shape including two flange types with different dimensional series and block type with small width are available, you can select an optimal product for the specifications of your machine and device.

3 ● Stainless steel selections superior in corrosion resistance are listed on lineup. For details ● P.I-39

Products made of stainless steel are highly resistant to corrosion, so that they are suitable for applications where rust prevention oil is not preferred, such as in a cleanroom environment.

Identification Number and Specification

Example of an identification number

The specification of LWF series is indicated by the identification number. Indicate the identification number, consisting of a model code, dimensions, a part code, a material code, a preload symbol, a classification symbol, an interchangeable code, and any supplemental codes for each specification to apply.

Non-interchangeable specification									
	1	2	3	4	5	6	7	8	9
Assembled set	LWFF	37	C1	R800		T ₁	P		/FZ
Interchangeable specification									
Single slide unit	LWFS	37	C1		SL	T ₁	P	S1	/Z
Single track rail ⁽¹⁾	LWFF	37		R800	SL		P	S1	/F
Assembled set	LWFS	37	C1	R800	SL	T ₁	P	S1	/FZ

1 Model

Model code

Page II – 137

2 Size

Dimensions

Page II – 137

3 Number of slide units

Part code

Page II – 137

4 Length of track rail

5 Material type

Material code

Page II – 137

6 Preload amount

Preload symbol

Page II – 139

7 Accuracy class

Classification symbol

Page II – 140

8 Interchangeable

Interchangeable code

Page II – 141

9 Special specification

Supplemental code

Page II – 141

LWF





Note (1) Indicate "LWFF" for the model code of the single track rail of block type LWFS mounting from top or stainless steel LWFS.

Identification Number and Specification

— Model · Size · Number of Slide Unit ·

1	Model	Linear Way F ⁽¹⁾ (LWF series)	Flange type mounting from top / bottom : LWFH : LWFF	Block type mounting from top : LWFS
		For applicable models and sizes, see Table 1. Indicate "LWFF" for the model code of the single track rail of block type LWFS mounting from top or stainless steel LWFS. Note ⁽¹⁾ This model has no built-in C-Lube.		
2	Size	33,37,40,42,60,69,90	For applicable models and sizes, see Table 1.	
3	Number of slide units	: C○	For an assembled set, indicates the number of slide units assembled on a track rail. For a single slide unit, only "C1" is specified.	
4	Length of track rail	: R○	Indicate the length of track rail in mm. For standard and maximum length, see Table 2.1 and Table 2.2.	
5	Material type	High carbon steel made : No symbol Stainless steel made ⁽²⁾ : SL	For applicable models and sizes, see Table 1. Note ⁽²⁾ Mount a standard grease nipple (brass) on the stainless steel type, too. Stainless steel grease nipple is also available. If needed, please contact IKO.	


Table 1 Models and sizes of LWF series

Material	Shape	Model	Size						
			33	37	40	42	60	69	90
High carbon steel made	Flange type mounting from top/bottom 	LWFH	—	—	○	—	○	—	○
	Flange type mounting from top/bottom 	LWFF	○	○	—	○	—	○	—
	Block type mounting from top 	LWFS	○	○	—	—	—	—	—
Stainless steel made	Block type mounting from top 	LWFS…SL	○	○	—	○	—	—	—

Remark: For the models indicated in , the interchangeable specification is available.

Length of Track Rail · Material Type—

Table 2.1 Standard and maximum length of high carbon steel track rail

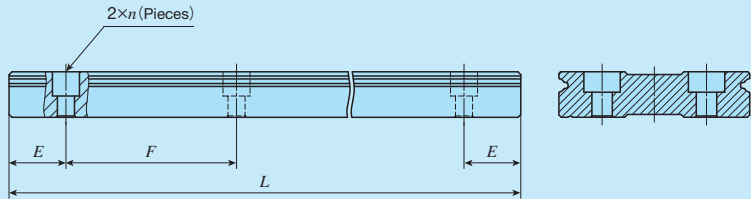

unit: mm

Identification number	LWFH40	LWFH60	LWFH90
Item			
Standard length L (n)	180 (3) 240 (4) 360 (6) 480 (8) 660 (11) 840 (14)	240 (3) 480 (5) 640 (8) 800 (10) 1 040 (13)	480 (6) 640 (8) 800 (10) 1 040 (13) 1 200 (15) 1 520 (19)
Pitch of mounting holes F	60	80	80
E	30	40	40
Standard E dimensions (1)	8	10	10
or higher			
below	38	50	50
Maximum length (2)	1 500	1 520	1 520

Identification number	LWFF33 LWFS33	LWFF37 LWFS37	LWFF42	LWFF69
Item				
Standard length L (n)	120 (3) 200 (5) 320 (8) 480 (12) 560 (14)	150 (3) 250 (5) 400 (8) 500 (10) 600 (12) 800 (16)	180 (3) 240 (4) 360 (6) 480 (8) 660 (11) 840 (14)	320 (4) 480 (6) 800 (10) 1 040 (13) 1 280 (16) 1 600 (20)
Pitch of mounting holes F	40	50	60	80
E	20	25	30	40
Standard E dimensions (1)	7	7	7	9
or higher				
below	27	32	37	49
Maximum length (2)	1 600	2 000	1 980	2 000

Notes (1) This does not apply to female threads for bellows (supplemental code "/J").
(2) We can produce products longer than the maximum length. If needed, please contact IKO.
Remarks 1. Indicate "LWFF" for the model code of the single track rail of block type LWFS mounting from top.
2. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III –30.

Table 2.2 Standard and maximum length of stainless steel track rail

unit: mm

Identification number	LWFS33···SL	LWFS37···SL	LWFS42···SL
Item			
Standard length L (n)	120 (3) 200 (5) 320 (8) 480 (12) 560 (14)	150 (3) 250 (5) 400 (8) 500 (10) 600 (12) 800 (16)	180 (3) 240 (4) 360 (6) 480 (8) 660 (11) 840 (14)
Pitch of mounting holes F	40	50	60
E	20	25	30
Standard E dimensions (1)	7	7	7
or higher			
below	27	32	37
Maximum length (2)	1 200	1 200	1 200

Notes (1) This does not apply to female threads for bellows (supplemental code "/J").
(2) We can produce products longer than the maximum length. If needed, please contact IKO.
Remarks 1. Indicate "LWFF" for the model code of the single track rail.
2. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III –30.

—Preload Amount—

6	Preload amount	Standard	: No symbol	Specify this item for an assembled set or a single slide unit.
		Light preload	: T ₁	For details of the preload amount, see Table 3.
		Medium preload	: T ₂	For applicable preload types, see Table 4.

Table 3 Preload amount

Item	Preload symbol	Preload amount N	Operational conditions
Standard	(No symbol)	0 ⁽¹⁾	• Light and precise motion
Light preload	T ₁	0.02C ₀	• Almost no vibrations • Load is evenly balanced • Light and precise motion
Medium preload	T ₂	0.05C ₀	• Medium vibration • Medium overhung load

Note ⁽¹⁾ Indicates zero or minimal amount of preload.
Remark: C₀ indicates the basic static load rating.

Table 4 Application of preload


Size	Preload type (preload symbol)		
	Standard (No symbol)	Light preload (T ₁)	Medium preload (T ₂)
33	○	○	○
37	○	○	○
40	○	○	○
42	○	○	○
60	○	○	○
69	○	○	○
90	○	○	○

Remark: The mark indicates that interchangeable specification products are available.

—Accuracy Class—

7	Accuracy class	High	: H	For interchangeable specification products, assemble a slide unit and a track rail of the same accuracy class. For details of accuracy class, see Table 5. For applicable accuracy class, see Table 6.
		Precision	: P	
		Super precision	: SP	

Table 5 Tolerance and allowance

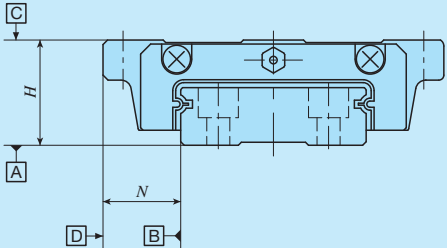


unit: mm

Item \ Class (classification symbol)	High (H)	Precision (P)	Super precision (SP)
Dim. <i>H</i> tolerance	±0.040	±0.020	±0.010
Dim. <i>N</i> tolerance	±0.050	±0.025	±0.015
Dim. variation of <i>H</i> ⁽¹⁾	0.015	0.007	0.005
Dim. variation of <i>N</i> ⁽¹⁾	0.020	0.010	0.007
Dim. variation of <i>H</i> for multiple assembled sets ⁽²⁾	0.035	0.025	—
Parallelism in operation of the slide unit C surface to A surface	See Fig. 1		
Parallelism in operation of the slide unit D surface to B surface	See Fig. 1		


Notes ⁽¹⁾ It means the size variation between slide units mounted on the same track rail.
⁽²⁾ Applicable to the interchangeable specifications.

Table 6 Application of accuracy class

Size	Class (classification symbol)		
	High (H)	Precision (P)	Super precision (SP)
33	○	○	○
37	○	○	○
40	○	○	○
42	○	○	○
60	○	○	○
69	○	○	○
90	○	○	○

Remark: The mark  indicates that interchangeable specification products are available.

LWF

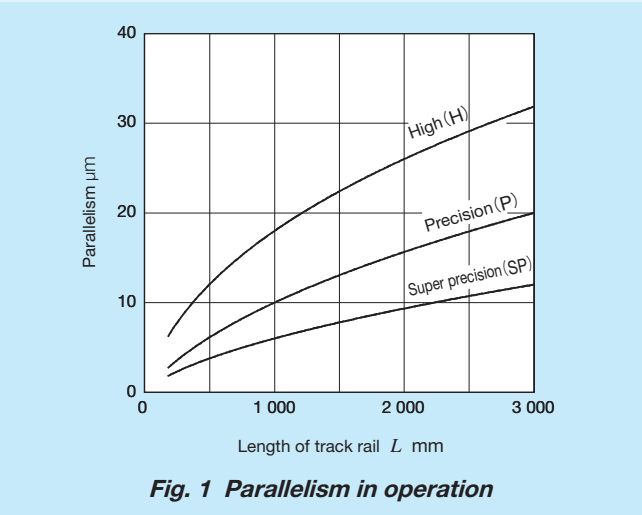

– Interchangeable Specification · Special Specification –

8	Interchangeable	S1 specification : S1 S2 specification : S2 Non-interchangeable specification : No symbol	This is specified for the interchangeable specifications. Assemble a track rail and a slide unit with the same interchangeable code. Performance and accuracy of "S1" and "S2" are the same. No symbol is indicated for non-interchangeable specification.
9	Special specification	/A, /C, /D, /E, /F, /I, /J○, /L○, /LF○, /MN, /N, /Q, /U, /V○, /W○, /Y○, /Z○	For applicable special specifications, see Tables 7.1, 7.2, 7.3, and 7.4. For combination of multiple special specifications, see Table 8. For details of special specifications, see page III – 29.

Table 7.1 Application of special specifications (Interchangeable specification, single slide unit)

Special specification	Supplemental code	Size						
		33	37	40	42	60	69	90
Female threads for bellows (¹)	/J○	○	○	○	○	○	○	○
No end seal	/N	○	○	○	○	○	○	○
With C-Lube plate	/Q	○	○	○	○	○	○	○
Under seal	/U	○	○	○	○	○	○	○
Double end seals	/V○	○	○	×	○	×	○	×
Scrapers	/Z○	○	○	○	○	○	○	○

Note (¹) Not applicable to stainless steel made products.

Table 7.2 Application of special specifications (Interchangeable specification, single track rail)

Special specification	Supplemental code	Size						
		33	37	40	42	60	69	90
Specified rail mounting hole positions	/E	○	○	○	○	○	○	○
Caps for rail mounting holes	/F	○	○	○	○	○	○	○
Female threads for bellows (¹)	/J	○	○	○	○	○	○	○
Without track rail mounting bolt	/MN	○	○	○	○	○	○	○

Note (¹) Not applicable to stainless steel made products.

Table 7.3 Application of special specifications (Interchangeable specification and assembled set)

Special specification	Supplemental code	Size						
		33	37	40	42	60	69	90
Opposite reference surfaces arrangement	/D	○	○	○	○	○	○	○
Specified rail mounting hole positions	/E	○	○	○	○	○	○	○
Caps for rail mounting holes	/F	○	○	○	○	○	○	○
Female threads for bellows (¹)	/J○	○	○	○	○	○	○	○
Black chrome surface treatment	/L○	○	○	○	○	○	○	○
Fluorine black chrome surface treatment	/LF○	○	○	○	○	○	○	○
Without track rail mounting bolt	/MN	○	○	○	○	○	○	○
No end seal	/N	○	○	○	○	○	○	○
With C-Lube plate	/Q	○	○	○	○	○	○	○
Under seal	/U	○	○	○	○	○	○	○
Double end seals	/V○	○	○	×	○	×	○	×
Specified grease	/Y○	○	○	○	○	○	○	○
Scrapers	/Z○	○	○	○	○	○	○	○

Note (¹) Not applicable to stainless steel made products.

Special specification	Supplemental code	Size						
		33	37	40	42	60	69	90
Butt-jointing track rails	/A	○	○	○	○	○	○	○
Chamfered reference surface	/C○	×	×	○	×	○	×	○
Opposite reference surfaces arrangement	/D	○	○	○	○	○	○	○
Specified rail mounting hole positions	/E	○	○	○	○	○	○	○
Caps for rail mounting holes	/F	○	○	○	○	○	○	○
Inspection sheet	/I	○	○	○	○	○	○	○
Female threads for bellows	/J○	○	○	○	○	○	○	○
Black chrome surface treatment	/L○	○	○	○	○	○	○	○
Fluorine black chrome surface treatment	/LF○	○	○	○	○	○	○	○
Without track rail mounting bolt	/MN	○	○	○ (1)	○	○	○	○
No end seal	/N	○	○	○	○	○	○	○
With C-Lube plate	/Q	○	○	○	○	○	○	○
Under seal	/U	○	○	○	○	○	○	○
Double end seals	/V○	○	○	×	○	×	○	×
A group of multiple assembled sets	/W○	○	○	○	○	○	○	○
Specified grease	/Y○	○	○	○	○	○	○	○
Scrapers	/Z○	○	○	○	○	○	○	○

Table 8 *Combination of supplemental codes*

[illegible]

3. When using multiple types for combination, please indicate by arranging the symbols in alphabetical order.

—Special Specification—


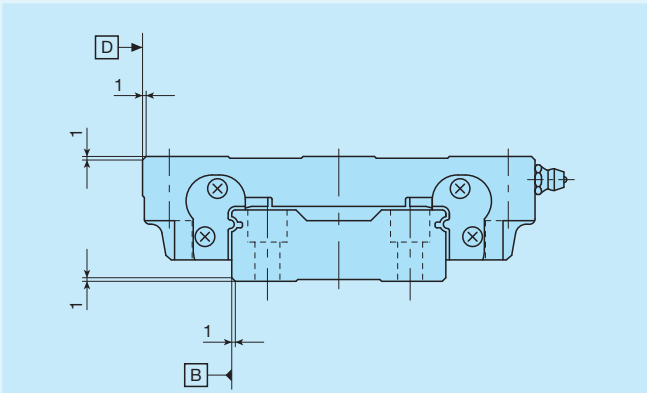


Fig. 2 Dimension of chamfered reference surface
(Supplemental code /C /CC)

Remark: Add chamfer to the reference mounting surface of the slide unit and track rail.
For corner R of the mounting section, see Table 17.2 on page II – 148.

Table 9 Dimension of female threads for bellows (Supplemental code Single unit: /J Assembled set: /J /JJ)

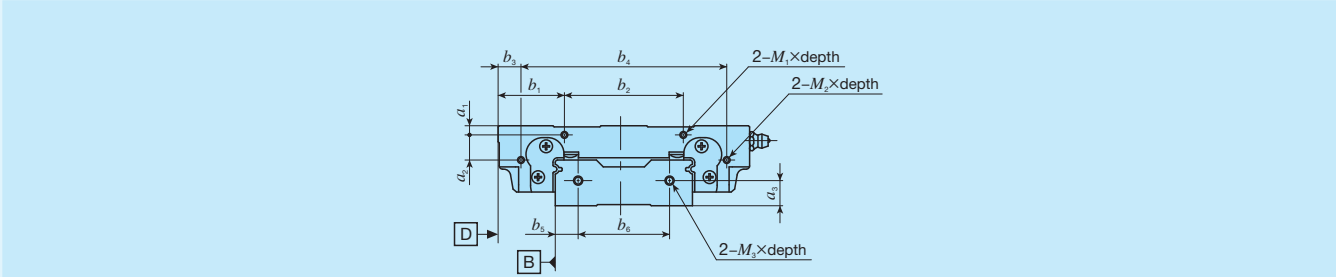


unit: mm

Identification number	Slide unit								Track rail			
	a ₁	a ₂	b ₁	b ₂	b ₃	b ₄	M ₁ × depth	M ₂ × depth	a ₃	b ₅	b ₆	M ₃ × depth
LWFH 40	3	—	23.5	35	—	—	M3 × 6	—	9	8	24	M3 × 6
LWFH 60	4	11	29	52	10	90	M3 × 6	M3 × 3	11	10	40	M4 × 8
LWFH 90	6	17	41	80	13	136	M3 × 5	M3 × 5	13	15	60	M4 × 8

— Special Specification —

Table 10 Dimension of female threads for bellows (Supplemental code Single unit: /J Assembled set: /J /JJ)

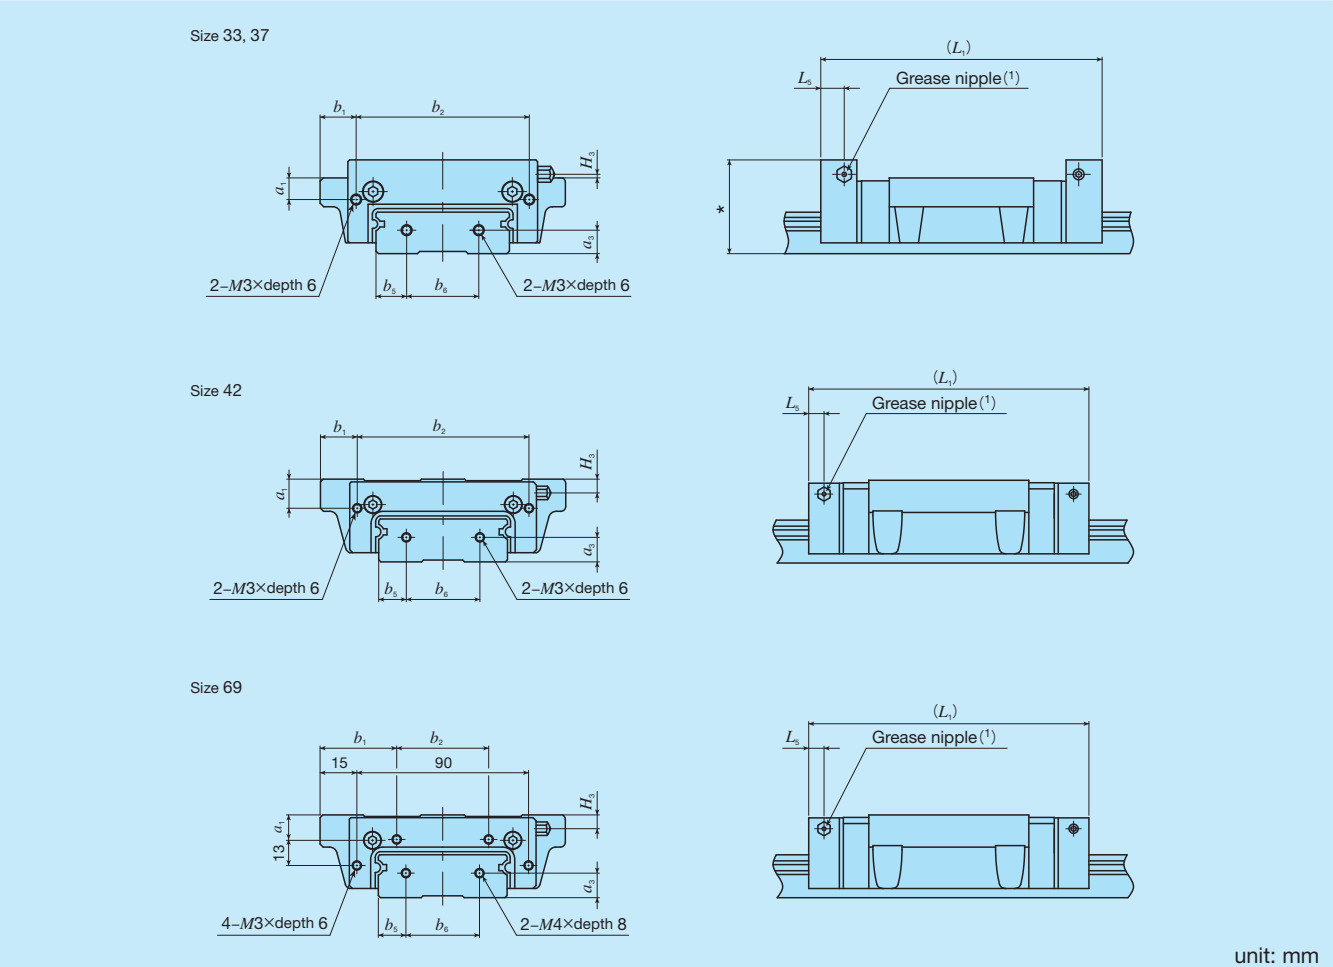

unit: mm

Identification number	Slide unit						Track rail		
	a_1	b_1	b_2	$L_1^{(2)}$	L_5	H_3	a_3	b_5	b_6
LWFF 33	4	8.25	43.5	71	5	1	6	7.5	18
LWFS 33(…SL)		3.25							
LWFF 37	6	10	48	78	5	1	6.5	8.5	20
LWFS 37(…SL)		3							
LWFF 42	9.5	12	56	92	7	4.5	8	9	24
LWFS 42…SL		3							
LWFF 69	9	35	50	125	7	5	11	14.5	40

Notes (1) Grease nipple specifications and mounting position are different from standard specifications. Provided grease nipple is A-M3 for size 37 and 42 models, and A-M4 for size 69 model. For grease nipple specification, see Table 15 on page II – 146.


(2) Dimensions of the specification that female threads for bellows are fitted to both ends of the slide unit are indicated.

Remark: Dimensions indicated by * mark for series of size 33 and Size 37 is higher than the H dimension of Linear Way F. For details, contact IKO.

LWF

— Special Specification —

Table 11 Dimension of slide unit with C-Lube plate
(Supplemental code /Q)

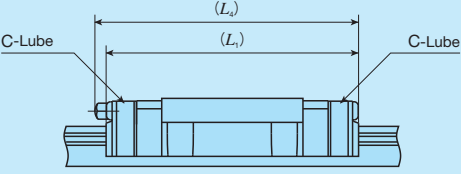


The diagram shows a cross-section of a slide unit with C-Lube plates at both ends. Dimensions L_1 and L_4 are indicated with arrows.

Size	L_1	L_4
33	64	66
37	73	75
40	78	—
42	86	98
60	98	—
69	121	132
90	131	—

unit: mm

Remark: The dimensions of the slide unit with C-Lube at both ends are indicated.

Table 12 H_1 dimension with under seal (Supplemental code /U)




The diagram shows a cross-section of a slide unit with an under seal. Dimension H_1 is indicated with an arrow.

Size	H_1
40	3
60	4
90	5

unit: mm

Remark: H_1 dimensions of series of the Size 33, 37, 42, and 69 are the same as dimensions before mounting of under seal.

Table 13 Dimension of slide unit with double end seals
(Supplemental code Single unit: /V
Assembled set: /V /VV)

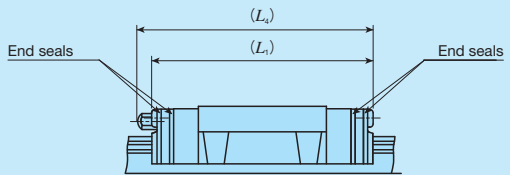


The diagram shows a cross-section of a slide unit with double end seals. Dimensions L_1 and L_4 are indicated with arrows.

Size	L_1	L_4
33	61	64
37	70	74
42	82	96
69	117	130

unit: mm

Remark: The dimensions of the slide unit with double end seals at both ends are indicated.

Table 14 Dimension of slide unit with scrapers
(Supplemental code Single unit: /Z
Assembled set: /Z /ZZ)

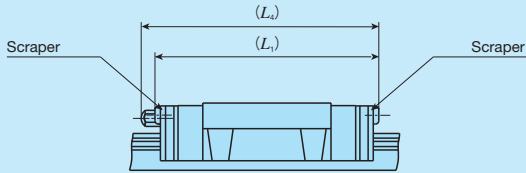

The diagram shows a cross-section of a slide unit with scrapers. Dimensions L_1 and L_4 are indicated with arrows.

Size	L_1	L_4
33	62	64
37	71	75
40	80	—
42	84	97
60	100	—
69	119	131
90	130	—

unit: mm

Remark: The dimensions of the slide unit with scraper at both ends are indicated.

Lubrication

Lithium-soap base grease with extreme-pressure additive (Alvania EP grease 2 [SHOWA SHELL SEKIYU K. K.]) is pre-packed in LWF series.

LWF series has grease nipple as indicated in Table 15. Supply nozzles fit to each shapes of grease nipple are also available. For order of these parts for lubrication, see Table 14.1 on page III – 23 and Table 15 on page III – 24.

Table 15 Parts for lubrication

Size	Grease nipple type ⁽¹⁾	Applicable supply nozzle type		Bolt size of female threads for piping
33	A-M3	A-5120V B-5120V	A-5240V B-5240V	—
37	A-M4			M4
40	JIS type 1	Grease gun available on the market		M6
42	B-M6			
60	JIS type 1			
69	B-M6			
90	JIS type 1			

Note (1) For grease nipple specification, see Table 14.1 and Table 14.2 on page III – 23.

Remark: Stainless steel grease nipple is also available. If needed, please contact IKO.

Dust Protection

The slide units of LWF series are equipped with end seals as standard for dust protection. However, if large amount of contaminant or dust are floating, or if large particles of foreign substances such as chips or sand may adhere to the track rail, it is recommended to cover the whole unit with bellows or telescope type shield, etc.

LWF series is provided with specific bellows. The bellows are easy to mount and provide excellent dust protection. If needed, please refer to III – 26 for ordering.



LWF

Precaution for Use

❶ Mounting surface, reference mounting surface and typical mounting structure

When mounting the LWF series, properly align the reference mounting surface B and D of the track rail and slide unit with the reference mounting surface of the table and bed and fix them. (See Fig. 3.)

The reference mounting surfaces B and D and mounting surfaces A and C are precisely ground. Machining the mounting surface of the table and bed, such as machine or device, to high accuracy and mounting them properly will ensure stable linear motion with high accuracy.

Reference mounting surface of the slide unit is the opposite side of the  mark. The track rail reference mounting surface is identified by locating the  mark on the top surface of the track rail. It is the side surface above the mark (in the direction of the arrow). (See Fig. 4)

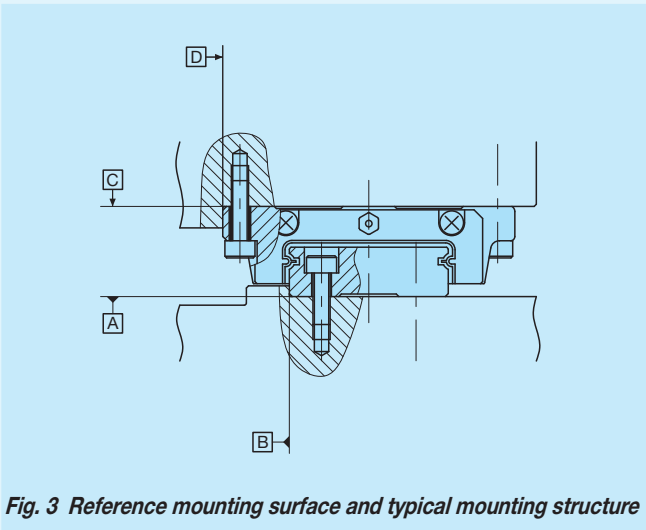


Fig. 3 Reference mounting surface and typical mounting structure

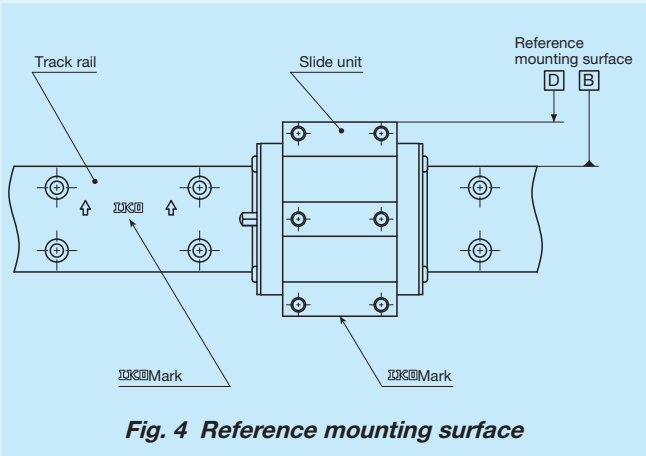


Fig. 4 Reference mounting surface

❷ Shoulder height and corner radius of the reference mounting surface

For the opposite corner of the mating reference mounting, it is recommended to have relieved fillet as indicated in Fig. 5. Recommended value for the shoulder height and corner radius on the mating side is indicated in Table 17.1 and Table 17.2.

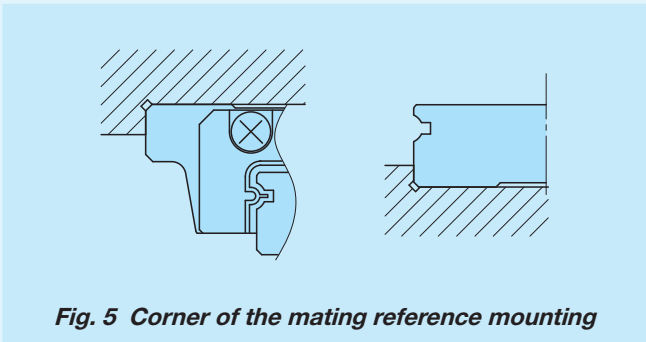


Fig. 5 Corner of the mating reference mounting

❸ Tightening torque for fixing screw



Typical tightening torque for mounting of the LWF series to the steel mating member material is indicated in Table 16. When vibration and shock of the machine or device are large, fluctuating load is large, or moment load is applied, fix it by using the torque 1.2 to 1.5 times larger than the value indicated in the table as necessary. If the mating member material is cast iron or aluminum alloy, reduce the tightening torque depending on the strength characteristics of the mating member material.

Table 16 Tightening torque for fixing screw

Bolt size	Tightening torque N · m	
	High carbon steel-made screw	Stainless steel-made screw
M 4×0.7	4.1	2.5
M 5×0.8	8.0	5.0
M 6×1	13.6	8.5
M 8×1.25	32.7	—
M10×1.5	63.9	—

Remark: The tightening torque is calculated based on strength division 12.9 and property division A2-70.





Table 17.1 Shoulder height and corner radius of the reference mounting surface



unit: mm

Size	Mounting part of slide unit		Mounting part of track rail	
	Shoulder height h_1	Corner radius R (Maximum)	Shoulder height h_2	Corner radius R (Maximum)
33	4	0.4	2	0.4
37	5	0.4	2.5	0.4
42	5	0.4	2.5	0.4
69	5	0.8	3.5	0.8

Table 17.2 Shoulder height and corner radius of the reference mounting surface





unit: mm

Size	Mounting part of slide unit		Mounting part of track rail	Corner radius when supplemental code "/CC" is specified R (Maximum)
	Shoulder height h_1	Corner radius R (Maximum)	Shoulder height h_2	
40	4	0.3	3	1
60	6	0.5	4	1
90	8	0.5	6	1

IKO Linear Way F


Flange type mounting from top / bottom


Shape	LWFH		
			
Size	40	60	90

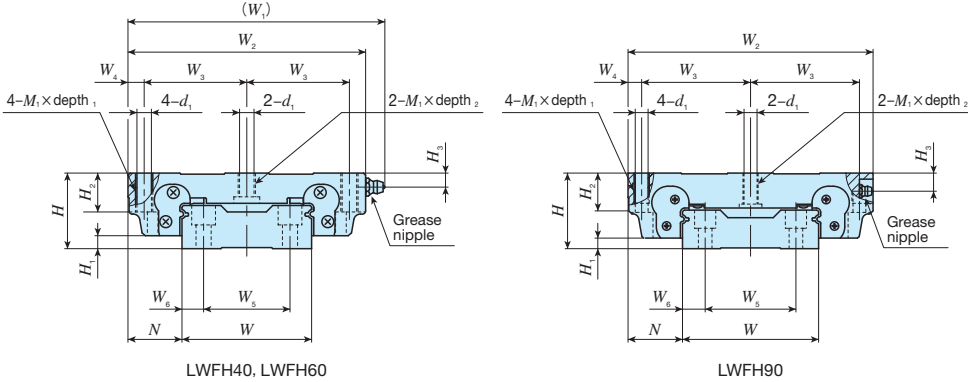

Identification number	Interchangeable	Mass(Ref.)		Dimensions of assembly			Dimensions of slide unit											
		Slide unit kg	Track rail kg/m	mm			mm											
LWF series (No C-Lube)				H	H ₁	N	W ₁	W ₂	W ₃	W ₄	L ₁	L ₂	L ₅	d ₁	M ₁ ×depth ₁	depth ₂	H ₂	
LWFH 40	○	0.58	4.60	27	5	21	91	82	37	4	70	60	27.5	4.3	M 5×14	8	14	
LWFH 60	○	1.29	8.60	35	6	25	119	110	47.5	7.5	90	75	45	6.7	M 8×18	11	18	
LWFH 90	○	4.06	16.5	50	7	36	—	162	72	9	120	100	60	8.6	M10×20	20.5	26	

Notes (1) Track rail lengths *L* are shown in Table 2.1 on page II – 138.
(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For size 40, small-head bolts are appended.
(3) The direction of basic dynamic load rating (*C*), basic static load rating (*C₀*), and static moment rating (*T₀*, *T_x*, *T_y*) are shown in the sketches below. The upper values of *T_x* and *T_y* are for one slide unit and the lower values are for two slide units in close contact.
Remark: The specifications of grease nipple are shown in Table 15 on page II – 146.

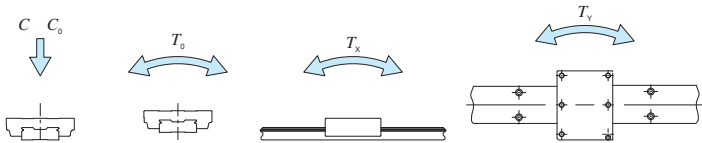

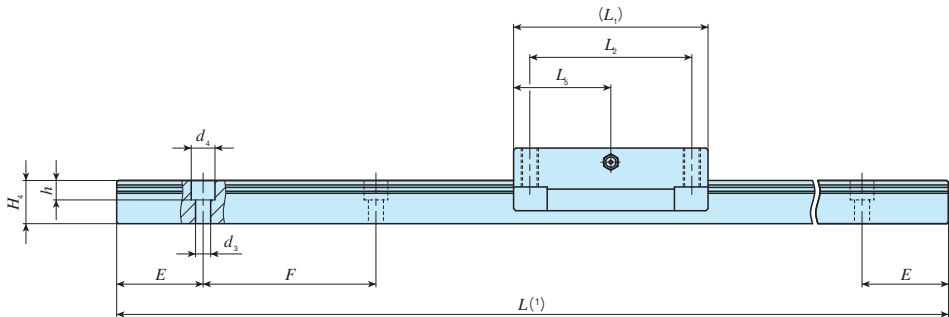

		Dimensions of track rail									Appended mounting bolt for track rail ⁽²⁾ mm	Basic dynamic load rating ⁽³⁾	Basic static load rating ⁽³⁾	Static moment rating ⁽³⁾		
		mm												T_0	T_x	T_y
		H_3	W	H_4	W_5	W_6	d_3	d_4	h	E						
	6.5	40	16	24	8	4.5	7.2	6	30	60	M4×16	12 600	16 600	280	108 612	99.3 563
	6.5	60	20	40	10	7	11	9	40	80	M6×22	16 100	23 500	600	210 090	193 998
	12	90	25.5	60	15	9	14	12	40	80	M8×28	31 600	43 300	1 650	513 2 680	470 2 460

LWF

Example of identification number of assembled set

Model code Dimensions Part code Preload symbol Classification symbol Interchangeable code Supplemental code

LWFH 60 C2 R800 T1 P /U

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Model	LWFH	Flange type mounting from top / bottom
---------	------	--

② Size	40, 60, 90
--------	------------

③ Number of slide unit (2)	
----------------------------	--

④ Length of track rail (800 mm)	
---------------------------------	--

⑤ Preload amount	No symbol	Standard
	T1	Light preload
	T2	Medium preload

⑥ Accuracy class	H	High
	P	Precision
	SP	Super precision

⑦ Interchangeable	No symbol	Non-interchangeable specification
	S1	S1 specification
	S2	S2 specification


⑧ Special specification	A, C, D, E, F, I, J, L, LF
	MN, N, Q, U, W, Y, Z

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

IKO Linear Way F


Flange type mounting from top / bottom


Shape	LWFF			
Size	33	37	42	69

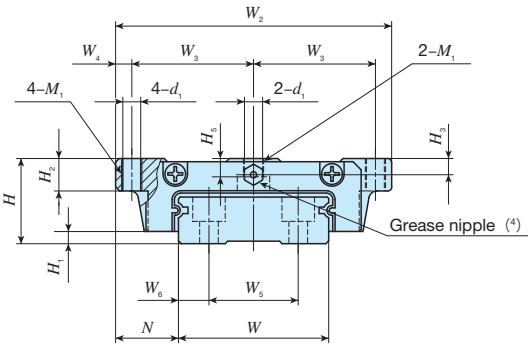

Identification number	Interchangeable	Mass(Ref.)		Dimensions of assembly			Dimensions of slide unit												
							mm												
LWF series (No C-Lube)		Slide unit kg	Track rail kg/m	H	H ₁	N	W ₂	W ₃	W ₄	L ₁	L ₂	L ₃	L ₄	d ₁	M ₁	H ₂	H ₃	H ₅	
LWFF 33	○	0.14	2.41	17	2.5	13.5	60	26.5	3.5	54	26	35.3	56	3.3	M4	6	3.2	3.7	
LWFF 37	○	0.23	3.05	21	3	15.5	68	30	4	62	29	40	66	4.4	M5	8	4	4.5	
LWFF 42	○	0.49	4.30	27	3	19	80	35	5	75	40	52.2	86	5.3	M6	10	6	7	
LWFF 69	○	1.40	9.51	35	4	25.5	120	53.5	6.5	109	60	79.5	120	7	M8	14	8	8	

- Notes (1) Track rail lengths *L* are shown in Table 2.1 on page II – 138.
- (2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176.
- (3) The direction of basic dynamic load rating (*C*), basic static load rating (*C₀*), and static moment rating (*T₀*, *T_x*, *T_y*) are shown in the sketches below. The upper values of *T_x* and *T_y* are for one slide unit and the lower values are for two slide units in close contact.
- (4) The shapes of grease nipple vary by size. The specifications are shown in Table 15 on page II – 146.

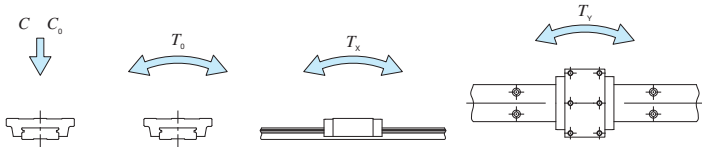

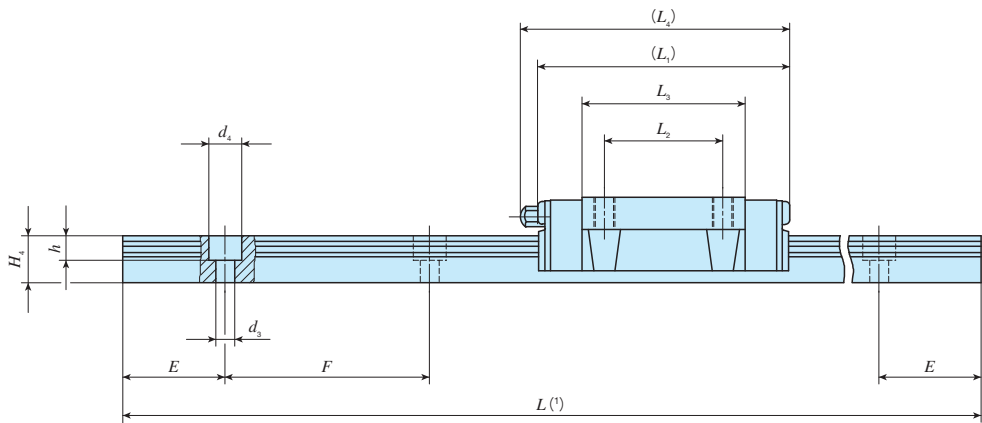

	Dimensions of track rail									Appended mounting bolt for track rail ⁽²⁾ mm Bolt size× ℓ	Basic dynamic load rating ⁽³⁾ C N	Basic static load rating ⁽³⁾ C ₀ N	Static moment rating ⁽³⁾		
	mm												T ₀ N · m	T _x N · m	T _y N · m
	W	H ₄	W ₅	W ₆	d ₃	d ₄	h	E	F						
	33	10	18	7.5	4.6	8	6	20	40	M4×10	6 530	8 610	146	49.0 292	49.0 292
	37	11.5	22	7.5	4.6	8	6	25	50	M4×12	9 840	12 200	235	80.0 480	80.0 480
	42	14	24	9	4.6	8	6	30	60	M4×16	15 500	19 400	424	165 904	165 904
	69	19.5	40	14.5	7	11	9	40	80	M6×22	34 900	44 100	1 560	581 2 940	488 2 460

LWF

Example of identification number of assembled set

Model code Dimensions Part code Preload symbol Classification symbol Interchangeable code Supplemental code

LWFF **37** **C2** **R800** **T₁** **P** **/U**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Model
LWFF Flange type mounting from top / bottom

② Size
33, 37, 42, 69

③ Number of slide unit (2)

④ Length of track rail (800 mm)

⑤ Preload amount
No symbol Standard
T₁ Light preload
T₂ Medium preload


⑥ Accuracy class
H High
P Precision
SP Super precision


⑦ Interchangeable
No symbol Non-interchangeable specification
S1 S1 specification
S2 S2 specification

⑧ Special specification
A, D, E, F, I, J, L, LF
MN, N, Q, U, V, W, Y, Z

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch


IKO Linear Way F


Block type mounting from top			
Shape			
	LWFS		
Size	33	37	42

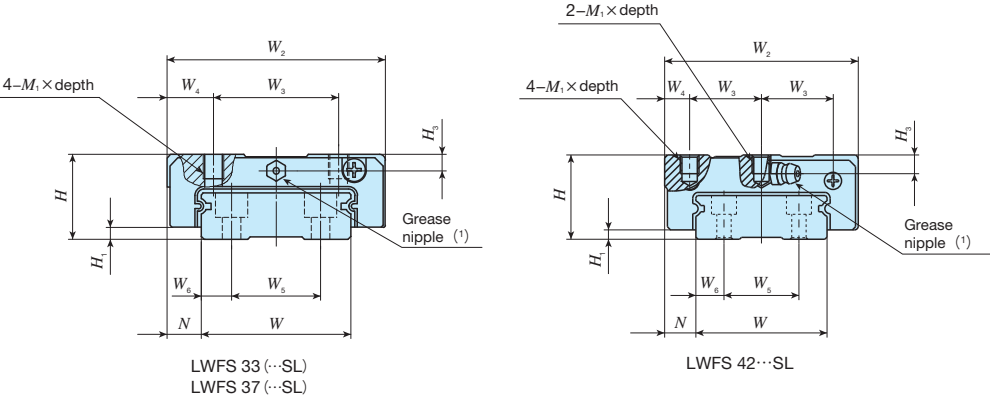

Identification number	Interchangeable	Mass(Ref.)		Dimensions of assembly			Dimensions of slide unit									
		Slide unit kg	Track rail kg/m	H	H ₁	N	W ₂	W ₃	W ₄	L ₁	L ₂	L ₃	L ₄	M ₁ ×depth	H ₃	
LWFS 33	○	0.13	2.41	17	2.5	8.5	50	29	10.5	54	15	35.3	56	M4×5	3.2	
LWFS 33…SL	○															
LWFS 37	○	0.20	3.05	21	3	8.5	54	31	11.5	62	19	40	66	M5×6	4	
LWFS 37…SL	○															
LWFS 42…SL	○	0.40	4.30	27	3	10	62	23	8	75	32	52.2	86	M6×6	6	

- Notes (1) Track rail lengths *L* are shown in Tables 2.1 and 2.2 on page II – 138.
- (2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For stainless steel model, stainless steel bolts are appended.
- (3) The direction of basic dynamic load rating (*C*), basic static load rating (*C₀*), and static moment rating (*T₀*, *T_x*, *T_y*) are shown in the sketches below. The upper values of *T_x* and *T_y* are for one slide unit and the lower values are for two slide units in close contact.
- (4) The shapes of grease nipple vary by size. The specifications are shown in Table 15 on page II – 146.

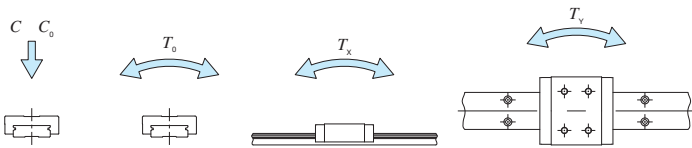

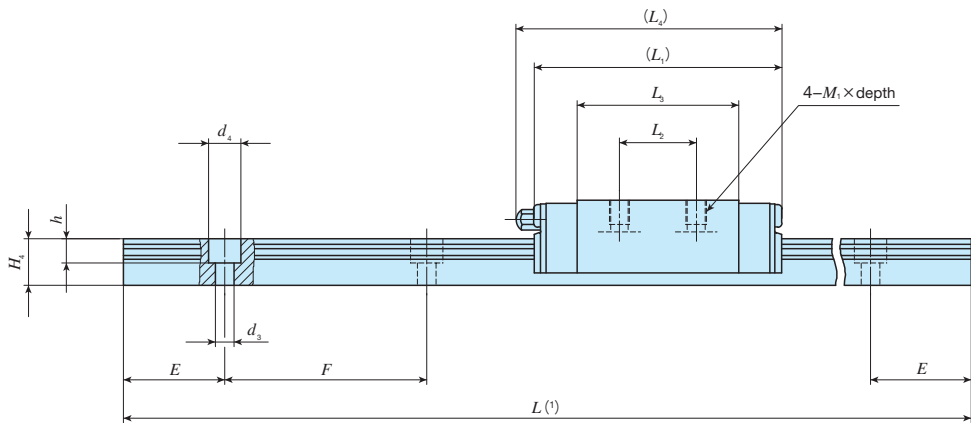

	Dimensions of track rail									Appended mounting bolt for track rail ⁽²⁾ mm Bolt size× ℓ	Basic dynamic load rating ⁽³⁾ C N	Basic static load rating ⁽³⁾ C ₀ N	Static moment rating ⁽³⁾		
	mm												T ₀	T _x	T _y
	W	H ₄	W ₅	W ₆	d ₃	d ₄	h	E	F				N · m	N · m	N · m
	33	10	18	7.5	4.6	8	6	20	40	M4×10	6 530	8 610	146	49.0 292	49.0 292
	37	11.5	22	7.5	4.6	8	6	25	50	M4×12	9 840	12 200	235	80.0 480	80.0 480
	42	14	24	9	4.6	8	6	30	60	M4×16	15 500	19 400	424	165 904	165 904

LWF

Example of identification number of assembled set

Model codeDimensionsPart codeMaterial codePreload symbolClassification symbolInterchangeable codeSupplemental code

LWFS

37

C2

R800

T1

P

/U

1

2

3

4

5

6

7

8

9

① Model	LWFS	Block type mounting from top
② Size	33, 37, 42	

③ Number of slide unit (2)		
④ Length of track rail (800 mm)		
⑤ Material type	No symbol	High carbon steel made
	SL	Stainless steel made

⑥ Preload amount	No symbol	Standard	⑧ Interchangeable	No symbol	Non-interchangeable specification
	T1	Light preload		S1	S1 specification
	T2	Medium preload		S2	S2 specification
⑦ Accuracy class	H	High	⑨ Special specification	A, D, E, F, I, J, L, LF	
	P	Precision		MN, N, Q, U, V, W, Y, Z	
	SP	Super precision			