# www.rodavigo.net +34 986 288118 Servicio de Att. al Cliente

# www.rodavigo.net +34 986 288118 Servicio de Att. al Cliente



## Major product specifications

Driving method	Linear motor
Linear motion rolling guide	Linear Way (ball type)
Built-in lubrication part	Lubrication part "C-Lube" is built-in
Material of table and bed	High-strength aluminum alloy (High carbon steel is used for the LT100CE bed)
Sensor	Select by identification number

## Accuracy

	unit: mm
Positioning repeatability	±0.0005~0.0010
Positioning accuracy	-
Lost motion	-
Parallelism in table motion A	-
Parallelism in table motion B	-
Attitude accuracy	-
Straightness	-
Backlash	-




## Compact, high thrust, and long stroke LT series!

Linear Motor Table LT is a compact and high-precision positioning table with an optical linear encoder built in and with AC linear servomotor incorporated between moving table and bed. Lightweight moving table and large thrust force enables the operation of high acceleration / deceleration and high response. And, the advanced servo technology achieves high static stability and speed stability.

Three types, consisting of Compact type LT···CE, Long stroke type LT···LD, and High thrust type LT···H, are listed on lineup, which allows customers to select the most suitable model depending on the usage.


#### Linear Motor Table LT specification list

	Compact type LT···CE				Long stroke type LT…LD										
Model and size	L	T100CE	G	LT150CEG		L	LT130LDG		LT170LDG		LT170LDV				
woder and size						21/									
Sectional shape	100		150		130		170								
Maximum thrust N	150		450			150			450			190			
Rated thrust N		15		60 15		15		60		25					
Maximum load mass kg		15			45		15 45			28					
Effective stroke length mm		1000		1200			2760			2720			2720		
Resolution $\mu$ m	0.1	0.5	1.0	0.1	0.5	1.0	0.1	0.5	1.0	0.1	0.5	1.0	0.1	0.5	1.0
Maximum speed mm/s	700	2000	2000	700	2000	2000	700	2000	3000	700	2000	2000	700	2000	3000
Positioning repeatability $\mu$ m	±0.5	±0.5	±1.0	±0.5	±0.5	±1.0	±0.5	±0.5	±1.0	±0.5	±0.5	±1.0	±0.5	±0.5	±1.0




#### **IKO** Linear Motor Table LT

#### Sectional Structure of Linear Motor Table LT

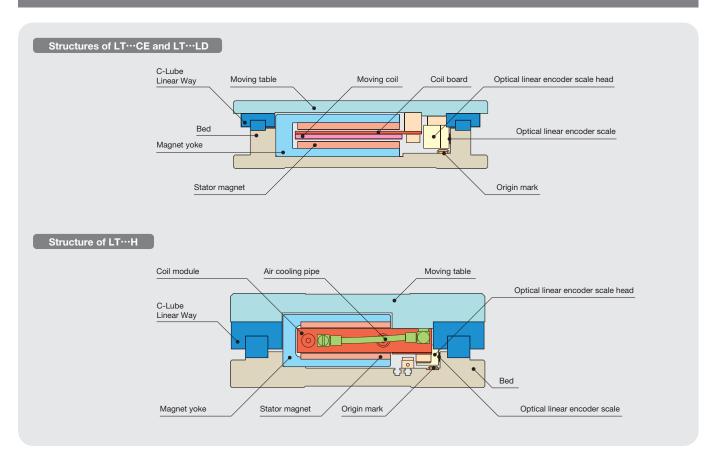


## Operating principle of Linear Motor Table LT

Linear Motor Table LT consists of moving field coil and stator having a magnet arranged facing the inside of C-type yoke. Magnetic flux vertically exerted by magnet and rotational flux generated around the coil by electric current causes the coil to be forced horizontally. (Fleming's left-hand rule)




By switching the coil current to certain direction corresponding to the flux direction, continuous thrust force in a certain direction can be obtained and linear motions of the rotator is maintained. In the High Thrust Series, as the coils are densely arranged in vertical magnetic flux generated by a pair of coil yokes arranged one above the other, it can produce extremely high thrust force although it is small.



[Compact type]


LT...CE is a compact linear motor table with high thrust force generating capability, which uses C-Lube Linear Way ML, miniature linear motion rolling guide in the table guiding parts and adopts lightweight aluminum alloy in the moving table.

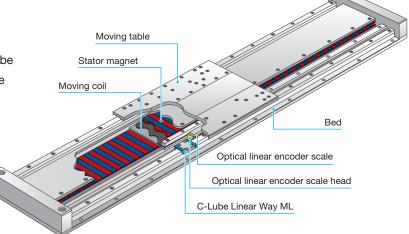

# Points

#### Compact


Low profile design with downsizing thoroughly pursued by adopting C-Lube Linear Way ML and small optical linear encoder. Minimum sectional height of 30mm (LT100CE) is achieved.



## High speed stability

Direct drive and advanced servo technology has achieved high speed stability.






\* Value when using ADVA driver.

### Static stability


Advanced servo technology has achieved high static stability.



\* Value when using ADVA driver.

#### High acceleration / deceleration and high response

This unit is small but can produce a great thrust force. Aluminum alloy-made and lightweight moving table has achieved the positioning by high acceleration / deceleration and high response. It contributes to shortening of tact time.



1N=0.102kgf=0.2248lbs. 1mm=0.03937inch


II-286

#### **IKO** Linear Motor Table LT



## [Long stroke type]

Using C-Lube Linear Way ME of the jointing specification track rail in the table guiding parts, the LT…LD is a linear motor table enabling the long stroke and high-speed operation.

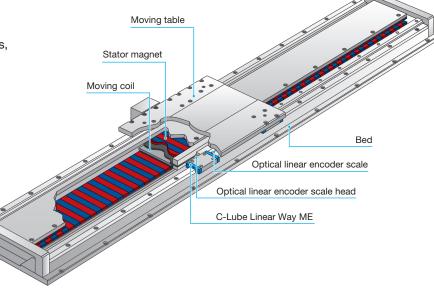


# **Points**

#### High speed

Direct drive enables both high-precision positioning and high speed. Supports high speed operation required for long stroke motion. It is possible to

perform high-speed motion of up to 3,000mm/s.




## Super long stroke

Adopting C-Lube Linear Way ME of jointing specification track rail, this unit has achieved long stroke of up to 2,760mm specific to linear motor driving.



## [ High thrust type ]


LT···H uses C-Lube Linear Way ME in the table guiding parts and can produce the biggest thrust force among Linear Motor Table LT units without impairing the compact feature, so that it is a linear motor table best suited for precision positioning of a heavy load.

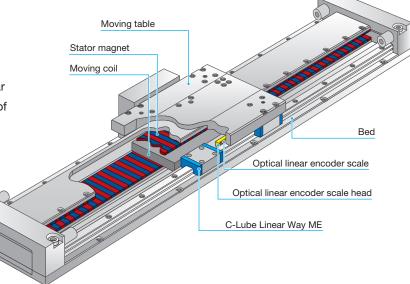


# Points

### High thrust


Although this table is compact in shape, it can produce maximum thrust force of 900N. This unit is best suited to the precision positioning of heavy load.






#### High acceleration / deceleration


Lightweight table and high thrust have achieved high acceleration / deceleration and high response.







## Air cooling

Cooling mechanism for suppressing the heating of motor section is optionally set. It enables shortening of tact time and contributes to improving the production efficiency.





1N=0.102kgf=0.2248lbs. 1mm=0.03937inch

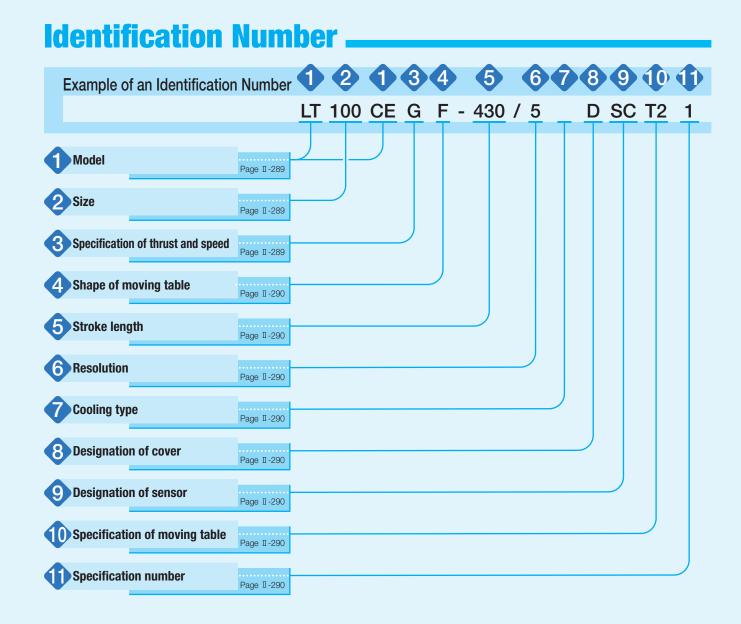

## **Identification Number and Specification**

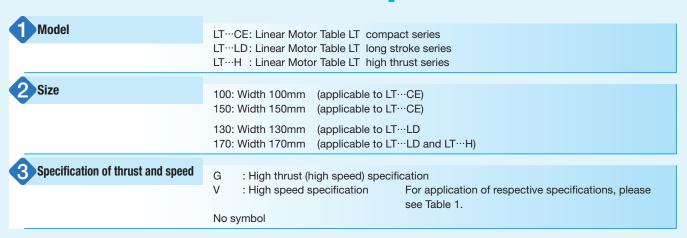


Table 1 Application of thrust force and speed symbols

Model	Size	Thrust / speed specification				
	Size	G	V	No symbol		
ITCE	100	0	_	_		
LT···CE	150	0	_	_		
ITI.D.	130	0	_	_		
LT···LD	170	0	0	_		
LT···H	170	_	_	0		

4 Shape of moving table S: Standard F: With flange When selecting S, set "No symbol" in the entry of section 3 "Designation of cover". When selecting F, select D in the entry of section ③ "Designation of cover". 5 Stroke length

Select a stroke length from the list of Table 2.

#### Table 2 Stroke length

Model and size	Stroke length mm
LT100CEG (S, F)	200, 400, 600, 800, 1 000
LT100CEG (S, F)···/T2	230, 430, 630, 830
LT150CEG (S, F)	400, 600, 800, 1 000, 1 200
LT150CEG (S, F)···/T2	350, 550, 750, 950
LT130LDGS	240, 720, 1 200, 1 680, 2 160, 2 640, 2 760
LT130LDGS···/T2	500, 980, 1 460, 1 940, 2 420, 2 540
LT130LDGF	240, 720, 1 200, 1 680
LT130LDGF···/T2	500, 980, 1 460
LT170LD (G, V)S	680, 1 160, 1 640, 2 120, 2 600, 2 720
LT170LD (G, V)S···/T2	420, 900, 1 380, 1 860, 2 340, 2 460
LT170LD (G, V)F	680, 1 160, 1 640
LT170LD (G, V)F···/T2	420, 900, 1 380
LT170HS	650, 1 130, 1 610, 2 090, 2 570, 2 670
LT170HS···T2	410, 890, 1 370, 1 850, 2 330, 2 430
LT170HF	650, 1 130, 1 610
LT170HF···T2	410, 890, 1 370

6 Resolution	1: 0.1 µm
	5: 0.5 μm
	10: 1.0μm

Cooling type	No symbol: Natural air cooling
	CA : Air cooling (applicable to LT···H)

8 Designation of cover	No symbol: Without cover (applicable to standard moving table)
	D : With cover (applicable to moving table with flange)

9 Designation of sensor	No symbol: Without sensor  SC : Sensor (limit and pre-origin), with sensor rail (applicable to LT···CE)
	LT···LD and LT···H have a sensor built-in. For the entry of section 4, set "No symbol".

<b>A</b>	
Specification of moving table	No symbol: Single table
	T2 : Twin table

Specification number	1 : Specification number 1
	The specification number is limited to 1.

## **Specifications**.

#### Table 3 LT···CE performance

Model a	nd size	LT100CEG			LT150CEG			
Maximum thrust(1)	N	150 (120)			450 (350)			
Rated thrust	N		15			60		
Maximum load mass	kg		15 (12)			45 (35)		
Resolution	μm	0.1	0.5	1.0	0.1	0.5	1.0	
Maximum speed(2)	mm/s	700 2 000 2 000			700	2 000	2 000	
Positioning repeatability(3	β) μm	±0.5	±0.5	±1.0	±0.5	±0.5	±1.0	

Notes (1) The duration of maximum thrust is up to 1 second.

- (2) This speed may not be reached depending on the max. output frequency of the controller used.
- (3) When the temperature of the product is constant.

Remark: The value in ( ) is when the ADVA driver is used.

Table 4 LT···LD performance

Model and size	LT130LDG				LT170LDG		LT170LDV			
Maximum thrust(1) N		150 (120)			450 (350)		190 (145)			
Rated thrust N		15			60			25		
Maximum load mass kg		15 (12)			45 (35)			28 (20)		
Resolution µm	0.1	0.5	1.0	0.1	0.5	1.0	0.1	0.5	1.0	
Maximum speed (2) mm/s	700	2 000	3 000	700	2 000	2 000	700	2 000	3 000	
Positioning repeatability(3) $\mu$ m $\pm 0.5$ $\pm 0.5$ $\pm 1.0$		±0.5	±0.5	±1.0	±0.5	±0.5	±1.0			

Notes (1) The duration of maximum thrust is up to 1 second.

- (2) This speed may not be reached depending on the max. output frequency of the controller used.
- (3) When the temperature of the product is constant.

Remark: The value in ( ) is when the ADVA driver is used.


Table 5 LT···H performance


Item	Model and size	LT170H						
Maximum th	nrust(1) N		900					
Rated	Natural air cooling N	120						
thrust(2)	Air cooling (3) N		150					
Maximum Id	oad mass kg	90						
Resolution	μm 0.1 0.5 1.0			1.0				
Maximum s	peed (4) (5) mm/s	700 1 500(2 000) 1 500(2 000						
Positioning re	epeatability(6) µm	±0.5 ±0.5 ±1.0						


Notes (1) The duration of maximum thrust is up to 1 second.

- (2) In the case where the unit is fixed on a steel-made cradle under ambient temperature of 0 to 25°C. For more information, please see Fig. 12 on page Ⅱ-294.
- (3) This is under air flow rate of 30NL/min.
- $\ensuremath{^{(4)}}$  For the speed exceeding 1,500mm/s, please contact IKO.
- (5) This speed may not be reached depending on the max. output frequency of the controller used.
- (6) When the temperature of the product is constant.


■ Thrust characteristics of LT···CE



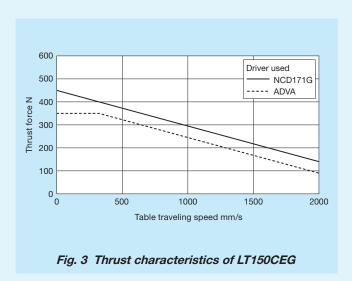



Remark: These are values calculated based on the thrust force with table moving speed set to 1,000mm/s.



Remark: These are values calculated based on the thrust force with table moving speed set to 1,000mm/s.

#### **Specifications**

#### ■ Thrust characteristics of LT···LD







Fig. 5 Thrust characteristics of LT130LDG





Remark: These are values calculated based on the thrust force with table moving speed set to 1,000mm/s.

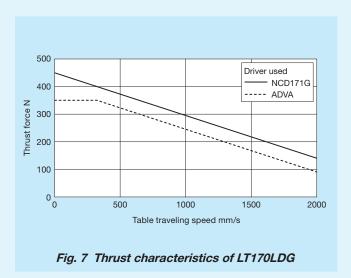




Remark: These are values calculated based on the thrust force with table moving speed set to 1,000mm/s.

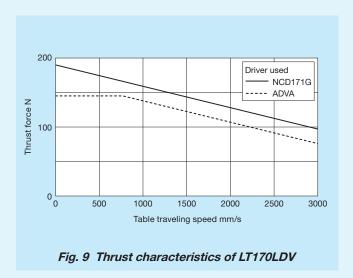





Remark: These are values calculated based on the thrust force with table moving speed set to 1,000mm/s.

#### ■ Thrust characteristics of LT···H

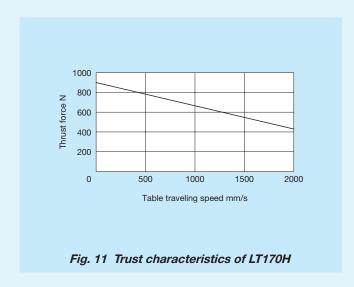






Remark: These are values calculated based on the thrust force with table moving speed set to 1,000mm/s.

## **Mounting**

For the processing accuracy of the Precision Positioning Table mounting surface and the tightening torque of the fixing screws, see page II-29.


## **Sensor Specification**

Table 6.1 Sensor timing chart for single table of LT···CE, LT···LD, and LT···H

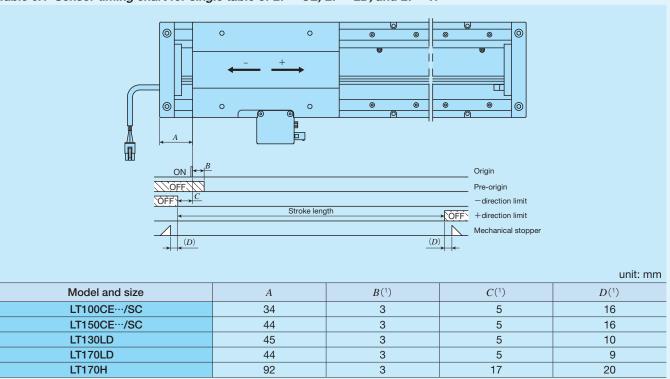

Note (1) Respective values are for reference and are not guaranteed values. For detailed dimensions, please contact IKO. Remark: For the specifications of respective sensors, please see the section of sensor specification in General Explanation.

Table 6.2 Sensor timing chart for twin tables of LT···CE, LT···LD, and LT···H

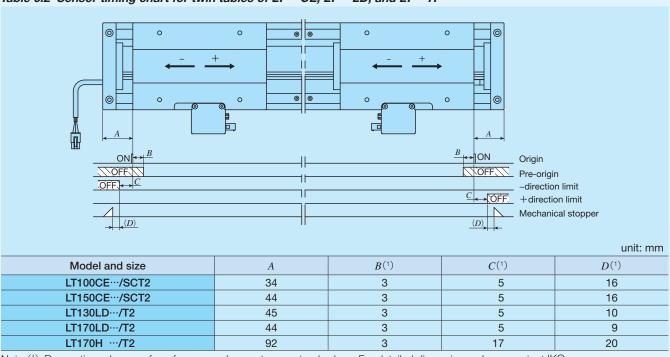

Note (1) Respective values are for reference and are not guaranteed values. For detailed dimensions, please contact IKO. Remark: For the specifications of respective sensors, please see the section of sensor specification in General Explanation.

## **System Configuration**

Dedicated drivers ADVA and NCD171G are available for Linear Motor Table LT, and the system configuration varies depending on the driver used. For ADVA, two types of specification, pulse train specification and high speed network EtherCAT specification, are available. Table 7 shows the correspondence between drivers and tables. Table 8 shows an example of identification number for ADVA, and Tables 9 to 11 show the system configuration for each driver. For detailed driver specification, please see the driver specification on page II-353 to II-356 and II-357.

Please also note that the driver (MR-J4-10B made by Mitsubishi Electric Corporation) compatible with SSCNET II/H and that compatible with MECHATROLINK (Σ-7 Series AC servo amplifier made by Yaskawa Electric Corporation) will be prepared based on usage. If needed, please contact IKO.

Table 7 Identification numbers of Linear Motor Tables LT...CE, LT...LD, LT...H and applicable drivers

Driver type	Applicable Linear Motor Table model
ADVA	LT···CE、LT···LD、LT···H
NCD171G	Limbe, Limb, Limh

#### Table 8 Identification number for ADVA

ADVA	-	01NL	EC	/	LT100CEG	
(1) Model		(2)	(3)		(4)	

(2) Current and v	(2) Current and voltage/maximum applicable motor capacity					
01NL		Single-phase / Three-phase 200 V, 100 W (Applicable to LT···CE, LT···LD)				
08NL	Single-phase / Three-phase 200 V, 750 W (Applicable to LT170H)					
(3) Command ty	ре					
No symbol		Pulse train command				
EC		EtherCAT				
·						

(4) Applicable Linear Motor Table model						
LT100CEG	LT100CEG					
LT150CEG	LT150CEG					
LT130LDG	LT130LDG					
LT170LDG	LT170LDG (high thrust specification)					
LT170LDV	LT170LDV (high speed specification)					
LT170H	LT170H					


#### Setup Software

When operating Linear Motor Table LT through ADVA, initial setting of driver parameters is required. Parameter setting for driver is performed using the setup software. It can also be used for gain adjustment and operational status check. In the driver, the setup software and PC connection cable are not provided. These can be shared in plural drivers but at least 1 set is required. Please prepare these on your own or place an order separately according to your requirement.

#### Motion Network

The ADVA driver for Linear Motor Drive Table LT supports motion network EtherCAT.

Motion network realizes higher performance and higher accuracy of devices free from pulse frequency constraint in pulse train command, noise effects in analog command (voltage command), voltage drop due to cable length and effects of temperature drifting. Reduction of wiring can also be achieved, so synchronization system with more than one table can easily be established.

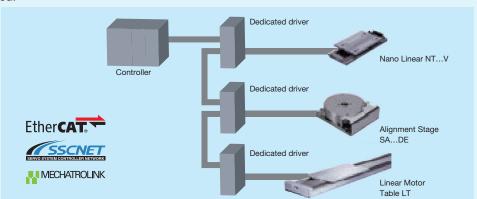

Remark: Please also note that the driver (MR-J4-10B made by Mitsubishi Electric Corporation) compatible with SSCNET II/H and that compatible with MECHATROLINK ( $\Sigma$ -7 Series AC servo amplifier made by Yaskawa Electric Corporation) will be prepared based on usage. If needed, please contact IKO.


Model	Features
EtherCAT	This is an Ethernet-based open network communication system developed by Beckhoff of Germany, allowing real time control. High speed communication and high accuracy inter-node synchronization provide higher performance and higher accuracy of devices. In addition, Ethernet cables available on the market can be used and various wiring types can be supported.
SSCNET Ⅲ/H	This is a motion network communication system for servo system control developed by Mitsubishi Electric Corporation. It applies the optical fiber cables, so noise immunity is improved relative to conventional SSCNET.
MECHATROLINK	The open field network communication that connects the controller and various components.  Developed by Yaskawa Electric Corporation and managed by MECHATROLINK Members Association.

1N=0.102kgf=0.2248lbs. 1mm=0.03937inch


#### **System Configuration**

#### Table 9 System configuration for LT with driver ADVA (···EC)

Example of system configuration for single table



Example of system configuration for twin table

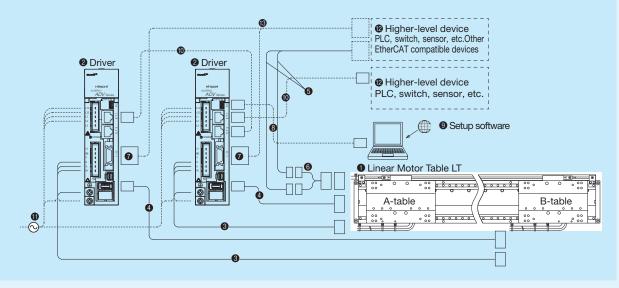

No.	Name	Identification number					
0	Linear motor table	Please see pages of II-300 to II-309.					
2	Driver	Please see Table 8 to select suitable driver for Linear Motor Table model.					
3	Motor extension cord	TAE20V7-AM□□ (applicable to LT···CE, LT···LD)					
•	Wotor extension cord	TAE20V9-AM□□ (applicable to LT···H)					
4	Encoder extension cord	TAE20V8-EC□□ (applicable to LT···CE, LT···LD)					
4	Encoder extension cord	TAE20W0-EC□□ (applicable to LT···H)					
6	Sensor extension cord (3)	TAE10V8-LC□□					
6	Limit branch cord (0.1m)	TAE20V2-BC					
7	I/O connector	TAE20R5-CN <sup>(1)</sup> (applicable to driver for pulse train command)					
V		TAE20V5-CN <sup>(2)</sup> (applicable to driver for EtherCAT)					
8	PC connection cable	USB mini B cable					
•	PC connection cable	This must be prepared by customer.					
9	Setup software	ProDriveNext					
	Setup software	Please download from the official website of Hitachi Industrial Equipment Systems Co., Ltd.					
0	Ethernet cable						
•	Power cord	This must be prepared by customer.					
Ø	Higher-level device	This must be prepared by customer.					
®	I/O connector connection cable						

Note(1) I/O connector TAE20R5-CN is a combined product of 10150-3000PE (connector) and 10350-52F0-008 (cover) from 3M Japan Limited.


- (2) I/O connector TAE20V5-CN is a combined product of 10120-3000PE (connector) and 10320-52F0-008 (cover) from 3M Japan Limited.
- (3) Signal lines #9 and #11 of the sensor extension cord for the B-table are not in use.

Remark The lengths of motor extension cord, encoder extension cord, and sensor extension cord are specified in the 🖂 located at the end of the identification number for length of 3 to 10m in units of 1m.


The cord length is specified in two digits even when the length is less than 10m. (For 3m: TAE20V7-AM03)

#### Table 10 System configuration using programmable control unit NCD171G

• Example of system configuration for single table

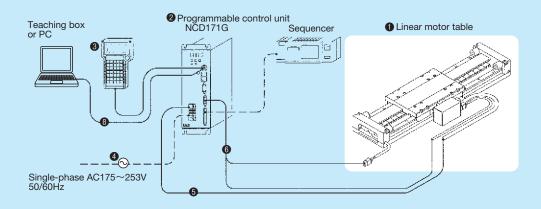

• Example of system configuration for twin table

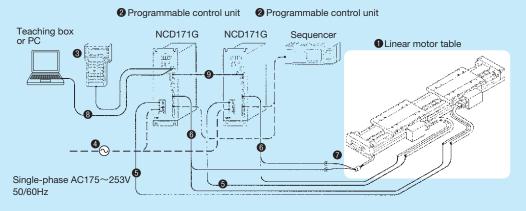

No	Name	Identification number							
No.		LT···CE	LT···CE/SC	LT····LD	LT···H				
0	Linear motor table		Please see pages of II-300 to II-309						
2	Programmable control unit		NCD171G-L2620 NCD171G-L6820						
3	Teaching box	TAE1050-TB							
4	Power cord	This must be prepared by customer.							
6	Motor extension cord	TAE20C8-MC□□							
6	Encoder extension cord (1)	TAE20S5-EC□□	_	_	_				
•	Limit / Encorder extension cord	_	TAE20V0	)-EC□□	TAE20V1-EC□□				
7	Limit branch cord (0.1m)	TAE20V2-BC							
8	Communication cable (2.0m)	TAE1098-RS							
9	Inter axial cable (1.0m)		TAE10	99-LC					

Note (1) This is applied to LT···CE without sensor. Limit sensor connection cord shown in the configuration example is not included. Remark: The lengths of motor extension cord, encoder extension cord, and limit / encorder extension cord are specified in the fields of 🗆 🗷 located at the end of the identification number with a length from 3 to 10m in units of 1m.

(The limit cord portion is shortened by 1.5m.)

The cord length is specified in two digits even when the length is less than 10m. (For 3m: TAE20C8-MC03)

#### **System Configuration**

#### Two-axis parallel operation

Implementing rigid combination of two sets of Linear Motor Table LT arranged in parallel enables parallel operation by twoaxis driving.


As compared with conventional single-axis driving and single-axis driven method, the two-axis parallel operation enables stabilized positioning mechanism with flame torsion and the delay of right and left drive shafts minimized. This is most suitable for inspection devices that need carrying of large size work and wide moving area such as a flat panel display

Two-axis parallel operation is prepared based on respective usages. For details of product specifications, please contact IKO.

#### Comparison of characteristics by driving method

#### Two-axis parallel operation single-axis driving and single-axis driven method · This is driven by two-axis and can generate large thrust force. · This is driven by single-axis and cannot generate large thrust · Driving of right and left tables enables positioning mechanism force. with table delay and flame torsion minimized. Only single-axis is driving, which is likely to cause the delay of · Table delay and flame torsion are minimized, which ensures high driven-side table and flame torsion. positioning accuracy. Delay of driven-side table and flame torsion tend to occur, which · As compared with two-axis synchronization control system, this cannot ensure the positioning accuracy. can reduce the cost.


System configuration example using programmable control unit NCD171G

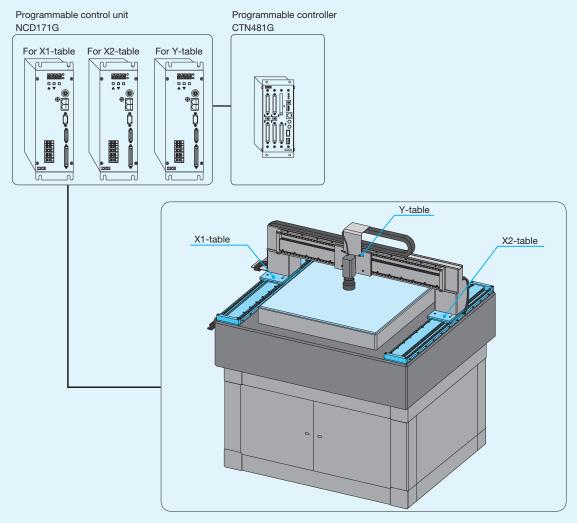

This configuration example is a system configuration of parallel operation of X1 and X2 tables with IKO programmable controller CTN481G set as an upper controller.

## **IKU** Linear Motor Table LT

#### LT100CEGS Single table

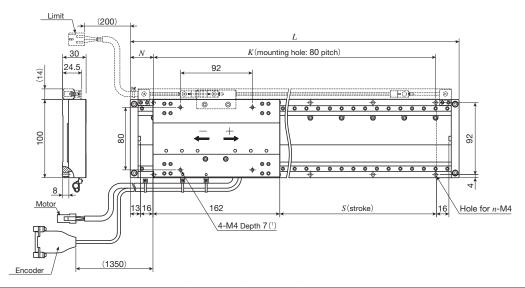

unit: mm


Identification number	Stroke length	Overall length	length Mounting holes of bed			Total mass of table	Mass of moving table
identification number	S(2)	L	N	K	n	kg	kg
LT100CEGS- 200	200	420	50	320	10	4.9	
LT100CEGS- 400	400	620	30	560	16	6.9	
LT100CEGS- 600	600	820	50	720	20	9.0	0.58
LT100CEGS- 800	800	1 020	30	960	26	11.1	
LT100CEGS-1000	1 000	1 220	50	1 120	30	13.1	

Notes (1) Too deep insertion depth of the mounting bolt may affect the running performance of the moving table, so never insert a bolt longer than the depth of the through hole.

(2) For other stroke lengths, please contact IKO.

Remark: Dashed line portions in the dimensional figures indicate the sensor-included specification / SC.

#### LT100CEGS/T2 Twin table

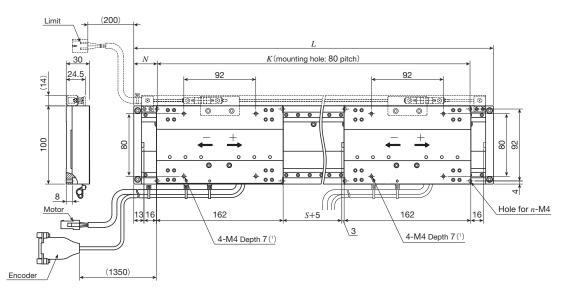

unit: mm

Identification number		Stroke length	Overall length	Moun	ting holes o	of bed	Total mass of table	Mass of moving table
	identification number	S(2)	L	N	K	n	kg	kg
	LT100CEGS-230/T2	230	620	30	560	16	7.5	
	LT100CEGS-430/T2	430	820	50	720	20	9.6	0.50
	LT100CEGS-630/T2	630	1 020	30	960	26	11.7	0.58
	LT100CEGS-830/T2	830	1 220	50	1 120	30	13.7	


Notes (1) Too deep insertion depth of the mounting bolt may affect the running performance of the moving table, so never insert a bolt longer than the depth of the through hole.

(2) For other stroke lengths, please contact IKO.

Remark: Dashed line portions in the dimensional figures indicate the sensor-included specification / SC.

## **IK** Linear Motor Table LT

#### LT100CEGF/D Single table with cover

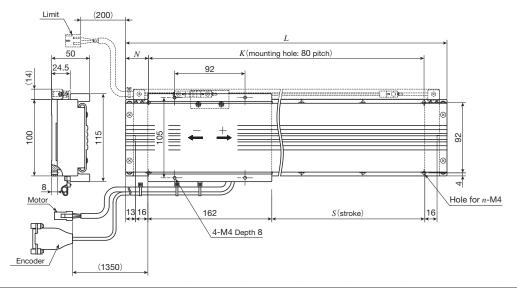

unit: mm


unit: mm

Identification number	Stroke length	Overall length	Mounting holes of bed			Total mass of table	Mass of moving table
identification number	<i>S</i> (¹)	L	N	K	n	kg	kg
LT100CEGF- 200/D	200	420	50	320	10	5.6	
LT100CEGF- 400/D	400	620	30	560	16	7.8	
LT100CEGF- 600/D	600	820	50	720	20	10.0	0.93
LT100CEGF- 800/D	800	1 020	30	960	26	12.2	
LT100CEGF-1000/D	1 000	1 220	50	1 120	30	14.4	

Note (1) For other stroke lengths, please contact IKO.

Remark: Dashed line portions in the dimensional figures indicate the sensor-included specification / SC.

#### LT100CEGF/DT2 Twin table with cover

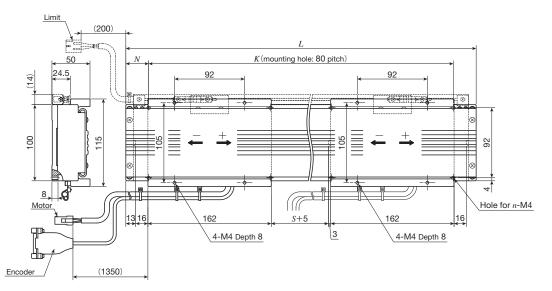


Identification number	Stroke length	Overall length	Moun	ting holes	of bed	Total mass of table	Mass of moving table
identification number	S(1)	L	N	K	n	kg	kg
LT100CEGF-230/DT2	230	620	30	560	16	8.7	
LT100CEGF-430/DT2	430	820	50	720	20	10.9	0.93
LT100CEGF-630/DT2	630	1 020	30	960	26	13.2	0.93
LT100CEGF-830/DT2	830	1 220	50	1 120	30	15.4	

Note (1) For other stroke lengths, please contact IKO.

Remark: Dashed line portions in the dimensional figures indicate the sensor-included specification / SC.

1N=0.102kgf=0.2248lbs. 1mm=0.03937inch

### LT150CEGS Single table

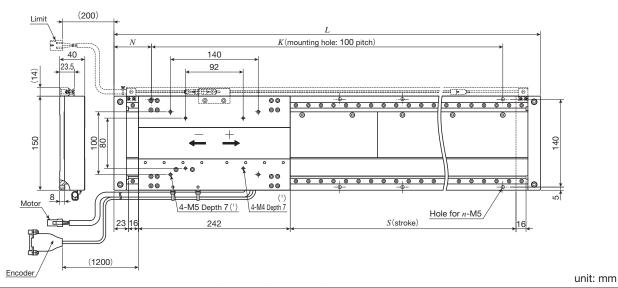


Mounting holes of bed Overall length Total mass of table Mass of moving table Stroke length Identification number Lkg kg N K LT150CEGS- 400 400 720 600 14 12.4 60 LT150CEGS- 600 600 920 800 15.5 60 18 LT150CEGS- 800 800 1 120 1 000 18.6 60 22 1.5 LT150CEGS-1000 1 000 1 320 60 1 200 26 21.6 LT150CEGS-1200 1 200 1 520 60 1 400 30 24.7

Notes (1) Too deep insertion depth of the mounting bolt may affect the running performance of the moving table, so never insert a bolt longer than the depth of the through hole.

(2) For other stroke lengths, please contact IKO.

Remark: Dashed line portions in the dimensional figures indicate the sensor-included specification / SC.

#### LT150CEGS/T2 Twin table

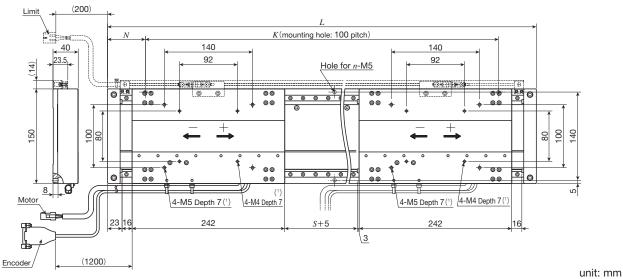

Identification number	Stroke length	Moun	ting holes	of bed	Total mass of table	Mass of moving table	
identification number	S(2)	L	N	K	n	kg	kg
LT150CEGS-350/T2	350	920	60	800	18	17.0	
LT150CEGS-550/T2	550	1 120	60	1 000	22	20.1	4.5
LT150CEGS-750/T2	750	1 320	60	1 200	26	23.1	1.5
LT150CEGS-950/T2	950	1 520	60	1 400	30	26.2	

Notes (1) Too deep insertion depth of the mounting bolt may affect the running performance of the moving table, so never insert a bolt longer than the depth of the through hole.


(2) For other stroke lengths, please contact IKO.

Remark: Dashed line portions in the dimensional figures indicate the sensor-included specification / SC.

1N=0.102kgf=0.2248lbs. 1mm=0.03937inch

## **IK** Linear Motor Table LT

#### LT150CEGF/D Single table with cover

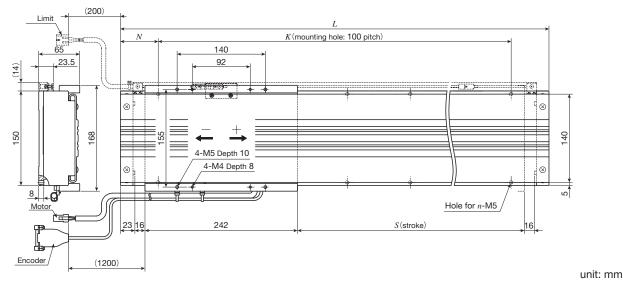


Identification number	Stroke length	Moun	ting holes o	of bed	Total mass of table	Mass of moving table	
identification number	<i>S</i> (¹)	L	N	K	n	kg	kg
LT150CEGF- 400/D	400	720	60	600	14	14.8	
LT150CEGF- 600/D	600	920	60	800	18	18.1	
LT150CEGF- 800/D	800	1 120	60	1 000	22	21.5	2.4
LT150CEGF-1000/D	1 000	1 320	60	1 200	26	24.8	
LT150CEGF-1200/D	1 200	1 520	60	1 400	30	28.2	

Note (1) For other stroke lengths, please contact IKO.

Remark: Dashed line portions in the dimensional figures indicate the sensor-included specification / SC.

#### LT150CEGF/DT2 Twin table with cover

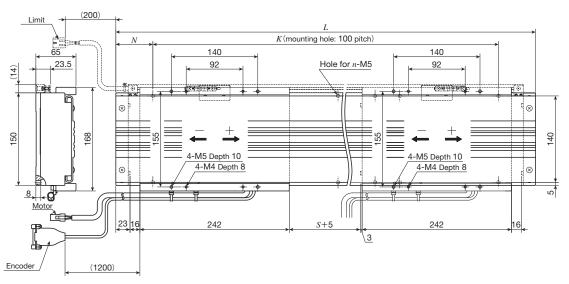


unit: mm

Identification number	Stroke length	Moun	ting holes	of bed	Total mass of table	Mass of moving table	
identification number	S(1)	L	N	K	n	kg	kg
LT150CEGF-350/DT2	350	920	60	800	18	20.5	
LT150CEGF-550/DT2	550	1120	60	1000	22	23.9	2.4
LT150CEGF-750/DT2	750	1320	60	1200	26	27.3	2.4
LT150CEGF-950/DT2	950	1520	60	1400	30	30.6	

Note (1) For other stroke lengths, please contact IKO.

Remark: Dashed line portions in the dimensional figures indicate the sensor-included specification / SC.

## LT130LDGS Single table

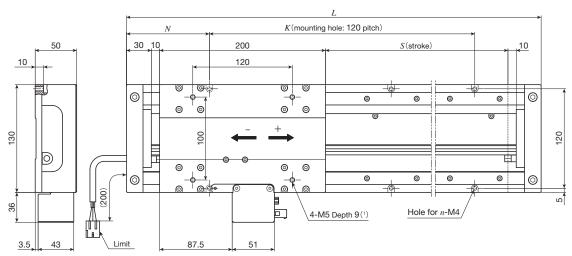


unit: mm

Identification number	Stroke length	Overall length	Moun	ting holes	of bed	Total mass of table	Mass of moving table
identification number	S(2)	L	N	K	n	kg	kg
LT130LDGS- 240	240	520	80	360	8	7.6	
LT130LDGS- 720	720	1 000	80	840	16	13.5	
LT130LDGS-1200	1 200	1 480	80	1320	24	19.4	
LT130LDGS-1680	1 680	1 960	80	1800	32	25.3	1.7
LT130LDGS-2160	2 160	2 440	80	2280	40	31.2	
LT130LDGS-2640	2 640	2 920	80	2760	48	37.1	
LT130LDGS-2760	2 760	3 040	80	2880	50	38.6	

Notes (1) Too deep insertion depth of the mounting bolt may affect the running performance of the moving table, so never insert a bolt longer than the depth of the through hole.

(2) For other stroke lengths, please contact IKO.

#### LT130LDGS/T2 Twin table

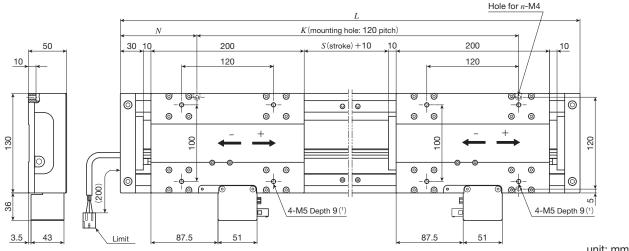

							unit. min
Identification number	Stroke length Overall le		Moun	ting holes	of bed	Total mass of table	Mass of moving table
identification number	$S(^{2})$	L	N	K	n	kg	kg
LT130LDGS- 500/T2	500	1 000	80	840	16	15.2	
LT130LDGS- 980/T2	980	1 480	80	1 320	24	21.1	
LT130LDGS-1460/T2	1 460	1 960	80	1 800	32	27.0	1.7
LT130LDGS-1940/T2	1 940	2 440	80	2 280	40	32.9	1.7
LT130LDGS-2420/T2	2 420	2 920	80	2 760	48	38.8	
LT130LDGS-2540/T2	2 540	3 040	80	2 880	50	40.3	


Notes (1) Too deep insertion depth of the mounting bolt may affect the running performance of the moving table, so never insert a bolt longer than the depth of the through hole.

(2) For other stroke lengths, please contact IKO.

1N=0.102kgf=0.2248lbs. 1mm=0.03937inch

## **IKU** Linear Motor Table LT


### LT130LDGF/D Single table with cover

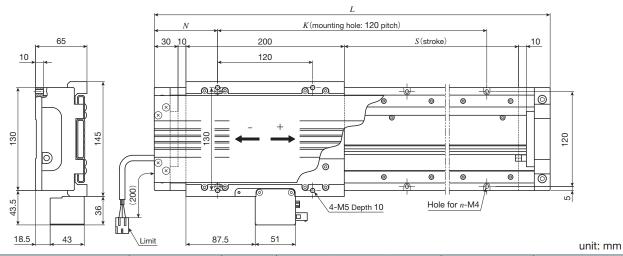

Identification number	Stroke length	Moun	ting holes o	of bed	Total mass of table	Mass of moving table	
identification number	<i>S</i> (¹)	L	N	K	n	kg	kg
LT130LDGF- 240/D	240	520	80	360	8	8.3	
LT130LDGF- 720/D	720	1 000	80	840	16	14.6	2.0
LT130LDGF-1200/D	1 200	1 480	80	1 320	24	20.9	2.0
LT130LDGF-1680/D	1 680	1 960	80	1 800	32	27.2	

Note (1) For other stroke lengths, please contact IKO.


#### LT130LDGF/DT2 Twin table with cover

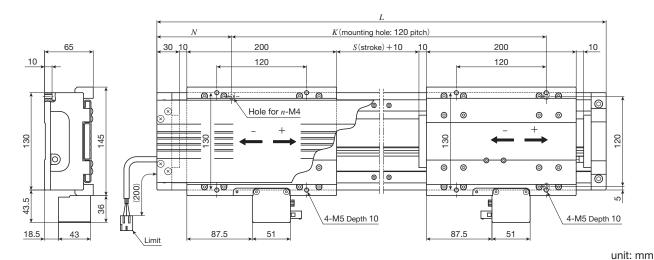

Identification number	Stroke length	Moun	ting holes	of bed	Total mass of table	Mass of moving table	
	S(1)	L	N	K	n	kg	kg
LT130LDGF- 500/DT2	500	1 000	80	840	16	16.6	
LT130LDGF- 980/DT2	980	1 480	80	1 320	24	22.8	2.0
LT130LDGF-1460/DT2	1 460	1 960	80	1 800	32	29.1	

Note (1) For other stroke lengths, please contact IKO.

# LT170LDGS Single table / High thrust specification LT170LDVS Single table / High speed specification

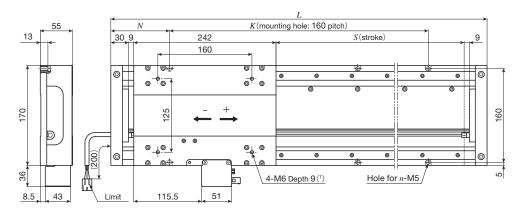


unit: mm

Identification number	Stroke length $S^{(2)}$	Overall length $L$	<b>M</b> oun	ting holes o	of bed	Total mass of table kg	Mass of moving table kg
LT170LDGS- 680 LT170LDVS- 680	680	1 000	100	800	12	22.6	
LT170LDGS-1160 LT170LDVS-1160	1 160	1 480	100	1 280	18	32.7	
LT170LDGS-1640 LT170LDVS-1640	1 640	1 960	100	1 760	24	42.7	0.5
LT170LDGS-2120 LT170LDVS-2120	2 120	2 440	100	2 240	30	52.8	2.5
LT170LDGS-2600 LT170LDVS-2600	2 600	2 920	100	2 720	36	62.9	
LT170LDGS-2720 LT170LDVS-2720	2 720	3 040	80	2 880	38	65.4	

Notes (1) Too deep insertion depth of the mounting bolt may affect the running performance of the moving table, so never insert a bolt longer than the depth of the through hole.

(2) For other stroke lengths, please contact IKO.

# LT170LDGS/T2 Twin table / High thrust specification LT170LDVS/T2 Twin table / High speed specification

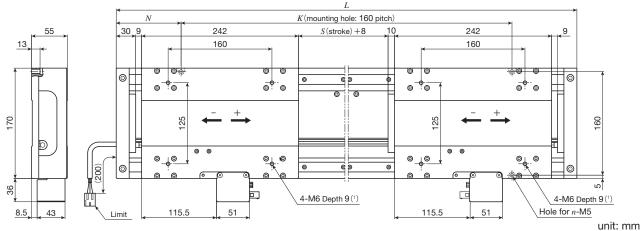

Identification number	Stroke length	Overall length	Moun	ting holes of	of bed	Total mass of table	Mass of moving table
identification number	$S^{(2)}$	L	N	K	n	kg	kg
LT170LDGS- 420/T2 LT170LDVS- 420/T2	420	1 000	100	800	12	25.1	
LT170LDGS- 900/T2 LT170LDVS- 900/T2	900	1 480	100	1 280	18	35.2	
LT170LDGS-1380/T2 LT170LDVS-1380/T2	1 380	1 960	100	1 760	24	45.2	2.5
LT170LDGS-1860/T2 LT170LDVS-1860/T2	1 860	2 440	100	2 240	30	55.3	2.5
LT170LDGS-2340/T2 LT170LDVS-2340/T2	2 340	2 920	100	2 720	36	65.4	
LT170LDGS-2460/T2 LT170LDVS-2460/T2	2 460	3 040	80	2 880	38	67.9	


Notes (1) Too deep insertion depth of the mounting bolt may affect the running performance of the moving table, so never insert a bolt longer than the depth of the through hole.

(2) For other stroke lengths, please contact IKO.

1N=0.102kgf=0.2248lbs. 1mm=0.03937inch

## **IKU** Linear Motor Table LT

# LT170LDGF/D Single table with cover / High thrust specification LT170LDVF/D Single table with cover / High speed specification

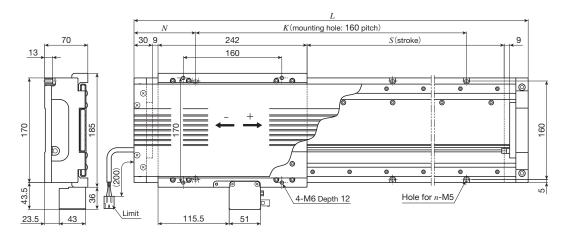


unit: mm

Identification number	Stroke length	Overall length	Moun	ting holes o	of bed		Mass of moving table
	$S^{(1)}$	L	N	K	n	kg	kg
LT170LDGF- 680/D LT170LDVF- 680/D	680	1 000	100	800	12	24.0	
LT170LDGF-1160/D LT170LDVF-1160/D	1 160	1 480	100	1 280	18	34.6	2.8
LT170LDGF-1640/D LT170LDVF-1640/D	1 640	1 960	100	1 760	24	45.2	

Note (1) For other stroke lengths, please contact IKO.

# LT170LDGF/DT2 Twin table with cover / High thrust specification LT170LDVF/DT2 Twin table with cover / High speed specification

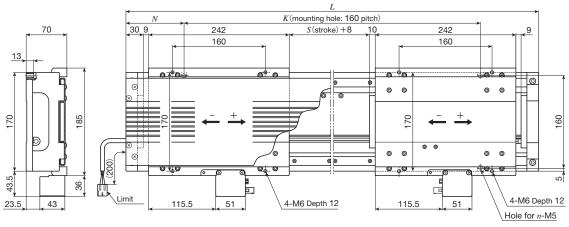


unit: mm

Identification number	Stroke length	Overall length	Moun	ting holes o	of bed	Total mass of table	Mass of moving table
identification number	<i>S</i> ( <sup>1</sup> )	L	N	K	n	kg	kg
LT170LDGF- 420/DT2 LT170LDVF- 420/DT2	420	1 000	100	800	12	26.9	
LT170LDGF- 900/DT2 LT170LDVF- 900/DT2	900	1 480	100	1 280	18	37.5	2.8
LT170LDGF-1380/DT2 LT170LDVF-1380/DT2	1 380	1 960	100	1 760	24	48.0	

Note (1) For other stroke lengths, please contact IKO.

## LT170HS Single table

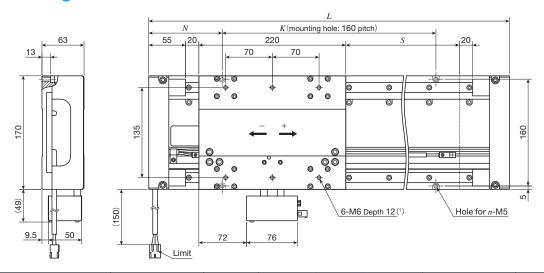


unit: mm

Identification number	Stroke length	Overall length	Mounting holes of bed			Total mass of table	Mass of moving table
identification number	S(2)	L	N	K	n	kg	kg
LT170HS- 650	650	1 020	110	800	12	25.1	
LT170HS-1130	1 130	1 500	110	1 280	18	34.9	
LT170HS-1610	1 610	1 980	110	1 760	24	44.6	4.0
LT170HS-2090	2 090	2 460	110	2 240	30	54.4	4.0
LT170HS-2570	2 570	2 940	110	2 720	36	64.1	
LT170HS-2670	2 670	3 040	80	2 880	38	66.4	

Notes (1) Too deep insertion depth of the mounting bolt may affect the running performance of the moving table, so never insert a bolt longer than the depth of the through hole.

#### LT170HS/T2 Twin table

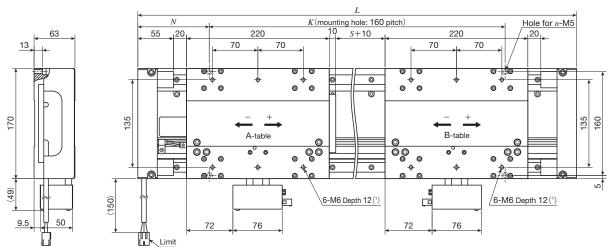

unit: mm

Identification number	Stroke length	Overall length	Mounting holes of bed			Total mass of table	Mass of moving table
identification number	S(2)	L	N	K	n	kg	kg
LT170HS- 410/T2	410	1 020	110	800	12	29.1	
LT170HS- 890/T2	890	1 500	110	1280	18	38.9	
LT170HS-1370/T2	1 370	1 980	110	1760	24	48.6	4.0
LT170HS-1850/T2	1 850	2 460	110	2240	30	58.4	
LT170HS-2330/T2	2 330	2 940	110	2720	36	68.1	
LT170HS-2430/T2	2 430	3 040	80	2880	38	70.4	

Notes (1) Too deep insertion depth of the mounting bolt may affect the running performance of the moving table, so never insert a bolt longer than the depth of the through hole.


(2) For other stroke lengths, please contact IKO.

1N=0.102kgf=0.2248lbs. 1mm=0.03937inch

<sup>(2)</sup> For other stroke lengths, please contact IKO.

## **IK** Linear Motor Table LT

### LT170HF/D Single table with cover

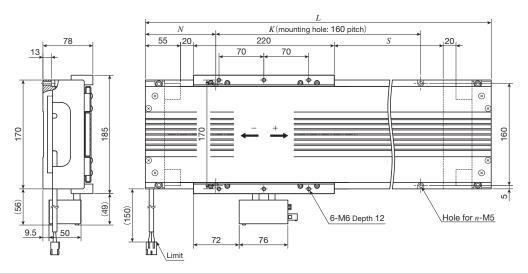


unit: mm

Identification number	Stroke length	Overall length	Mounting holes of bed			Total mass of table	Mass of moving table
	S(1)	L	N	K	n	kg	kg
LT170HF- 650/D	650	1 020	110	800	12	25.5	
LT170HF-1130/D	1 130	1 500	110	1 280	18	35.2	4.4
LT170HF-1610/D	1 610	1 980	110	1 760	24	45.0	

Note (1) For other stroke lengths, please contact IKO.

#### LT170HF/DT2 Twin table with cover

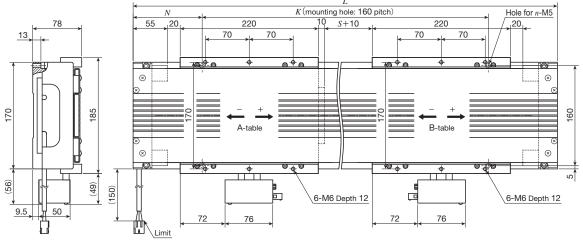

unit: mm

Identification number	Stroke length	Overall length Mounting holes of bed				Total mass of table	Mass of moving table
identification number	S(1)	L	N	K	n	kg	kg
LT170HF- 410/DT2	410	1 020	110	800	12	29.9	
LT170HF- 890/DT2	890	1 500	110	1 280	18	39.6	4.4
LT170HF-1370/DT2	1 370	1 980	110	1 760	24	49.4	

Note (1) For other stroke lengths, please contact IKO.