


<b>Cabezas esférica</b>	<b>Norma DIN 648 serie K</b>
-------------------------	------------------------------

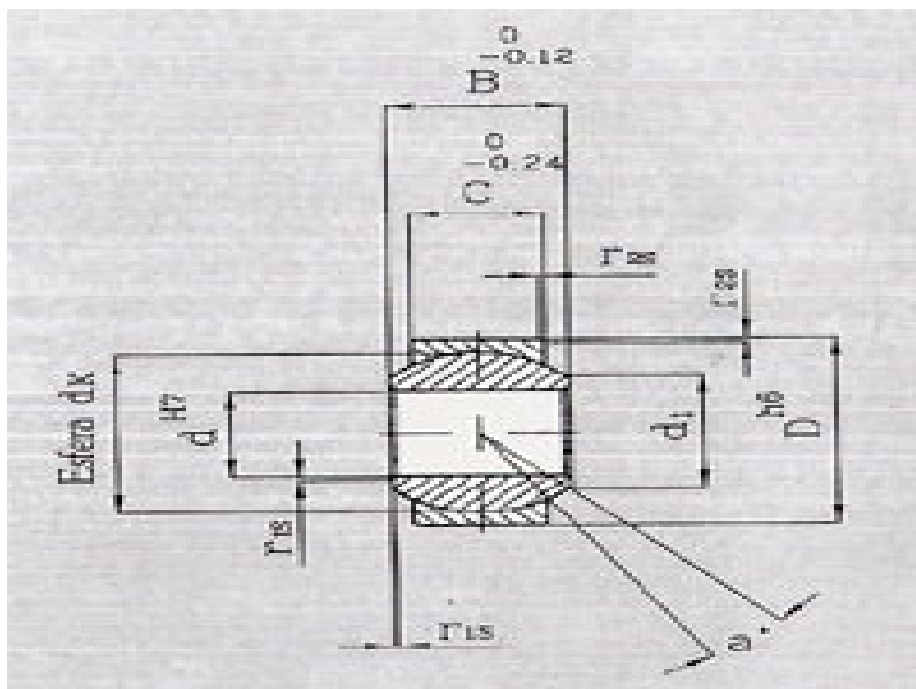

Denom.	d mm	B	C	D	d <sub>1</sub>	d <sub>k</sub>	r <sub>1</sub> smin. r <sub>2</sub> smin.	Carga estática Co(daN)	áng. °	Peso Kg
<b>G5</b>	5	8	6	13	7.7	11.112	0.3	1300	13	0.006
<b>G6</b>	6	9	6.75	16	8.9	12.7	0.3	1700	13	0.009
<b>G8</b>	8	12	9	19	10.4	15.875	0.3	2800	14	0.016
<b>G10</b>	10	14	10.5	22	12.9	19.05	0.3	4000	13	0.025
<b>G12</b>	12	16	12	26	15.4	22.225	0.3	5300	13	0.040
<b>G16</b>	16	21	15	32	19.3	28.575	0.3	8500	15	0.080
<b>G20</b>	20	25	18	40	24.3	34.925	0.3	12500	14	0.150
<b>G30</b>	30	37	25	55	34.8	50.8	0.6	25400	17	0.380
<b>G35</b>	35	43	28	62	37.7	57.15	0.6	32000	19	0.490