

ADJUSTABLE CABLE LOCKOUT




PRODUCT DESCRIPTION

Adjustable Cable Lockout

PRODUCT CODE


LM-A-MCL

The OSHA standard for The Control of Hazardous Energy (Lockout/Tagout): Title 29 (CFR) Part 1910.147

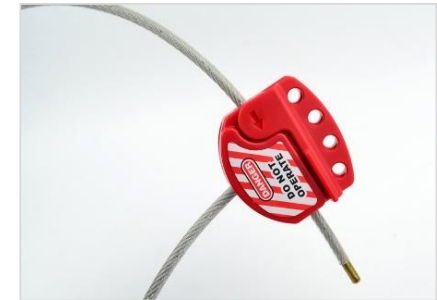

Features

- 4mm diameter x 2 meters pull-tight cable adjusts for a secure fit every time. Also available from 2 to 10 meters long and 6mm diameter
- Integrated safety hasp and cable is ideal for multiple circuit breaker panel and side-by-side gate valve lockouts
- Tough, flexible multi-stranded steel cable is insulated with a clear plastic coating
- Tough, lightweight thermoplastic body withstands chemicals
- Includes high-visibility, re-usable, write-on safety labels
- Identify the responsible person, then erase for the next job



INSTRUCTIONS FOR USE

- Feed the cable end through the points to be locked out, then back through the lockout body
- Cinch it tight to remove any slack with the patented locking feature

CABLE LOCKOUTS



Your Lockout / Tagout Expert

www.lotomaster.eu