



The MayTec Personnel Transfer System

Personnel transfer conveyor


- aluminium base frame
- min. 120 mm total height
- belt options available
- internal drive
- belt speed: 0 - 10 m/min
- optional
- fire safety specification: B1 compliant version
- electrostatic discharge: ESD compliant version

Platform / interchangeable platform

- power supply (electricity, light, water)
- lights
- oil drip trays
- service and access points
- variable working height
- optional
- fire safety specification: B1 compliant version
- electrostatic discharge: ESD compliant version

Project Integration Management

- project implementation
- delivery
- assembly and installation management

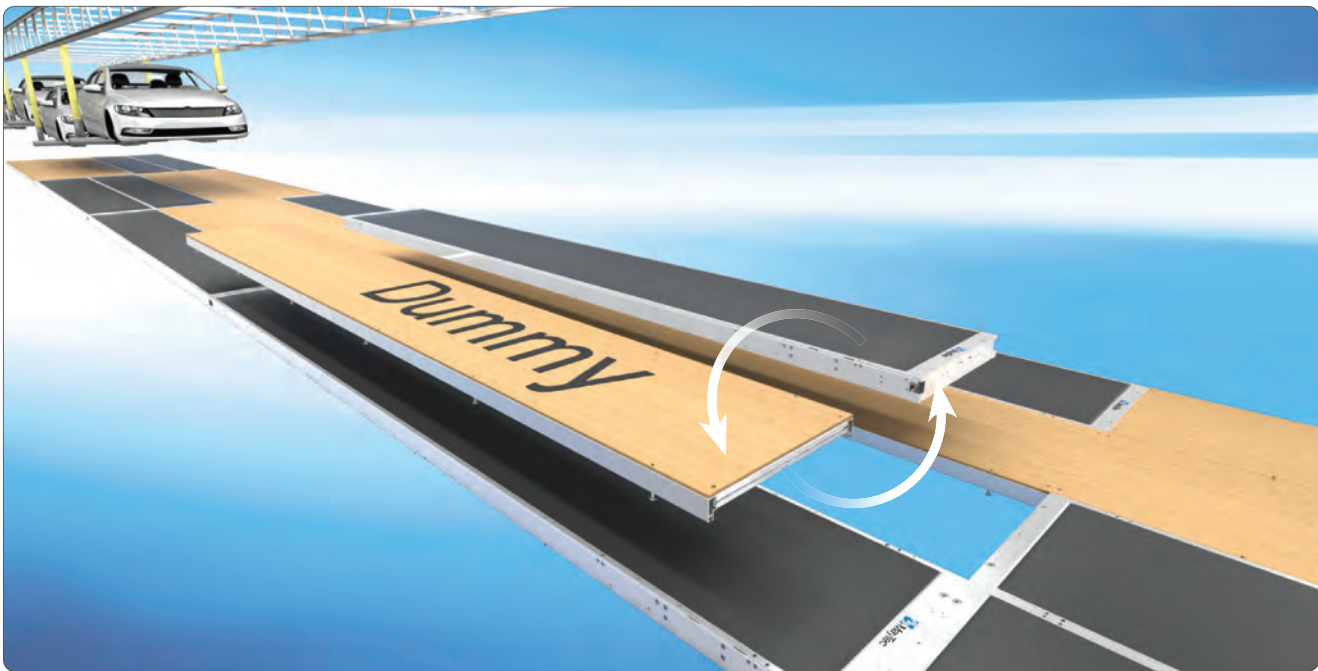

installation of conveyors within the platform according to need
replacement with interchangeable platform
required time for replacement: approximately 15 minutes



in combination with suspension track system



in combination with skid tracks




in combination with floor conveyors




The Personnel Transfer System: Structure

5

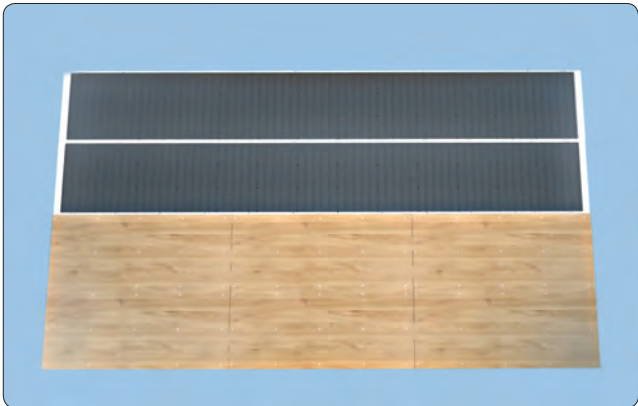

platform system

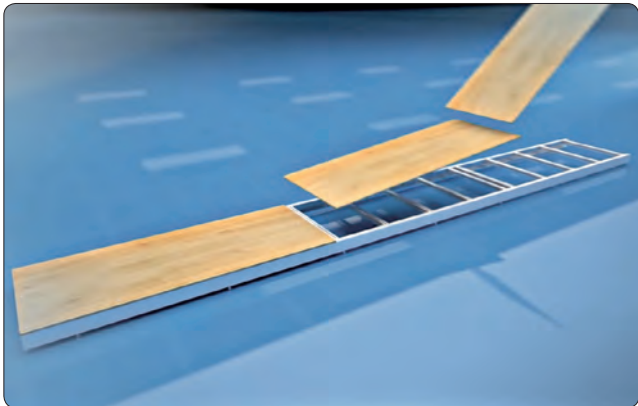


MayTec baseframe with floor panels




conveyor setup with platform




conveyor setup with height adjustable platform

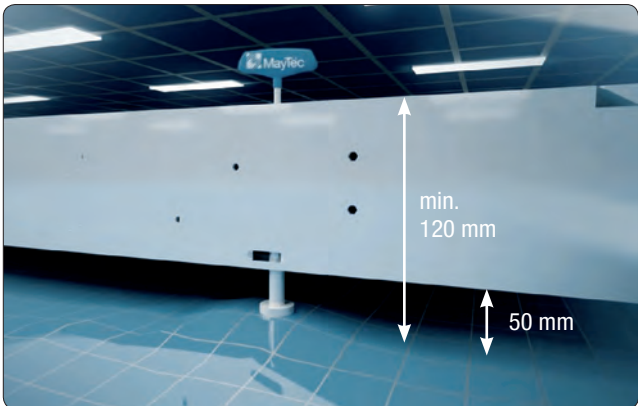


height adjustment for conveyor and platform

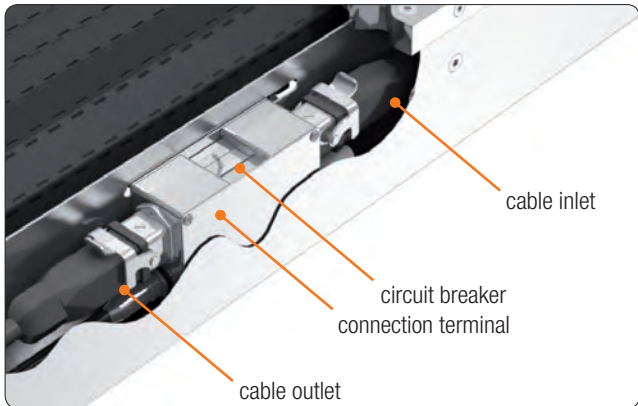

connection terminal with circuit breaker

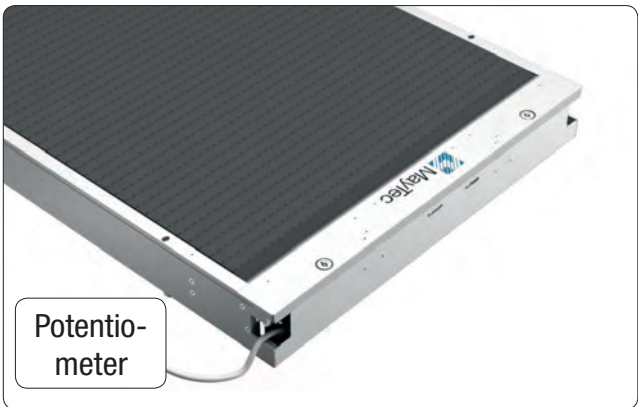

speed adjustment by potentiometer

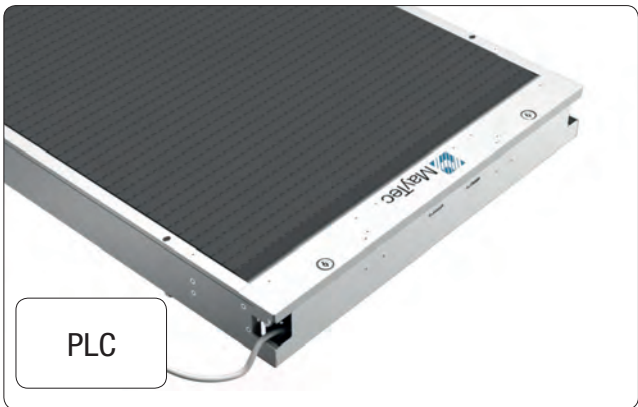

external speed adjustment