

# SLIDE BUSH

## SLIDE BUSH

STRUCTURE AND ADVANTAGES	C-2
TYPES	C-3
BLOCK SERIES	C-6
SPECIFICATIONS	C-7
ACCURACY	C-7
LIFE CALCULATION	C-7
LOAD RATING FOR OPEN TYPE SLIDE BUSH	C-8
MOUNTING	C-8
LUBRICATION	C-11
DUST PREVENTION	C-11
COUNTERMEASURE FOR DUST PREVENTION	C-12
FIT SERIES	C-13
SURFACE TREATMENT ANTIRUST EFFECT	C-14
SPECIAL SPECIFICATIONS	C-14
ACCURACY OF CE·CD TYPE	C-14
USE AND HANDLING PRECAUTIONS	C-15
NOTES ON USAGE OF BLOCK SERIES	C-15
DIMENSION TABLE	C-16~

SLIDE BUSH

## NIPPON BEARING

## SLIDE BUSH

The NB slide bush is a linear motion mechanism utilizing the rotational motion of ball elements. Since linear motion is obtained using a simple mechanism, the slide bush can be used in a wide variety of applications, including transportation equipment, food processing equipment, and semiconductor manufacturing equipment.

## STRUCTURE AND ADVANTAGES

The outer cylinder of slide bush contains a ball retainer that is perfectly designed to control the circulation of ball elements, resulting in smooth linear motion.

**Compact Mechanism**

The NB slide bush uses a round shaft for the guiding axis, resulting in space-saving, which allows for compact designs.

**A Wide Variety of Shapes and Installation Methods**

The NB slide bush is available in various types, standard, clearance-adjustable, open, flange, etc., for a various applications.

**Selection According to Environment**

NB slide bushes are available in standard and anti-corrosion types. Available options include steel-retainer suitable for use in harsh environments and resin retainer for low acoustic, low-cost requirement. Other options can be specified according to the application requirements.

**Compatibility**

The NB slide bush is fully compatible with a variety of shaft types.

**Doublelip-Seal**

Doublelip-seals reduce the grease leakage, keeping the same function as UU seals which prevent the foreign particles from entering the bush. (see page C-11)

**Low Friction**

The raceway surface is precision ground. Since the contact surface between the ball elements and the raceway surface is minimized, the NB slide bush provides low friction compared to other linear motion mechanisms.

**GM Series**

The GM slide bush makes efficient use of resin sub-parts making it possible to achieve an overall weight reduction of 30~50% compared with the SM slide bush. The ball return section is made of resin material, which serves for low noise operation. Also, cost-effectiveness expands the use of slide bush in many applications.


**Block Type Series**

Block type series is a unit of NB slide bush and a block type housing. A variety of block types are available such as precision-machined blocks, resin-made blocks, and cost-effective units, each contributes to higher accuracy, light-weight, and low-cost and design-time saving, respectively.

**FIT Series**


FIT series is a combination of NB slide bush and precision-machined shaft. The best-fit between slide bush and shaft achieves a smooth, high-accuracy performance meeting the customer requirements. (see page C-13)

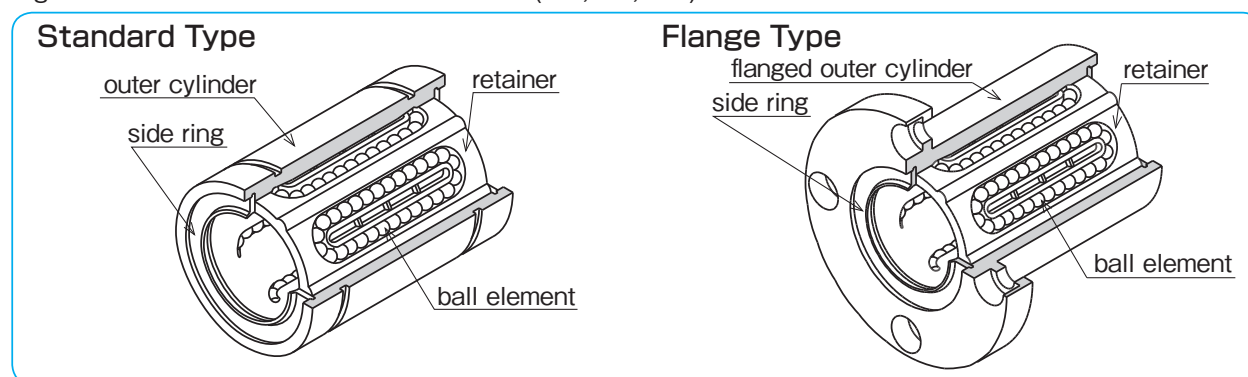Figure C-1 Basic Structure of NB Slide Bush (SM, KB, SW)



SLIDE BUSH

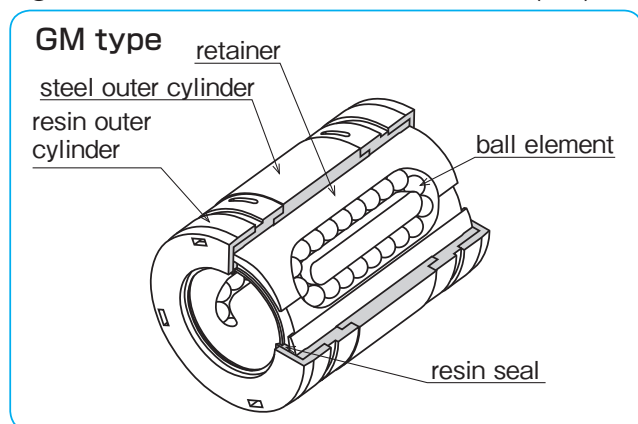Figure C-2 Basic Structure of NB Slide Bush (GM)



TYPES










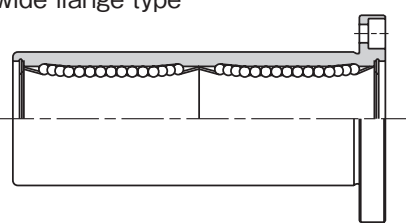



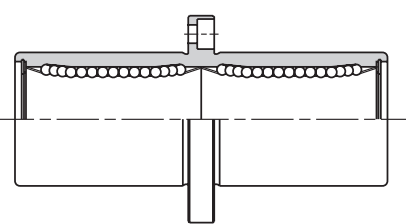



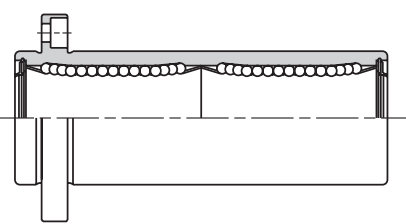


Table C-1 Type (1)

type	standard	anti-corrosion	page
standard type 	<b>SM</b>	<b>SMS</b>	C- 16
	<b>KB</b>	<b>KBS</b>	C- 80
	<b>SW</b>	<b>SWS</b>	C-100
clearance-adjustable (AJ) type 	<b>SM-AJ</b>	<b>SMS-AJ</b>	C- 18
	<b>KB-AJ</b>	<b>KBS-AJ</b>	C- 82
	<b>SW-AJ</b>	<b>SWS-AJ</b>	C-102
open (OP) type 	<b>SM-OP</b>	<b>SMS-OP</b>	C- 20
	<b>KB-OP</b>	<b>KBS-OP</b>	C- 84
	<b>SW-OP</b>	<b>SWS-OP</b>	C-104
long type 	<b>SM-G-L</b>	—	C- 22
double-wide type 	<b>SM-W</b>	<b>SMS-W</b>	C- 24
	<b>KB-W</b>	<b>KBS-W</b>	C- 86
	<b>SW-W</b>	<b>SWS-W</b>	C-106

SLIDE BUSH

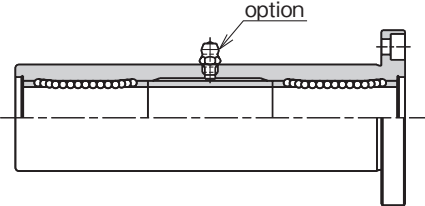



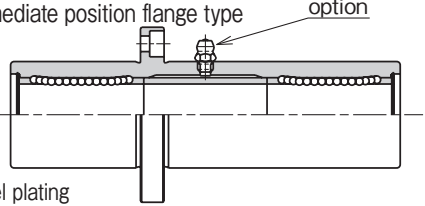











NIPPON BEARING

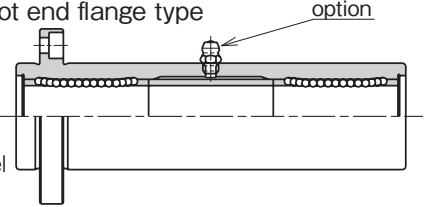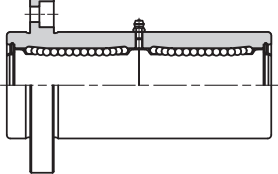Table C-2 Type (2)

type		standard	anti-corrosion	page	
flange type 		<b>SMF</b>	<b>SMSF</b>	C- 26	
		<b>KBF</b>	<b>KBSF</b>	C- 88	
		<b>SWF</b>	<b>SWSF</b>	C-108	
		<b>SMK</b>	<b>SMSK</b>	C- 28	
		<b>KBK</b>	<b>KBSK</b>	C- 90	
		<b>SWK</b>	<b>SWSK</b>	C-110	
	<b>SMT</b>	<b>SMST</b>	C- 30		
flange type with pilot end 		<b>SMF-E</b>	<b>SMSF-E</b>	C- 32	
			<b>SMK-E</b>	<b>SMSK-E</b>	C- 34
			<b>SMT-E</b>	<b>SMST-E</b>	C- 36
long flange type 		<b>SMK-G-L</b>	—	C- 38	
double wide flange type 		<b>SMF-W</b>	<b>SMSF-W</b>	C- 40	
		<b>KBF-W</b>	<b>KBSF-W</b>	C- 92	
		<b>SWF-W</b>	<b>SWSF-W</b>	C-112	
		<b>SMK-W</b>	<b>SMSK-W</b>	C- 42	
		<b>KBK-W</b>	<b>KBSK-W</b>	C- 94	
		<b>SWK-W</b>	<b>SWSK-W</b>	C-114	
	<b>SMT-W</b>	<b>SMST-W</b>	C- 44		
center mount flange type 		<b>SMFC</b>	<b>SMSFC</b>	C- 46	
		<b>KBFC</b>	<b>KBSFC</b>	C- 96	
		<b>SMKC</b>	<b>SMSKC</b>	C- 48	
		<b>KBKC</b>	<b>KBSKC</b>	C- 98	
		<b>SMTC</b>	<b>SMSTC</b>	C- 50	
double-wide pilot end flange type 		<b>SMF-W-E</b>	<b>SMSF-W-E</b>	C- 52	
			<b>SMK-W-E</b>	<b>SMSK-W-E</b>	C- 54
			<b>SMT-W-E</b>	<b>SMST-W-E</b>	C- 56





SLIDE BUSH

Table C-3 Type (3)

type		standard	page
triple wide flange type 		<b>TRF</b>	C- 58
		<b>TRK</b>	C- 60
		<b>TRT</b>	C- 62
※ Outer cylinder is treated with electroless nickel plating			
triple-wide intermediate position flange type 		<b>TRFC</b>	C- 64
		<b>TRKC</b>	C- 66
※ Outer cylinder is treated with electroless nickel plating			
triple-wide pilot end flange type 		<b>TRF-E</b>	C- 68
		<b>TRK-E</b>	C- 70
※ Outer cylinder is treated with electroless nickel plating			
flange type with pilot end Grease fitting is standard 		<b>TQF-E</b>	C- 72
		<b>TQK-E</b>	C- 74
double flange type with pilot end Grease fitting is standard 		<b>TQF-W-E</b>	C- 76
		<b>TQK-W-E</b>	C- 78












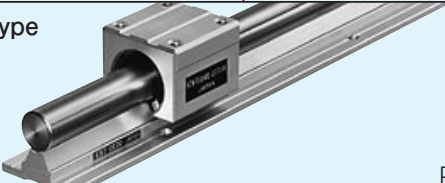
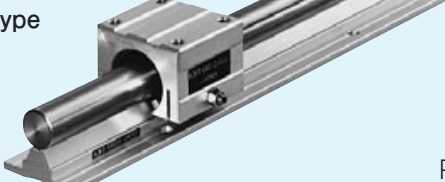
SLIDE BUSH

Table C-4 Type (4) GM Series

type		standard	page
GM single type 		<b>GM</b>	C-116
GM double-wide type 		<b>GM-W</b>	C-117

NIPPON BEARING

BLOCK SERIES

	single	double-wide
<p><b>SMA·AK·SWA Type</b></p> <p>This type is the most commonly used standard type. The housing is made of aluminum alloy. The wide (W) type is also available for SMA and AK types.</p>	<p>SMA type</p>  <p>P.C-118</p>	<p>SMA-W type</p>  <p>P.C-120</p>
	<p>AK type</p>  <p>P.C-122</p>	<p>AK-W type</p>  <p>P.C-124</p>
	<p>SWA type</p>  <p>P.C-140</p>	
<p><b>SMP Type</b></p> <p>The housing has a self-aligning feature. This feature will absorb inaccuracy of the installation base so that a smooth movement is expected.</p>	<p>SMP type</p>  <p>P.C-126</p>	
<p><b>SMJ · SWJ Type</b></p> <p>Clearance-adjustment is achieved by creating a slit on the SMA/SWA type housing. Less clearance between block and shaft results in higher positioning accuracy by tightening the adjustment screw.</p>	<p>SMJ type</p>  <p>P.C-128</p>	<p>SWJ type</p>  <p>P.C-142</p>
	<p><b>SME·SMD·SWD Type</b></p> <p>Open type housing allows a support from below so that a deflection of the shaft is minimized for high loading or long-stroke applications. The wide(W) type is also available for SME type.</p>	<p>SME type</p>  <p>P.C-130</p>
	<p>SMD type</p>  <p>P.C-134</p>	<p>SWD type</p>  <p>P.C-144</p>
<p><b>CE·CD Type</b></p> <p>This type is a unit of block(s), shaft, and support rail that contributes to a total cost reduction. The maximum length is 2,000mm for the support rail and for the shaft the maximum length is 4,500mm.</p>	<p>CE type</p>  <p>P.C-136</p>	
	<p>CD type</p>  <p>P.C-138</p>	

SLIDE BUSH

SPECIFICATIONS

Series

The NB slide bush is available in three primary dimensional series, each with different dimensions and tolerances depending on the location of use. Please select the series that is most appropriate for your location.

Allowable Load

NB slide bushes are categorized into three functional types depending on the number and location of retainers: single, double, and triple. Table C-6 shows load ratings and static moment in comparison. The single type uses only one retainer, so when a moment load is to be applied, the double or triple type is recommended.

Material

The outer cylinder of standard type is made of bearing steel and the outer cylinder of anti-corrosion type is made of Martensitic stainless steel. The retainer is available in steel (stainless steel for anti-corrosion), and resin for low acoustic operation. The steel retainer is made of one plate (seamless type).

ACCURACY

The accuracy of the NB slide bush is represented as eccentricity (concentricity) and perpendicularity as shown in Fig. C-3.

LIFE CALCULATION

Since ball elements are used as the rolling element in the NB slide bush, the following equation is used to calculate the travel life.

$$L = \left( \frac{f_H \cdot f_T \cdot f_C}{f_W} \cdot \frac{C}{P} \right)^3 \cdot 50$$

L: rated life (km) f<sub>H</sub>: hardness coefficient  
 f<sub>T</sub>: temperature coefficient f<sub>C</sub>: contact coefficient  
 f<sub>W</sub>: applied load coefficient C: basic dynamic load rating (N)  
 P: applied load (N)

\*Refer to page Eng-5 for the coefficients.

Table C-5 Series and Use Location

series	location			
	Japan	Asia	Europe	North America
metric SM	◎	◎	○	○
KB	○	○	◎	○
inch SW	○	○	○	◎

◎ generally used ○ rarely used

Table C-6 Load Comparison

type	basic dynamic load rating	basic static load rating	allowable static moment
single	1	1	1
long	1.3	1.8	approx. 4
GM-W	1.6	2	approx. 4
SM double	1.6	2	approx. 6
triple	1.6	2	approx.21


※ The single type is designated as "1" for comparison purposes.

Table C-7 Operating Environment Temperature

material		temperature range
outer cylinder	retainer	
steel	steel	-20°C ~ 110°C
	resin	-20°C ~ 80°C
stainless	steel	-20°C ~ 140°C*
	resin	-20°C ~ 80°C

\* If a seal is used in the stainless steel slide bush, the temperature is up to 120°C. Please contact NB if a temperature range exceeds 140°C.

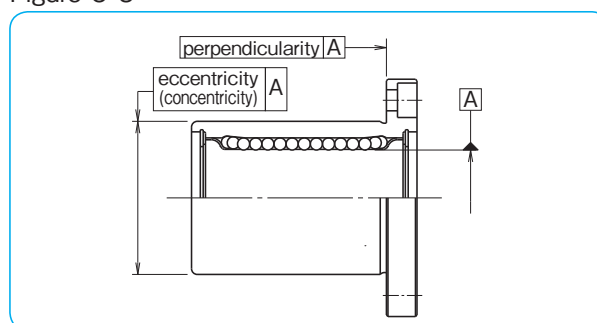Figure C-3



If the stroke distance and number of strokes per unit time are constant, the life time is calculated using the following equation.

$$L_h = \frac{L \cdot 10^3}{2 \cdot l_s \cdot n_1 \cdot 60}$$

L<sub>h</sub>: life time (hr) l<sub>s</sub>: stroke length (m)  
 L: rated life (km) n<sub>1</sub>: number of cycles per minute (cpm)

## NIPPON BEARING

### LOAD RATING FOR OPEN TYPE SLIDE BUSH

For the open type slide bush an opening is provided to allow the shaft to be supported from underneath. In case a load is constantly applied in the direction of the opening (for example, being used with a vertical shaft or an overhang loading is applied), the load rating decreases due to less number of loaded rows of ball elements (Table C-8). Therefore, the load rating must be calibrated at the time of design based on the direction of the loading.

Table C-8 Direction of Load and Basic Static Load Rating


part number	SM10G~16G-OP KB10G~16G-OP SW 8G~10G-OP SME (D) 10G~16G CE (D) 16 <small>(The loading from below cannot be received by retainer made of stainless steel.)</small>	SM20 (G) -OP KB20 (G) -OP SW12 (G) -OP SME (D) 20 CE (D) 20	SM25 (G) ~100-OP KB25 (G) ~80-OP SW16 (G) ~64-OP SME25~50 SMD25~30 CE (D) 25~30	SM120,150-OP
loading from above				
	C	C	C	C
loading from below				
	0.64C	0.54C	0.57C	0.35C

※ Excludes all 3-row steel retainer types. Please contact NB for 3-row steel retainer.

## MOUNTING

Examples of Mounting methods are shown in Figures C-4~7.

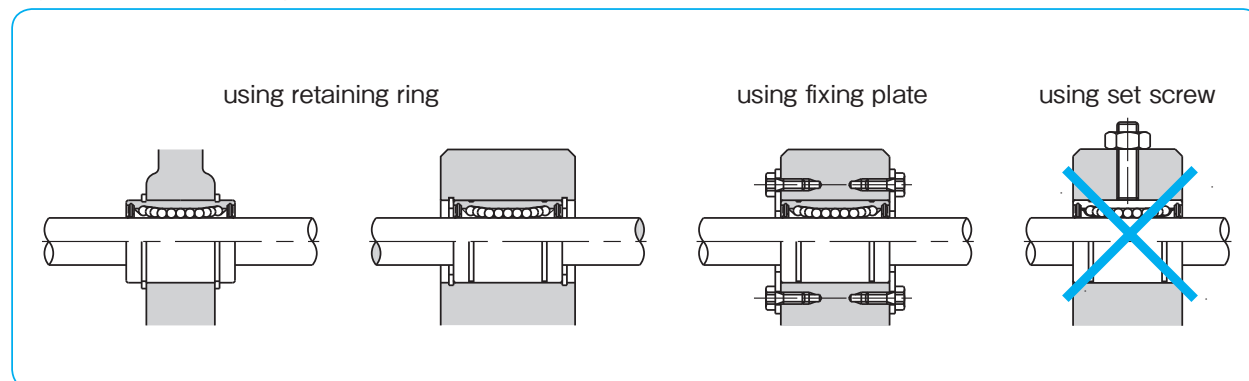Figure C-4 Standard Type





SLIDE BUSH

Figure C-5 Clearance Adjustable Type

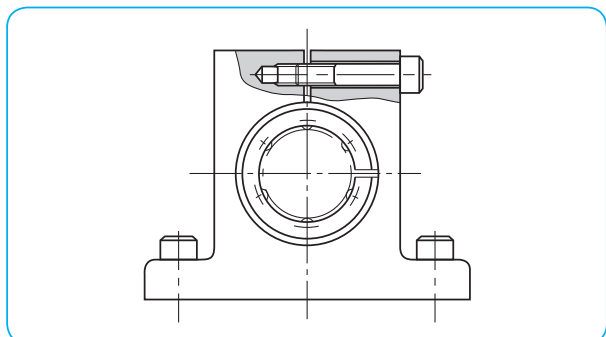


Figure C-6 Open Type


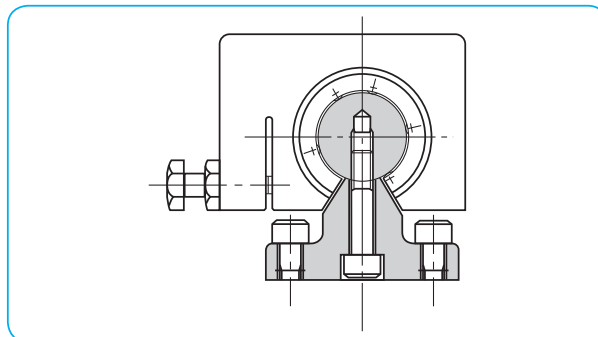


Figure C-7 Flange Type

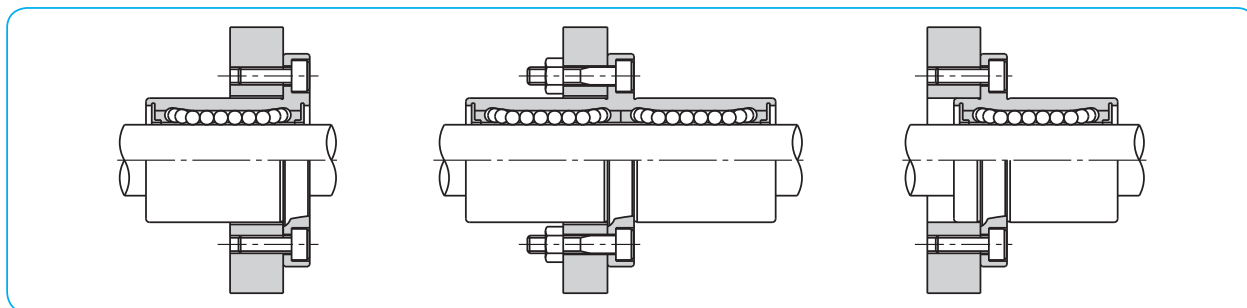

SLIDE BUSH

Fit

The normal clearance fit listed in Table C-9 is generally selected as a shaft outer diameter tolerance for the NB slide bush. The transition fit is selected for a higher accuracy by reducing clearance between slide bush and shaft. Matching bush and shaft (FIT series) is also available for customer's specified clearance. Please be cautious not to apply excess preloading with clearance adjustable and open types. Please keep preloading within the maximum radial clearance listed in the dimension table. The flange-type bush is generally inserted into an installation bore, which is slightly larger than the outer cylinder. However, if the outer cylinder is used as the pilot, H7 tolerance is recommended for housing.

The recommended clearances for the flange type are listed in Table C-10.

Table C-9 Recommended Fit

series	accuracy grade	shaft diameter		housing inner diameter	
		clearance fit	transition fit	clearance fit	transition fit
SM	high	g6	h6	H7	J7
	precision(P)	g5	h5	H6	J6
SM-G-L	high	g6	—	H7	—
SM-W	high	g6	—	H7	—
KB	high	h6	j6	H7	J7
KB-W	high	h6	—	H7	—
SW	high	g6	h6	H7	J7
	precision(P)	g5	h5	H6	J6
SW-W	high	g6	—	H7	—
GM	high	g6	h6	H7	—
GM-W	high	g6	—	H7	—

Table C-10 Recommended Fit (Flange Type)

series	shaft diameter	
	clearance fit	transition fit
SMF	g6	h6
SMK-G-L	g6	—
SMF-W	g6	—
TRF	g6	—
KBF	h6	j6
KBF-W	h6	—
SWF	g6	h6
SWF-W	g6	—

Notes on Shaft Selection:

In order to ensure a high accuracy motion of the bush, it is essential to select a high quality shaft.

In selecting a shaft, please take note of:

Hardness: 58HRC or more (refer to hardness coefficient on page Eng-5) recommended

Surface Roughness: less than Ra0.4 recommended

NIPPON BEARING

Retaining Ring for Mounting

It is possible to mount NB slide bush by retaining ring. It is recommended to select the retaining ring with reference to the Table C-11

Figure C-8 Retaining Ring

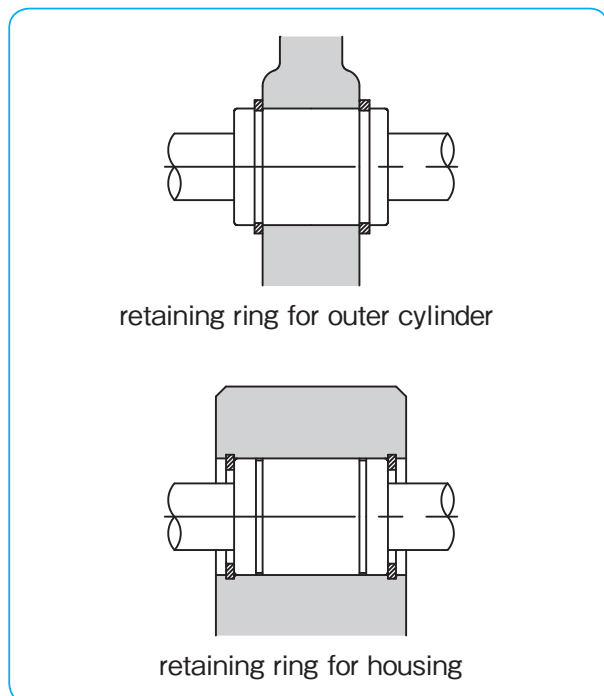


Table C-11 Applicable retaining ring

part number	size of retaining ring for outer cylinder	size of retaining ring for housing
SM 3 KB 3	—	※ 7
SM 4 KB 4	—	※ 8
SM 5	10	※ 10
SM 6 GM 6 KB 5	12	※ 12
SM 8s	15	15
SM 8 GM 8	15	15
KB 8	16	16
SM 10 GM10 KB10	19	19
SM 12 GM12	21	21
KB12	22	22
SM 13 GM13	※ 23	※ 23
KB16	26	26
SM 16 GM16	28	28
SM 20 GM20 KB20	32	32
SM 25 GM25 KB25	40	40
SM 30 GM30	45	45
KB30	※ 47	47
SM 35	52	52
SM 40	60	60
KB40	62	62
KB50	75	75
SM 50	80	80
SM 60 KB60	90	90
SM 80 KB80	120	120
SM100	※ 150	※ 150
SM120	※ 180	※ 180
SM150	※ 210	※ 210

※ part is not in the JIS standard. Please contact NB for details.

## SLIDE BUSH

## LUBRICATION

It is important to lubricate the slide bush for an accurate operation and for a long life. Anti-rust oil is applied to NB slide bush prior to shipment. The NB selected anti-rust oil has a little effect on the lubricant, however, please apply lubricant after cleaning the slide bush by, for example, kerosene, etc.

## Grease Lubricant

Prior to usage, please apply grease, then re-lubricate periodically according to the operating conditions. (Lithium soap-based grease is recommended.) Re-lubrication can be done by directly applying grease inside the ball bush or by using a grease fitting as Figure C-9 shows.

A special low dust generating grease is optional for clean room application, please refer to page Eng-40.

## Oil Lubricant

Prior to usage, please apply oil directly to the shaft surface or by using an oil hole as Figure C-10 shows. Turbine oil (ISO standard VG32-68) is recommended.

Oil holes can be machined (see Figure C-10) in the center portion of the outer cylinder. Please contact NB for oil hole specification.

Figure C-9 Grease Fitting


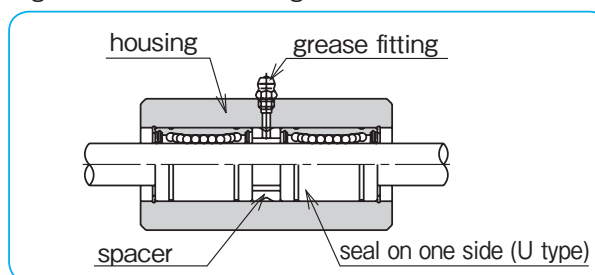


Figure C-10 Oil Hole -Specification-

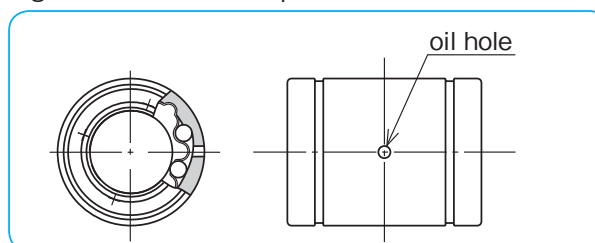

SLIDE BUSH

## DUST PREVENTION

## Seal

The seals prevent dust from entering the slide bush in order to retain the motion accuracy, resulting in a long life time. The UU type is a standard option that has seals on both sides. The U type has a seal on one side only and is available for the standard, clearance adjustable, and open types. Nitril rubber, which has low wear and good sealing characteristics, is used as the seal material.

\* Resin seals are used for GM and GW series.

## Doublelip-Seal

A doublelip-seal is a combination of outside lip-seal and inside lip-seal. Outside lip-seal prevents foreign particles from entering the bush and inside lip-seal prevents grease from leaking out of the bush.

By the doublelip-seal, the seal resistance shall be increased by some margin. Applicable Part Number: SM(S) 6 to 30, TRF 6 to 30.

Please refer to the dimension table for seal option.

## Fluororubber Seal

For a high temperature application, fluororubber seals are available on the SM series size 3 to 30. Please contact NB for details.

Figure C-11 Seal Profile


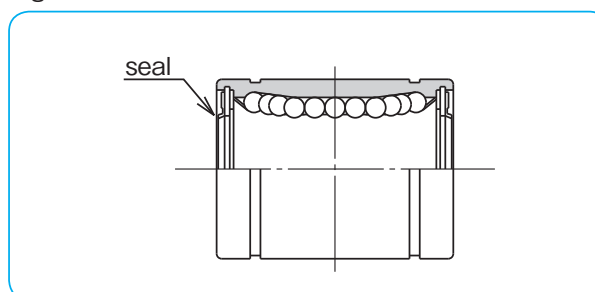


Figure C-12 Doublelip-Seal

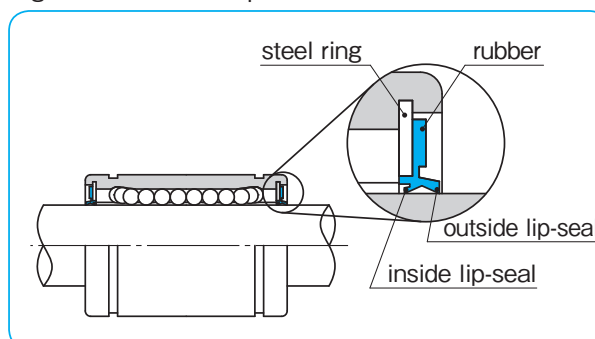


## NIPPON BEARING

### COUNTERMEASURE FOR DUST PREVENTION

A smooth ball circulation is hindered by dust or foreign particles inside the slide bush. Seals on both sides is a standard option for the NB slide bush, however, in a harsh environment it is necessary to attach bellows or protective covers.

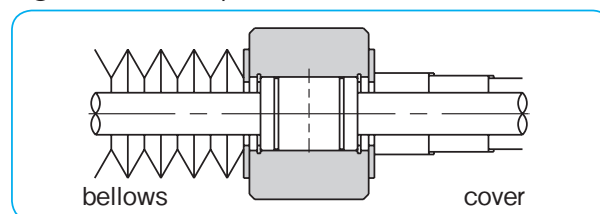Figure C-13 Example of Dust Prevention



### Felt Seal (Except Flange Type)

If the above dust prevention mechanism is difficult to design, a felt seal is recommended. Due to the oil impregnation effect of the felt, it is possible to extend the lubrication interval and to improve dust resistance.

● Instruction

The felt seal is used by press-fitting into a housing which is manufactured according to the recommended fits in Table C-9.

Stopper of slide bush is necessary other than felt seal.

Insert it between the slide bush and retaining ring as shown in the left figure of Fig. C15, or provide a place to press fit outside the retaining ring as shown in the right figure.

※At the time of shipment, the oil impregnation to the felt seal is not applied.

Figure C-14 Felt Seal

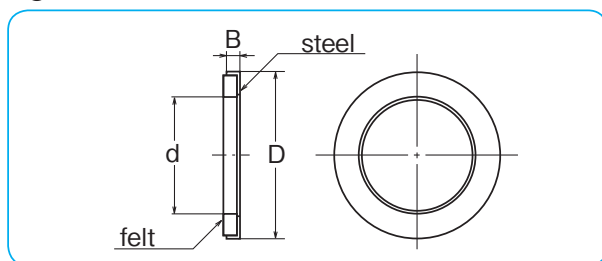


Figure C-15 Example of Felt Seal Installation

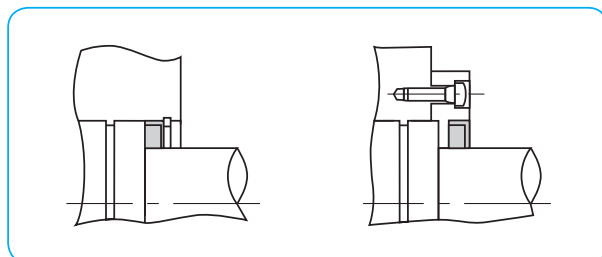


Table C-12

part number	major dimensions(mm)			applicable slide bush
	d	D	B	
FLM 6	6	12	2	SM 6 / GM 6
FLM 8	8	15	2	SM 8 / GM 8
FLM 10	10	19	3	SM 10 / GM10
FLM 12	12	21	3	SM 12 / GM12
FLM 13	13	23	3	SM 13 / GM13
FLM 16	16	28	4	SM 16 / GM16
FLM 20	20	32	4	SM 20 / GM20
FLM 25	25	40	5	SM 25 / GM25
FLM 30	30	45	5	SM 30 / GM30
FLM 35	35	52	5	SM 35
FLM 40	40	60	5	SM 40
FLM 50	50	80	10	SM 50
FLM 60	60	90	10	SM 60
FLM 80	80	120	10	SM 80
FLM100	100	150	10	SM100

SLIDE BUSH

FIT SERIES

Due to the combined tolerances of the bush's bore and the shaft's diameter, accuracy can be affected by clearance or increased dynamic friction caused by preloading.

NB's FIT Series takes advantages of the lower cost slide bush and the precision ground shaft to achieve a target clearance in order for the linear system to produce a smooth, high-accuracy performance.

part number structure

example

**F-** **SMS25GUU** **x1** / **SNS25x550**

FIT series

shaft part number

slide bush part number

number of slide bush on one shaft

- Please refer to corresponding catalog pages for details.
- Please specify on the drawing about the shaft machining, radial clearance, match-marking, etc.

Recommended Radial Clearance

Depending on the type of application, the clearance range varies, please use the chart below as a guideline.

target	clearance (+)	← 0 →	clearance (-)
light motion	[Blue bar from + to 0]		
high accuracy	[Blue bar from 0 to -]		
no play	[Blue bar from 0 to -]		

SLIDE BUSH


Slide Bush, Radial Clearance (-) , Negative Limit

Negative clearance is opted to reduce backlash. Please refer to the chart below for the negative clearance limits.

size	3~8	10~13	16~25	30~35	40	50~60
radial clearance limit	-3μm	-4μm	-6μm	-8μm	-10μm	-13μm

- The off-center of the housing causes uneven loading on the slide bush, please pay special attention to the centering of the housing especially when negative clearance is a requirement.
- Please contact NB for details on the extra preloading requirement or on other part numbers like SRE, SR, etc.

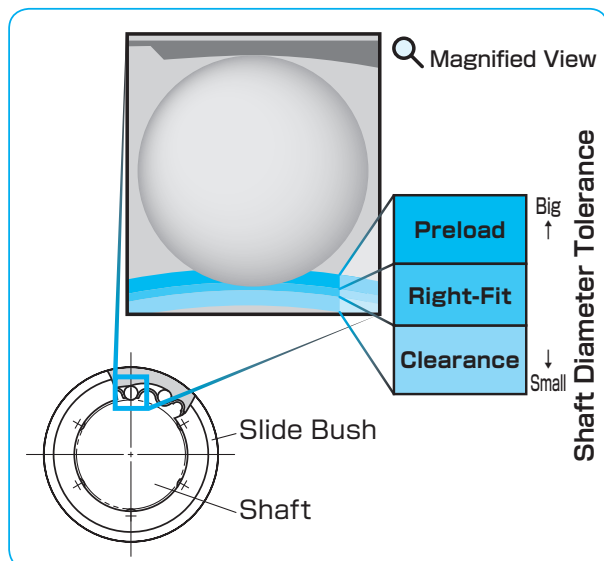Figure C-16 Radial Clearance between Slide Bush and Shaft



## NIPPON BEARING

### SURFACE TREATMENT AND ANTIRUST EFFECT

In order to adapt various kinds of environment, NB provides flange bushes with surface treatment as a standard.

Table C-13 Surface Treatment

part number	surface treatment	anti-rust effect	color
SK	electroless nickel plating	◎	silver
LF	low temperature black chrome treatment with fluoride coating	◎	black
SB	black oxide (excluding anti-corrosion type)	△	black
SC	industrial chrome plating	○	silver
standard	High-carbon chromium bearing steel ( without surface treatment)	—*2	silver
anti-corrosion	Martensite stainless steel (without surface treatment)	○	silver

◎:excellent ◎:highly effective ○:effective △:mildly effective

※1 : Please note that tolerance of bushes with surface treatment may be different from the tolerance in dimension table. Please contact NB for details of thickness of plating.


※2 : In order to prevent corrosion, please do not leave de-greased standard bush without surface treatment.

### SPECIAL SPECIFICATIONS

#### ● Special Specifications

Please contact NB for more information on surface treatment, oil hole (Figure C-10), flange mounting hole (Figure C-17), etc.

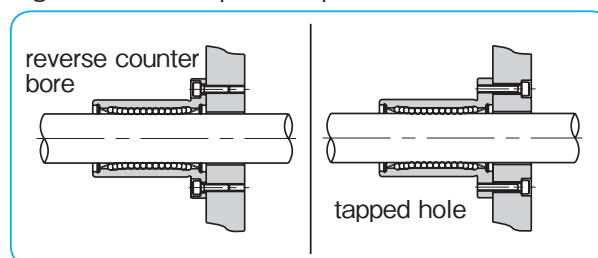Figure C-17 Examples of Special Installation Hole



### ACCURACY OF CE · CD TYPE

The accuracy of CE · CD-type support rails are measured as shown in Figure C-18.

Figure C-18 Accuracy Measurement


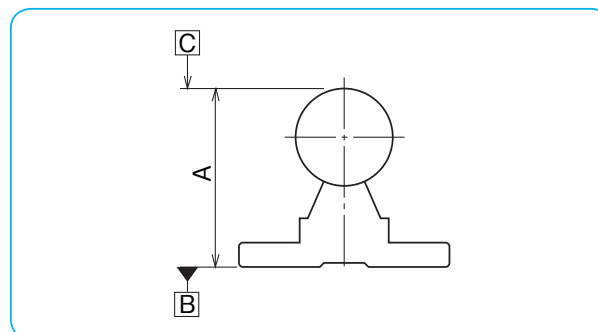


Figure C-19 Accuracy of CE · CD-type Support Rails

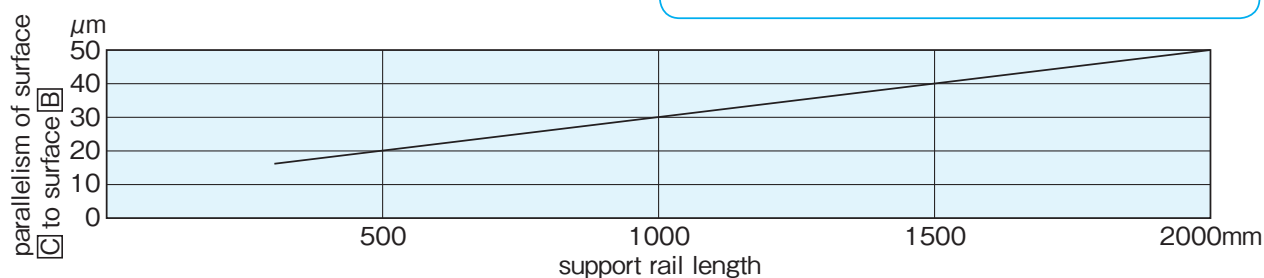

SLIDE BUSH

USE AND HANDLING PRECAUTIONS

The NB slide bush is a precision component, please handle with care to maintain its high motion accuracy.

The slide bush is designed for linear motion, so that for applications in which a combination of linear and rotational motion is a requirement, let us recommend Stroke Bush, Slide Rotary Bush, or Rotary Ball Spline.

Notes on Installation

When inserting a slide bush into a housing, carefully insert it by using a jig to apply a uniform pushing force at the end of the outer cylinder, as illustrated in Figure C-21. Motion performance may be diminished if an excessive force is applied to the resin portion of the outer cylinder, the side-ring, or the seal.

Ensure that all burrs are removed from the shaft and carefully install the bush by aligning it with the center of the bore. Excessive force may drop out the ball elements during insertion.

When two or more shafts are used, the parallelism of the shafts will greatly affect the motion characteristics and life of the slide bush. Please check the parallelism by moving the slide bush back and forth the length of stroke to check for freedom of movement before final fixing of the shaft. Please refer to page F-3 for shaft specifications.

GM Standard Type

Please avoid a tension load when retaining rings are used for installation.

NOTES ON USAGE OF BLOCK SERIES

Reference Surface

The NB slide units have a reference surface as shown in Figure C-23. Accuracy is achieved by simply pushing the reference surface against the shoulder of the installation surface. (Excluding RBW and SMP types)

Clearance Adjustment

On the clearance adjustment type please avoid excessive preloading. In the same manner please do not apply excessive torque when tightening the screws.

Mounting of RBW Type

RBW type has a resin housing. Table C-14 shows proper torque values.

Recommended Fit

For clearance fit please use a shaft with g6 tolerance and for transition fit a shaft with h6 tolerance. (Excluding adjustable-clearance and open types)

Special Installation Case of SMJ Type

Special mouting holes will be required for installations such as Figure C-24 shows. Please contact NB for special requirements.

Figure C-20 Direction of Motion

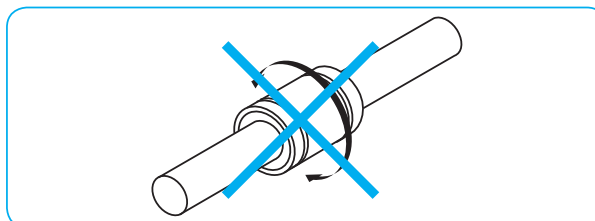


Figure C-21 Insertion of Slide Bush

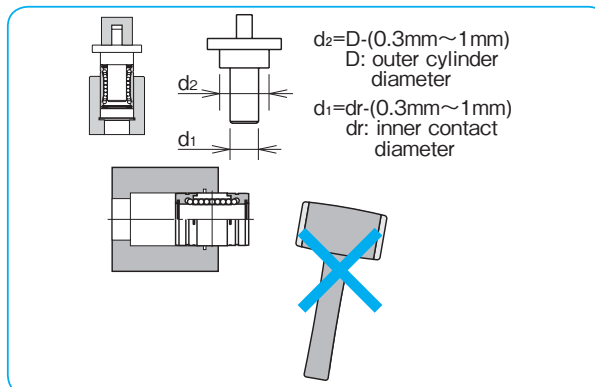


Figure C-22 Installation of GM Standard Type

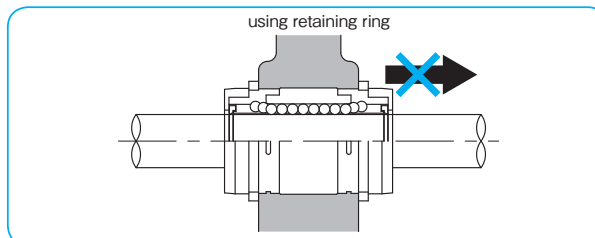


Figure C-23 Reference Surface


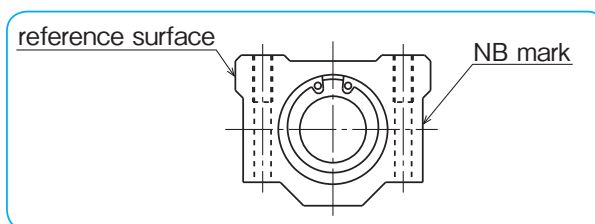


Table C-14 Recommended Torque for RBW Type

part number	mounting screw	torque N · m
RBW8	#6	1.3
RBW10,12	#8	1.9
RBW16	#10	5.2

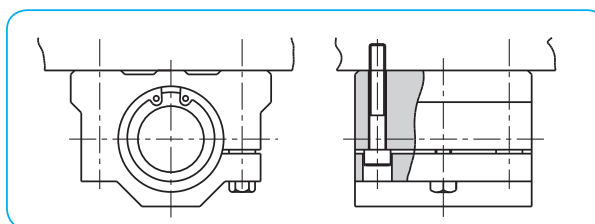Figure C-24 Special Installation Case of SMJ Type



SLIDE BUSH

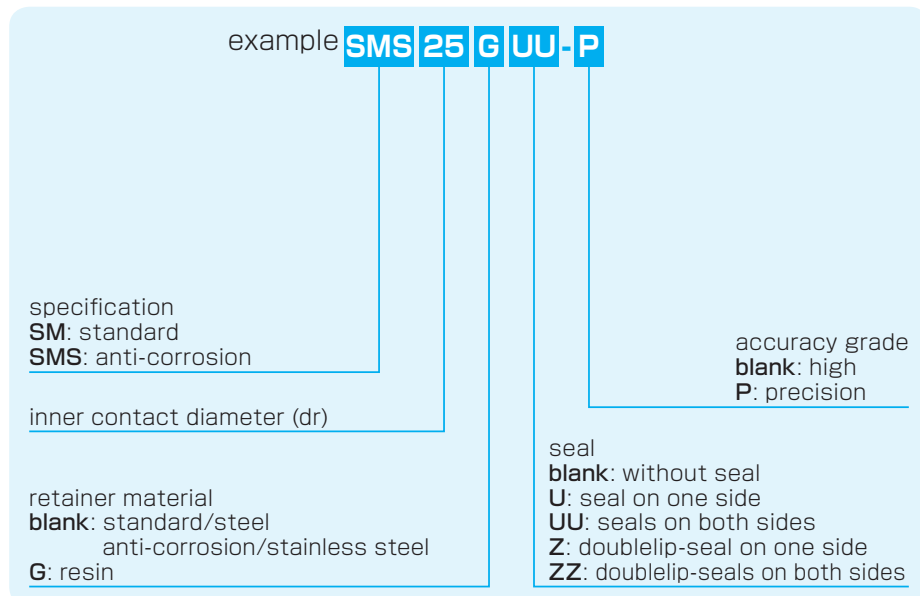
NIPPON BEARING

SM TYPE

– Standard Type –



part number structure




Doublelip-seal is available for size 6 to 30.

part number		anti-corrosion		number of ball circuits	mm	dr tolerance $\mu\text{m}$		major dimensions	
standard		stainless retainer	resin retainer			precision	high	D mm	D tolerance $\mu\text{m}$
SM 3	SM 3G	SMS 3	SMS 3G	4	3	0 - 5	0 - 8	7	0
SM 4	SM 4G	SMS 4	SMS 4G	4	4			8	- 9
SM 5	SM 5G	SMS 5	SMS 5G	4	5			10	
SM 6	SM 6G	SMS 6	SMS 6G	4	6	0 - 6	0 - 9	12	0
SM 8s	SM 8sG	SMS 8s	SMS 8sG	4	8			15	- 11
SM 8	SM 8G	SMS 8	SMS 8G	4	8			15	
SM 10	SM10G	SMS10	SMS10G	4	10			19	0
SM 12	SM12G	SMS12	SMS12G	4	12			21	- 13
SM 13	SM13G	SMS13	SMS13G	4	13			23	
SM 16	SM16G	SMS16	SMS16G	4	16	28			
SM 20	SM20G	SMS20	SMS20G	5	20	0 - 7	0 - 10	32	0
SM 25	SM25G	SMS25	SMS25G	6	25			40	- 16
SM 30	SM30G	SMS30	SMS30G	6	30			45	
SM 35	SM35G	SMS35	SMS35G	6	35	0 - 8	0 - 12	52	0
SM 40	SM40G	SMS40	SMS40G	6	40			60	- 19
SM 50	SM50G	SMS50	SMS50G	6	50			80	
SM 60	SM60G	SMS60	SMS60G	6	60	0	0	90	0
SM 80	SM80G	SMS80	SMS80G	6	80	- 9	- 15	120	- 22
SM100	-	-	-	6	100	0	0	150	0
SM120	-	-	-	8	120	- 10	- 20	180	- 25
SM150	-	-	-	8	150	0/- 13	0/- 25	210	0/- 29



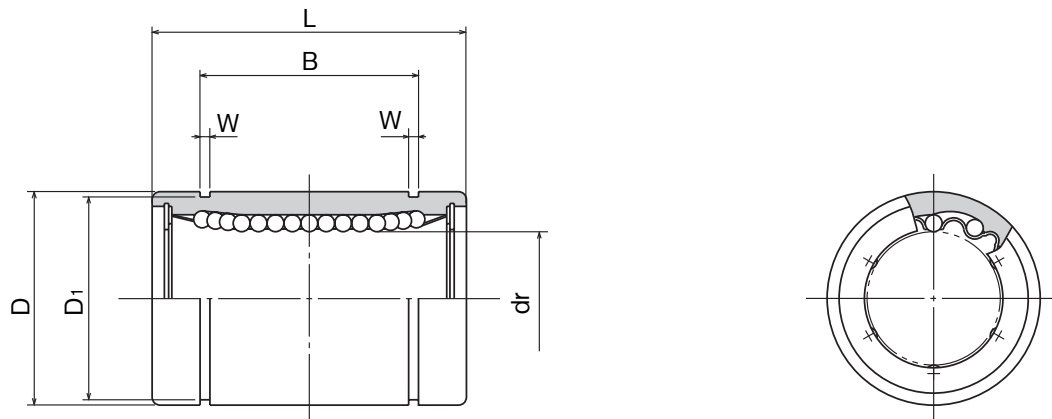SLIDE BUSH



SLIDE BUSH

mm	L	mm	B	mm	W	D <sub>1</sub>	eccentricity		radial clearance (maximum) μm	basic load rating		mass g	shaft diameter mm
	tolerance mm		tolerance mm				precision μm	high μm		C N	Co N		
10	0	—	—	—	—	—	4	8	- 3	69	105	1.4	3
12	-0.12	—	—	—	—	—				8	88	127	2.0
15	—	10.2	0	-0.2	1.1	9.6	8	12		167	206	4.0	5
19	—	13.5			1.1	11.5			206	265	8.5	6	
17	—	11.5			1.1	14.3			176	216	11	8	
24	—	17.5			1.1	14.3			274	392	17	8	
29	0	22			1.3	18			372	549	36	10	
30	-0.2	23			1.3	20			510	784	42	12	
32	—	23	1.3	22	510	784	49	13					
37	—	26.5	1.6	27	774	1,180	76	16					
42	—	30.5	1.6	30.5	882	1,370	100	20					
59	—	41	1.85	38	980	1,570	240	25					
64	—	44.5	1.85	43	1,570	2,740	270	30					
70	0	49.5	2.1	49	1,670	3,140	425	35					
80	-0.3	60.5	2.1	57	2,160	4,020	654	40					
100	—	74	2.6	76.5	3,820	7,940	1,700	50					
110	—	85	3.15	86.5	4,700	10,000	2,000	60					
140	—	105.5	4.15	116	7,350	16,000	4,520	80					
175	0	125.5	4.15	145	14,100	34,800	8,600	100					
200	-0.4	158.6	4.15	175	16,400	40,000	15,000	120					
240	—	170.6	5.15	204	21,100	54,300	20,250	150					

1N ≅ 0.102kgf

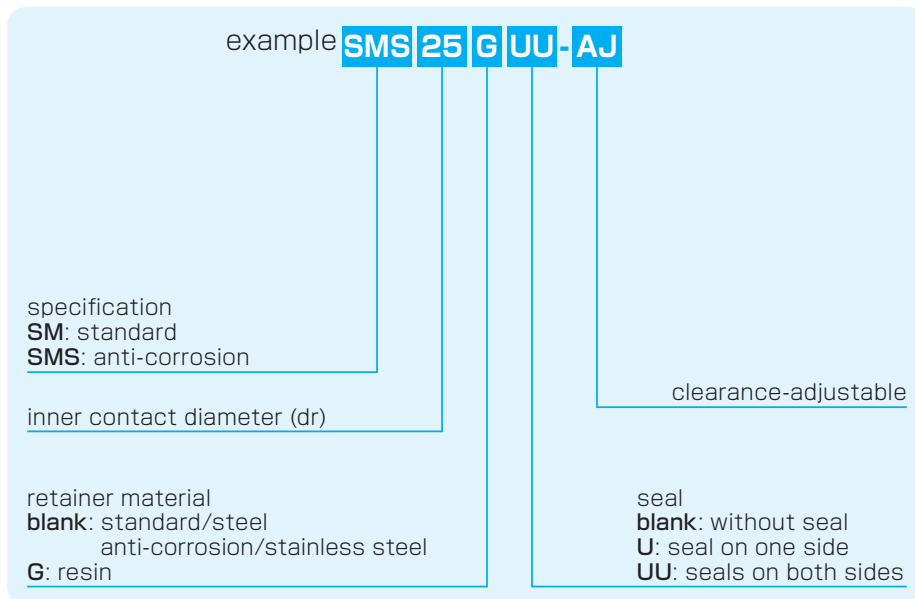
NIPPON BEARING

SM-AJ TYPE

– Clearance Adjustable Type –




part number structure



part number				number of ball circuits	dr mm	major dimensions		
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer			dr tolerance* μm	D mm	D tolerance* μm
–	SM 6G-AJ	–	SMS 6G-AJ	4	6	12	0	
–	SM 8sG-AJ	–	SMS 8sG-AJ	4	8	15	–11	
–	SM 8G-AJ	–	SMS 8G-AJ	4	8	15	–11	
–	SM10G-AJ	–	SMS10G-AJ	4	10	19	–11	
SM 12-AJ	SM12G-AJ	SMS12-AJ	SMS12G-AJ	4	12	21	0	
SM 13-AJ	SM13G-AJ	SMS13-AJ	SMS13G-AJ	4	13	23	–13	
SM 16-AJ	SM16G-AJ	SMS16-AJ	SMS16G-AJ	4	16	28	–13	
SM 20-AJ	SM20G-AJ	SMS20-AJ	SMS20G-AJ	5	20	32	0	
SM 25-AJ	SM25G-AJ	SMS25-AJ	SMS25G-AJ	6	25	40	–16	
SM 30-AJ	SM30G-AJ	SMS30-AJ	SMS30G-AJ	6	30	45	–16	
SM 35-AJ	SM35G-AJ	SMS35-AJ	SMS35G-AJ	6	35	52	0	
SM 40-AJ	SM40G-AJ	SMS40-AJ	SMS40G-AJ	6	40	60	–19	
SM 50-AJ	SM50G-AJ	SMS50-AJ	SMS50G-AJ	6	50	80	–19	
SM 60-AJ	SM60G-AJ	SMS60-AJ	SMS60G-AJ	6	60	90	0	
SM 80-AJ	SM80G-AJ	–	–	6	80	120	–22	
SM100-AJ	–	–	–	6	100	150	0	
SM120-AJ	–	–	–	8	120	180	–25	
SM150-AJ	–	–	–	8	150	210	0/–29	

\* Accuracy is measured prior to machining clearance slit.

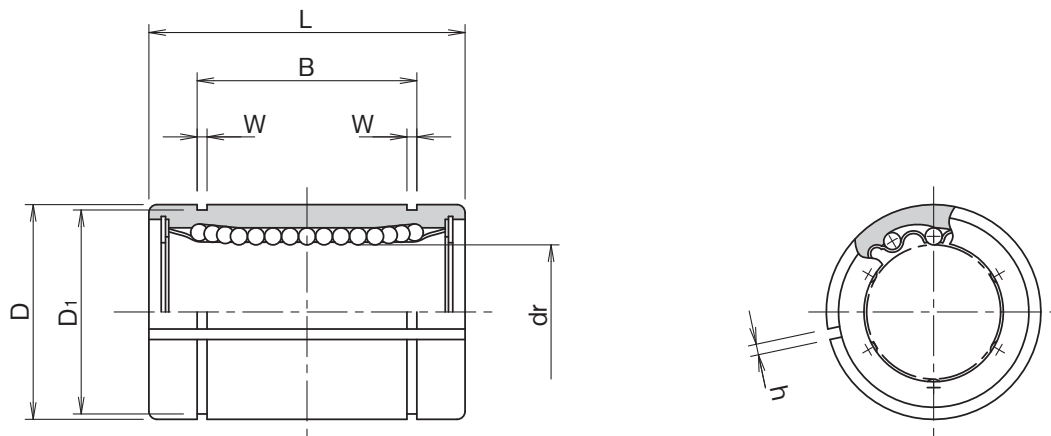SLIDE BUSH



SLIDE BUSH


mm	L tolerance mm	mm	B tolerance mm	W mm	D <sub>1</sub> mm	h mm	eccentricity* μm	basic load rating		mass g	shaft diameter mm
								dynamic C N	static C <sub>0</sub> N		
19	0 -0.2	13.5	0 -0.2	1.1	11.5	1	12	206	265	7.5	6
17		11.5		1.1	14.3	1		176	216	10	8
24		17.5		1.1	14.3	1		274	392	14.7	8
29		22		1.3	18	1		372	549	29	10
30		23		1.3	20	1.5		510	784	41	12
32		23		1.3	22	1.5		510	784	48	13
37		26.5		1.6	27	1.5		774	1,180	75	16
42		30.5		1.6	30.5	1.5		882	1,370	98	20
59	0 -0.3	41	0 -0.3	1.85	38	2	15	980	1,570	237	25
64		44.5		1.85	43	2.5		1,570	2,740	262	30
70		49.5		2.1	49	2.5		1,670	3,140	420	35
80		60.5		2.1	57	3		2,160	4,020	640	40
100	0 -0.4	74	0 -0.4	2.6	76.5	3	20	3,820	7,940	1,680	50
110		85		3.15	86.5	3		4,700	10,000	1,980	60
140		105.5		4.15	116	3		7,350	16,000	4,400	80
175	0 -0.4	125.5	0 -0.4	4.15	145	3	25	14,100	34,800	8,540	100
200		158.6		4.15	175	3		16,400	40,000	14,900	120
240		170.6		5.15	204	3		21,100	54,300	20,150	150
									40		

1N≅0.102kgf


NIPPON BEARING

SM-OP TYPE

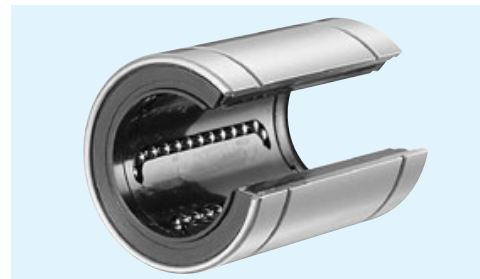– Open Type –




part number structure

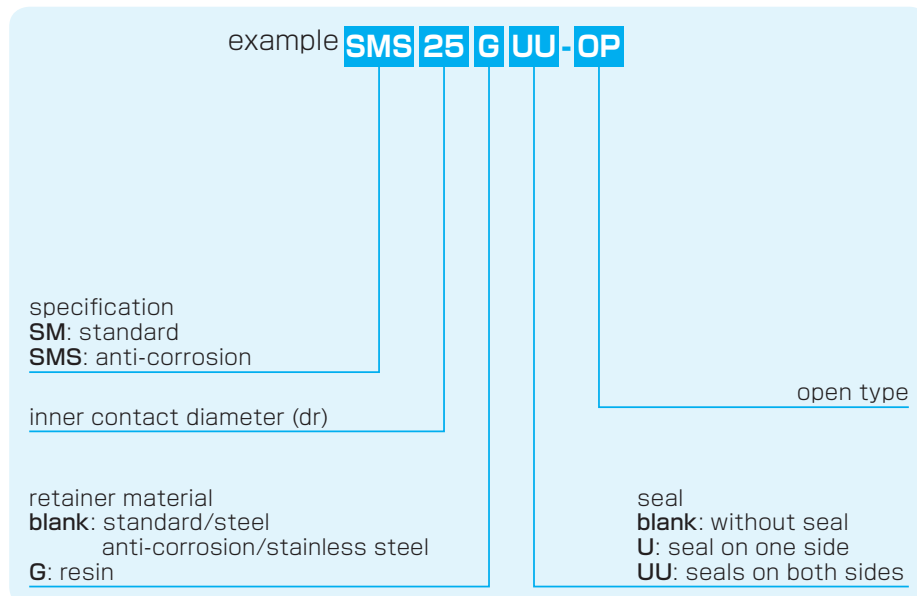

part number		number of ball circuits	dr mm	major dimensions			
standard	anti-corrosion			D mm	tolerance* μm		
steel retainer	resin retainer	stainless retainer	resin retainer				
–	<b>SM10G-OP</b>	–	<b>SMS10G-OP</b>	3	10	19	0
<b>SM 12-OP</b>	<b>SM12G-OP</b>	<b>SMS 12-OP</b>	<b>SMS12G-OP</b>	3	12	21	0
<b>SM 13-OP</b>	<b>SM13G-OP</b>	<b>SMS 13-OP</b>	<b>SMS13G-OP</b>	3	13	23	–13
<b>SM 16-OP</b>	<b>SM16G-OP</b>	<b>SMS 16-OP</b>	<b>SMS16G-OP</b>	3	16	28	0
<b>SM 20-OP</b>	<b>SM20G-OP</b>	<b>SMS20-OP</b>	<b>SMS20G-OP</b>	4	20	32	0
<b>SM 25-OP</b>	<b>SM25G-OP</b>	<b>SMS25-OP</b>	<b>SMS25G-OP</b>	5	25	40	–16
<b>SM 30-OP</b>	<b>SM30G-OP</b>	<b>SMS30-OP</b>	<b>SMS30G-OP</b>	5	30	45	0
<b>SM 35-OP</b>	<b>SM35G-OP</b>	<b>SMS35-OP</b>	<b>SMS35G-OP</b>	5	35	52	0
<b>SM 40-OP</b>	<b>SM40G-OP</b>	<b>SMS40-OP</b>	<b>SMS40G-OP</b>	5	40	60	–19
<b>SM 50-OP</b>	<b>SM50G-OP</b>	<b>SMS50-OP</b>	<b>SMS50G-OP</b>	5	50	80	0
<b>SM 60-OP</b>	<b>SM60G-OP</b>	<b>SMS60-OP</b>	<b>SMS60G-OP</b>	5	60	90	0
<b>SM 80-OP</b>	<b>SM80G-OP</b>	–	–	5	80	120	–22
<b>SM100-OP</b>	–	–	–	5	100	150	0
<b>SM120-OP</b>	–	–	–	6	120	180	–25
<b>SM150-OP</b>	–	–	–	6	150	210	0/–29

\* Accuracy is measured prior to machining open slit.

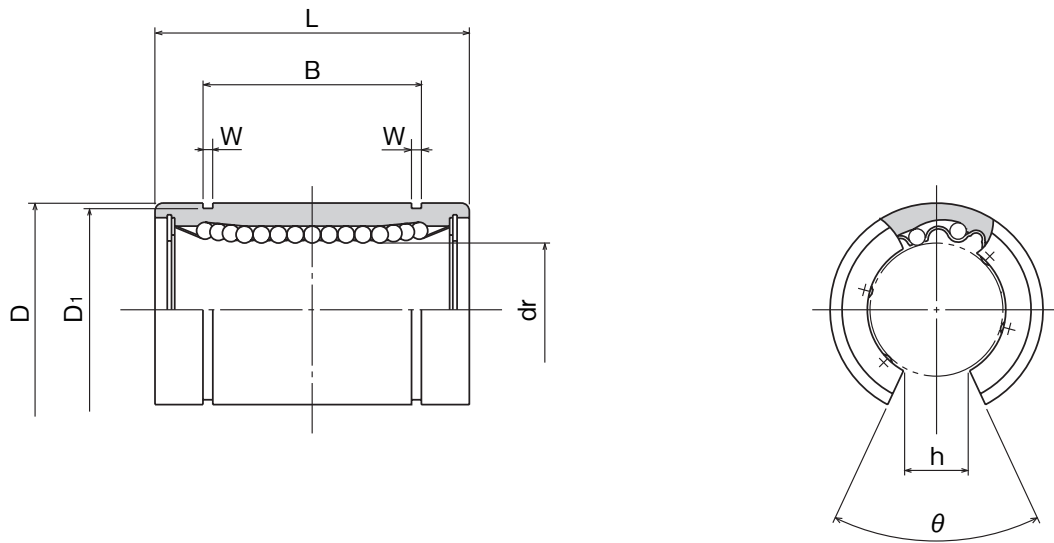SLIDE BUSH



SLIDE BUSH

mm	L	mm	B	mm	W	D <sub>1</sub>	h	θ	eccentricity* μm	basic load rating		mass g	shaft diameter mm
	tolerance mm		tolerance mm							C N	Co N		
29	0 -0.2	22	0 -0.2	1.3	18	6.8	80°	12	15	372	549	23	10
30		23		1.3	20	8	80°			510	784	32	12
32		23		1.3	22	9	80°			510	784	37	13
37		26.5		1.6	27	11	80°			774	1,180	58	16
42		30.5		1.6	30.5	11	60°			882	1,370	79	20
59	0 -0.3	41	0 -0.3	1.85	38	12	50°	20	25	980	1,570	203	25
64		44.5		1.85	43	15	50°			1,570	2,740	228	30
70		49.5		2.1	49	17	50°			1,670	3,140	355	35
80		60.5		2.1	57	20	50°			2,160	4,020	546	40
100		74		2.6	76.5	25	50°			3,820	7,940	1,420	50
110	0 -0.4	85	0 -0.4	3.15	86.5	30	50°	30	40	4,700	10,000	1,650	60
140		105.5		4.15	116	40	50°			7,350	16,000	3,750	80
175		125.5		4.15	145	50	50°			14,100	34,800	7,200	100
200		158.6		4.15	175	85	80°			16,400	40,000	11,600	120
240		170.6		5.15	204	105	80°			21,100	54,300	15,700	150

1N ≅ 0.102kgf

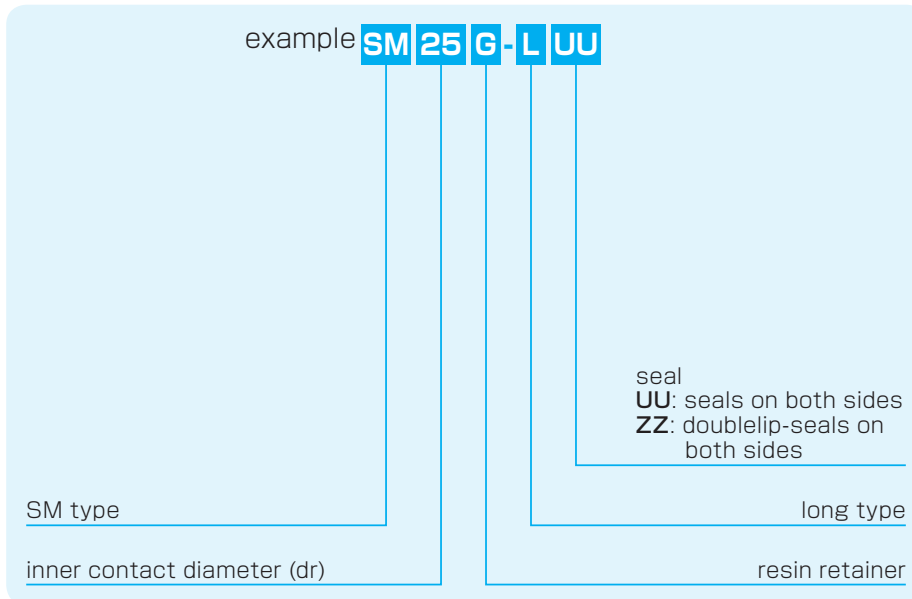
NIPPON BEARING

SM-G-L TYPE

– Long Type –




part number structure



part number*	number of ball circuits	major dimensions							
		dr		D		L		B	
		mm	tolerance $\mu\text{m}$	mm	tolerance $\mu\text{m}$	mm	tolerance mm	mm	tolerance mm
SM 6G-LUU	4	6	-10	12	0	26	0 -0.3	20.5	0 -0.2
SM 8G-LUU	4	8		15	-13	32		25.5	
SM10G-LUU	4	10		19	39	32			
SM12G-LUU	4	12		21	0	41		34	
SM13G-LUU	4	13		23	-16	45		36	
SM16G-LUU	4	16		28	53	42			
SM20G-LUU	5	20		32	0	59		47.5	
SM25G-LUU	6	25	40	0	83	69	0		
SM30G-LUU	6	30	-12	45	-19	90	75	-0.3	

\* Seals-on-both-sides is standard.

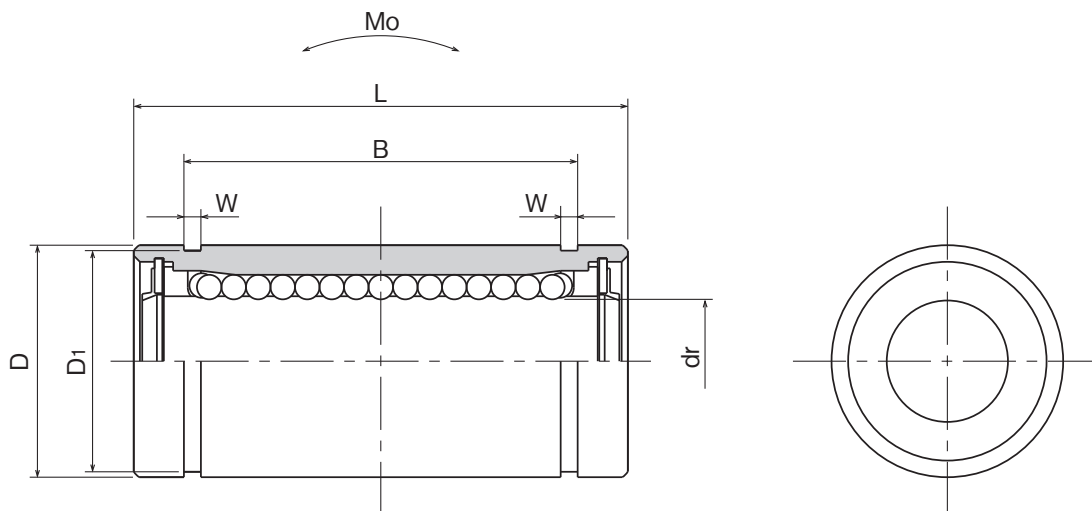SLIDE BUSH



SLIDE BUSH

W mm	D <sub>1</sub> mm	eccentricity μm	basic load rating		allowable static moment Mo N · m	mass g	shaft diameter mm
			dynamic C N	static Co N			
1.1	11.5	15	262	476	1.15	10	6
1.1	14.3		352	615	1.94	19	8
1.3	18		493	1,000	3.98	38	10
1.3	20		637	1,430	6.26	43	12
1.3	22		682	1,560	7.68	62	13
1.6	27		1,039	2,350	13.2	99	16
1.6	30.5	20	1,160	2,740	17.9	125	20
1.85	38		1,300	2,960	27.2	315	25
1.85	43		2,160	5,880	61.3	347	30

1N≅0.102kgf 1N · m≅0.102kgf · m

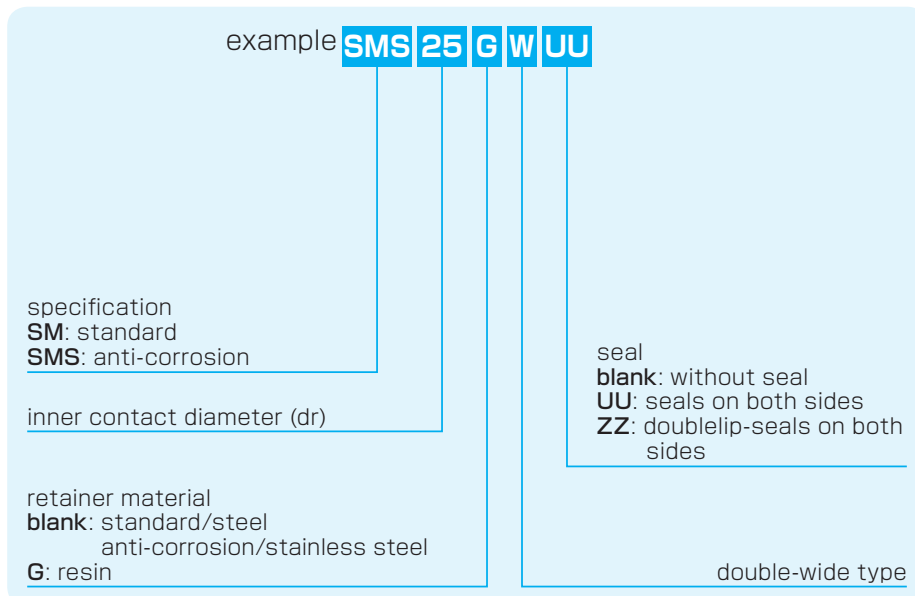
NIPPON BEARING

SM-W TYPE

– Double-Wide Type –



part number structure




Doublelip-seal is available for size 6 to 30.

part number				number of ball circuits	dr mm	dr tolerance μm	major dimensions	
standard steel retainer	resin retainer	anti-corrosion stainless retainer					D mm	D tolerance μm
<b>SM 3W</b>	<b>SM 3GW</b>	<b>SMS 3W</b>	<b>SMS 3GW</b>	4	3	0 -10	7	0 -11
<b>SM 4W</b>	<b>SM 4GW</b>	<b>SMS 4W</b>	<b>SMS 4GW</b>	4	4		8	
<b>SM 5W</b>	<b>SM 5GW</b>	<b>SMS 5W</b>	<b>SMS 5GW</b>	4	5		10	
<b>SM 6W</b>	<b>SM 6GW</b>	<b>SMS 6W</b>	<b>SMS 6GW</b>	4	6		12	0
<b>SM 8W</b>	<b>SM 8GW</b>	<b>SMS 8W</b>	<b>SMS 8GW</b>	4	8		15	-13
<b>SM10W</b>	<b>SM10GW</b>	<b>SMS10W</b>	<b>SMS10GW</b>	4	10		19	0 -16
<b>SM12W</b>	<b>SM12GW</b>	<b>SMS12W</b>	<b>SMS12GW</b>	4	12		21	
<b>SM13W</b>	<b>SM13GW</b>	<b>SMS13W</b>	<b>SMS13GW</b>	4	13		23	
<b>SM16W</b>	<b>SM16GW</b>	<b>SMS16W</b>	<b>SMS16GW</b>	4	16		28	
<b>SM20W</b>	<b>SM20GW</b>	<b>SMS20W</b>	<b>SMS20GW</b>	5	20		0 -12	32
<b>SM25W</b>	<b>SM25GW</b>	<b>SMS25W</b>	<b>SMS25GW</b>	6	25	40		-19
<b>SM30W</b>	<b>SM30GW</b>	<b>SMS30W</b>	<b>SMS30GW</b>	6	30	45		
<b>SM35W</b>	<b>SM35GW</b>	<b>SMS35W</b>	<b>SMS35GW</b>	6	35	0 -15	52	0
<b>SM40W</b>	<b>SM40GW</b>	<b>SMS40W</b>	<b>SMS40GW</b>	6	40		60	-22
<b>SM50W</b>	<b>SM50GW</b>	<b>SMS50W</b>	<b>SMS50GW</b>	6	50		80	
<b>SM60W</b>	<b>SM60GW</b>	<b>SMS60W</b>	<b>SMS60GW</b>	6	60		90	



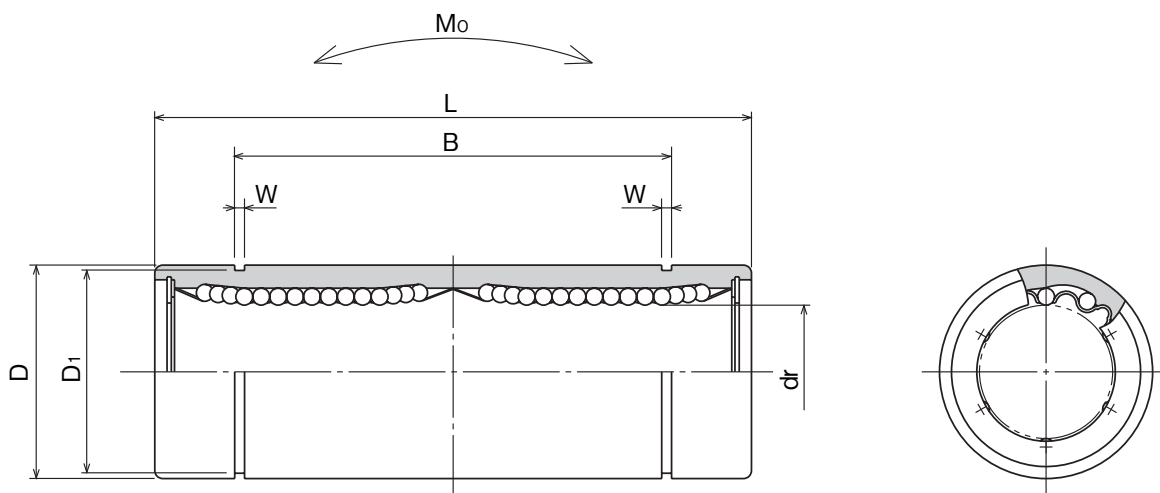SLIDE BUSH



SLIDE BUSH

mm	L tolerance mm	mm	B tolerance mm	W mm	D <sub>1</sub> mm	eccentricity μm	basic load rating		allowable static moment M <sub>o</sub> N · m	mass g	shaft diameter mm	
							dynamic C N	static C <sub>o</sub> N				
19	0 -0.3	—	—	—	—	10	138	210	0.51	3.2	3	
23		—	—	—	—		176	254	0.63	4.8	4	
28		20.4	0 -0.3	1.1	9.6		265	412	1.38	11	5	
35		27		1.1	11.5		323	530	2.18	16	6	
45		35		1.1	14.3	431	784	4.31	31	8		
55		44		1.3	18	588	1,100	7.24	62	10		
57		46		1.3	20	813	1,570	10.9	80	12		
61		46		1.3	22	813	1,570	11.6	90	13		
70		0 -0.4	53	0 -0.4	1.6	27	15	1,230	2,350	19.7	145	16
80			61		1.6	30.5		1,400	2,740	26.8	180	20
112	82		1.85		38	20		1,560	3,140	43.4	440	25
123	89		1.85		43	25		2,490	5,490	82.8	480	30
135	99		2.1		49	25	2,650	6,270	110	795	35	
151	121		2.1		57		3,430	8,040	147	1,170	40	
192	148		2.6		76.5		6,080	15,900	397	3,100	50	
209	170		3.15		86.5		30	7,550	20,000	530	3,500	60

1N≅0.102kgf 1N · m≅0.102kgf · m

NIPPON BEARING

SMF TYPE

– Round Flange Type –



part number structure


example **SMSF 25 G UU-SK**

specification SMF: standard SMSF: anti-corrosion	inner contact diameter (dr)	retainer material blank: standard/steel anti-corrosion/stainless steel G: resin	outer cylinder surface treatment blank: no surface treatment SK: electroless nickel plating LF: low temperature black chrome treatment with fluoride coating SB: black oxide (not available on anti-corrosion type) SC: industrial chrome plating	seal blank: without seal UU: seals on both sides ZZ: doublelip-seals on both sides
--	-----------------------------	--	--	---

Doublelip-seal is available for size 6 to 30.

part number				number of ball circuits	dr mm	major dimensions				
standard steel retainer	resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer			dr tolerance μm	D mm	D tolerance μm	L ±0.3 mm	
SMF 6	SMF 6G	SMSF 6	SMSF 6G	4	6	0 -9	12	-13	19	
SMF 8s	SMF 8sG	SMSF 8s	SMSF 8sG	4	8		15		17	
SMF 8	SMF 8G	SMSF 8	SMSF 8G	4	8		15		24	
SMF 10	SMF10G	SMSF10	SMSF10G	4	10		19	-16	29	
SMF 12	SMF12G	SMSF12	SMSF12G	4	12		21		0	30
SMF 13	SMF13G	SMSF13	SMSF13G	4	13		23		32	
SMF 16	SMF16G	SMSF16	SMSF16G	4	16		28		37	
SMF 20	SMF20G	SMSF20	SMSF20G	5	20		0 -10	32	-19	42
SMF 25	SMF25G	SMSF25	SMSF25G	6	25			40		0
SMF 30	SMF30G	SMSF30	SMSF30G	6	30		0 -12	45	-22	64
SMF 35	SMF35G	SMSF35	SMSF35G	6	35	52		0		70
SMF 40	SMF40G	SMSF40	SMSF40G	6	40	60		80		
SMF 50	SMF50G	SMSF50	SMSF50G	6	50	0 -15	80	-25	100	
SMF 60	SMF60G	SMSF60	SMSF60G	6	60		90		0	110
SMF 80	—	—	—	6	80	0/-20	120	0/-29	140	
SMF100	—	—	—	6	100		150		175	

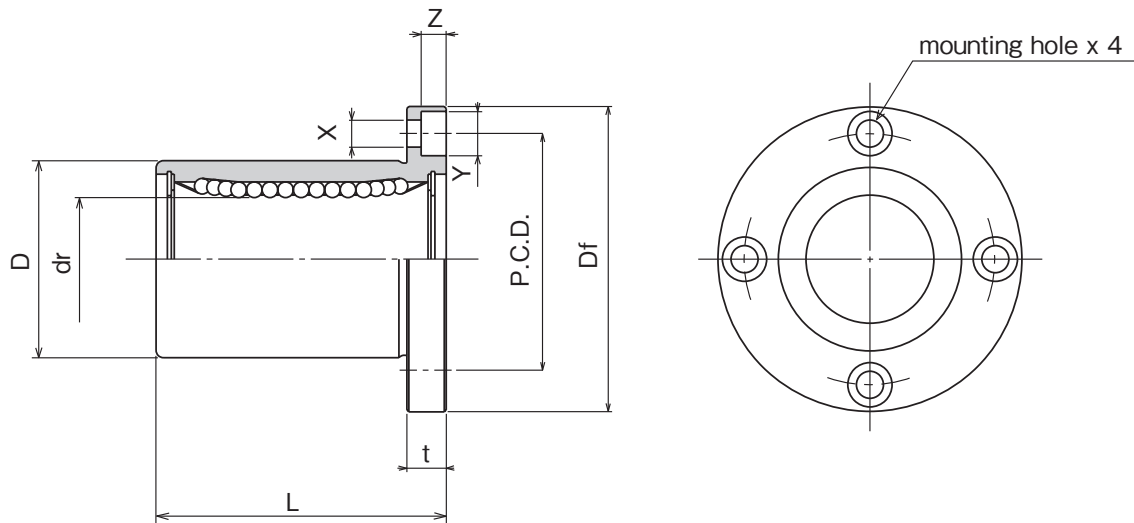SLIDE BUSH



SLIDE BUSH

Df mm	t mm	flange P.C.D. mm	X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating		mass g	shaft diameter mm
						dynamic C N	static Co N		
28	5	20	3.5×6×3.1	12	12	206	265	24	6
32	5	24	3.5×6×3.1			176	216	32	8
32	5	24	3.5×6×3.1			274	392	37	8
40	6	29	4.5×7.5×4.1			372	549	72	10
42	6	32	4.5×7.5×4.1			510	784	76	12
43	6	33	4.5×7.5×4.1			510	784	88	13
48	6	38	4.5×7.5×4.1			774	1,180	120	16
54	8	43	5.5×9×5.1	15	15	882	1,370	180	20
62	8	51	5.5×9×5.1			980	1,570	340	25
74	10	60	6.6×11×6.1			1,570	2,740	470	30
82	10	67	6.6×11×6.1	20	20	1,670	3,140	650	35
96	13	78	9×14×8.1			2,160	4,020	1,060	40
116	13	98	9×14×8.1			3,820	7,940	2,200	50
134	18	112	11×17×11.1	25	25	4,700	10,000	3,000	60
164	18	142	11×17×11.1			7,350	16,000	5,800	80
200	20	175	14×20×13.1			14,100	34,800	10,600	100

1N≅0.102kgf

NIPPON BEARING

SMK TYPE

– Square Flange Type –



part number structure


example **SMSK 25 G UU-SK**

specification SMK: standard SMSK: anti-corrosion	inner contact diameter (dr)	retainer material blank: standard/steel anti-corrosion/stainless steel G: resin	outer cylinder surface treatment blank: no surface treatment SK: electroless nickel plating LF: low temperature black chrome treatment with fluoride coating SB: black oxide (not available on anti-corrosion type) SC: industrial chrome plating	seal blank: without seal UU: seals on both sides ZZ: doublelip-seals on both sides
--	-----------------------------	--	--	---

Doublelip-seal is available for size 6 to 30.

part number		number of ball circuits	dr mm	major dimensions				
standard	anti-corrosion			D mm	L mm			
steel retainer	resin retainer	stainless retainer	resin retainer	tolerance μm	tolerance μm	±0.3 mm		
SMK 6	SMK 6G	SMSK 6	SMSK 6G	4	6	12	0	19
SMK 8s	SMK 8sG	SMSK 8s	SMSK 8sG	4	8	15	-13	17
SMK 8	SMK 8G	SMSK 8	SMSK 8G	4	8	15		24
SMK 10	SMK10G	SMSK10	SMSK10G	4	10	19	0	29
SMK 12	SMK12G	SMSK12	SMSK12G	4	12	21	-16	30
SMK 13	SMK13G	SMSK13	SMSK13G	4	13	23		32
SMK 16	SMK16G	SMSK16	SMSK16G	4	16	28		37
SMK 20	SMK20G	SMSK20	SMSK20G	5	20	32	0	42
SMK 25	SMK25G	SMSK25	SMSK25G	6	25	40	-19	59
SMK 30	SMK30G	SMSK30	SMSK30G	6	30	45		64
SMK 35	SMK35G	SMSK35	SMSK35G	6	35	52	0	70
SMK 40	SMK40G	SMSK40	SMSK40G	6	40	60	-22	80
SMK 50	SMK50G	SMSK50	SMSK50G	6	50	80		100
SMK 60	SMK60G	SMSK60	SMSK60G	6	60	90	0	110
SMK 80	—	—	—	6	80	120	-25	140
SMK100	—	—	—	6	100	150	0/-29	175

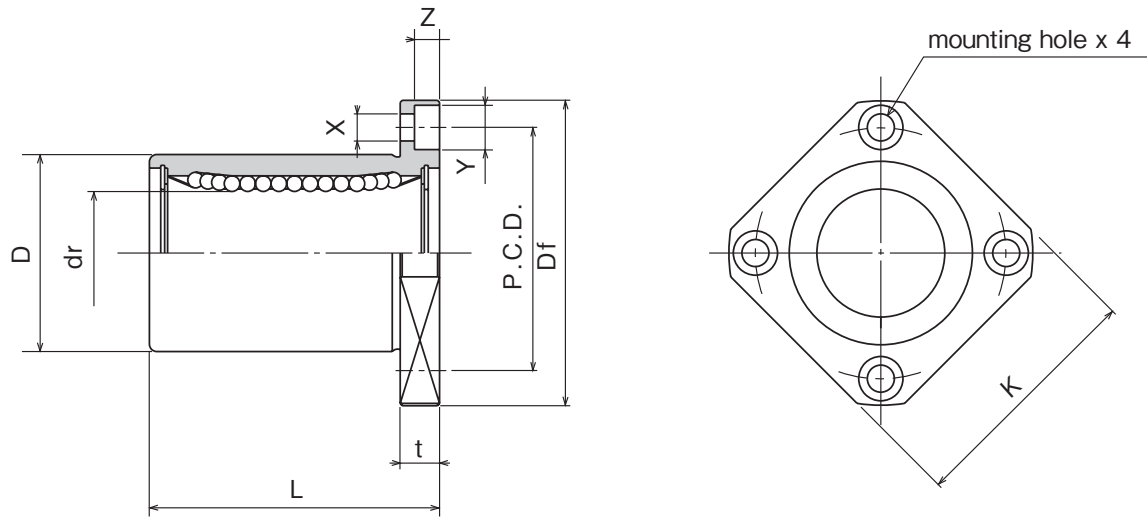SLIDE BUSH



SLIDE BUSH

Df mm	K mm	flange			eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		mass g	shaft diameter mm
		t mm	P.C.D. mm	X×Y×Z mm			dynamic C N	static Co N		
28	22	5	20	3.5×6×3.1	12	12	206	265	18	6
32	25	5	24	3.5×6×3.1			176	216	24	8
32	25	5	24	3.5×6×3.1			274	392	29	8
40	30	6	29	4.5×7.5×4.1			372	549	52	10
42	32	6	32	4.5×7.5×4.1			510	784	57	12
43	34	6	33	4.5×7.5×4.1			510	784	72	13
48	37	6	38	4.5×7.5×4.1			774	1,180	104	16
54	42	8	43	5.5×9×5.1	15	15	882	1,370	145	20
62	50	8	51	5.5×9×5.1			980	1,570	300	25
74	58	10	60	6.6×11×6.1			1,570	2,740	375	30
82	64	10	67	6.6×11×6.1	20	20	1,670	3,140	560	35
96	75	13	78	9×14×8.1			2,160	4,020	880	40
116	92	13	98	9×14×8.1			3,820	7,940	2,000	50
134	106	18	112	11×17×11.1	25	25	4,700	10,000	2,560	60
164	136	18	142	11×17×11.1			7,350	16,000	5,300	80
200	170	20	175	14×20×13.1			14,100	34,800	9,900	100

1N≅0.102kgf

NIPPON BEARING

SMT TYPE

– Two Side Cut Flange Type –



part number structure


example **SMST 25 G UU-SK**

specification SMT: standard SMST: anti-corrosion	inner contact diameter (dr)	retainer material blank: standard/steel anti-corrosion/stainless steel G: resin	outer cylinder surface treatment blank: no surface treatment SK: electroless nickel plating LF: low temperature black chrome treatment with fluoride coating SB: black oxide (not available on anti-corrosion type) SC: industrial chrome plating	seal UU: seals on both sides ZZ: doublelip-seals on both sides
--	-----------------------------	--	--	--

part number*				number of ball circuits	dr mm	dr tolerance μm	major dimensions		
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer				D mm	D tolerance μm	L ±0.3 mm
SMT 6UU	SMT 6GUU	SMST 6UU	SMST 6GUU	4	6	- 9	12	0	19
SMT 8UU	SMT 8GUU	SMST 8UU	SMST 8GUU	4	8		15	-13	24
SMT 10UU	SMT 10GUU	SMST 10UU	SMST 10GUU	4	10		19	0	29
SMT 12UU	SMT 12GUU	SMST 12UU	SMST 12GUU	4	12		21	0	30
SMT 13UU	SMT 13GUU	SMST 13UU	SMST 13GUU	4	13		23	-16	32
SMT 16UU	SMT 16GUU	SMST 16UU	SMST 16GUU	4	16		28		37
SMT 20UU	SMT 20GUU	SMST 20UU	SMST 20GUU	5	20	- 10	32	0	42
SMT 25UU	SMT 25GUU	SMST 25UU	SMST 25GUU	6	25		40	-19	59
SMT 30UU	SMT 30GUU	SMST 30UU	SMST 30GUU	6	30		45		64

\* Seals-on-both-sides is standard.

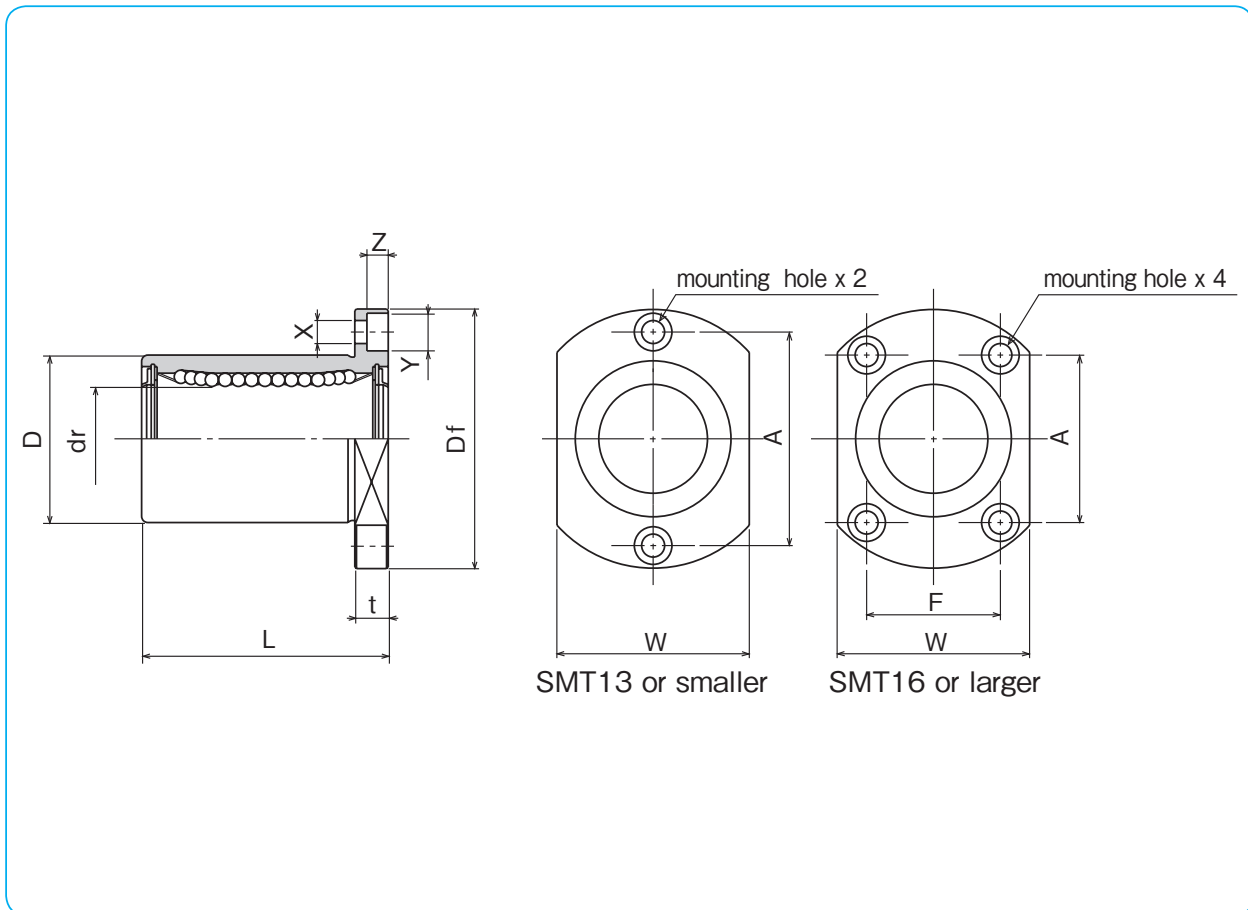SLIDE BUSH



SLIDE BUSH

Df mm	W mm	t mm	flange		X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating		mass g	shaft diameter mm
			A mm	F mm				C N	Co N		
28	18	5	20	—	3.5×6×3.1	12	12	206	265	21	6
32	21	5	24	—	3.5×6×3.1			274	392	33	8
40	25	6	29	—	4.5×7.5×4.1			372	549	64	10
42	27	6	32	—	4.5×7.5×4.1			510	784	68	12
43	29	6	33	—	4.5×7.5×4.1			510	784	81	13
48	34	6	31	22	4.5×7.5×4.1			774	1,180	112	16
54	38	8	36	24	5.5×9×5.1	15	15	882	1,370	167	20
62	46	8	40	32	5.5×9×5.1			980	1,570	325	25
74	51	10	49	35	6.6×11×6.1			1,570	2,740	388	30

1N≅0.102kgf

NIPPON BEARING

SMF-E TYPE

– Round Flange Type with Pilot End –



part number structure

example **SMSF 25 G UU-E-SK**

specification  
**SMF**: standard  
**SMSF**: anti-corrosion

inner contact diameter (dr)

retainer material  
**blank**: standard/steel  
 anti-corrosion/stainless steel  
**G**: resin

outer cylinder surface treatment  
**blank**: no surface treatment  
**SK**: electroless nickel plating  
**LF**: low temperature black chrome treatment with fluoride coating  
**SB**: black oxide (not available on anti-corrosion type)  
**SC**: industrial chrome plating

with pilot end

seal  
**UU**: seals on both sides  
**ZZ**: doublelip-seals on both sides


Doublelip-seal is available for size 6 to 30.

part number*				number of ball circuits	dr mm	dr tolerance μm	major dimensions		
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer				D mm	D tolerance μm	L ±0.3 mm
SMF 6UU-E	SMF 6GUU-E	SMSF 6UU-E	SMSF 6GUU-E	4	6		12	0	19
SMF 8UU-E	SMF 8GUU-E	SMSF 8UU-E	SMSF 8GUU-E	4	8		15	-13	24
SMF 10UU-E	SMF 10GUU-E	SMSF 10UU-E	SMSF 10GUU-E	4	10	0	19		29
SMF 12UU-E	SMF 12GUU-E	SMSF 12UU-E	SMSF 12GUU-E	4	12	-9	21	0	30
SMF 13UU-E	SMF 13GUU-E	SMSF 13UU-E	SMSF 13GUU-E	4	13		23	-16	32
SMF 16UU-E	SMF 16GUU-E	SMSF 16UU-E	SMSF 16GUU-E	4	16		28		37
SMF 20UU-E	SMF 20GUU-E	SMSF 20UU-E	SMSF 20GUU-E	5	20	0	32	0	42
SMF 25UU-E	SMF 25GUU-E	SMSF 25UU-E	SMSF 25GUU-E	6	25	-10	40	-19	59
SMF 30UU-E	SMF 30GUU-E	SMSF 30UU-E	SMSF 30GUU-E	6	30		45		64
SMF 35UU-E	SMF 35GUU-E	-	-	6	35	0	52	0	70
SMF 40UU-E	SMF 40GUU-E	-	-	6	40	-12	60	-22	80
SMF 50UU-E	SMF 50GUU-E	-	-	6	50		80		100
SMF 60UU-E	SMF 60GUU-E	-	-	6	60	0/-15	90	0/-25	110

\* Seals-on-both-sides is standard.



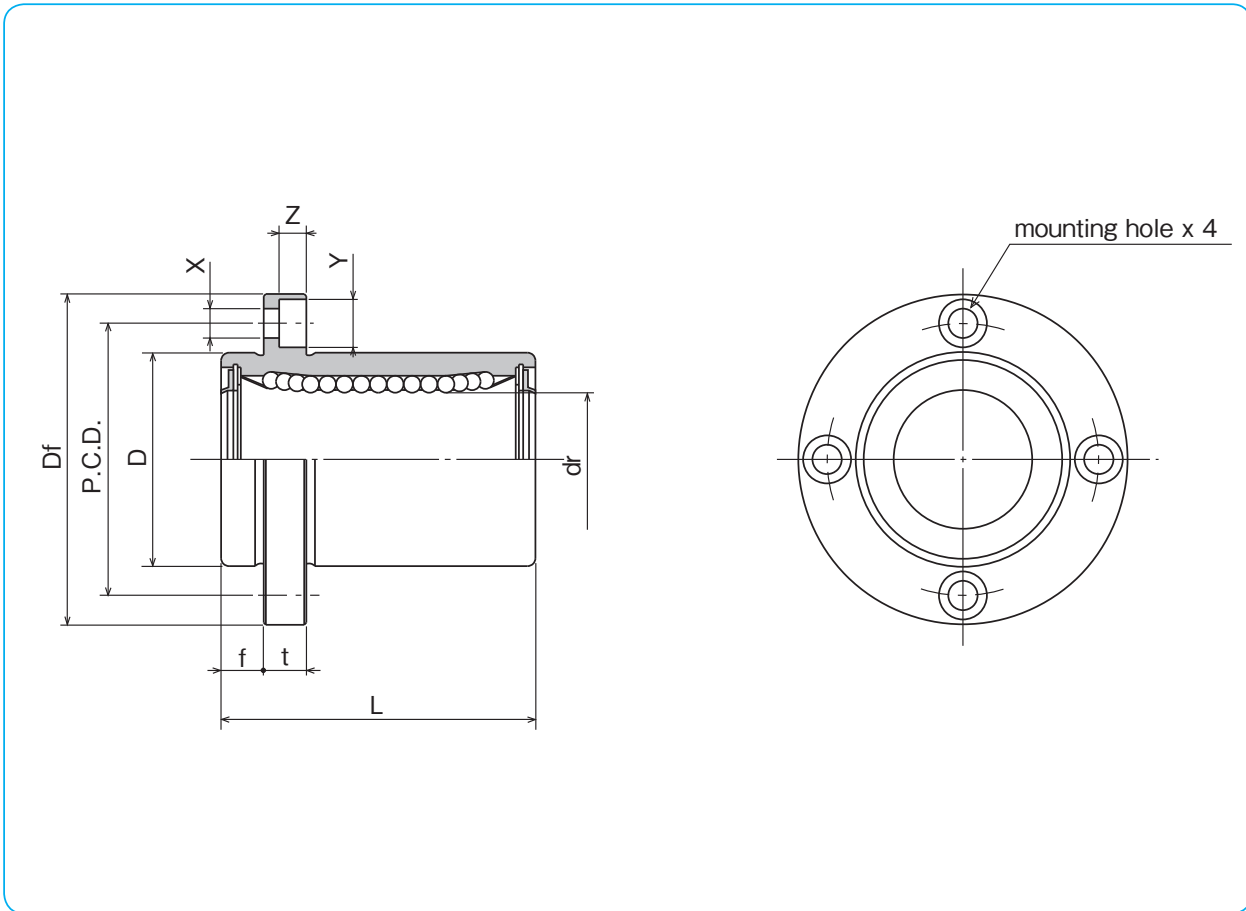SLIDE BUSH



SLIDE BUSH

f mm	Df mm	flange			eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		mass g	shaft diameter mm
		t mm	P.C.D. mm	X×Y×Z mm			C N	Co N		
5	28	5	20	3.5×6×3.1	12	12	206	265	24	6
5	32	5	24	3.5×6×3.1			274	392	37	8
6	40	6	29	4.5×7.5×4.1			372	549	72	10
6	42	6	32	4.5×7.5×4.1			510	784	76	12
6	43	6	33	4.5×7.5×4.1			510	784	88	13
6	48	6	38	4.5×7.5×4.1			774	1,180	120	16
8	54	8	43	5.5×9×5.1	15	15	882	1,370	180	20
8	62	8	51	5.5×9×5.1			980	1,570	340	25
10	74	10	60	6.6×11×6.1			1,570	2,740	470	30
10	82	10	67	6.6×11×6.1	20	20	1,670	3,140	650	35
13	96	13	78	9×14×8.1			2,160	4,020	1,060	40
13	116	13	98	9×14×8.1			3,820	7,940	2,200	50
18	134	18	112	11×17×11.1	25	25	4,700	10,000	3,000	60

1N≅0.102kgf

NIPPON BEARING

SMK-E TYPE

– Square Flange Type with Pilot End –



part number structure

example **SMSK 25 G UU-E-SK**

specification  
**SMK**: standard  
**SMSK**: anti-corrosion

inner contact diameter (dr)

retainer material  
**blank**: standard/steel  
 anti-corrosion/stainless steel  
**G**: resin

outer cylinder surface treatment  
**blank**: no surface treatment  
**SK**: electroless nickel plating  
**LF**: low temperature black chrome treatment with fluoride coating  
**SB**: black oxide (not available on anti-corrosion type)  
**SC**: industrial chrome plating

with pilot end


seal  
**UU**: seals on both sides  
**ZZ**: doublelip-seals on both sides

Doublelip-seal is available for size 6 to 30.

part number*				number of ball circuits	dr mm	dr tolerance μm	major dimensions		
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer				D mm	D tolerance μm	L ±0.3 mm
SMK 6UU-E	SMK 6GUU-E	SMSK 6UU-E	SMSK 6GUU-E	4	6		12	0	19
SMK 8UU-E	SMK 8GUU-E	SMSK 8UU-E	SMSK 8GUU-E	4	8		15	-13	24
SMK 10UU-E	SMK 10GUU-E	SMSK 10UU-E	SMSK 10GUU-E	4	10	0	19		29
SMK 12UU-E	SMK 12GUU-E	SMSK 12UU-E	SMSK 12GUU-E	4	12	-9	21	0	30
SMK 13UU-E	SMK 13GUU-E	SMSK 13UU-E	SMSK 13GUU-E	4	13		23	-16	32
SMK 16UU-E	SMK 16GUU-E	SMSK 16UU-E	SMSK 16GUU-E	4	16		28		37
SMK 20UU-E	SMK 20GUU-E	SMSK 20UU-E	SMSK 20GUU-E	5	20	0	32	0	42
SMK 25UU-E	SMK 25GUU-E	SMSK 25UU-E	SMSK 25GUU-E	6	25	-10	40	-19	59
SMK 30UU-E	SMK 30GUU-E	SMSK 30UU-E	SMSK 30GUU-E	6	30		45		64
SMK 35UU-E	SMK 35GUU-E	—	—	6	35	0	52	0	70
SMK 40UU-E	SMK 40GUU-E	—	—	6	40	-12	60	-22	80
SMK 50UU-E	SMK 50GUU-E	—	—	6	50		80		100
SMK 60UU-E	SMK 60GUU-E	—	—	6	60	0/-15	90	0/-25	110

\* Seals-on-both-sides is standard.

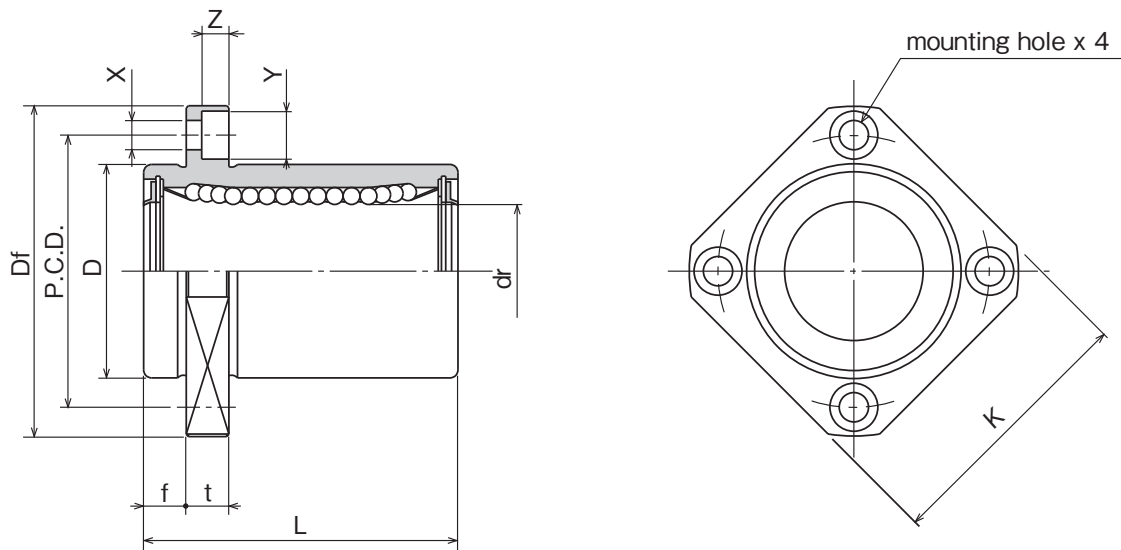SLIDE BUSH



SLIDE BUSH

f mm	Df mm	K mm	flange			eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		mass g	shaft diameter mm
			t mm	P.C.D. mm	X×Y×Z mm			dynamic C N	static Co N		
5	28	22	5	20	3.5×6×3.1	12	12	206	265	18	6
5	32	25	5	24	3.5×6×3.1			274	392	29	8
6	40	30	6	29	4.5×7.5×4.1			372	549	52	10
6	42	32	6	32	4.5×7.5×4.1			510	784	57	12
6	43	34	6	33	4.5×7.5×4.1			510	784	72	13
6	48	37	6	38	4.5×7.5×4.1			774	1,180	104	16
8	54	42	8	43	5.5×9×5.1	15	15	882	1,370	145	20
8	62	50	8	51	5.5×9×5.1			980	1,570	300	25
10	74	58	10	60	6.6×11×6.1			1,570	2,740	375	30
10	82	64	10	67	6.6×11×6.1	20	20	1,670	3,140	560	35
13	96	75	13	78	9×14×8.1			2,160	4,020	880	40
13	116	92	13	98	9×14×8.1			3,820	7,940	2,000	50
18	134	106	18	112	11×17×11.1	25	25	4,700	10,000	2,560	60

1N≅0.102kgf

NIPPON BEARING

SMT-E TYPE

– Two Side Cut Pilot End Flange Type –



part number structure

example **SMST 25 G UU-E-SK**

specification  
**SMT:** standard  
**SMST:** anti-corrosion

inner contact diameter (dr)

retainer material  
**blank:** standard/steel  
 anti-corrosion/stainless steel  
**G:** resin

outer cylinder surface treatment  
**blank:** no surface treatment  
**SK:** electroless nickel plating  
**LF:** low temperature black chrome treatment with fluoride coating  
**SB:** black oxide (not available on anti-corrosion type)  
**SC:** industrial chrome plating


with pilot end

seal  
**UU:** seals on both sides  
**ZZ:** doublelip-seals on both sides

part number*				number of ball circuits	dr mm	dr tolerance μm	major dimensions			
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer				D mm	D tolerance μm	L ±0.3 mm	
SMT 6UU-E	SMT 6GUU-E	SMST 6UU-E	SMST 6GUU-E	4	6	- 9	12	0	19	
SMT 8UU-E	SMT 8GUU-E	SMST 8UU-E	SMST 8GUU-E	4	8		15	-13	24	
SMT 10UU-E	SMT 10GUU-E	SMST 10UU-E	SMST 10GUU-E	4	10		19	-16	29	
SMT 12UU-E	SMT 12GUU-E	SMST 12UU-E	SMST 12GUU-E	4	12		21		0	30
SMT 13UU-E	SMT 13GUU-E	SMST 13UU-E	SMST 13GUU-E	4	13		23		32	
SMT 16UU-E	SMT 16GUU-E	SMST 16UU-E	SMST 16GUU-E	4	16		28		37	
SMT 20UU-E	SMT 20GUU-E	SMST 20UU-E	SMST 20GUU-E	5	20	-10	32	0	42	
SMT 25UU-E	SMT 25GUU-E	SMST 25UU-E	SMST 25GUU-E	6	25		40	-19	59	
SMT 30UU-E	SMT 30GUU-E	SMST 30UU-E	SMST 30GUU-E	6	30		45	64		

\* Seals-on-both-sides is standard.

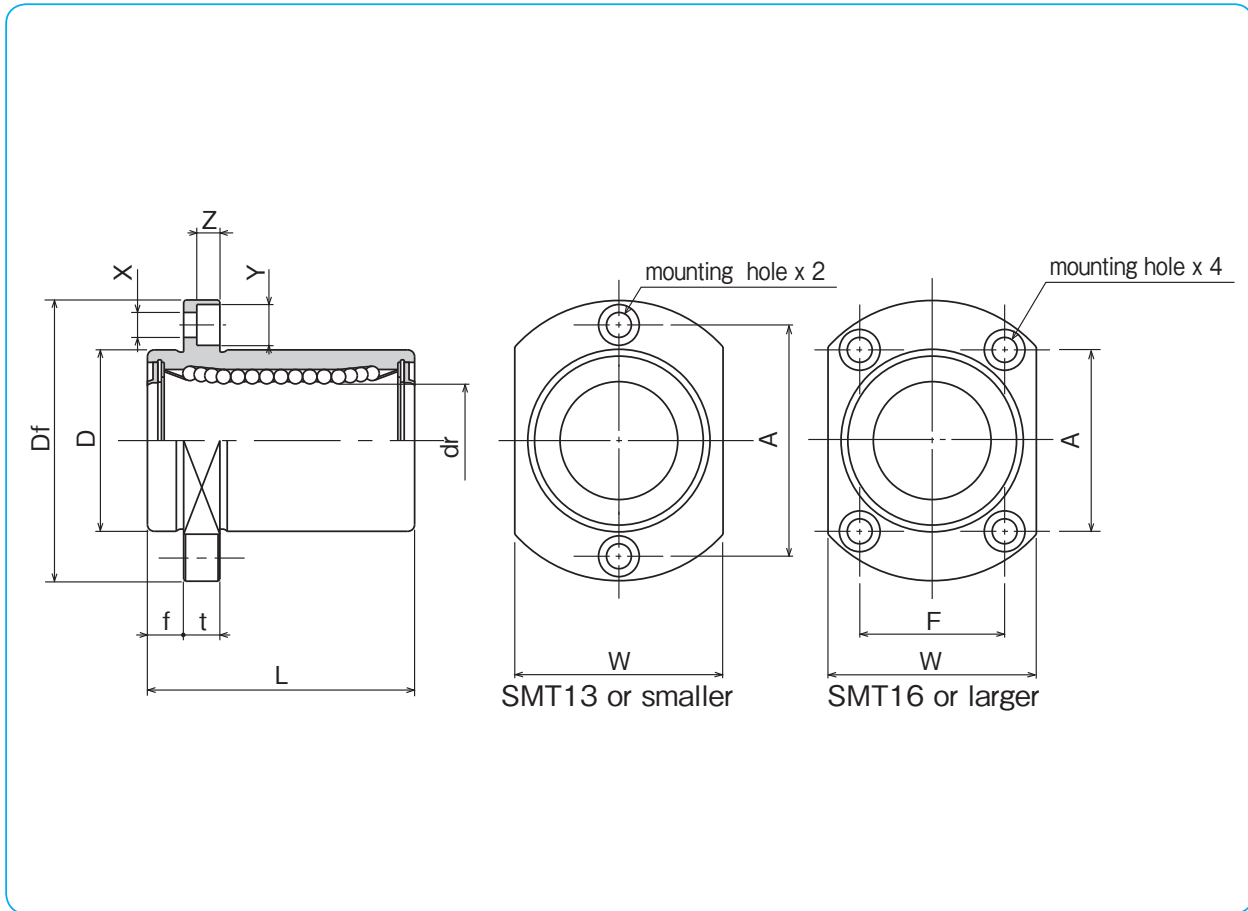SLIDE BUSH



SLIDE BUSH

f mm	Df mm	flange					eccentricity μm	perpendicularity μm	basic load rating		mass g	shaft diameter mm
		W mm	t mm	A mm	F mm	X×Y×Z mm			dynamic C N	static Co N		
5	28	18	5	20	—	3.5×6×3.1	12	12	206	265	21	6
5	32	21	5	24	—	3.5×6×3.1			274	392	33	8
6	40	25	6	29	—	4.5×7.5×4.1			372	549	64	10
6	42	27	6	32	—	4.5×7.5×4.1			510	784	68	12
6	43	29	6	33	—	4.5×7.5×4.1			510	784	81	13
6	48	34	6	31	22	4.5×7.5×4.1			774	1,180	112	16
8	54	38	8	36	24	5.5×9×5.1	15	15	882	1,370	167	20
8	62	46	8	40	32	5.5×9×5.1			980	1,570	325	25
10	74	51	10	49	35	6.6×11×6.1			1,570	2,740	388	30

1N≅0.102kgf

NIPPON BEARING

SMK-G-L TYPE

– Square Flange Long type –



part number structure

example **SMK 25 G - L UU - SK**

SMK type

inner contact diameter (dr)

resin retainer

outer cylinder  
surface treatment  
**blank**: no surface treatment  
**SK**: electroless nickel plating  
**LF**: low temperature black chrome  
treatment with fluoride coating  
**SB**: black oxide (not available on  
anti-corrosion type)  
**SC**: industrial chrome plating

seal

**UU**: seals on both sides


**ZZ**: doublelip-seals on both sides

long type

part number*	number of ball circuits	dr		D		major dimensions				
		mm	tolerance $\mu\text{m}$	mm	tolerance $\mu\text{m}$	L $\pm 0.3$ mm	Df mm	K mm	t mm	flange P.C.D. mm
SMK 6G-LUU	4	6	-10	12	0	26	28	22	5	20
SMK 8G-LUU	4	8		15	-13	32	32	25	5	24
SMK10G-LUU	4	10		19	0	39	40	30	6	29
SMK12G-LUU	4	12		21	-16	41	42	32	6	32
SMK13G-LUU	4	13		23	0	45	43	34	6	33
SMK16G-LUU	4	16		28	-19	53	48	37	6	38
SMK20G-LUU	5	20	-12	32	0	59	54	42	8	43
SMK25G-LUU	6	25		40	-19	83	62	50	8	51
SMK30G-LUU	6	30		45	0	90	74	58	10	60

\* Seals-on-both-sides is standard.

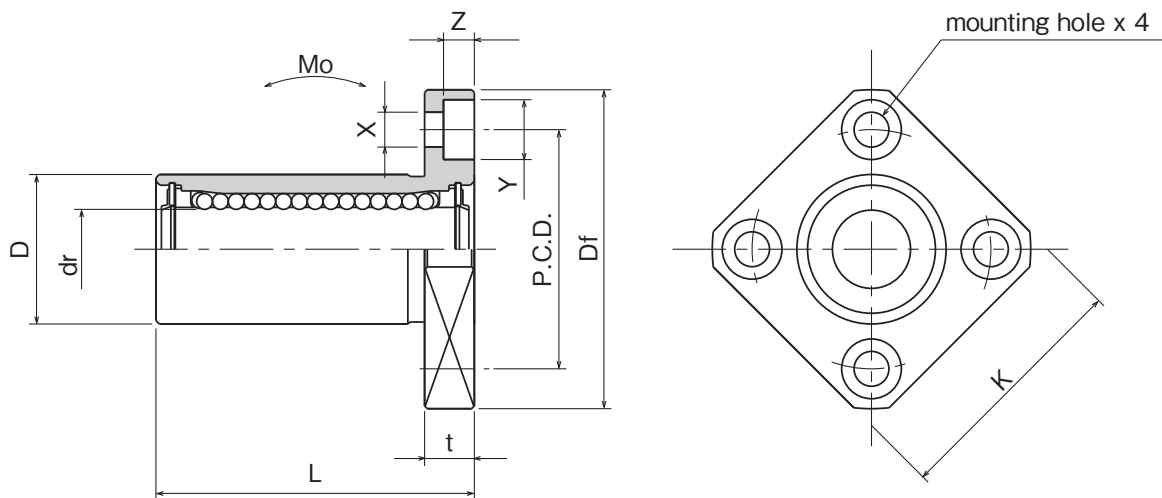SLIDE BUSH



SLIDE BUSH

X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating		allowable static moment Mo N·m	mass g	shaft diameter mm
			dynamic C N	static Co N			
3.5×6×3.1	15	15	262	476	1.15	20	6
3.5×6×3.1			352	615	1.94	32	8
4.5×7.5×4.1			493	1,000	3.98	59	10
4.5×7.5×4.1			637	1,430	6.26	67	12
4.5×7.5×4.1			682	1,560	7.68	88	13
4.5×7.5×4.1			1,039	2,350	13.2	125	16
5.5×9×5.1	20	20	1,160	2,740	17.9	170	20
5.5×9×5.1			1,300	2,960	27.2	380	25
6.6×11×6.1			2,160	5,880	61.3	460	30

1N≅0.102kgf 1N·m≅0.102kgf·m

NIPPON BEARING

SMF-W TYPE

– Round Flange Double-Wide Type –



part number structure

example **SMSF 25 G W UU-SK**


specification <b>SMF</b> : standard <b>SMSF</b> : anti-corrosion	inner contact diameter (dr)	retainer material <b>blank</b> : standard/steel anti-corrosion/stainless steel <b>G</b> : resin	outer cylinder surface treatment <b>blank</b> : no surface treatment <b>SK</b> : electroless nickel plating <b>LF</b> : low temperature black chrome treatment with fluoride coating <b>SB</b> : black oxide (not available on anti-corrosion type) <b>SC</b> : industrial chrome plating	seal <b>blank</b> : without seal <b>UU</b> : seals on both sides <b>ZZ</b> : doublelip-seals on both sides	double-wide type
--	-----------------------------	--	--	---	------------------

Doublelip-seal is available for size 6 to 30.

part number				number of ball circuits	dr mm	dr tolerance μm	major dimensions		
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer				D mm	D tolerance μm	L ±0.3 mm
<b>SMF 6W</b>	<b>SMF 6GW</b>	<b>SMSF 6W</b>	<b>SMSF 6GW</b>	4	6	-10	12	0	35
<b>SMF 8W</b>	<b>SMF 8GW</b>	<b>SMSF 8W</b>	<b>SMSF 8GW</b>	4	8		15	-13	45
<b>SMF10W</b>	<b>SMF10GW</b>	<b>SMSF10W</b>	<b>SMSF10GW</b>	4	10		19	0	55
<b>SMF12W</b>	<b>SMF12GW</b>	<b>SMSF12W</b>	<b>SMSF12GW</b>	4	12		21	0	57
<b>SMF13W</b>	<b>SMF13GW</b>	<b>SMSF13W</b>	<b>SMSF13GW</b>	4	13		23	-16	61
<b>SMF16W</b>	<b>SMF16GW</b>	<b>SMSF16W</b>	<b>SMSF16GW</b>	4	16		28		70
<b>SMF20W</b>	<b>SMF20GW</b>	<b>SMSF20W</b>	<b>SMSF20GW</b>	5	20	-12	32	0	80
<b>SMF25W</b>	<b>SMF25GW</b>	<b>SMSF25W</b>	<b>SMSF25GW</b>	6	25		40	-19	112
<b>SMF30W</b>	<b>SMF30GW</b>	<b>SMSF30W</b>	<b>SMSF30GW</b>	6	30		45		123
<b>SMF35W</b>	<b>SMF35GW</b>	<b>SMSF35W</b>	<b>SMSF35GW</b>	6	35	-15	52	0	135
<b>SMF40W</b>	<b>SMF40GW</b>	<b>SMSF40W</b>	<b>SMSF40GW</b>	6	40		60	-22	151
<b>SMF50W</b>	<b>SMF50GW</b>	<b>SMSF50W</b>	<b>SMSF50GW</b>	6	50		80		192
<b>SMF60W</b>	<b>SMF60GW</b>	<b>SMSF60W</b>	<b>SMSF60GW</b>	6	60	0/-20	90	0/-25	209



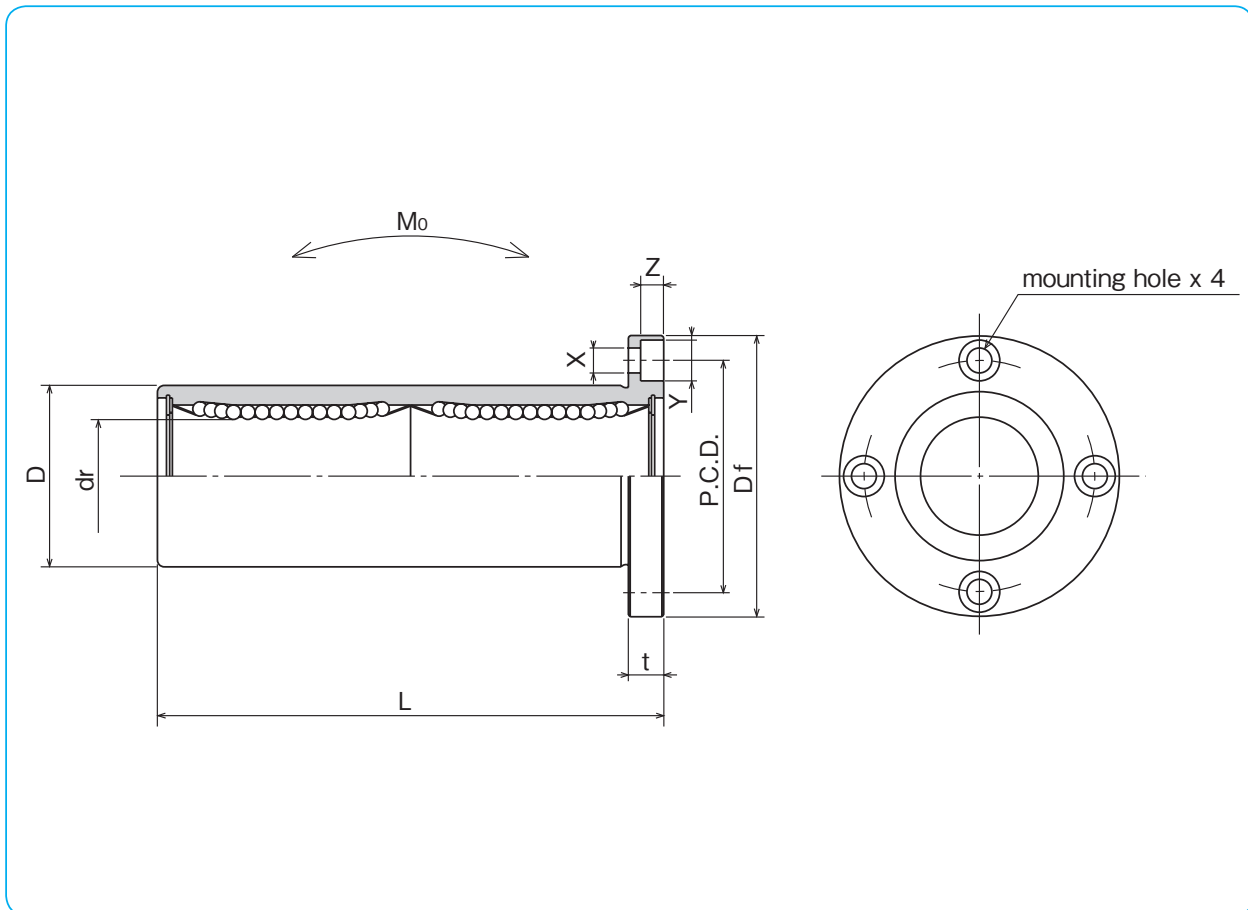SLIDE BUSH



SLIDE BUSH


Df mm	t mm	flange P.C.D. mm	X×Y×Z mm	eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		allowable static moment $M_o$ $\text{N} \cdot \text{m}$	mass g	shaft diameter mm
						dynamic C N	static $C_o$ N			
28	5	20	3.5×6×3.1	15	15	323	530	2.18	31	6
32	5	24	3.5×6×3.1			431	784	4.31	51	8
40	6	29	4.5×7.5×4.1			588	1,100	7.24	98	10
42	6	32	4.5×7.5×4.1			813	1,570	10.9	110	12
43	6	33	4.5×7.5×4.1			813	1,570	11.6	130	13
48	6	38	4.5×7.5×4.1			1,230	2,350	19.7	190	16
54	8	43	5.5×9×5.1	20	20	1,400	2,740	26.8	260	20
62	8	51	5.5×9×5.1			1,560	3,140	43.4	540	25
74	10	60	6.6×11×6.1			2,490	5,490	82.8	680	30
82	10	67	6.6×11×6.1	25	25	2,650	6,270	110	1,020	35
96	13	78	9×14×8.1			3,430	8,040	147	1,570	40
116	13	98	9×14×8.1			6,080	15,900	397	3,600	50
134	18	112	11×17×11.1	30	30	7,550	20,000	530	4,500	60

1N≅0.102kgf 1N · m≅0.102kgf · m

NIPPON BEARING

SMK-W TYPE

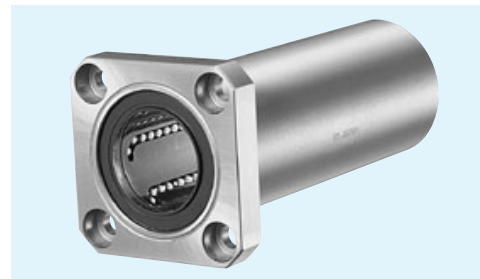– Square Flange Double-Wide Type –



part number structure


example **SMSK 25 G W UU-SK**

specification <b>SMK</b> : standard <b>SMSK</b> : anti-corrosion	inner contact diameter (dr)	retainer material <b>blank</b> : standard/steel anti-corrosion/stainless steel <b>G</b> : resin	outer cylinder surface treatment <b>blank</b> : no surface treatment <b>SK</b> : electroless nickel plating <b>LF</b> : low temperature black chrome treatment with fluoride coating <b>SB</b> : black oxide (not available on anti-corrosion type) <b>SC</b> : industrial chrome plating	seal <b>blank</b> : without seal <b>UU</b> : seals on both sides <b>ZZ</b> : doublelip-seals on both sides	double-wide type
--	-----------------------------	--	--	---	------------------

Doublelip-seal is available for size 6 to 30.

part number				number of ball circuits	dr mm	dr tolerance μm	major dimensions		
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer				D mm	D tolerance μm	L ±0.3 mm
<b>SMK 6W</b>	<b>SMK 6GW</b>	<b>SMSK 6W</b>	<b>SMSK 6GW</b>	4	6		12	0	35
<b>SMK 8W</b>	<b>SMK 8GW</b>	<b>SMSK 8W</b>	<b>SMSK 8GW</b>	4	8		15	-13	45
<b>SMK10W</b>	<b>SMK10GW</b>	<b>SMSK10W</b>	<b>SMSK10GW</b>	4	10	0	19		55
<b>SMK12W</b>	<b>SMK12GW</b>	<b>SMSK12W</b>	<b>SMSK12GW</b>	4	12	-10	21	0	57
<b>SMK13W</b>	<b>SMK13GW</b>	<b>SMSK13W</b>	<b>SMSK13GW</b>	4	13		23	-16	61
<b>SMK16W</b>	<b>SMK16GW</b>	<b>SMSK16W</b>	<b>SMSK16GW</b>	4	16		28		70
<b>SMK20W</b>	<b>SMK20GW</b>	<b>SMSK20W</b>	<b>SMSK20GW</b>	5	20	0	32	0	80
<b>SMK25W</b>	<b>SMK25GW</b>	<b>SMSK25W</b>	<b>SMSK25GW</b>	6	25	-12	40	-19	112
<b>SMK30W</b>	<b>SMK30GW</b>	<b>SMSK30W</b>	<b>SMSK30GW</b>	6	30		45		123
<b>SMK35W</b>	<b>SMK35GW</b>	<b>SMSK35W</b>	<b>SMSK35GW</b>	6	35	0	52	0	135
<b>SMK40W</b>	<b>SMK40GW</b>	<b>SMSK40W</b>	<b>SMSK40GW</b>	6	40	-15	60	-22	151
<b>SMK50W</b>	<b>SMK50GW</b>	<b>SMSK50W</b>	<b>SMSK50GW</b>	6	50		80		192
<b>SMK60W</b>	<b>SMK60GW</b>	<b>SMSK60W</b>	<b>SMSK60GW</b>	6	60	0/-20	90	0/-25	209

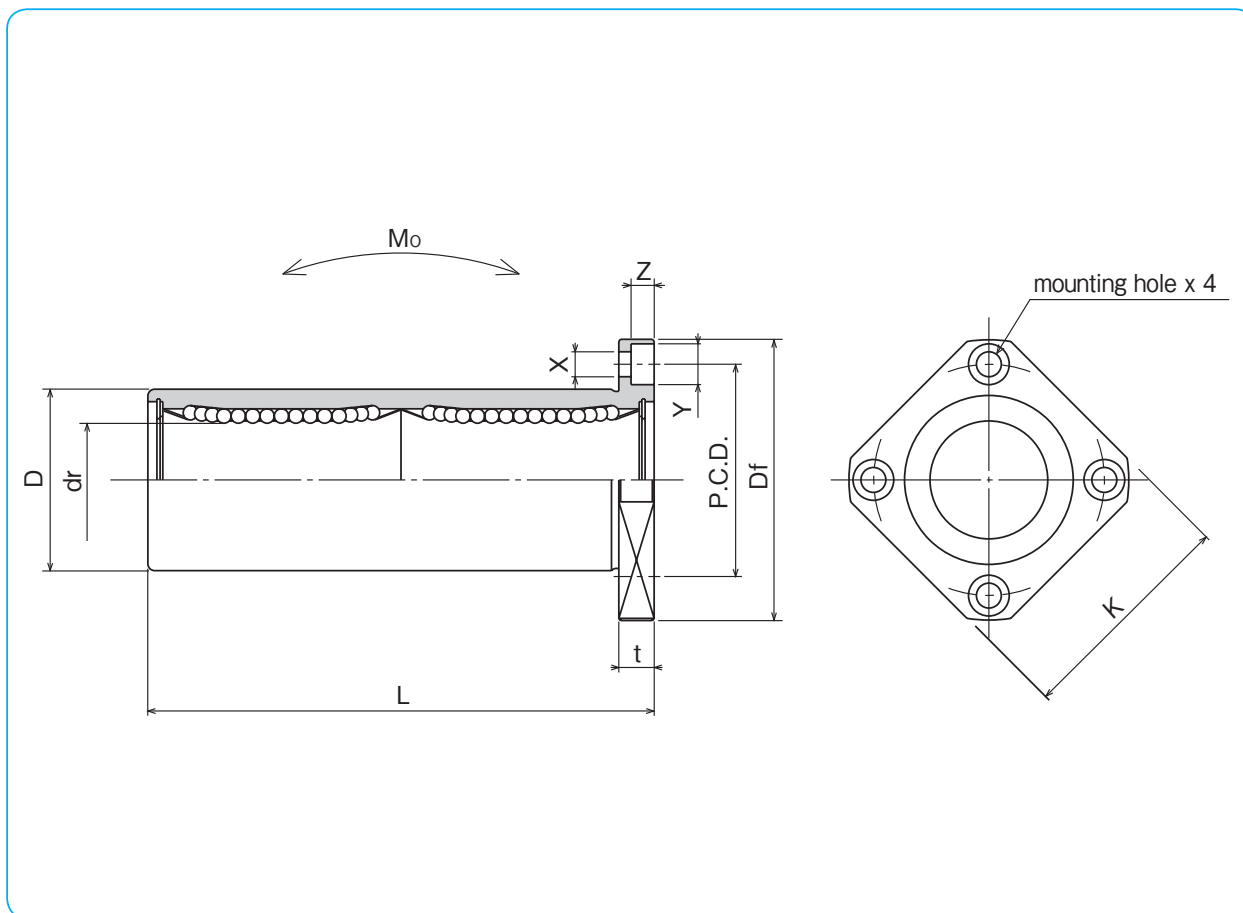SLIDE BUSH



SLIDE BUSH

Df mm	K mm	flange			eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		allowable static moment $M_o$ N · m	mass g	shaft diameter mm
		t mm	P.C.D. mm	X×Y×Z mm			dynamic C N	static $C_o$ N			
28	22	5	20	3.5×6×3.1	15	15	323	530	2.18	25	6
32	25	5	24	3.5×6×3.1			431	784	4.31	43	8
40	30	6	29	4.5×7.5×4.1			588	1,100	7.24	78	10
42	32	6	32	4.5×7.5×4.1			813	1,570	10.9	90	12
43	34	6	33	4.5×7.5×4.1			813	1,570	11.6	108	13
48	37	6	38	4.5×7.5×4.1			1,230	2,350	19.7	165	16
54	42	8	43	5.5×9×5.1	20	20	1,400	2,740	26.8	225	20
62	50	8	51	5.5×9×5.1			1,560	3,140	43.4	500	25
74	58	10	60	6.6×11×6.1			2,490	5,490	82.8	590	30
82	64	10	67	6.6×11×6.1	25	25	2,650	6,270	110	930	35
96	75	13	78	9×14×8.1			3,430	8,040	147	1,380	40
116	92	13	98	9×14×8.1			6,080	15,900	397	3,400	50
134	106	18	112	11×17×11.1	30	30	7,550	20,000	530	4,060	60

1N≅0.102kgf 1N · m≅0.102kgf · m

NIPPON BEARING

SMT-W TYPE

– Two Side Cut Double-Wide Flange Type –



part number structure


example **SMST 25 G W UU -SK**

specification <b>SMT</b> : standard <b>SMST</b> : anti-corrosion	inner contact diameter (dr)	retainer material <b>blank</b> : standard/steel anti-corrosion/stainless steel <b>G</b> : resin	outer cylinder surface treatment <b>blank</b> : no surface treatment <b>SK</b> : electroless nickel plating <b>LF</b> : low temperature black chrome treatment with fluoride coating <b>SB</b> : black oxide (not available on anti-corrosion type) <b>SC</b> : industrial chrome plating	seal <b>UU</b> : seals on both sides <b>ZZ</b> : doublelip-seals on both sides	double-wide type
--	-----------------------------	--	--	--	------------------

part number*				number of ball circuits	dr mm	major dimensions				
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer			dr tolerance $\mu\text{m}$	D mm	D tolerance $\mu\text{m}$	L $\pm 0.3$ mm	
SMT 6WUU	SMT 6GWUU	SMST 6WUU	SMST 6GWUU	4	6	-10	12	0	35	
SMT 8WUU	SMT 8GWUU	SMST 8WUU	SMST 8GWUU	4	8		15	-13	45	
SMT10WUU	SMT10GWUU	SMST10WUU	SMST10GWUU	4	10		19	-16	55	
SMT12WUU	SMT12GWUU	SMST12WUU	SMST12GWUU	4	12		21		0	57
SMT13WUU	SMT13GWUU	SMST13WUU	SMST13GWUU	4	13		23		61	
SMT16WUU	SMT16GWUU	SMST16WUU	SMST16GWUU	4	16		28		70	
SMT20WUU	SMT20GWUU	SMST20WUU	SMST20GWUU	5	20	-12	32	0	80	
SMT25WUU	SMT25GWUU	SMST25WUU	SMST25GWUU	6	25		40	-19	112	
SMT30WUU	SMT30GWUU	SMST30WUU	SMST30GWUU	6	30		45	123		

\* Seals-on-both-sides is standard.

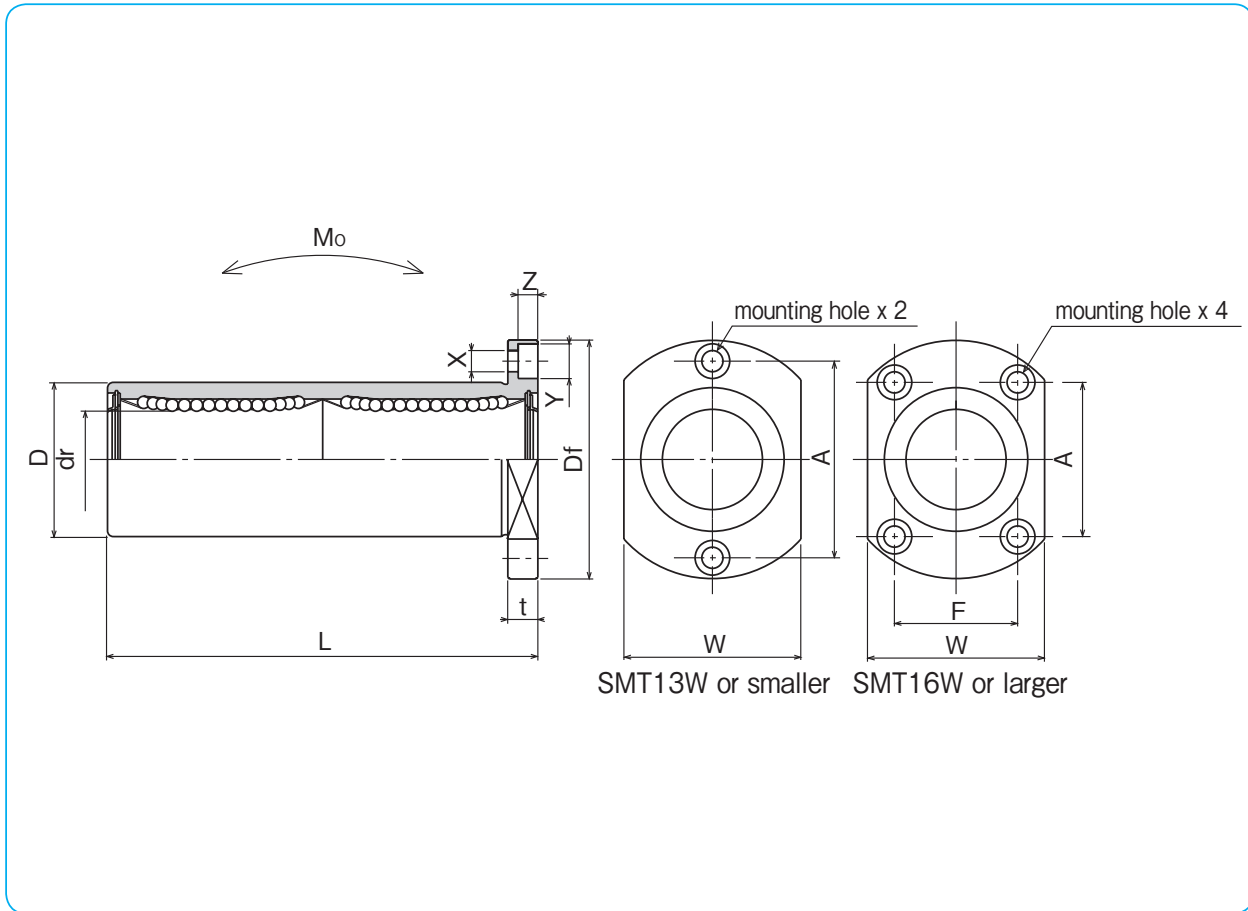SLIDE BUSH



SLIDE BUSH

Df mm	W mm	t mm	flange			eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		allowable static moment Mo N · m	mass g	shaft diameter mm
			A mm	F mm	X×Y×Z mm			dynamic C N	static Co N			
28	18	5	20	—	3.5×6×3.1	15	15	323	530	2.18	28	6
32	21	5	24	—	3.5×6×3.1			431	784	4.31	47	8
40	25	6	29	—	4.5×7.5×4.1			588	1,100	7.24	90	10
42	27	6	32	—	4.5×7.5×4.1			813	1,570	10.9	102	12
43	29	6	33	—	4.5×7.5×4.1			813	1,570	11.6	123	13
48	34	6	31	22	4.5×7.5×4.1			1,230	2,350	19.7	182	16
54	38	8	36	24	5.5×9×5.1	20	20	1,400	2,740	26.8	247	20
62	46	8	40	32	5.5×9×5.1			1,560	3,140	43.4	525	25
74	51	10	49	35	6.6×11×6.1			2,490	5,490	82.8	645	30

1N≅0.102kgf 1N · m≅0.102kgf · m

NIPPON BEARING

SMFC TYPE

– Center Mount Round Flange Type –



part number structure


example **SMSFC 25 G UU -SK**

specification <b>SMFC</b> : standard <b>SMSFC</b> : anti-corrosion	inner contact diameter (dr)	retainer material <b>blank</b> : standard/steel anti-corrosion/stainless steel <b>G</b> : resin	outer cylinder surface treatment <b>blank</b> : no surface treatment <b>SK</b> : electroless nickel plating <b>LF</b> : low temperature black chrome treatment with fluoride coating <b>SB</b> : black oxide (not available on anti-corrosion type) <b>SC</b> : industrial chrome plating	seal <b>blank</b> : without seal <b>UU</b> : seals on both sides <b>ZZ</b> : doublelip-seals on both sides
--	-----------------------------	--	--	---

Doublelip-seal is available for size 6 to 30.

part number				number of ball circuits	dr mm	dr tolerance μm	major dimensions		L ±0.3 mm
standard steel retainer	resin retainer	anti-corrosion stainless retainer resin retainer					D mm	D tolerance μm	
<b>SMFC 6</b>	<b>SMFC 6G</b>	<b>SMSFC 6</b>	<b>SMSFC 6G</b>	4	6		12	0	35
<b>SMFC 8</b>	<b>SMFC 8G</b>	<b>SMSFC 8</b>	<b>SMSFC 8G</b>	4	8		15	-13	45
<b>SMFC10</b>	<b>SMFC10G</b>	<b>SMSFC10</b>	<b>SMSFC10G</b>	4	10	0	19		55
<b>SMFC12</b>	<b>SMFC12G</b>	<b>SMSFC12</b>	<b>SMSFC12G</b>	4	12	-10	21	0	57
<b>SMFC13</b>	<b>SMFC13G</b>	<b>SMSFC13</b>	<b>SMSFC13G</b>	4	13		23	-16	61
<b>SMFC16</b>	<b>SMFC16G</b>	<b>SMSFC16</b>	<b>SMSFC16G</b>	4	16		28		70
<b>SMFC20</b>	<b>SMFC20G</b>	<b>SMSFC20</b>	<b>SMSFC20G</b>	5	20	0	32	0	80
<b>SMFC25</b>	<b>SMFC25G</b>	<b>SMSFC25</b>	<b>SMSFC25G</b>	6	25	-12	40	-19	112
<b>SMFC30</b>	<b>SMFC30G</b>	<b>SMSFC30</b>	<b>SMSFC30G</b>	6	30		45		123
<b>SMFC35</b>	<b>SMFC35G</b>	<b>SMSFC35</b>	<b>SMSFC35G</b>	6	35	0	52	0	135
<b>SMFC40</b>	<b>SMFC40G</b>	<b>SMSFC40</b>	<b>SMSFC40G</b>	6	40	-15	60	-22	151
<b>SMFC50</b>	<b>SMFC50G</b>	<b>SMSFC50</b>	<b>SMSFC50G</b>	6	50		80		192
<b>SMFC60</b>	<b>SMFC60G</b>	<b>SMSFC60</b>	<b>SMSFC60G</b>	6	60	0/-20	90	0/-25	209

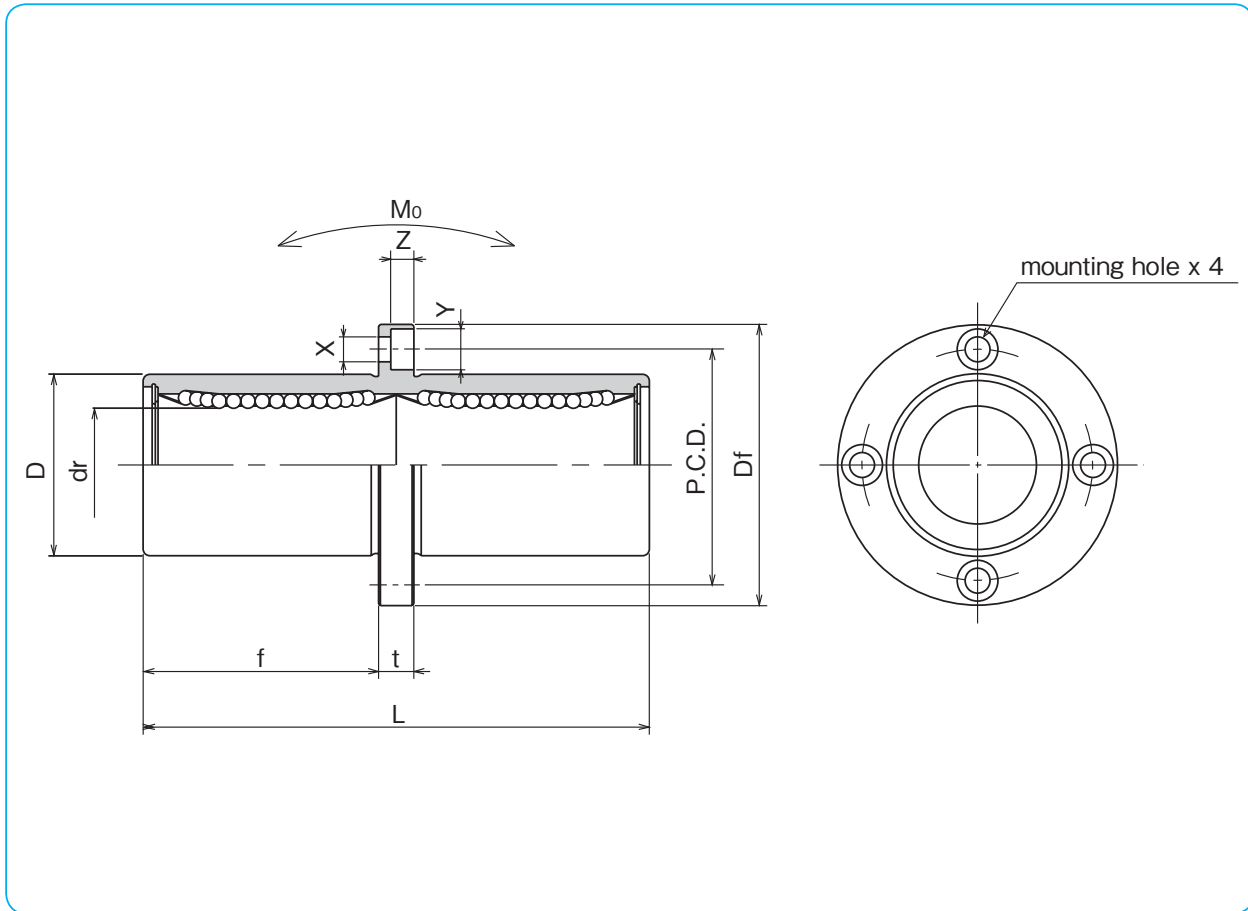SLIDE BUSH



SLIDE BUSH

f mm	Df mm	flange			eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		allowable static moment $\text{N} \cdot \text{m}$	mass g	shaft diameter mm
		t mm	P.C.D. mm	X×Y×Z mm			dynamic C N	static Co N			
15	28	5	20	3.5×6×3.1	15	15	323	530	2.18	31	6
20	32	5	24	3.5×6×3.1			431	784	4.31	51	8
24.5	40	6	29	4.5×7.5×4.1			588	1,100	7.24	98	10
25.5	42	6	32	4.5×7.5×4.1			813	1,570	10.9	110	12
27.5	43	6	33	4.5×7.5×4.1			813	1,570	11.6	130	13
32	48	6	38	4.5×7.5×4.1			1,230	2,350	19.7	190	16
36	54	8	43	5.5×9×5.1	20	20	1,400	2,740	26.8	260	20
52	62	8	51	5.5×9×5.1			1,560	3,140	43.4	540	25
56.5	74	10	60	6.6×11×6.1			2,490	5,490	82.8	680	30
62.5	82	10	67	6.6×11×6.1	25	25	2,650	6,270	110	1,020	35
69	96	13	78	9×14×8.1			3,430	8,040	147	1,570	40
89.5	116	13	98	9×14×8.1			6,080	15,900	397	3,600	50
95.5	134	18	112	11×17×11.1	30	30	7,550	20,000	530	4,500	60

1N≅0.102kgf 1N·m≅0.102kgf·m

NIPPON BEARING

SMKC TYPE

– Center Mount Square Flange Type –



part number structure

example **SMSKC 25 G UU -SK**


specification <b>SMKC</b> : standard <b>SMSKC</b> : anti-corrosion	inner contact diameter (dr)	retainer material <b>blank</b> : standard/steel anti-corrosion/stainless steel <b>G</b> : resin	outer cylinder surface treatment <b>blank</b> : no surface treatment <b>SK</b> : electroless nickel plating <b>LF</b> : low temperature black chrome treatment with fluoride coating <b>SB</b> : black oxide (not available on anti-corrosion type) <b>SC</b> : industrial chrome plating	seal <b>blank</b> : without seal <b>UU</b> : seals on both sides <b>ZZ</b> : doublelip-seals on both sides
--	-----------------------------	--	--	---

Doublelip-seal is available for size 6 to 30.

part number				number of ball circuits	dr mm	dr tolerance μm	major dimensions		
standard steel retainer	resin retainer	anti-corrosion stainless retainer resin retainer					D mm	D tolerance μm	L ±0.3 mm
<b>SMKC 6</b>	<b>SMKC 6G</b>	<b>SMSKC 6</b>	<b>SMSKC 6G</b>	4	6	12	0	35	
<b>SMKC 8</b>	<b>SMKC 8G</b>	<b>SMSKC 8</b>	<b>SMSKC 8G</b>	4	8	15	-13	45	
<b>SMKC10</b>	<b>SMKC10G</b>	<b>SMSKC10</b>	<b>SMSKC10G</b>	4	10	19	0	55	
<b>SMKC12</b>	<b>SMKC12G</b>	<b>SMSKC12</b>	<b>SMSKC12G</b>	4	12	21	0	57	
<b>SMKC13</b>	<b>SMKC13G</b>	<b>SMSKC13</b>	<b>SMSKC13G</b>	4	13	23	-16	61	
<b>SMKC16</b>	<b>SMKC16G</b>	<b>SMSKC16</b>	<b>SMSKC16G</b>	4	16	28	0	70	
<b>SMKC20</b>	<b>SMKC20G</b>	<b>SMSKC20</b>	<b>SMSKC20G</b>	5	20	32	0	80	
<b>SMKC25</b>	<b>SMKC25G</b>	<b>SMSKC25</b>	<b>SMSKC25G</b>	6	25	40	-19	112	
<b>SMKC30</b>	<b>SMKC30G</b>	<b>SMSKC30</b>	<b>SMSKC30G</b>	6	30	45	0	123	
<b>SMKC35</b>	<b>SMKC35G</b>	<b>SMSKC35</b>	<b>SMSKC35G</b>	6	35	52	0	135	
<b>SMKC40</b>	<b>SMKC40G</b>	<b>SMSKC40</b>	<b>SMSKC40G</b>	6	40	60	-22	151	
<b>SMKC50</b>	<b>SMKC50G</b>	<b>SMSKC50</b>	<b>SMSKC50G</b>	6	50	80	0	192	
<b>SMKC60</b>	<b>SMKC60G</b>	<b>SMSKC60</b>	<b>SMSKC60G</b>	6	60	0/-20	0/-25	209	



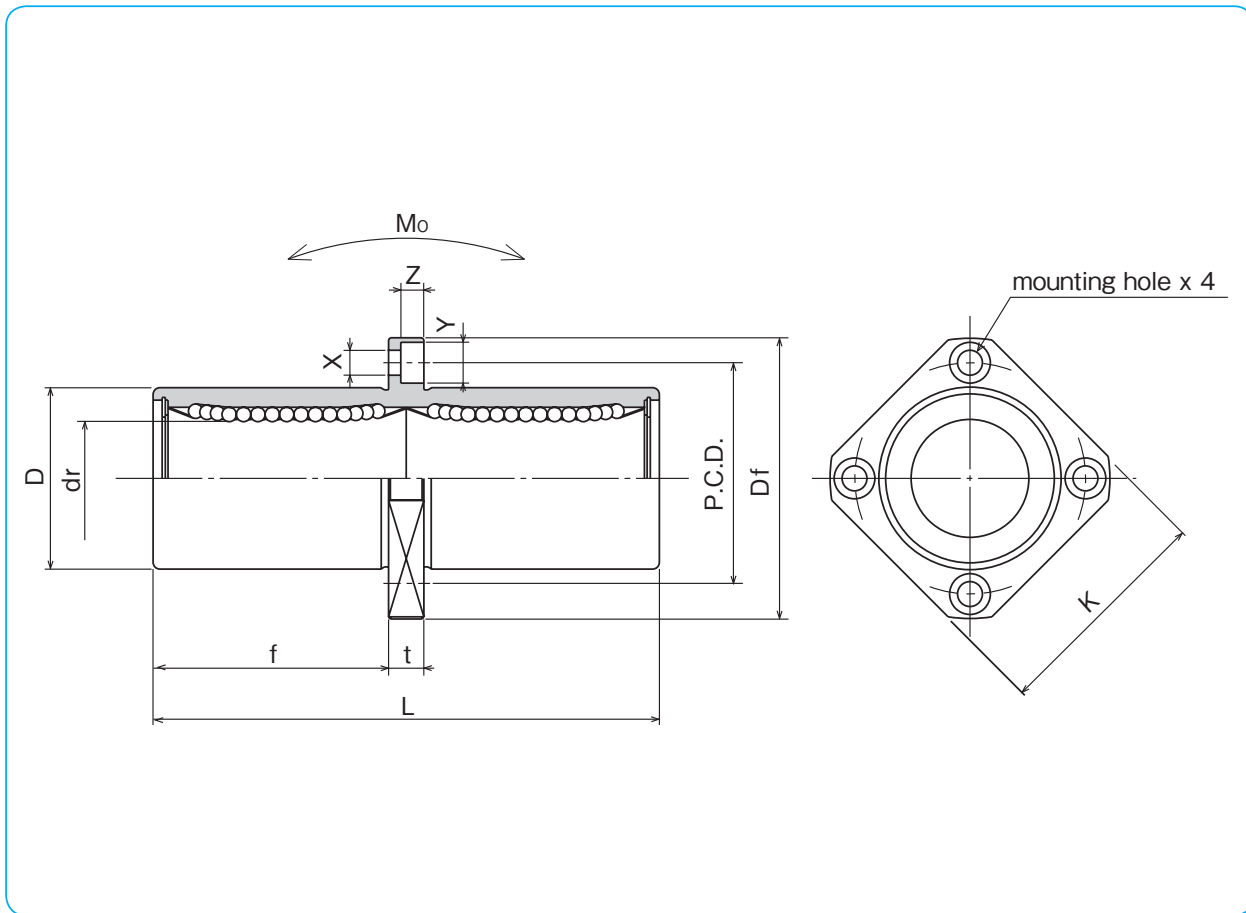SLIDE BUSH



SLIDE BUSH

f mm	Df mm	K mm	flange			eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		allowable static moment $M_o$ $\text{N} \cdot \text{m}$	mass g	shaft diameter mm
			t mm	P.C.D. mm	X×Y×Z mm			dynamic C N	static Co N			
15	28	22	5	20	3.5×6×3.1	15	15	323	530	2.18	25	6
20	32	25	5	24	3.5×6×3.1			431	784	4.31	43	8
24.5	40	30	6	29	4.5×7.5×4.1			588	1,100	7.24	78	10
25.5	42	32	6	32	4.5×7.5×4.1			813	1,570	10.9	90	12
27.5	43	34	6	33	4.5×7.5×4.1			813	1,570	11.6	108	13
32	48	37	6	38	4.5×7.5×4.1			1,230	2,350	19.7	165	16
36	54	42	8	43	5.5×9×5.1	20	20	1,400	2,740	26.8	225	20
52	62	50	8	51	5.5×9×5.1			1,560	3,140	43.4	500	25
56.5	74	58	10	60	6.6×11×6.1			2,490	5,490	82.8	590	30
62.5	82	64	10	67	6.6×11×6.1	25	25	2,650	6,270	110	930	35
69	96	75	13	78	9×14×8.1			3,430	8,040	147	1,380	40
89.5	116	92	13	98	9×14×8.1			6,080	15,900	397	3,400	50
95.5	134	106	18	112	11×17×11.1	30	30	7,550	20,000	530	4,060	60

1N≅0.102kgf 1N · m≅0.102kgf · m

NIPPON BEARING

SMTC TYPE

– Two Side Cut Center Flange Type –



part number structure

example **SMSTC 25 G UU -SK**

specification  
**SMTC**: standard  
**SMSTC**: anti-corrosion

inner contact diameter (dr)

retainer material  
**blank**: standard/steel  
 anti-corrosion/stainless steel  
**G**: resin


outer cylinder surface treatment  
**blank**: no surface treatment  
**SK**: electroless nickel plating  
**LF**: low temperature black chrome treatment with fluoride coating  
**SB**: black oxide (not available on anti-corrosion type)  
**SC**: industrial chrome plating

seal  
**UU**: seals on both sides  
**ZZ**: doublelip-seals on both sides

part number*				number of ball circuits	dr mm	dr tolerance μm	major dimensions			
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer				D mm	D tolerance μm	L ±0.3 mm	
<b>SMTC 6UU</b>	<b>SMTC 6GUU</b>	<b>SMSTC 6UU</b>	<b>SMSTC 6GUU</b>	4	6	-10	12	0	35	
<b>SMTC 8UU</b>	<b>SMTC 8GUU</b>	<b>SMSTC 8UU</b>	<b>SMSTC 8GUU</b>	4	8		15	-13	45	
<b>SMTC10UU</b>	<b>SMTC10GUU</b>	<b>SMSTC10UU</b>	<b>SMSTC10GUU</b>	4	10		19	-16	55	
<b>SMTC12UU</b>	<b>SMTC12GUU</b>	<b>SMSTC12UU</b>	<b>SMSTC12GUU</b>	4	12		21		0	57
<b>SMTC13UU</b>	<b>SMTC13GUU</b>	<b>SMSTC13UU</b>	<b>SMSTC13GUU</b>	4	13		23		61	
<b>SMTC16UU</b>	<b>SMTC16GUU</b>	<b>SMSTC16UU</b>	<b>SMSTC16GUU</b>	4	16		28		70	
<b>SMTC20UU</b>	<b>SMTC20GUU</b>	<b>SMSTC20UU</b>	<b>SMSTC20GUU</b>	5	20	-12	32	0	80	
<b>SMTC25UU</b>	<b>SMTC25GUU</b>	<b>SMSTC25UU</b>	<b>SMSTC25GUU</b>	6	25		40	-19	112	
<b>SMTC30UU</b>	<b>SMTC30GUU</b>	<b>SMSTC30UU</b>	<b>SMSTC30GUU</b>	6	30		45		123	

\* Seals-on-both-sides is standard.

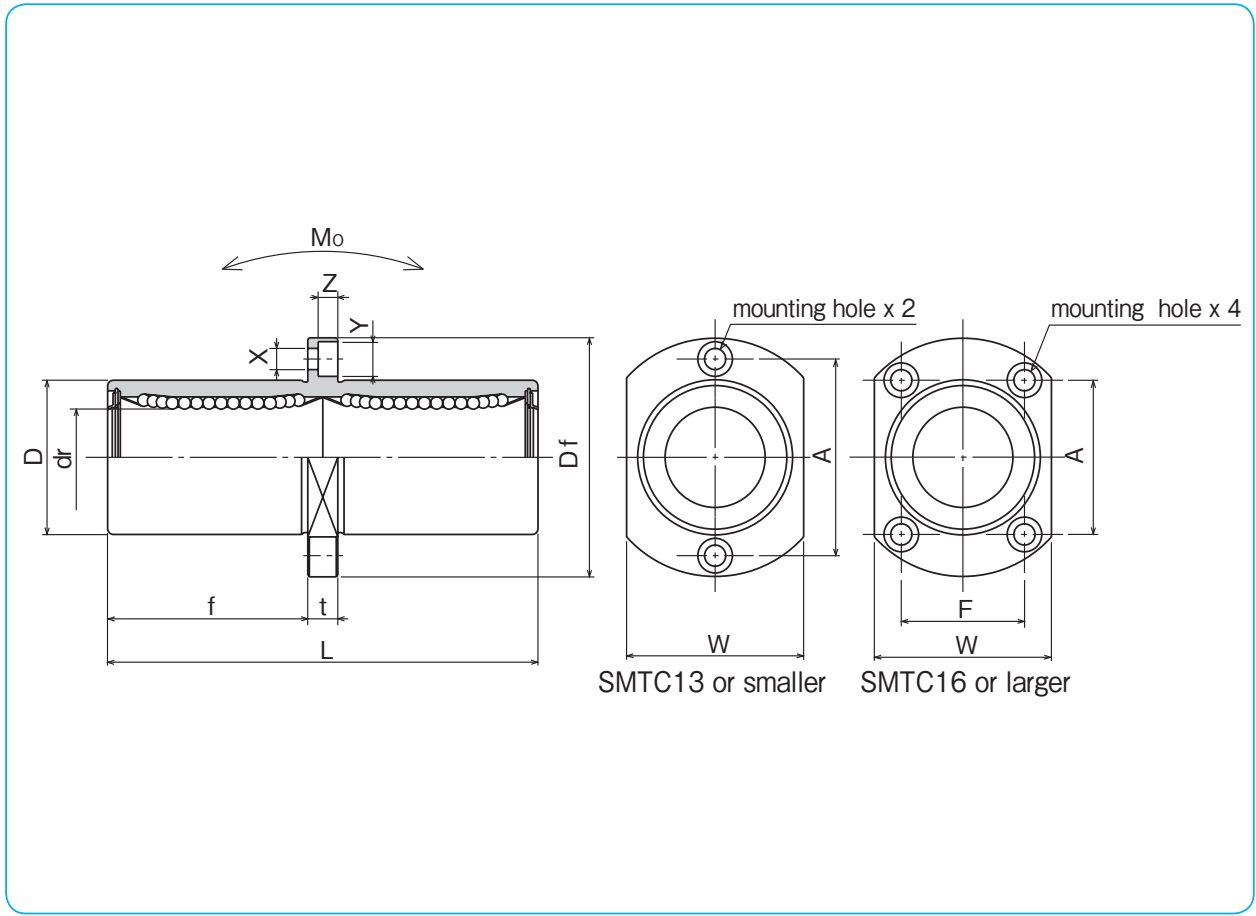SLIDE BUSH



SLIDE BUSH

f mm	Df mm	flange					eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		allowable static moment $\text{N} \cdot \text{m}$	mass g	shaft diameter mm
		W mm	t mm	A mm	F mm	X×Y×Z mm			dynamic C N	static Co N			
15	28	18	5	20	—	3.5×6×3.1	15	15	323	530	2.18	28	6
20	32	21	5	24	—	3.5×6×3.1			431	784	4.31	47	8
24.5	40	25	6	29	—	4.5×7.5×4.1			588	1,100	7.24	90	10
25.5	42	27	6	32	—	4.5×7.5×4.1			813	1,570	10.9	102	12
27.5	43	29	6	33	—	4.5×7.5×4.1			813	1,570	11.6	123	13
32	48	34	6	31	22	4.5×7.5×4.1			1,230	2,350	19.7	182	16
36	54	38	8	36	24	5.5×9×5.1			1,400	2,740	26.8	247	20
52	62	46	8	40	32	5.5×9×5.1	20	20	1,560	3,140	43.4	525	25
56.5	74	51	10	49	35	6.6×11×6.1			2,490	5,490	82.8	645	30

1N≅0.102kgf 1N · m≅0.102kgf · m

NIPPON BEARING

SMF-W-E TYPE

– Round Flange Double-Wide Pilot End Type –



part number structure

example **SMSF 25 G W UU - E - SK**


specification <b>SMF</b> : standard <b>SMSF</b> : anti-corrosion	inner contact diameter (dr)	retainer material <b>blank</b> : standard/steel anti-corrosion/stainless steel <b>G</b> : resin	double-wide type	outer cylinder surface treatment <b>blank</b> : no surface treatment <b>SK</b> : electroless nickel plating <b>LF</b> : low temperature black chrome treatment with fluoride coating <b>SB</b> : black oxide (not available on anti-corrosion type) <b>SC</b> : industrial chrome plating	with pilot end	seal <b>UU</b> : seals on both sides <b>ZZ</b> : doublelip-seals on both sides
--	-----------------------------	--	------------------	--	----------------	--

Doublelip-seal is available for size 6 to 30.

part number*				number of ball circuits	dr mm	dr tolerance μm	major dimensions		L ±0.3 mm
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer				D mm	D tolerance μm	
SMF 6WUU-E	SMF 6GWUU-E	SMSF 6WUU-E	SMSF 6GWUU-E	4	6	-10	12	0	35
SMF 8WUU-E	SMF 8GWUU-E	SMSF 8WUU-E	SMSF 8GWUU-E	4	8		15	-13	45
SMF10WUU-E	SMF10GWUU-E	SMSF10WUU-E	SMSF10GWUU-E	4	10		19	0	55
SMF12WUU-E	SMF12GWUU-E	SMSF12WUU-E	SMSF12GWUU-E	4	12		21	-16	57
SMF13WUU-E	SMF13GWUU-E	SMSF13WUU-E	SMSF13GWUU-E	4	13		23	0	61
SMF16WUU-E	SMF16GWUU-E	SMSF16WUU-E	SMSF16GWUU-E	4	16		28	-19	70
SMF20WUU-E	SMF20GWUU-E	SMSF20WUU-E	SMSF20GWUU-E	5	20	32	0	80	
SMF25WUU-E	SMF25GWUU-E	SMSF25WUU-E	SMSF25GWUU-E	6	25	40	-12	112	
SMF30WUU-E	SMF30GWUU-E	SMSF30WUU-E	SMSF30GWUU-E	6	30	45	0	123	
SMF35WUU-E	SMF35GWUU-E	—	—	6	35	52	0	135	
SMF40WUU-E	SMF40GWUU-E	—	—	6	40	60	-15	151	
SMF50WUU-E	SMF50GWUU-E	—	—	6	50	80	0	192	
SMF60WUU-E	SMF60GWUU-E	—	—	6	60	90	0/-25	209	

\* Seals-on-both-sides is standard.

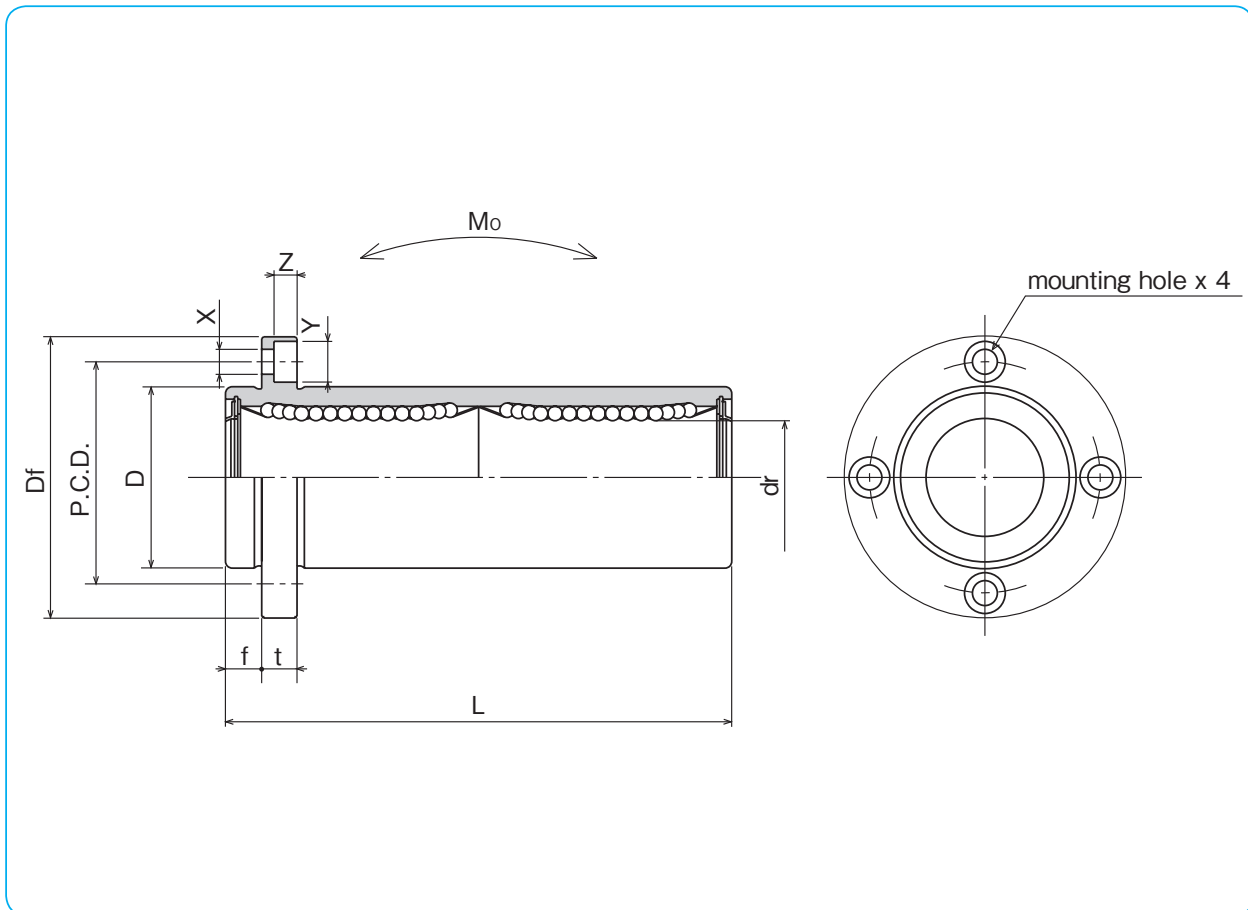SLIDE BUSH



SLIDE BUSH

f mm	Df mm	flange			eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		allowable static moment $\text{N} \cdot \text{m}$	mass g	shaft diameter mm
		t mm	P.C.D. mm	X×Y×Z mm			C N	Co N			
5	28	5	20	3.5×6×3.1	15	15	323	530	2.18	31	6
5	32	5	24	3.5×6×3.1			431	784	4.31	51	8
6	40	6	29	4.5×7.5×4.1			588	1,100	7.24	98	10
6	42	6	32	4.5×7.5×4.1			813	1,570	10.9	110	12
6	43	6	33	4.5×7.5×4.1			813	1,570	11.6	130	13
6	48	6	38	4.5×7.5×4.1			1,230	2,350	19.7	190	16
8	54	8	43	5.5×9×5.1	20	20	1,400	2,740	26.8	260	20
8	62	8	51	5.5×9×5.1			1,560	3,140	43.4	540	25
10	74	10	60	6.6×11×6.1			2,490	5,490	82.8	680	30
10	82	10	67	6.6×11×6.1	25	25	2,650	6,270	110	1,020	35
13	96	13	78	9×14×8.1			3,430	8,040	147	1,570	40
13	116	13	98	9×14×8.1			6,080	15,900	397	3,600	50
18	134	18	112	11×17×11.1	30	30	7,550	20,000	530	4,500	60

1N≅0.102kgf 1N · m≅0.102kgf · m

NIPPON BEARING

SMK-W-E TYPE

– Square Flange Double-Wide Pilot End Type –



part number structure

example **SMSK 25 G W UU - E - SK**


specification SMK: standard SMSK: anti-corrosion	inner contact diameter (dr)	retainer material blank: standard/steel anti-corrosion/stainless steel G: resin	double-wide type	outer cylinder surface treatment blank: no surface treatment SK: electroless nickel plating LF: low temperature black chrome treatment with fluoride coating SB: black oxide (not available on anti-corrosion type) SC: industrial chrome plating	with pilot end	seal UU: seals on both sides ZZ: doublelip-seals on both sides
--	-----------------------------	--	------------------	--	----------------	--

Doublelip-seal is available for size 6 to 30.

part number*				number of ball circuits	dr mm	dr tolerance μm	major dimensions		L ±0.3 mm	
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer				D mm	D tolerance μm		
SMK 6WUU-E	SMK 6GWUU-E	SMSK 6WUU-E	SMSK 6GWUU-E	4	6	-10	12	0	35	
SMK 8WUU-E	SMK 8GWUU-E	SMSK 8WUU-E	SMSK 8GWUU-E	4	8		15	-13	45	
SMK 10WUU-E	SMK 10GWUU-E	SMSK 10WUU-E	SMSK 10GWUU-E	4	10		19	-16	55	
SMK 12WUU-E	SMK 12GWUU-E	SMSK 12WUU-E	SMSK 12GWUU-E	4	12		21		0	57
SMK 13WUU-E	SMK 13GWUU-E	SMSK 13WUU-E	SMSK 13GWUU-E	4	13		23		61	
SMK 16WUU-E	SMK 16GWUU-E	SMSK 16WUU-E	SMSK 16GWUU-E	4	16		28		70	
SMK 20WUU-E	SMK 20GWUU-E	SMSK 20WUU-E	SMSK 20GWUU-E	5	20	-12	32	0	80	
SMK 25WUU-E	SMK 25GWUU-E	SMSK 25WUU-E	SMSK 25GWUU-E	6	25		40	-19	112	
SMK 30WUU-E	SMK 30GWUU-E	SMSK 30WUU-E	SMSK 30GWUU-E	6	30	-15	45	-22	123	
SMK 35WUU-E	SMK 35GWUU-E	—	—	6	35		52		0	135
SMK 40WUU-E	SMK 40GWUU-E	—	—	6	40	0/-20	60	0/-25	151	
SMK 50WUU-E	SMK 50GWUU-E	—	—	6	50		80		192	
SMK 60WUU-E	SMK 60GWUU-E	—	—	6	60		90		209	

\* Seals-on-both-sides is standard.

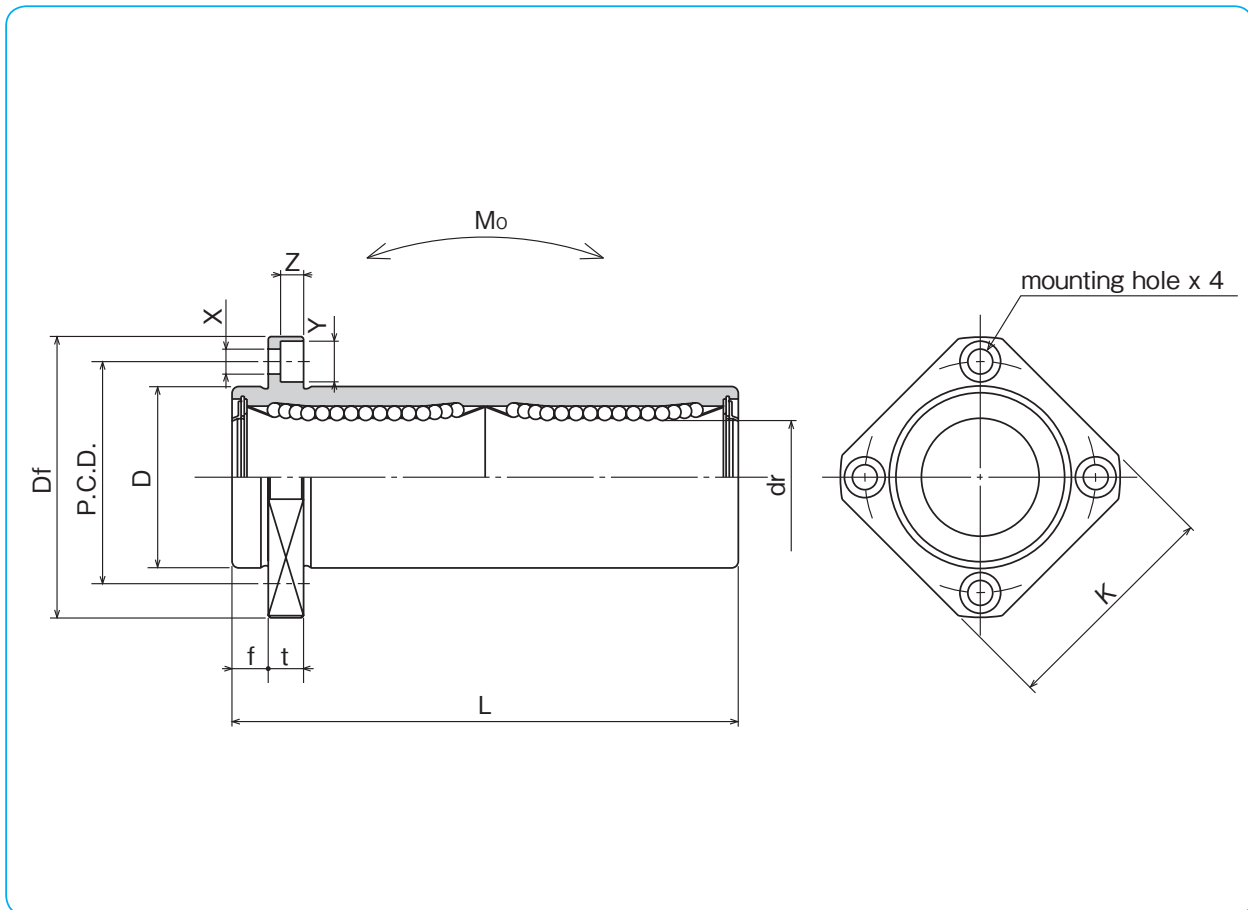SLIDE BUSH



SLIDE BUSH

f mm	Df mm	K mm	flange			eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		allowable static moment $M_o$ N · m	mass g	shaft diameter mm
			t mm	P.C.D. mm	X×Y×Z mm			C N	Co N			
5	28	22	5	20	3.5×6×3.1	15	15	323	530	2.18	25	6
5	32	25	5	24	3.5×6×3.1			431	784	4.31	43	8
6	40	30	6	29	4.5×7.5×4.1			588	1,100	7.24	78	10
6	42	32	6	32	4.5×7.5×4.1			813	1,570	10.9	90	12
6	43	34	6	33	4.5×7.5×4.1			813	1,570	11.6	108	13
6	48	37	6	38	4.5×7.5×4.1			1,230	2,350	19.7	165	16
8	54	42	8	43	5.5×9×5.1	20	20	1,400	2,740	26.8	225	20
8	62	50	8	51	5.5×9×5.1			1,560	3,140	43.4	500	25
10	74	58	10	60	6.6×11×6.1			2,490	5,490	82.8	590	30
10	82	64	10	67	6.6×11×6.1	25	25	2,650	6,270	110	930	35
13	96	75	13	78	9×14×8.1			3,430	8,040	147	1,380	40
13	116	92	13	98	9×14×8.1			6,080	15,900	397	3,400	50
18	134	106	18	112	11×17×11.1	30	30	7,550	20,000	530	4,060	60

1N≅0.102kgf 1N · m≅0.102kgf · m

NIPPON BEARING

SMT-W-E TYPE

— Two Side Cut Double-Wide Flange Pilot End Type —



part number structure

example **SMST 25 G W UU - E - SK**

specification  
**SMT:** standard  
**SMST:** anti-corrosion

inner contact diameter (dr)

retainer material  
**blank:** standard/steel  
 anti-corrosion/stainless steel  
**G:** resin

double-wide type

outer cylinder surface treatment  
**blank:** no surface treatment  
**SK:** electroless nickel plating  
**LF:** low temperature black chrome treatment with fluoride coating  
**SB:** black oxide (not available on anti-corrosion type)  
**SC:** industrial chrome plating

with pilot end


seal  
**UU:** seals on both sides  
**ZZ:** doublelip-seals on both sides

part number*				number of ball circuits	dr mm	dr tolerance μm	major dimensions		
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer				D mm	D tolerance μm	L ±0.3 mm
SMT 6WUU-E	SMT 6GWUU-E	SMST 6WUU-E	SMST 6GWUU-E	4	6	0 -10	12	0	35
SMT 8WUU-E	SMT 8GWUU-E	SMST 8WUU-E	SMST 8GWUU-E	4	8		15	-13	45
SMT10WUU-E	SMT10GWUU-E	SMST10WUU-E	SMST10GWUU-E	4	10		19	0	55
SMT12WUU-E	SMT12GWUU-E	SMST12WUU-E	SMST12GWUU-E	4	12		21	-16	57
SMT13WUU-E	SMT13GWUU-E	SMST13WUU-E	SMST13GWUU-E	4	13	23	0	61	
SMT16WUU-E	SMT16GWUU-E	SMST16WUU-E	SMST16GWUU-E	4	16	28	0	70	
SMT20WUU-E	SMT20GWUU-E	SMST20WUU-E	SMST20GWUU-E	5	20	0 -12	32	0	80
SMT25WUU-E	SMT25GWUU-E	SMST25WUU-E	SMST25GWUU-E	6	25		40	-19	112
SMT30WUU-E	SMT30GWUU-E	SMST30WUU-E	SMST30GWUU-E	6	30		45	0	123

\* Seals-on-both-sides is standard.



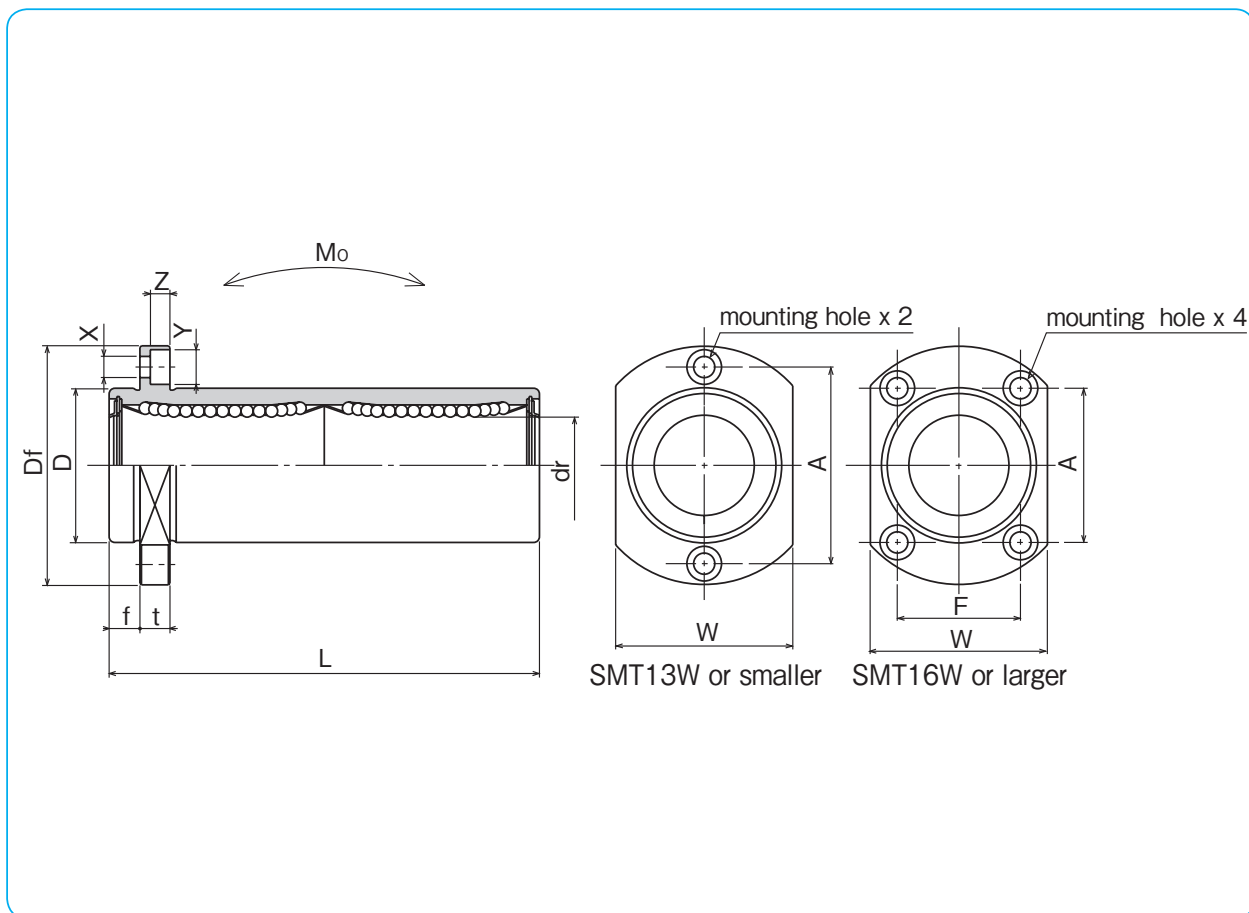SLIDE BUSH



SLIDE BUSH


f mm	Df mm	flange					eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		allowable static moment $M_o$ $\text{N} \cdot \text{m}$	mass g	shaft diameter mm
		W mm	t mm	A mm	F mm	X×Y×Z mm			dynamic C N	static Co N			
5	28	18	5	20	—	3.5×6×3.1	15	15	323	530	2.18	28	6
5	32	21	5	24	—	3.5×6×3.1			431	784	4.31	47	8
6	40	25	6	29	—	4.5×7.5×4.1			588	1,100	7.24	90	10
6	42	27	6	32	—	4.5×7.5×4.1			813	1,570	10.9	102	12
6	43	29	6	33	—	4.5×7.5×4.1			813	1,570	11.6	123	13
6	48	34	6	31	22	4.5×7.5×4.1			1,230	2,350	19.7	182	16
8	54	38	8	36	24	5.5×9×5.1	20	20	1,400	2,740	26.8	247	20
8	62	46	8	40	32	5.5×9×5.1			1,560	3,140	43.4	525	25
10	74	51	10	49	35	6.6×11×6.1			2,490	5,490	82.8	645	30

1N $\approx$ 0.102kgf 1N·m $\approx$ 0.102kgf·m


NIPPON BEARING

TRF TYPE

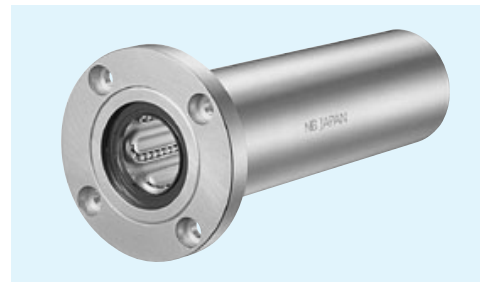– Triple-Wide Round Flange Type –



part number structure

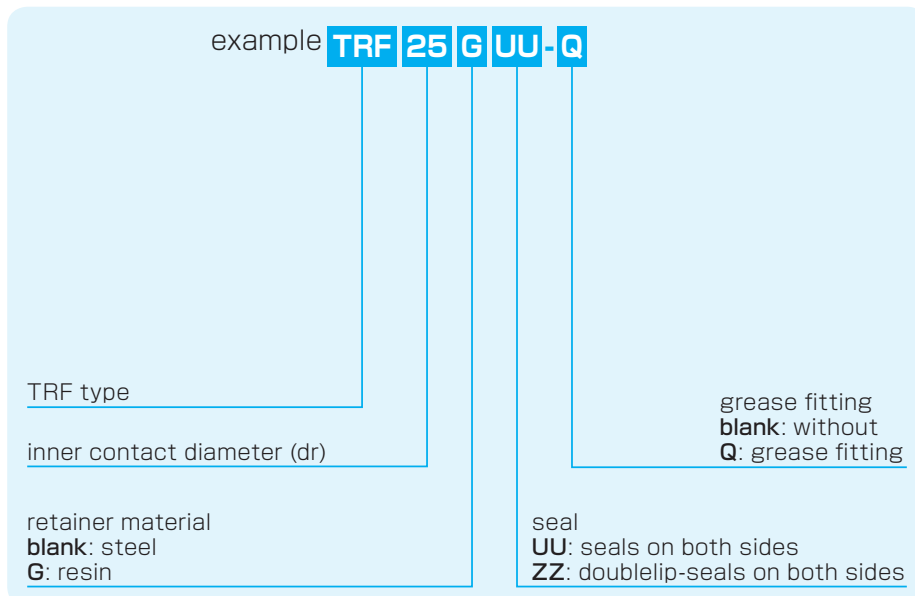

Doublelip-seal is available for size 6 to 30.


part number*		number of ball circuits	dr		major dimensions		L ±0.3 mm
steel retainer	resin retainer		mm	tolerance μm	D mm	tolerance μm	
TRF 6UU	TRF 6GUU	4	6	0 -12	15	0/-18	51
TRF 8UU	TRF 8GUU	4	8		19	0	66
TRF10UU	TRF10GUU	4	10	23	0		80
TRF12UU	TRF12GUU	4	12	0 -15	26	-21	84
TRF13UU	TRF13GUU	4	13		28		90
TRF16UU	TRF16GUU	4	16	32	0	103	
TRF20UU	TRF20GUU	5	20	40		-25	118
TRF25UU	TRF25GUU	6	25	0 -18	45	-25	165
TRF30UU	TRF30GUU	6	30		52		182
TRF35UU	TRF35GUU	6	35	0 -21	60	-30	200
TRF40UU	TRF40GUU	6	40		65		230
TRF50UU	TRF50GUU	6	50	0/-25	85	0	290
TRF60UU	TRF60GUU	6	60		100	-35	310

Outer cylinder is treated with electroless nickel plating.

\* Seals-on-both-sides is standard.

\*\* TRF6: A-MT6x1 TRF8: A-M6x1 TRF10~30: A-M6F TRF35~60: A-R1/8

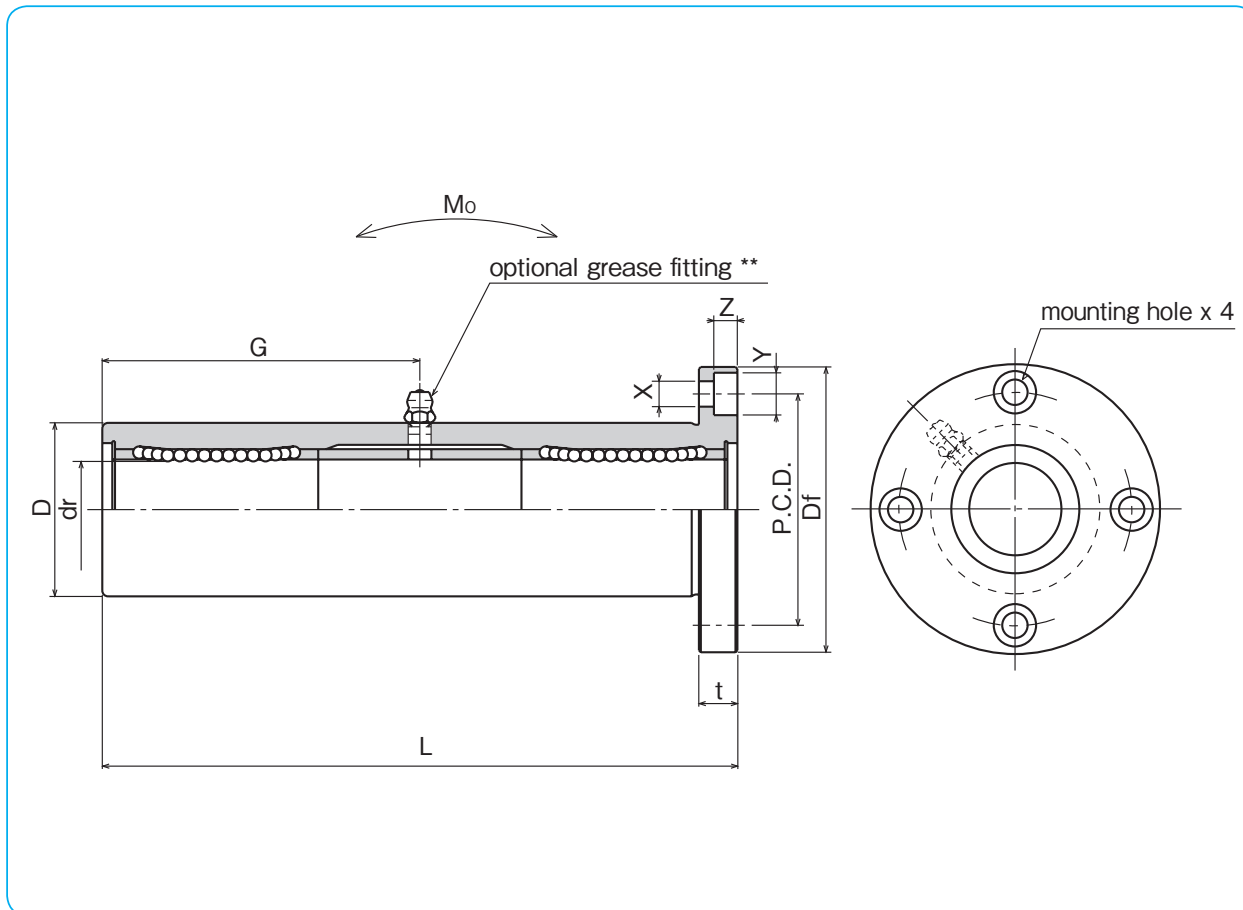SLIDE BUSH



Df mm	t mm	flange P.C.D. mm	X×Y×Z mm	grease fitting G mm	eccentricity $\mu$ m	perpendicularity $\mu$ m	basic load rating		allowable static moment $M_o$ N · m	mass g	shaft diameter mm
							dynamic C N	static $C_o$ N			
32	5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	66	6
40	6	29	4.5×7.5×4.1	29			431	784	16.0	135	8
43	6	33	4.5×7.5×4.1	38			588	1,100	27.0	205	10
46	6	36	4.5×7.5×4.1	41			813	1,570	40.1	248	12
48	6	38	4.5×7.5×4.1	45			813	1,570	42.9	308	13
54	8	43	5.5×9×5.1	51	25	25	1,230	2,350	73.5	412	16
62	8	51	5.5×9×5.1	59			1,400	2,740	98.0	752	20
74	10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,244	25
82	10	67	6.6×11×6.1	91			2,490	5,490	297	1,636	30
96	13	78	9×14×8.1	100			2,650	6,270	373	2,580	35
101	13	83	9×14×8.1	115	30	30	3,430	8,040	553	2,950	40
129	18	107	11×17×11.1	145			6,080	15,900	1,370	6,860	50
144	18	122	11×17×11.1	155			7,550	20,000	1,800	9,660	60

1N≅0.102kgf 1N · m≅0.102kgf · m

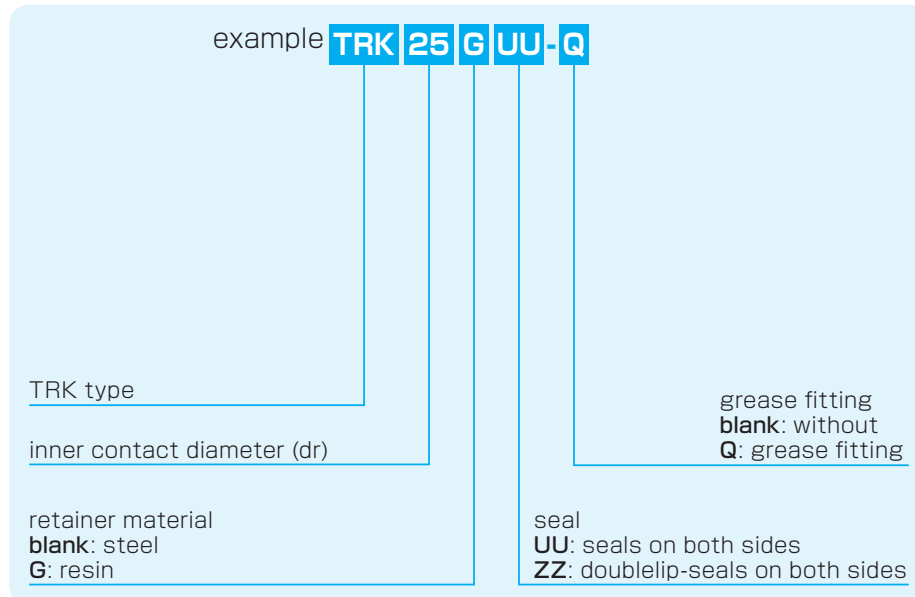
NIPPON BEARING

TRK TYPE

– Triple-Wide Square Flange Type –



part number structure



Doublelip-seal is available for size 6 to 30.


part number*		number of ball circuits	dr		major dimensions		L ±0.3 mm
steel retainer	resin retainer		mm	tolerance μm	D mm	tolerance μm	
TRK 6UU	TRK 6GUU	4	6	0 -12	15	0/-18	51
TRK 8UU	TRK 8GUU	4	8		19	0	66
TRK 10UU	TRK 10GUU	4	10		23		80
TRK 12UU	TRK 12GUU	4	12	0 -15	26	-21	84
TRK 13UU	TRK 13GUU	4	13		28		90
TRK 16UU	TRK 16GUU	4	16		32	0	103
TRK 20UU	TRK 20GUU	5	20	40	-25		118
TRK 25UU	TRK 25GUU	6	25	0 -18		45	0
TRK 30UU	TRK 30GUU	6	30		52	182	
TRK 35UU	TRK 35GUU	6	35	0 -21	60	-30	200
TRK 40UU	TRK 40GUU	6	40		65		230
TRK 50UU	TRK 50GUU	6	50		85	0	290
TRK 60UU	TRK 60GUU	6	60	0/-25	100	-35	310

Outer cylinder is treated with electroless nickel plating.

\* Seals-on-both-sides is standard.

\*\* TRK6: A-MT6x1 TRK8: A-M6x1 TRK10~30: A-M6F TRK35~60: A-R1/8

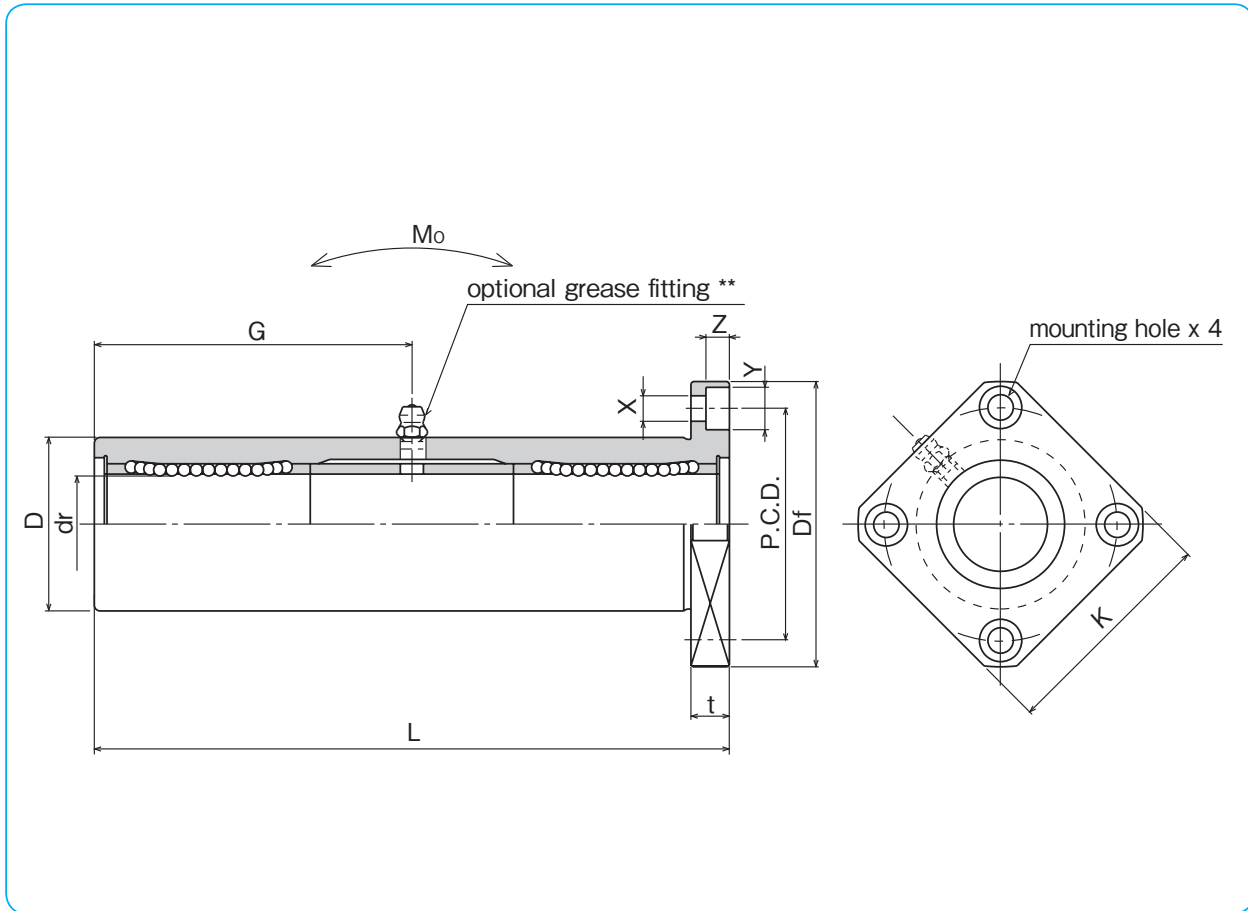SLIDE BUSH



SLIDE BUSH


Df mm	K mm	flange			grease fitting G mm	eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		allowable static moment $M_o$ N · m	mass g	shaft diameter mm
		t mm	P.C.D. mm	X×Y×Z mm				dynamic C N	static Co N			
32	25	5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	58	6
40	30	6	29	4.5×7.5×4.1	29			431	784	16.0	117	8
43	34	6	33	4.5×7.5×4.1	38			588	1,100	27.0	189	10
46	35	6	36	4.5×7.5×4.1	41			813	1,570	40.1	228	12
48	37	6	38	4.5×7.5×4.1	45			813	1,570	42.9	286	13
54	42	8	43	5.5×9×5.1	51	25	25	1,230	2,350	73.5	376	16
62	50	8	51	5.5×9×5.1	59			1,400	2,740	98.0	714	20
74	58	10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,163	25
82	64	10	67	6.6×11×6.1	91			2,490	5,490	297	1,543	30
96	75	13	78	9×14×8.1	100			2,650	6,270	373	2,400	35
101	80	13	83	9×14×8.1	115	30	30	3,430	8,040	553	2,510	40
129	100	18	107	11×17×11.1	145			6,080	15,900	1,370	6,400	50
144	116	18	122	11×17×11.1	155			7,550	20,000	1,800	9,200	60

1N $\approx$ 0.102kgf 1N · m $\approx$ 0.102kgf · m


NIPPON BEARING

TRT TYPE

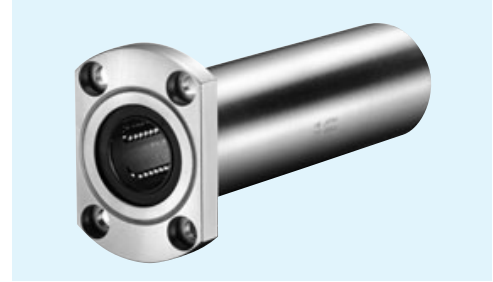– Triple-Wide Two Side Cut Flange Type –



part number structure

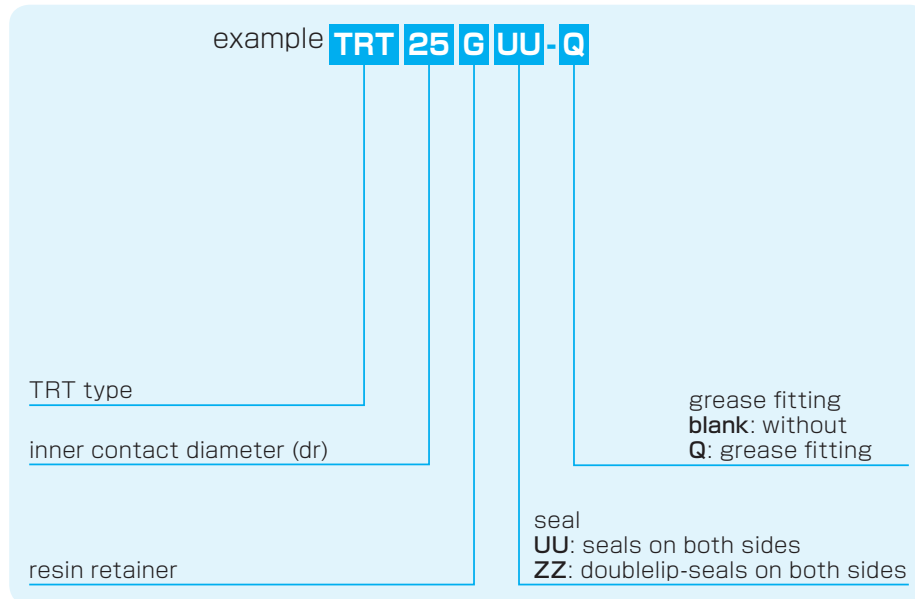


part number*	number of ball circuits	dr		D		major dimensions					
		mm	tolerance $\mu\text{m}$	mm	tolerance $\mu\text{m}$	L $\pm 0.3$ mm	Df mm	W mm	t mm	flange A mm F mm	
TRT12GUU	4	12	0	26	0	84	46	32	6	28	22
TRT13GUU	4	13		28	-21	90	48	34	6	31	22
TRT16GUU	4	16	-15	32	0	103	54	38	8	36	24
TRT20GUU	5	20	0	40		-25	118	62	46	8	40
TRT25GUU	6	25		-18	45	0/-30	165	74	51	10	49
TRT30GUU	6	30	52		182		82	58	10	55	38

Outer cylinder is treated with electroless nickel plating.

\* Seals-on-both-sides is standard.

\*\*TRT12G~30G : A-M6F

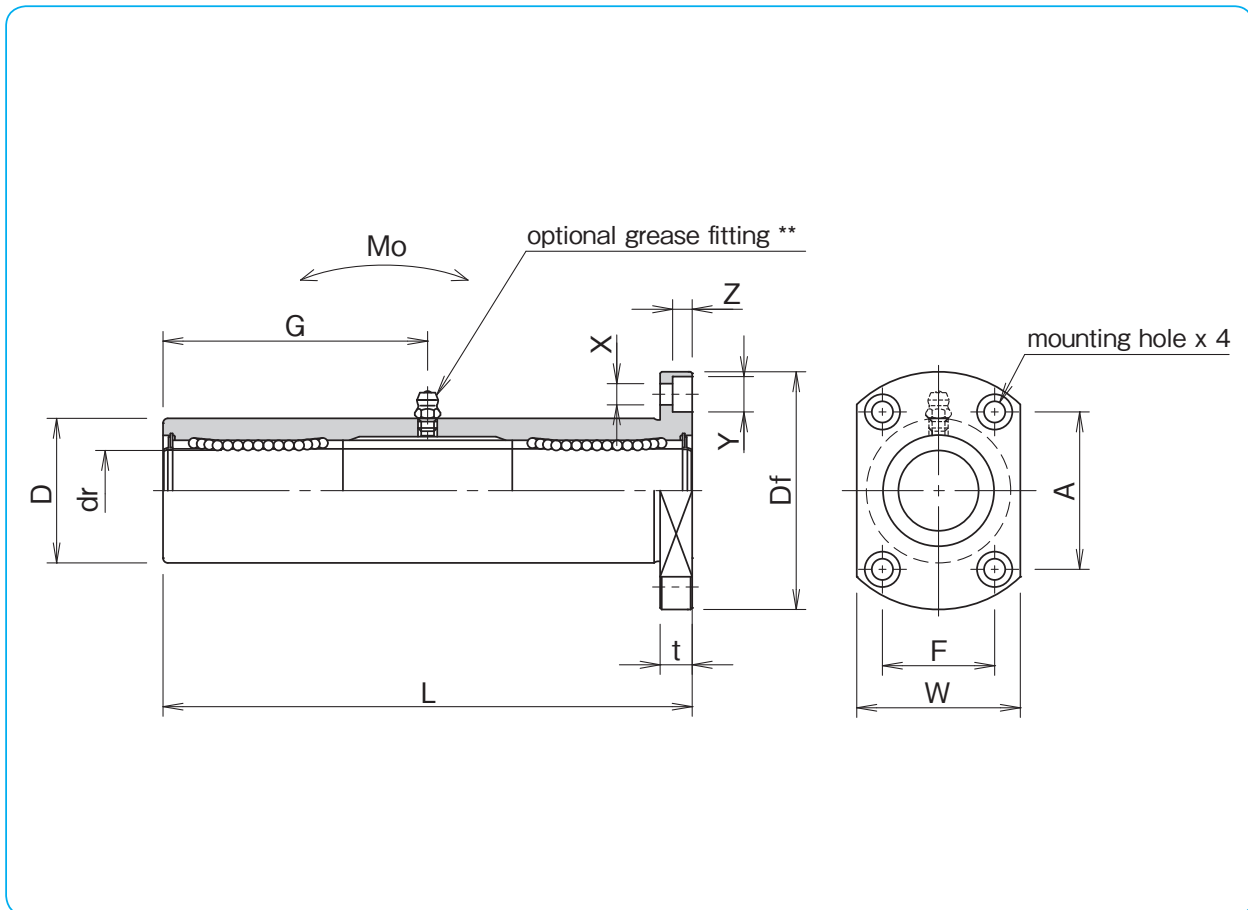SLIDE BUSH



SLIDE BUSH

X×Y×Z mm	grease fitting G mm	eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		allowable static moment $M_o$ N·m	mass g	shaft diameter mm
				dynamic C N	static $C_o$ N			
4.5×7.5×4.1	41	20	20	813	1,570	40.1	236	12
4.5×7.5×4.1	45			813	1,570	42.9	291	13
5.5×9×5.1	51	25	25	1,230	2,350	73.5	388	16
5.5×9×5.1	59			1,400	2,740	98.0	720	20
6.6×11×6.1	82.5			1,560	3,140	157	1,160	25
6.6×11×6.1	91			2,490	5,490	297	1,555	30

1N≅0.102kgf 1N·m≅0.102kgf·m

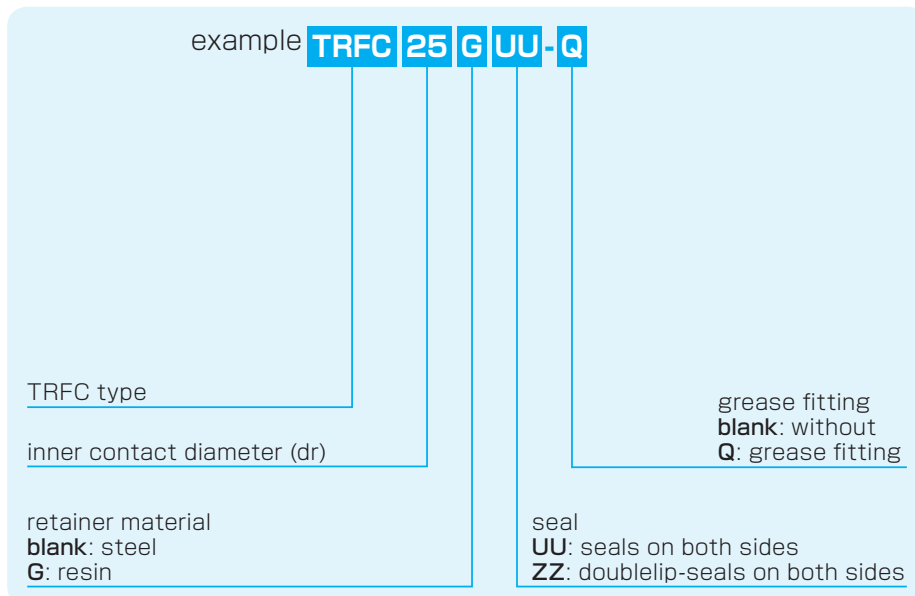
NIPPON BEARING

TRFC TYPE

— Triple-Wide Intermediate Position Round Flange Type —



part number structure



Doublelip-seal is available for size 6 to 30.

part number*		number of ball circuits	dr		major dimensions		L ±0.3 mm
steel retainer	resin retainer		mm	tolerance μm	D mm	tolerance μm	
TRFC 6UU	TRFC 6GUU	4	6	0 -12	15	0/-18	51
TRFC 8UU	TRFC 8GUU	4	8		19	0	66
TRFC 10UU	TRFC 10GUU	4	10		23		80
TRFC 12UU	TRFC 12GUU	4	12	0 -15	26	-21	84
TRFC 13UU	TRFC 13GUU	4	13		28		90
TRFC 16UU	TRFC 16GUU	4	16		32	0	103
TRFC 20UU	TRFC 20GUU	5	20	40	-25		118
TRFC 25UU	TRFC 25GUU	6	25	0 -18	45	0	165
TRFC 30UU	TRFC 30GUU	6	30		52		182
TRFC 35UU	TRFC 35GUU	6	35	0 -21	60	-30	200
TRFC 40UU	TRFC 40GUU	6	40		65		230
TRFC 50UU	TRFC 50GUU	6	50		85	0	290
TRFC 60UU	TRFC 60GUU	6	60	0/-25	100	-35	310

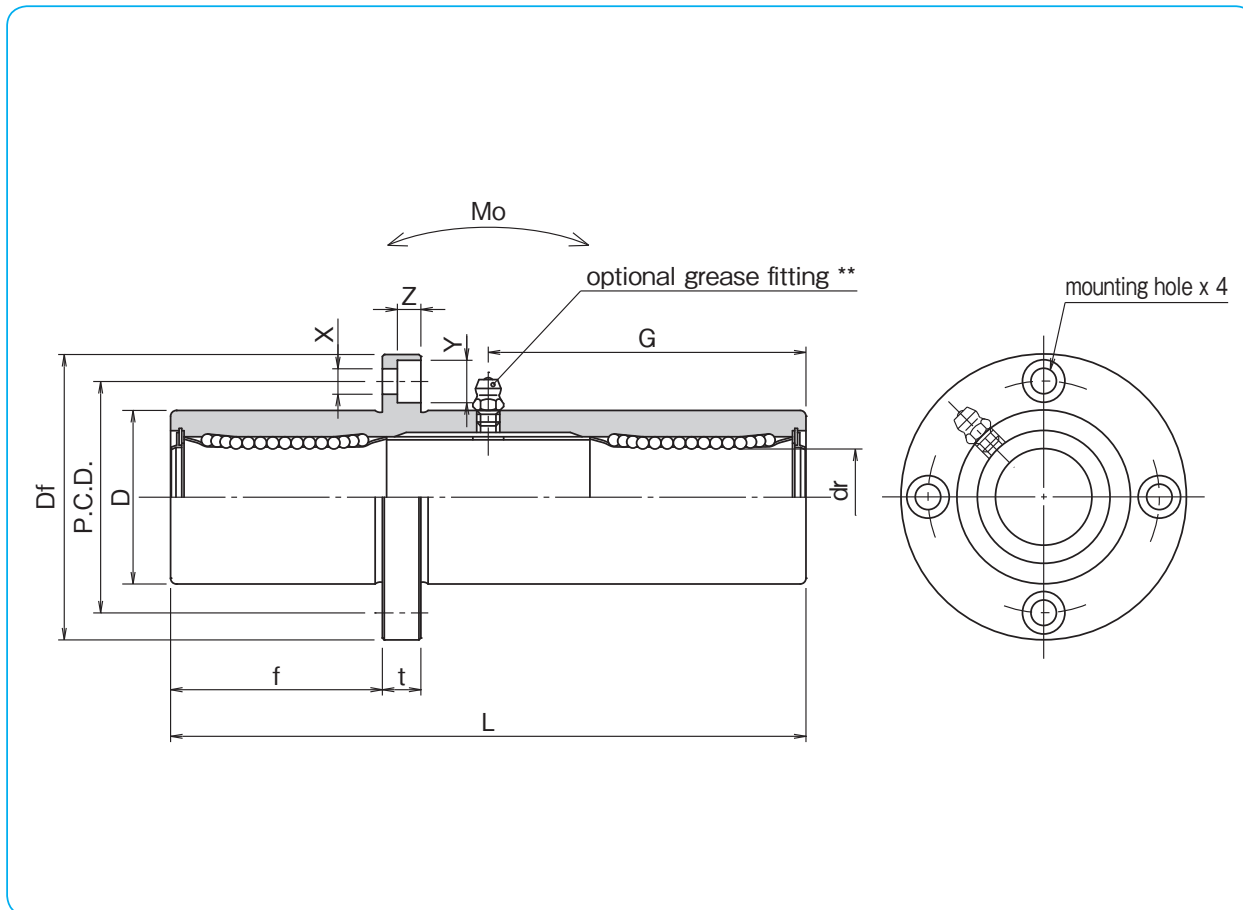
Outer cylinder is treated with electroless nickel plating.

\* Seals-on-both-sides is standard.

\*\* TRFC6: A-MT6x1 TRFC8: A-M6x1 TRFC10~30: A-M6F TRFC35~60: A-R1/8



SLIDE BUSH



SLIDE BUSH

f mm	Df mm	flange			grease fitting G mm	eccentricity $\mu m$	perpendicularity $\mu m$	basic load rating		allowable static moment $M_o$ N · m	mass g	shaft diameter mm
		t mm	P.C.D. mm	X×Y×Z mm				dynamic C N	static Co N			
17	32	5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	66	6
22	40	6	29	4.5×7.5×4.1	29			431	784	16.0	135	8
27	43	6	33	4.5×7.5×4.1	38			588	1,100	27.0	205	10
28	46	6	36	4.5×7.5×4.1	41			813	1,570	40.1	248	12
30	48	6	38	4.5×7.5×4.1	45			813	1,570	42.9	308	13
35	54	8	43	5.5×9×5.1	51	25	25	1,230	2,350	73.5	412	16
40	62	8	51	5.5×9×5.1	59			1,400	2,740	98.0	752	20
55	74	10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,244	25
61	82	10	67	6.6×11×6.1	91			2,490	5,490	297	1,636	30
67	96	13	78	9×14×8.1	100			2,650	6,270	373	2,580	35
77	101	13	83	9×14×8.1	115	30	30	3,430	8,040	553	2,950	40
97	129	18	107	11×17×11.1	145			6,080	15,900	1,370	6,860	50
104	144	18	122	11×17×11.1	155			7,550	20,000	1,800	9,660	60

1N≅0.102kgf 1N · m≅0.102kgf · m


NIPPON BEARING

# TRKC TYPE

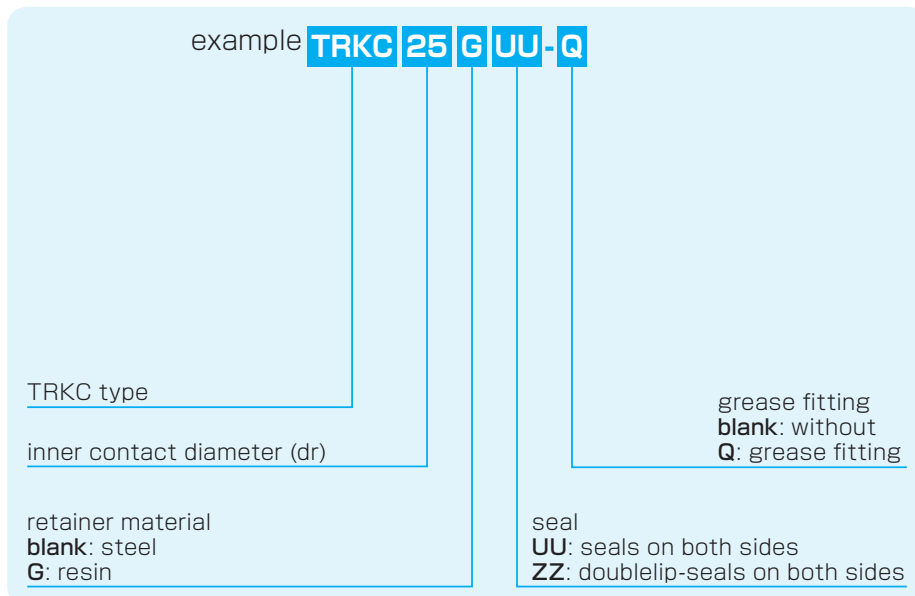— Triple-Wide Intermediate Position Square Flange Type —



## part number structure



Doublelip-seal is available for size 6 to 30.


part number*		number of ball circuits	dr		major dimensions		L ±0.3 mm
steel retainer	resin retainer		mm	tolerance μm	D mm	tolerance μm	
TRKC 6UU	TRKC 6GUU	4	6	0 -12	15	0/-18	51
TRKC 8UU	TRKC 8GUU	4	8		19	0	66
TRKC 10UU	TRKC 10GUU	4	10		23		80
TRKC 12UU	TRKC 12GUU	4	12	0 -15	26	-21	84
TRKC 13UU	TRKC 13GUU	4	13		28		90
TRKC 16UU	TRKC 16GUU	4	16	0 -18	32	0	103
TRKC 20UU	TRKC 20GUU	5	20		40		-25
TRKC 25UU	TRKC 25GUU	6	25	0 -21	45	0	165
TRKC 30UU	TRKC 30GUU	6	30		52		182
TRKC 35UU	TRKC 35GUU	6	35	0 -21	60	-30	200
TRKC 40UU	TRKC 40GUU	6	40		65		230
TRKC 50UU	TRKC 50GUU	6	50	0/-25	85	0	290
TRKC 60UU	TRKC 60GUU	6	60		100		-35

Outer cylinder is treated with electroless nickel plating.

\* Seals-on-both-sides is standard.

\*\* TRKC6: A-MT6x1 TRKC8: A-M6x1 TRKC10~30: A-M6F TRKC35~60: A-R1/8

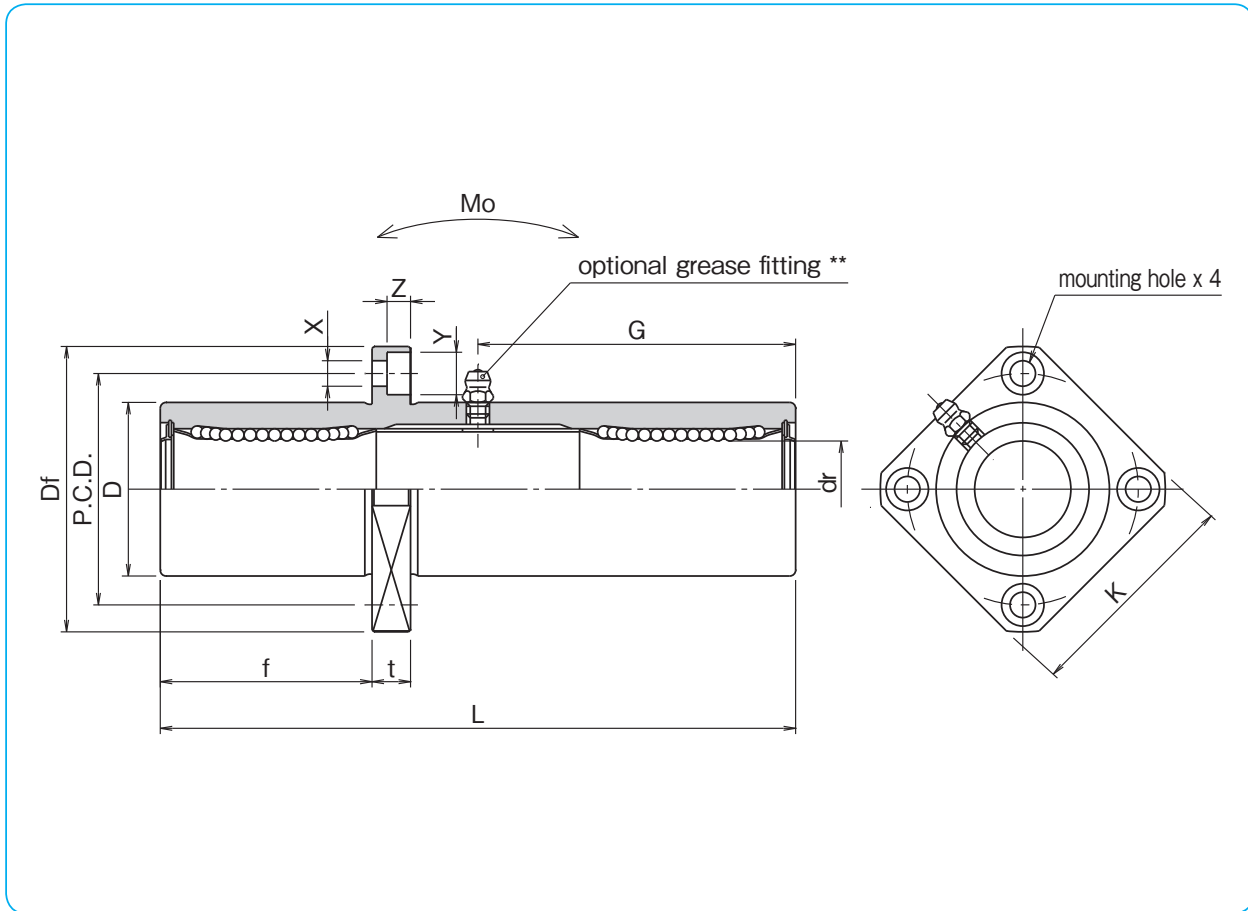SLIDE BUSH



SLIDE BUSH


f mm	Df mm	flange				grease fitting G mm	eccentricity $\mu$ m	perpendicularity $\mu$ m	basic load rating		allowable static moment $M_o$ N · m	mass g	shaft diameter mm
		K mm	t mm	P.C.D. mm	X×Y×Z mm				dynamic C N	static Co N			
17	32	25	5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	58	6
22	40	30	6	29	4.5×7.5×4.1	29			431	784	16.0	117	8
27	43	34	6	33	4.5×7.5×4.1	38			588	1,100	27.0	189	10
28	46	35	6	36	4.5×7.5×4.1	41			813	1,570	40.1	228	12
30	48	37	6	38	4.5×7.5×4.1	45			813	1,570	42.9	286	13
35	54	42	8	43	5.5×9×5.1	51	25	25	1,230	2,350	73.5	376	16
40	62	50	8	51	5.5×9×5.1	59			1,400	2,740	98.0	714	20
55	74	58	10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,163	25
61	82	64	10	67	6.6×11×6.1	91			2,490	5,490	297	1,543	30
67	96	75	13	78	9×14×8.1	100			2,650	6,270	373	2,400	35
77	101	80	13	83	9×14×8.1	115	30	30	3,430	8,040	553	2,510	40
97	129	100	18	107	11×17×11.1	145			6,080	15,900	1,370	6,400	50
104	144	116	18	122	11×17×11.1	155			7,550	20,000	1,800	9,200	60

1N≅0.102kgf 1N · m≅0.102kgf · m


NIPPON BEARING

# TRF-E TYPE

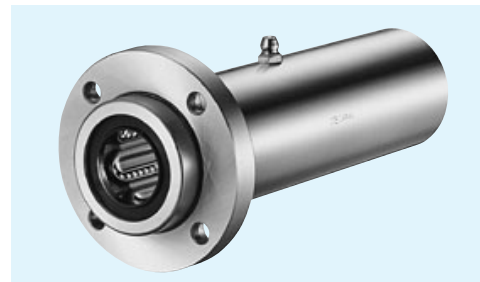– Triple-Wide Round Flange Pilot End Type –



## part number structure

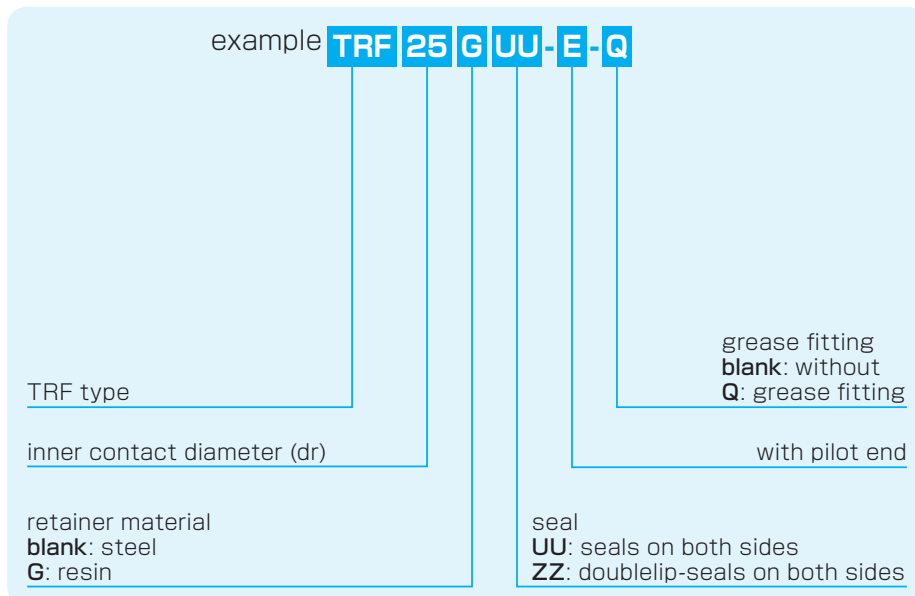

Doublelip-seal is available for size 6 to 30.


part number*		number of ball circuits	dr		major dimensions		
steel retainer	resin retainer		mm	tolerance $\mu\text{m}$	D mm	tolerance $\mu\text{m}$	L $\pm 0.3$ mm
TRF 6UU-E	TRF 6GUU-E	4	6	0	15	0/-18	51
TRF 8UU-E	TRF 8GUU-E	4	8	-12	19		66
TRF10UU-E	TRF10GUU-E	4	10		23	0	80
TRF12UU-E	TRF12GUU-E	4	12	0	26	-21	84
TRF13UU-E	TRF13GUU-E	4	13	-15	28		90
TRF16UU-E	TRF16GUU-E	4	16		32	0	103
TRF20UU-E	TRF20GUU-E	5	20	0	40	-25	118
TRF25UU-E	TRF25GUU-E	6	25	-18	45		165
TRF30UU-E	TRF30GUU-E	6	30		52	0	182
TRF35UU-E	TRF35GUU-E	6	35	0	60	-30	200
TRF40UU-E	TRF40GUU-E	6	40	-21	65		230
TRF50UU-E	TRF50GUU-E	6	50		85	0	290
TRF60UU-E	TRF60GUU-E	6	60	0/-25	100	-35	310

Outer cylinder is treated with electroless nickel plating.

\* Seals-on-both-sides is standard.

\*\* TRF6: A-MT6x1 TRF8: A-M6x1 TRF10~30: A-M6F TRF35~60: A-R1/8

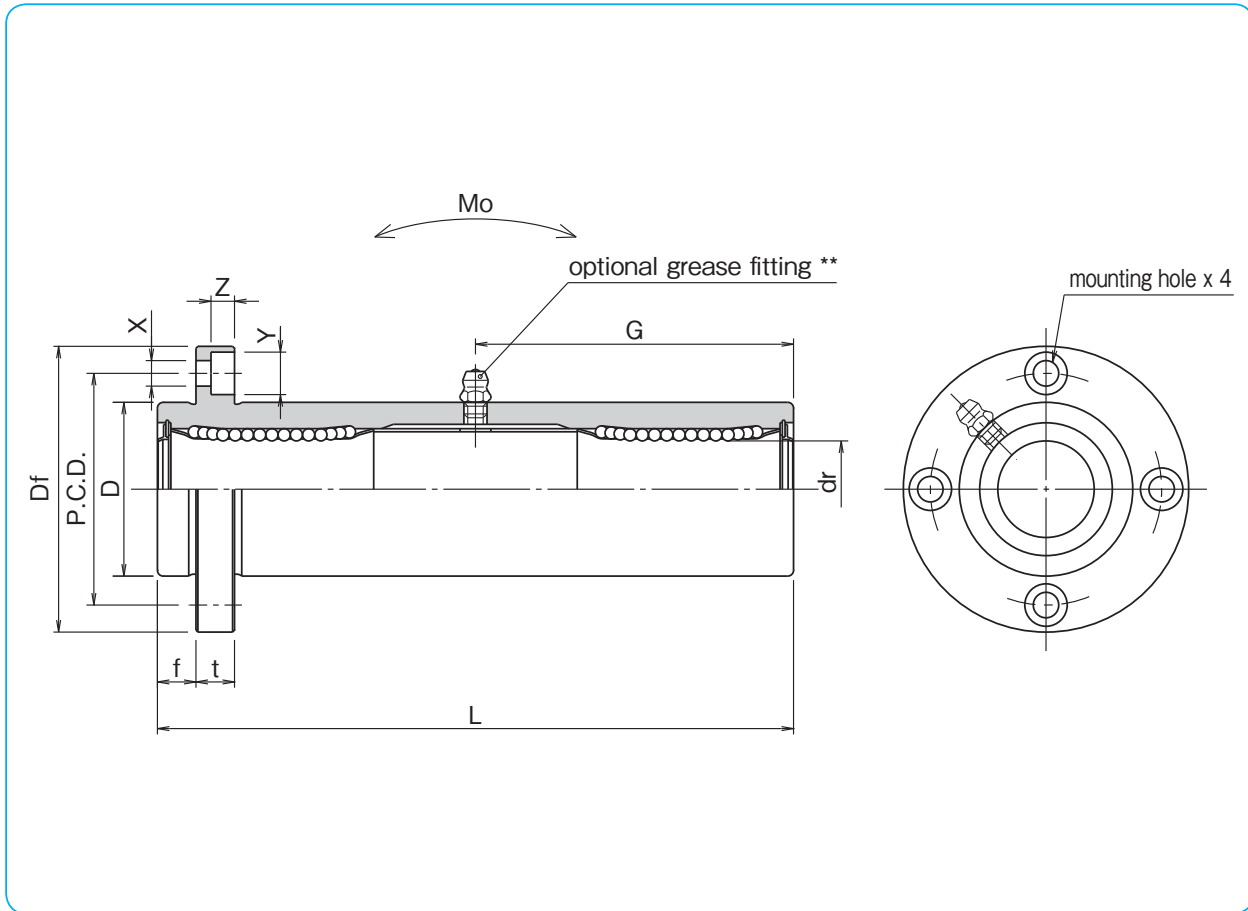SLIDE BUSH



SLIDE BUSH

f mm	Df mm	flange			grease fitting G mm	eccentricity $\mu m$	perpendicularity $\mu m$	basic load rating		allowable static moment $M_o$ N · m	mass g	shaft diameter mm
		t mm	P.C.D. mm	X×Y×Z mm				dynamic C N	static Co N			
5	32	5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	66	6
6	40	6	29	4.5×7.5×4.1	29			431	784	16.0	135	8
6	43	6	33	4.5×7.5×4.1	38			588	1,100	27.0	205	10
6	46	6	36	4.5×7.5×4.1	41			813	1,570	40.1	248	12
6	48	6	38	4.5×7.5×4.1	45			813	1,570	42.9	308	13
8	54	8	43	5.5×9×5.1	51	25	25	1,230	2,350	73.5	412	16
8	62	8	51	5.5×9×5.1	59			1,400	2,740	98.0	752	20
10	74	10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,244	25
10	82	10	67	6.6×11×6.1	91			2,490	5,490	297	1,636	30
13	96	13	78	9×14×8.1	100			2,650	6,270	373	2,580	35
13	101	13	83	9×14×8.1	115	30	30	3,430	8,040	553	2,950	40
18	129	18	107	11×17×11.1	145			6,080	15,900	1,370	6,860	50
18	144	18	122	11×17×11.1	155			7,550	20,000	1,800	9,660	60

1N≅0.102kgf 1N · m≅0.102kgf · m


## NIPPON BEARING
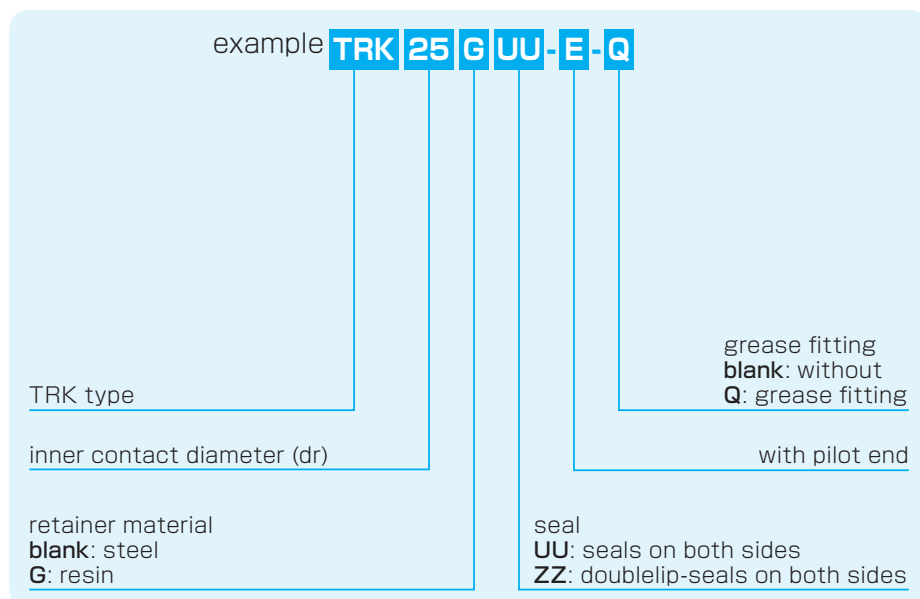
## TRK-E TYPE

– Triple-Wide Square Flange Pilot End Type –



## part number structure



Doublelip-seal is available for size 6 to 30.


part number*		number of ball circuits	major dimensions				
steel retainer	resin retainer		dr mm	dr tolerance $\mu\text{m}$	D mm	D tolerance $\mu\text{m}$	L $\pm 0.3$ mm
TRK 6UU-E	TRK 6GUU-E	4	6	0	15	0/-18	51
TRK 8UU-E	TRK 8GUU-E	4	8	-12	19		66
TRK 10UU-E	TRK 10GUU-E	4	10		23	0	80
TRK 12UU-E	TRK 12GUU-E	4	12	0	26	-21	84
TRK 13UU-E	TRK 13GUU-E	4	13	-15	28		90
TRK 16UU-E	TRK 16GUU-E	4	16		32	0	103
TRK 20UU-E	TRK 20GUU-E	5	20	0	40	-25	118
TRK 25UU-E	TRK 25GUU-E	6	25	-18	45		165
TRK 30UU-E	TRK 30GUU-E	6	30		52	0	182
TRK 35UU-E	TRK 35GUU-E	6	35	0	60	-30	200
TRK 40UU-E	TRK 40GUU-E	6	40	-21	65		230
TRK 50UU-E	TRK 50GUU-E	6	50		85	0	290
TRK 60UU-E	TRK 60GUU-E	6	60	0/-25	100	-35	310

Outer cylinder is treated with electroless nickel plating.

\* Seals-on-both-sides is standard.

\*\* TRK6: A-MT6x1 TRK8: A-M6x1 TRK10~30: A-M6F TRK35~60: A-R1/8

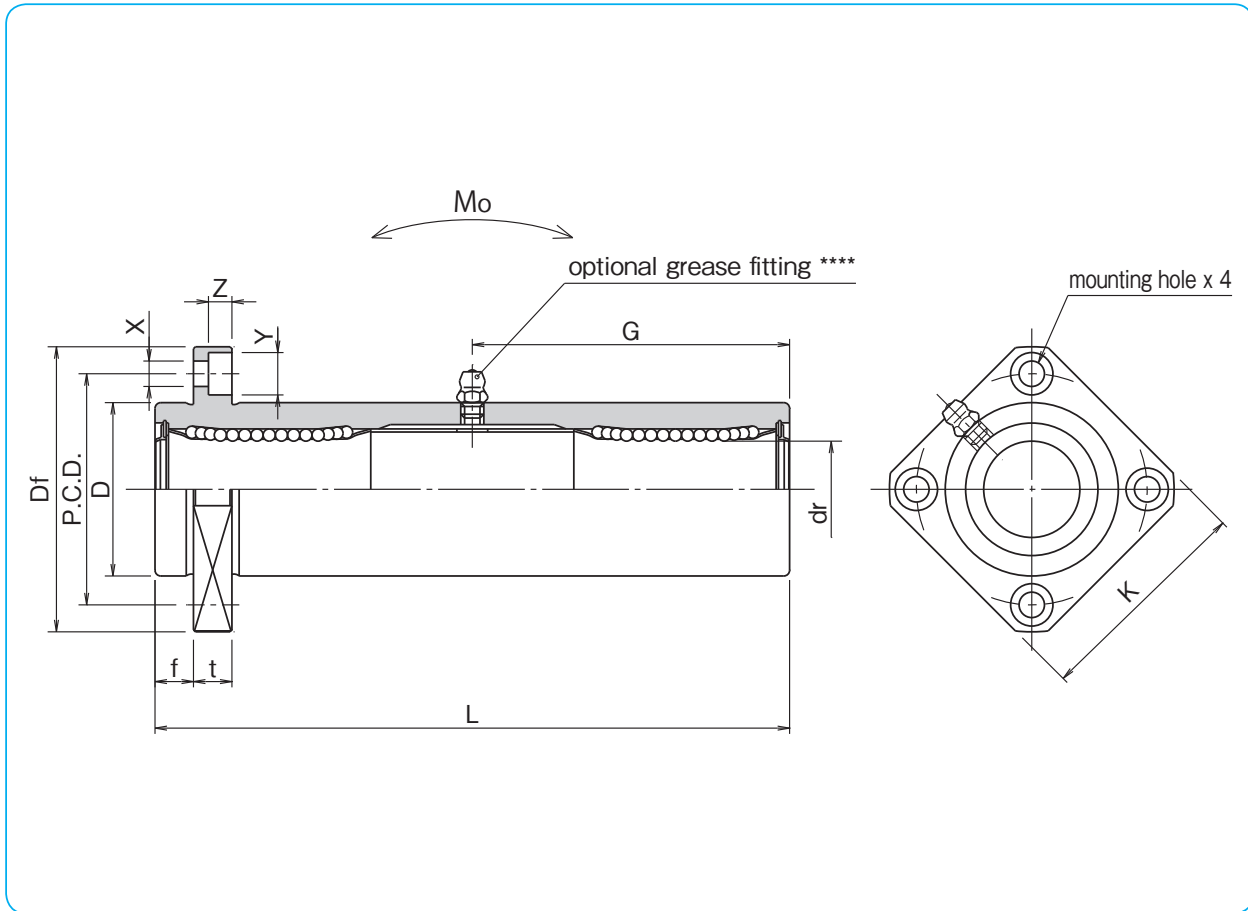SLIDE BUSH



SLIDE BUSH

f mm	Df mm	flange				grease fitting G mm	eccentricity $\mu$ m	perpendicularity $\mu$ m	basic load rating		allowable static moment $M_o$ N · m	mass g	shaft diameter mm
		K mm	t mm	P.C.D. mm	X×Y×Z mm				C N	Co N			
5	32	25	5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	58	6
6	40	30	6	29	4.5×7.5×4.1	29			431	784	16.0	117	8
6	43	34	6	33	4.5×7.5×4.1	38			588	1,100	27.0	189	10
6	46	35	6	36	4.5×7.5×4.1	41			813	1,570	40.1	228	12
6	48	37	6	38	4.5×7.5×4.1	45			813	1,570	42.9	286	13
8	54	42	8	43	5.5×9×5.1	51	25	25	1,230	2,350	73.5	376	16
8	62	50	8	51	5.5×9×5.1	59			1,400	2,740	98.0	714	20
10	74	58	10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,163	25
10	82	64	10	67	6.6×11×6.1	91			2,490	5,490	297	1,543	30
13	96	75	13	78	9×14×8.1	100			2,650	6,270	373	2,400	35
13	101	80	13	83	9×14×8.1	115	30	30	3,430	8,040	553	2,510	40
18	129	100	18	107	11×17×11.1	145			6,080	15,900	1,370	6,400	50
18	144	116	18	122	11×17×11.1	155			7,550	20,000	1,800	9,200	60

1N≅0.102kgf 1N · m≅0.102kgf · m

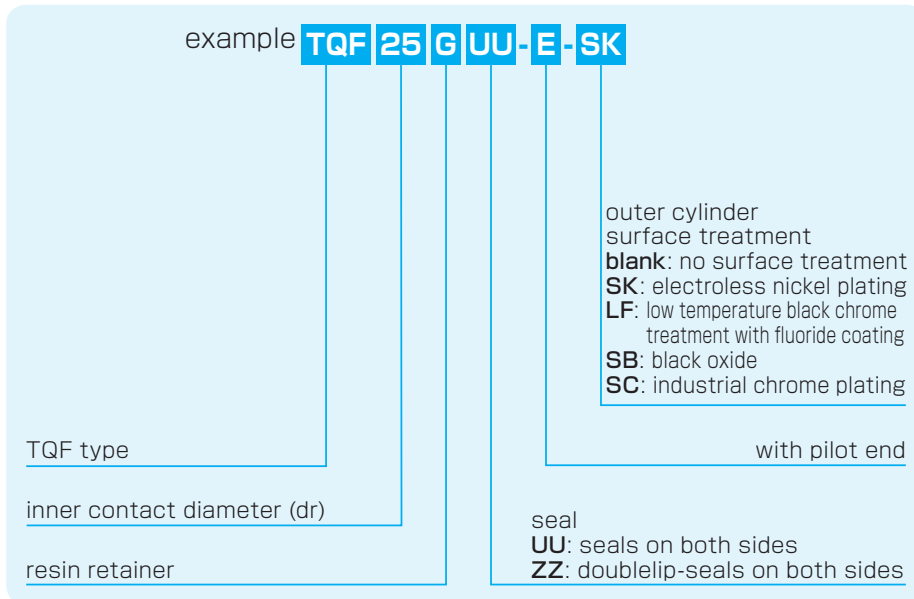
NIPPON BEARING

TQF-E TYPE

– Round Flange Type with Pilot End –



part number structure



Doublelip-seal is available for size 6 to 30.


part number*	number of ball circuits	dr		D		major dimensions				
		mm	tolerance $\mu\text{m}$	mm	tolerance $\mu\text{m}$	L $\pm 0.3$ mm	f mm	Df mm	t mm	flange P.C.D. mm
TQF16GUU-E	4	16	0/-9	32	0	37	8	54	8	43
TQF20GUU-E	5	20	0	40	-19	42	8	62	8	51
TQF25GUU-E	6	25	-10	45		59	10	74	10	60
TQF30GUU-E	6	30		52	0	64	10	82	10	67
TQF35GUU-E	6	35	0	60	-22	70	13	96	13	78
TQF40GUU-E	6	40	-12	65		80	13	101	13	83

\* Seals-on-both-sides is standard.

\*\*TQF16G~25G : M3-1 grease fitting TQF30G~40G : A-M6x1  
Surface treatment is optional.



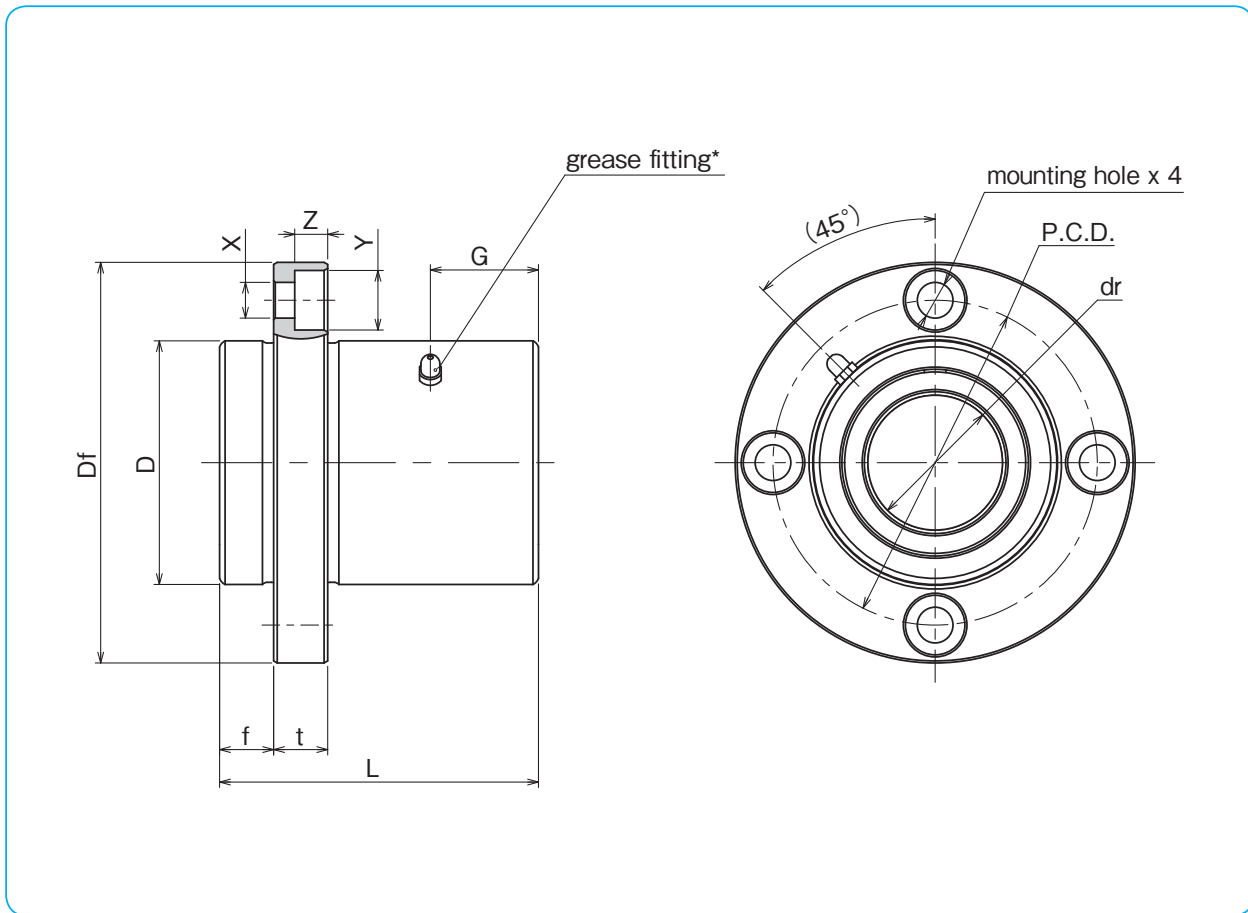SLIDE BUSH



SLIDE BUSH


X×Y×Z mm	grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating		mass g	shaft diameter mm
				dynamic C N	static Co N		
5.5×9×5.1	12	12	12	774	1,180	205	16
5.5×9×5.1	14	15	15	882	1,370	334	20
6.6×11×6.1	20			980	1,570	568	25
6.6×11×6.1	21	20	20	1,570	2,740	737	30
9×14×8.1	23			1,670	3,140	1,170	35
9×14×8.1	27			2,160	4,020	1,330	40

1N≅0.102kgf


NIPPON BEARING

**TQK-E TYPE**

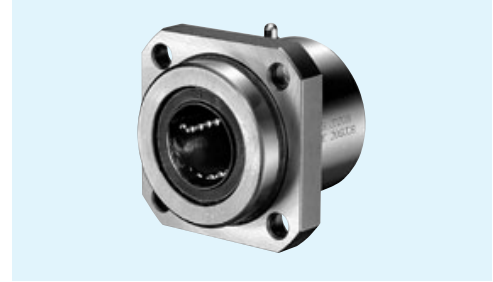– Square Flange Type with Pilot End –



part number structure

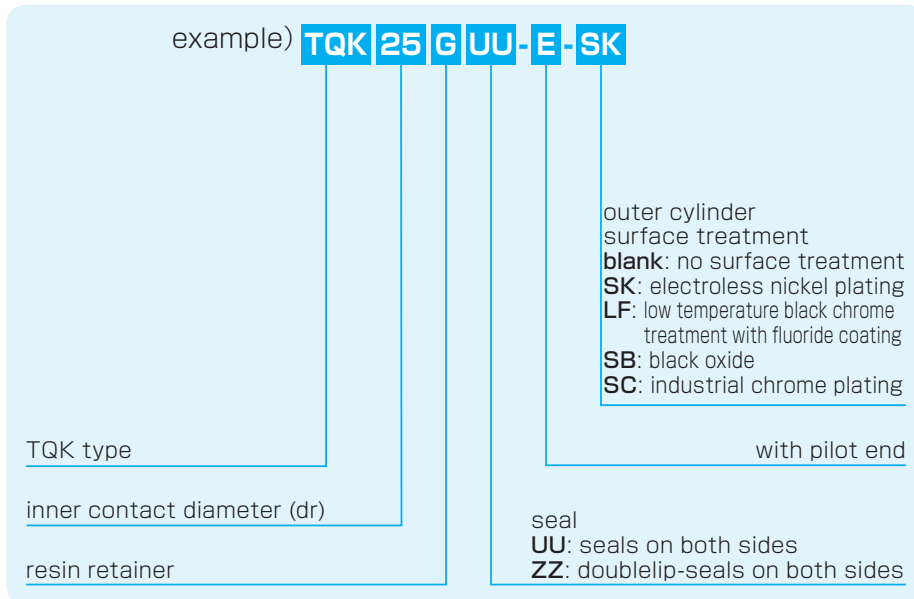


Doublelip-seal is available for size 6 to 30.

part number*	number of ball circuits	dr		D		major dimensions						
		mm	tolerance $\mu\text{m}$	mm	tolerance $\mu\text{m}$	L $\pm 0.3$ mm	f mm	Df mm	K mm	flange t mm	P.C.D. mm	
TQK16GUU-E	4	16	0/-9	32	0	37	8	54	42	8	43	
TQK20GUU-E	5	20	0	40	-19	42	8	62	50	8	51	
TQK25GUU-E	6	25		45		59	10	74	58	10	60	
TQK30GUU-E	6	30	-10	52	0	64	10	82	64	10	67	
TQK35GUU-E	6	35	0	60		-22	70	13	96	75	13	78
TQK40GUU-E	6	40	-12	65		80	13	101	80	13	83	

\* Seals-on-both-sides is standard.

\*\*TQK16G~25G : M3-1 grease fitting TQK30G~40G : A-M6x1  
Surface treatment is optional.

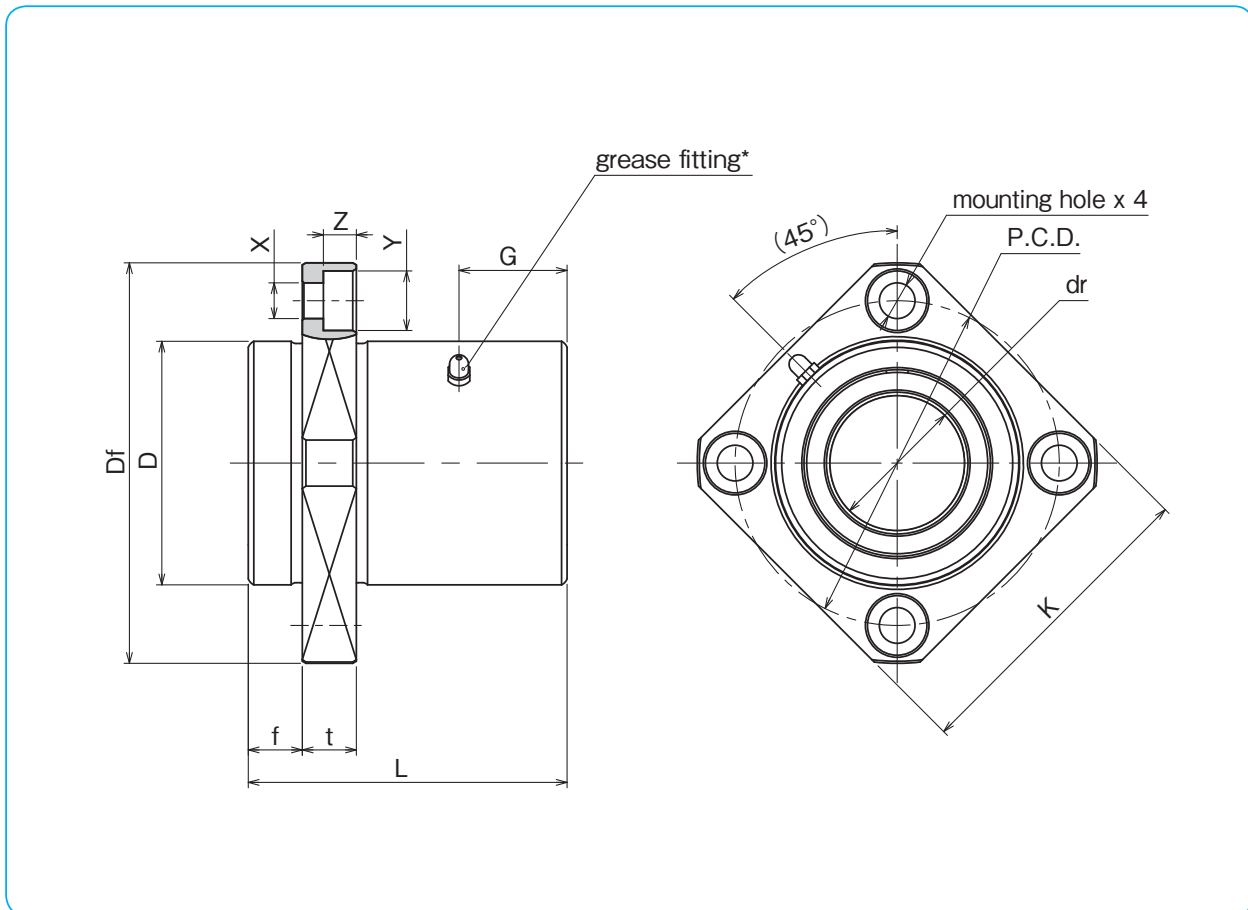SLIDE BUSH



SLIDE BUSH

X×Y×Z mm	grease fitting G mm	eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		mass g	shaft diameter mm
				dynamic C N	static Co N		
5.5×9×5.1	12	12	12	774	1,180	170	16
5.5×9×5.1	14	15	15	882	1,370	297	20
6.6×11×6.1	20			980	1,570	490	25
6.6×11×6.1	21	20	20	1,570	2,740	639	30
9×14×8.1	23			1,670	3,140	989	35
9×14×8.1	27			2,160	4,020	1,040	40

1N  $\approx$  0.102kgf

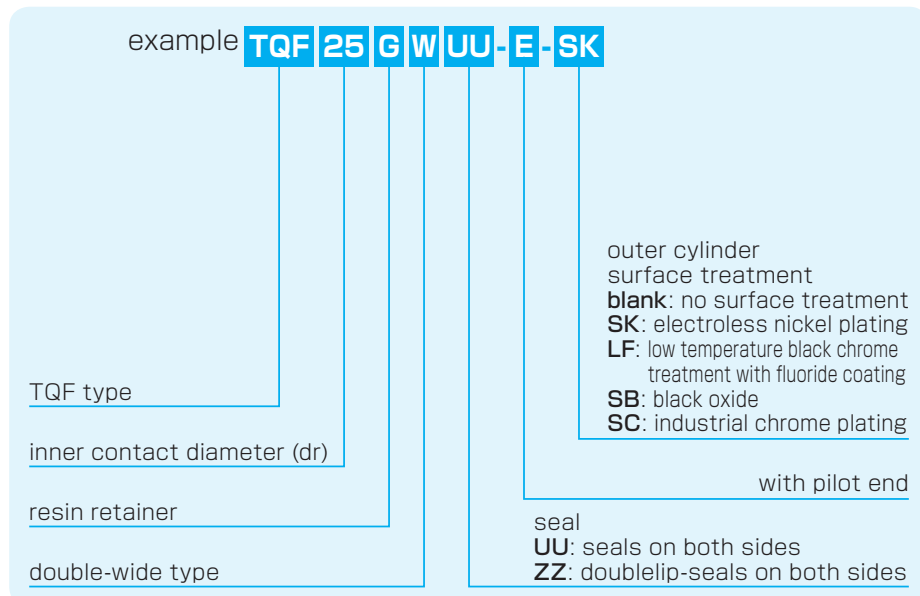
NIPPON BEARING

TQF-W-E TYPE

— Round Flange Double-Wide Pilot End Type —



part number structure




Doublelip-seal is available for size 6 to 30.

part number*	number of ball circuits	dr		D		major dimensions				
		mm	tolerance $\mu\text{m}$	mm	tolerance $\mu\text{m}$	L $\pm 0.3$ mm	f mm	Df mm	t mm	flange P.C.D. mm
TQF16GWUU-E	4	16	0/-9	32	0	70	8	54	8	43
TQF20GWUU-E	5	20	0	40		-19	80	8	62	8
TQF25GWUU-E	6	25		-12	45	0	112	10	74	10
TQF30GWUU-E	6	30	52		-22		123	10	82	10
TQF35GWUU-E	6	35	0	60	-22	135	13	96	13	78
TQF40GWUU-E	6	40	-15	65		151	13	101	13	83

\* Seals-on-both-sides is standard.

\*\*TQF16G~25G : M3-1 grease fitting TQF30G~40G : A-M6x1  
Surface treatment is optional.

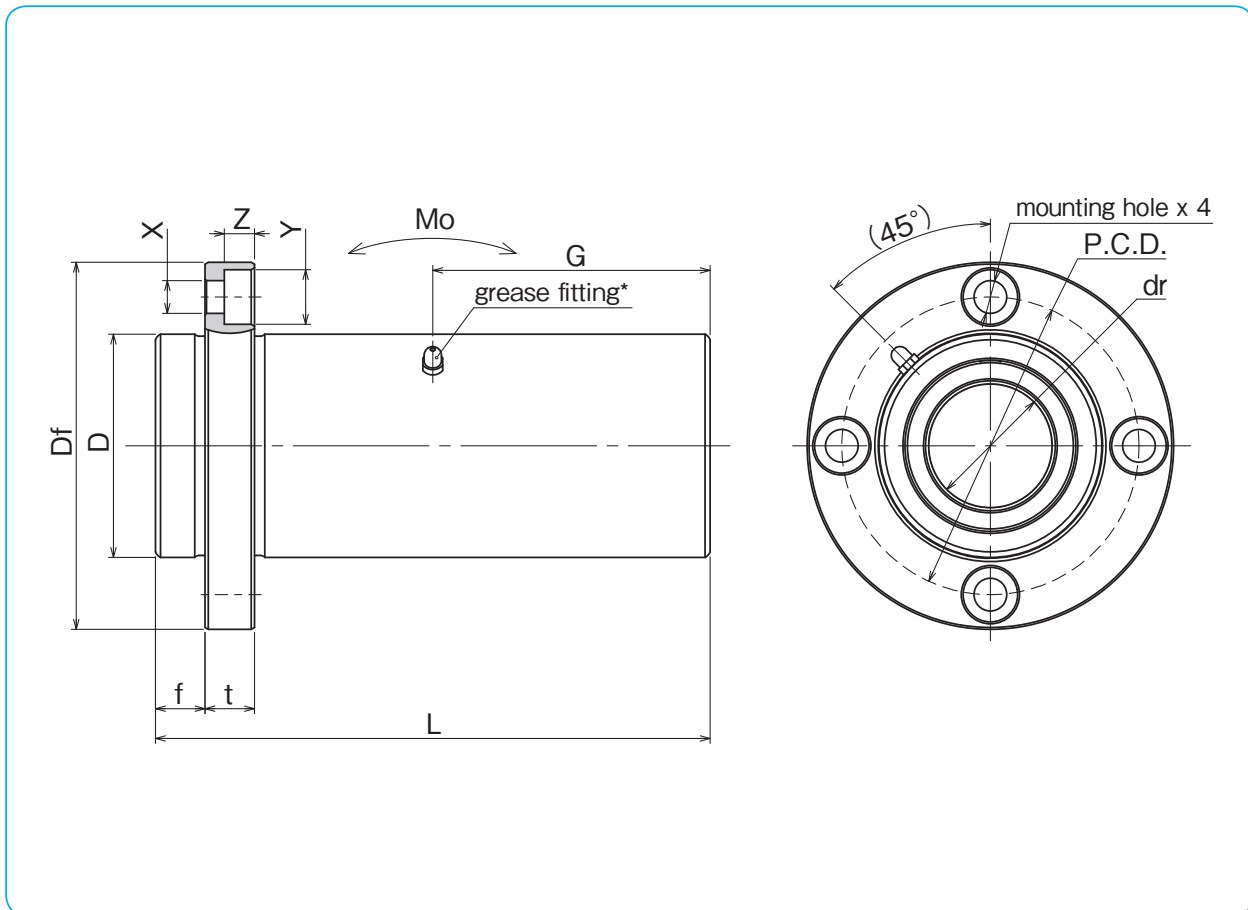SLIDE BUSH



SLIDE BUSH

X×Y×Z mm	grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating		allowable static moment Mo N·m	mass g	shaft diameter mm
				dynamic C N	static Co N			
5.5×9×5.1	35	15	15	1,230	2,350	19.7	317	16
5.5×9×5.1	40	20	20	1,400	2,740	26.8	552	20
6.6×11×6.1	56			1,560	3,140	43.4	916	25
6.6×11×6.1	61.5	25	25	2,490	5,490	82.8	1,217	30
9×14×8.1	67.5			2,650	6,270	110	1,880	35
9×14×8.1	75.5			3,430	8,040	147	2,140	40

1N≅0.102kgf 1N·m≅0.102kgf·m

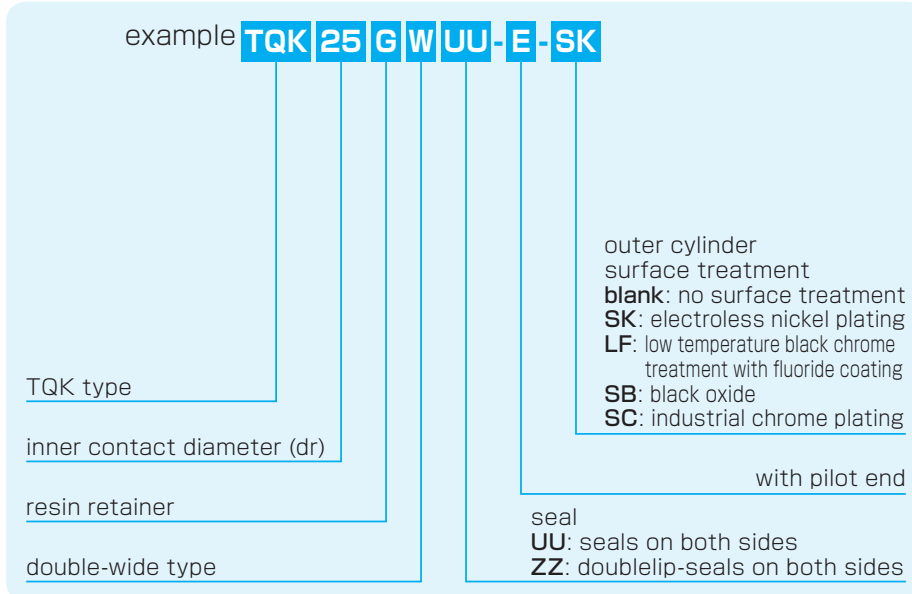
NIPPON BEARING

TQK-W-E TYPE

— Square Flange Double-Wide Pilot End Type —



part number structure



Doublelip-seal is available for size 6 to 30.


part number*	number of ball circuits	dr		D		major dimensions					
		mm	tolerance $\mu\text{m}$	mm	tolerance $\mu\text{m}$	L $\pm 0.3$ mm	f mm	Df mm	K mm	flange	
										t mm	P.C.D. mm
TQK16GWUU-E	4	16	0/-10	32	0	70	8	54	42	8	43
TQK20GWUU-E	5	20	0	40	-19	80	8	62	50	8	51
TQK25GWUU-E	6	25	-12	45		112	10	74	58	10	60
TQK30GWUU-E	6	30		52	0	123	10	82	64	10	67
TQK35GWUU-E	6	35	0	60	-22	135	13	96	75	13	78
TQK40GWUU-E	6	40	-15	65		151	13	101	80	13	83

\* Seals-on-both-sides is standard.

\*\*TQK16G~25G : M3-1 grease fitting TQK30G~40G : A-M6×1

Surface treatment is optional.

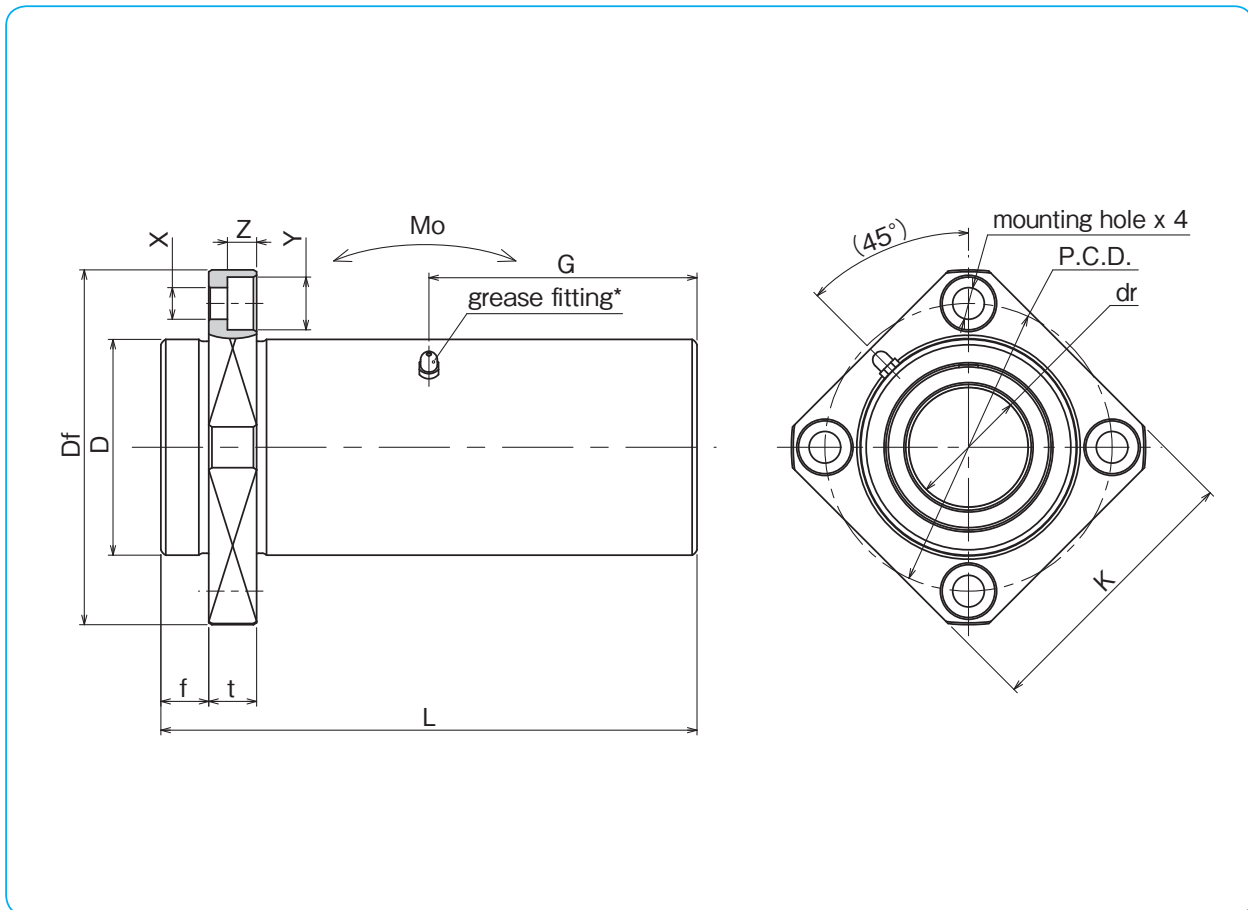SLIDE BUSH



SLIDE BUSH

X×Y×Z mm	grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating		allowable static moment Mo N·m	mass g	shaft diameter mm
				dynamic C N	static Co N			
5.5×9×5.1	35	15	15	1,230	2,350	19.7	282	16
5.5×9×5.1	40	20	20	1,400	2,740	26.8	515	20
6.6×11×6.1	56			1,560	3,140	43.4	838	25
6.6×11×6.1	61.5	25	25	2,490	5,490	82.8	1,120	30
9×14×8.1	67.5			2,650	6,270	110	1,710	35
9×14×8.1	75.5			3,430	8,040	147	1,960	40

1N≅0.102kgf 1N·m≅0.102kgf·m

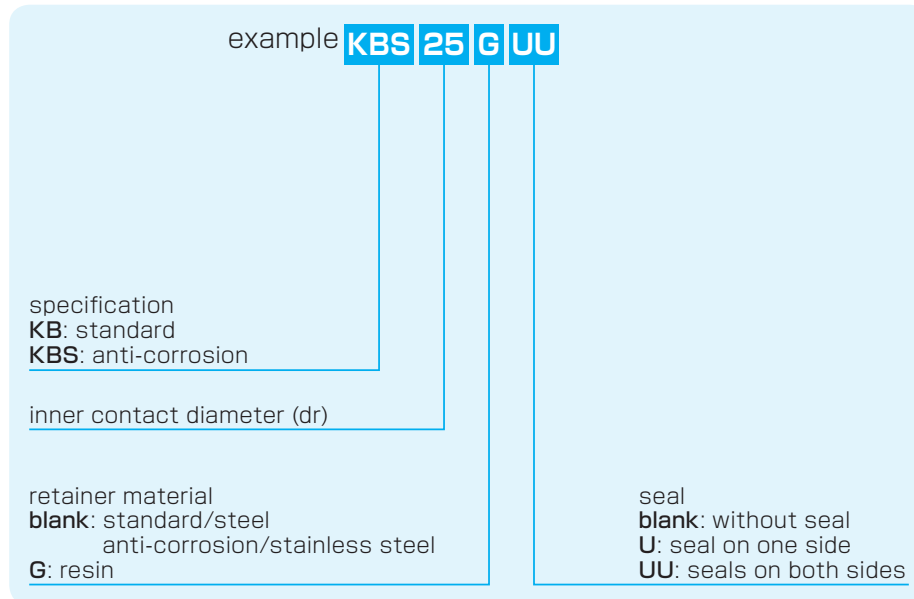
NIPPON BEARING

**KB TYPE** (Euro Standard)

– Standard Type –




part number structure



part number				number of ball circuits	dr mm	tolerance μm	major dimensions		
standard steel retainer	resin retainer	anti-corrosion stainless retainer	resin retainer				D mm	tolerance μm	
<b>KB 3</b>	<b>KB 3G</b>	<b>KBS 3</b>	<b>KBS 3G</b>	4	3	+ 8 0	7	0 - 8	
<b>KB 4</b>	<b>KB 4G</b>	<b>KBS 4</b>	<b>KBS 4G</b>	4	4		8		
<b>KB 5</b>	<b>KB 5G</b>	<b>KBS 5</b>	<b>KBS 5G</b>	4	5		12		
<b>KB 8</b>	<b>KB 8G</b>	<b>KBS 8</b>	<b>KBS 8G</b>	4	8		16		
<b>KB10</b>	<b>KB10G</b>	<b>KBS10</b>	<b>KBS10G</b>	4	10		19		
<b>KB12</b>	<b>KB12G</b>	<b>KBS12</b>	<b>KBS12G</b>	4	12		22		
<b>KB16</b>	<b>KB16G</b>	<b>KBS16</b>	<b>KBS16G</b>	4	16		+ 9 26		- 9
<b>KB20</b>	<b>KB20G</b>	<b>KBS20</b>	<b>KBS20G</b>	5	20		- 1 32		0
<b>KB25</b>	<b>KB25G</b>	<b>KBS25</b>	<b>KBS25G</b>	6	25		+11 40		-11
<b>KB30</b>	<b>KB30G</b>	<b>KBS30</b>	<b>KBS30G</b>	6	30		- 1 47		0
<b>KB40</b>	<b>KB40G</b>	<b>KBS40</b>	<b>KBS40G</b>	6	40	+13 62	0		
<b>KB50</b>	<b>KB50G</b>	<b>KBS50</b>	<b>KBS50G</b>	6	50	- 2 75	-13		
<b>KB60</b>	<b>KB60G</b>	<b>KBS60</b>	<b>KBS60G</b>	6	60	90	0		
<b>KB80</b>	-	-	-	6	80	+16/-4 120	-15		



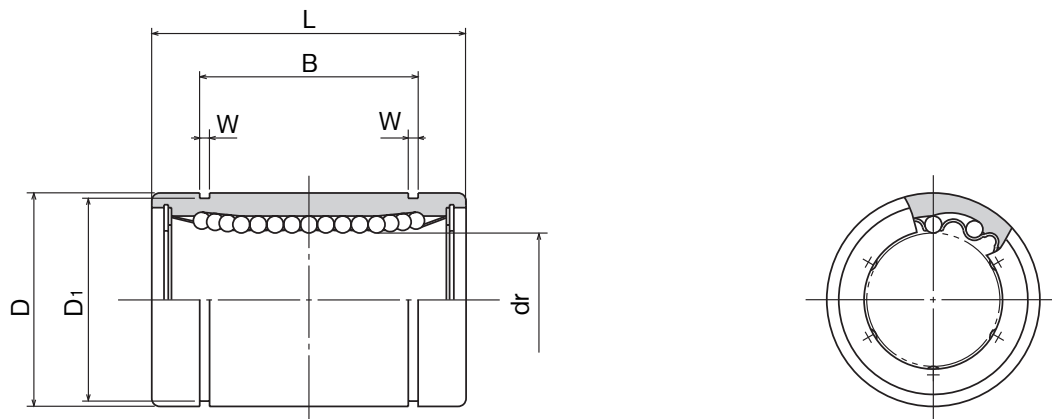SLIDE BUSH



SLIDE BUSH

mm	L tolerance mm	mm	B tolerance mm	W mm	D <sub>1</sub> mm	eccentricity μm	radial clearance (maximum) μm	basic load rating dynamic C N	static Co N	mass g	shaft diameter mm
10	0	—	—	—	—	10	— 3	69	105	1.4	3
12	-0.12	—	—	—	—			88	127	2	4
22	0 -0.2	14.5	0 -0.2	1.1	11.5	12	— 4	206	265	11	5
25		16.5		1.1	15.2			265	402	22	8
29		22		1.3	18			372	549	36	10
32		22.9		1.3	21			510	784	45	12
36		24.9		1.3	24.9			578	892	60	16
45		31.5		1.6	30.3			862	1,370	102	20
58	0 -0.3	44.1	0 -0.3	1.85	37.5	15	— 6	980	1,570	235	25
68		52.1		1.85	44.5			1,570	2,740	360	30
80		60.6		2.15	59			2,160	4,020	770	40
100		77.6		2.65	72			3,820	7,940	1,250	50
125	0 -0.4	101.7	0 -0.4	3.15	86.5	17	— 13	4,700	9,800	2,220	60
165		133.7		4.15	116			7,350	16,000	5,140	80
						20	— 20				

1N ≅ 0.102kgf

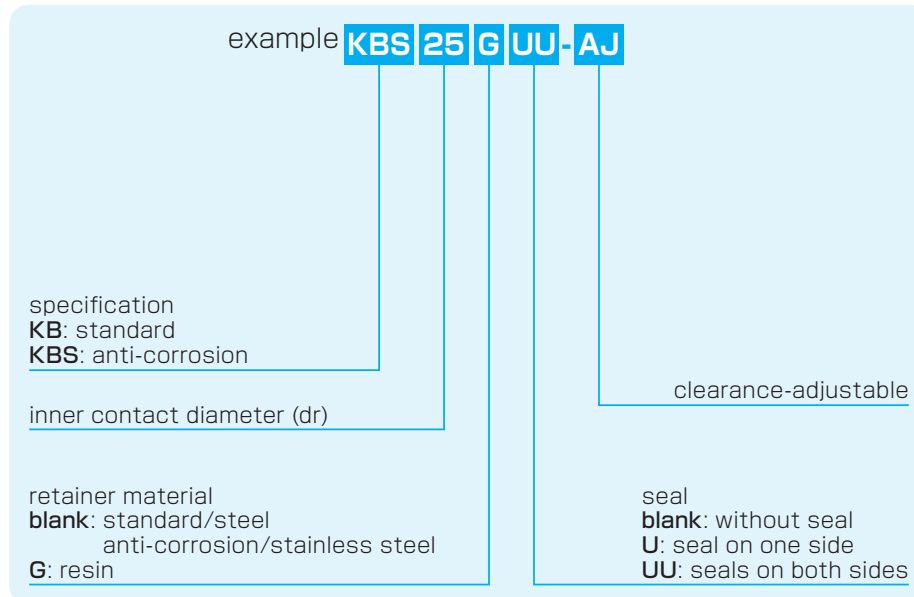
NIPPON BEARING

**KB-AJ TYPE** (Euro Standard)

– Clearance Adjustable Type –




part number structure



part number		number of ball circuits	major dimensions					
standard	anti-corrosion		dr	D				
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance* μm	mm	tolerance* μm	
–	<b>KB 5G-AJ</b>	–	<b>KBS 5G-AJ</b>	4	5	+ 8 0	12	0
–	<b>KB 8G-AJ</b>	–	<b>KBS 8G-AJ</b>	4	8		16	– 8
–	<b>KB10G-AJ</b>	–	<b>KBS10G-AJ</b>	4	10		19	0
<b>KB12-AJ</b>	<b>KB12G-AJ</b>	<b>KBS12-AJ</b>	<b>KBS12G-AJ</b>	4	12	+ 9	22	– 9
<b>KB16-AJ</b>	<b>KB16G-AJ</b>	<b>KBS16-AJ</b>	<b>KBS16G-AJ</b>	4	16		26	0
<b>KB20-AJ</b>	<b>KB20G-AJ</b>	<b>KBS20-AJ</b>	<b>KBS20G-AJ</b>	5	20	– 1	32	0
<b>KB25-AJ</b>	<b>KB25G-AJ</b>	<b>KBS25-AJ</b>	<b>KBS25G-AJ</b>	6	25	+11	40	–11
<b>KB30-AJ</b>	<b>KB30G-AJ</b>	<b>KBS30-AJ</b>	<b>KBS30G-AJ</b>	6	30	– 1	47	0
<b>KB40-AJ</b>	<b>KB40G-AJ</b>	<b>KBS40-AJ</b>	<b>KBS40G-AJ</b>	6	40	+13 – 2	62	0
<b>KB50-AJ</b>	<b>KB50G-AJ</b>	<b>KBS50-AJ</b>	<b>KBS50G-AJ</b>	6	50		75	–13
<b>KB60-AJ</b>	<b>KB60G-AJ</b>	<b>KBS60-AJ</b>	<b>KBS60G-AJ</b>	6	60	+16/–4	90	0
<b>KB80-AJ</b>	–	–	–	6	80		120	–15

\* Accuracy is measured prior to machining clearance slit.

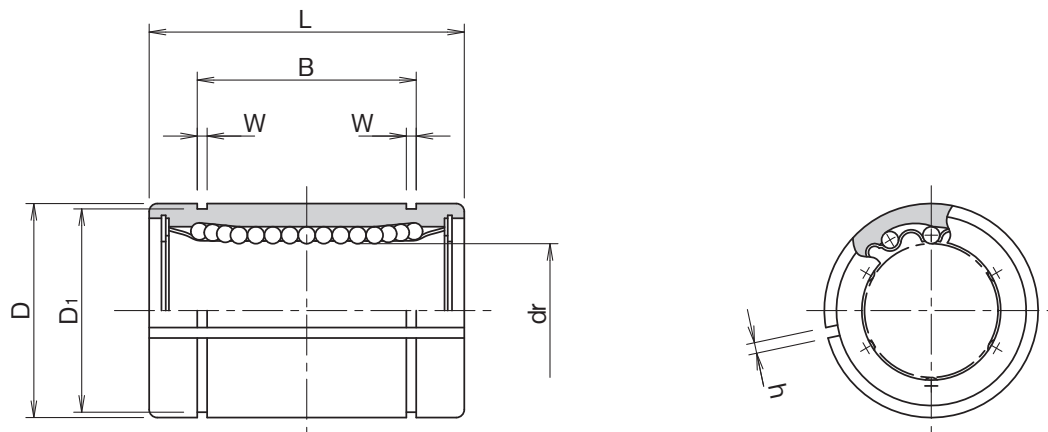SLIDE BUSH



SLIDE BUSH


mm	L tolerance mm	B		W mm	D <sub>1</sub> mm	h mm	eccentricity* μm	basic load rating		mass g	shaft diameter mm
		mm	tolerance mm					dynamic C N	static C <sub>0</sub> N		
22	0 -0.2	14.5	0 -0.2	1.1	11.5	1	12	206	265	10	5
25		16.5		1.1	15.2	1		265	402	19.5	8
29		22		1.3	18	1		372	549	29	10
32		22.9		1.3	21	1.5		510	784	44	12
36		24.9		1.3	24.9	1.5		578	892	59	16
45		31.5		1.6	30.3	2		862	1,370	100	20
58	0 -0.3	44.1	0 -0.3	1.85	37.5	2	15	980	1,570	230	25
68		52.1		1.85	44.5	2		1,570	2,740	355	30
80		60.6		2.15	59	3		2,160	4,020	758	40
100	0 -0.4	77.6	0 -0.4	2.65	72	3	17	3,820	7,940	1,230	50
125		101.7		3.15	86.5	3		4,700	9,800	2,170	60
165		133.7		4.15	116	3		7,350	16,000	5,000	80

1N ≅ 0.102kgf


NIPPON BEARING

**KB-OP TYPE** (Euro Standard)

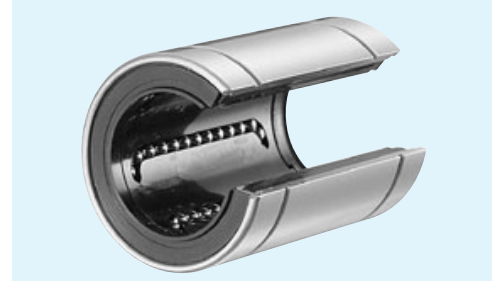– Open Type –




part number structure

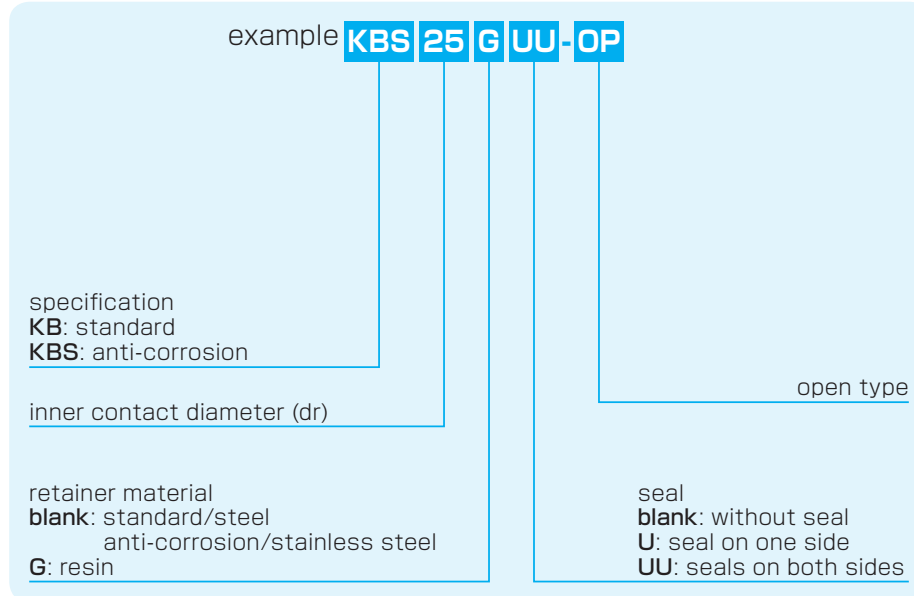

part number				number of ball circuits	dr		major dimensions	
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer		mm	tolerance* $\mu\text{m}$	D mm	tolerance* $\mu\text{m}$
–	<b>KB10G-OP</b>	–	<b>KBS10G-OP</b>	3	10	+ 8	19	0
<b>KB12-OP</b>	<b>KB12G-OP</b>	<b>KBS12-OP</b>	<b>KBS12G-OP</b>	3	12	0	22	– 9
<b>KB16-OP</b>	<b>KB16G-OP</b>	<b>KBS16-OP</b>	<b>KBS16G-OP</b>	3	16	+ 9	26	
<b>KB20-OP</b>	<b>KB20G-OP</b>	<b>KBS20-OP</b>	<b>KBS20G-OP</b>	4	20	– 1	32	0
<b>KB25-OP</b>	<b>KB25G-OP</b>	<b>KBS25-OP</b>	<b>KBS25G-OP</b>	5	25	+11	40	–11
<b>KB30-OP</b>	<b>KB30G-OP</b>	<b>KBS30-OP</b>	<b>KBS30G-OP</b>	5	30	– 1	47	
<b>KB40-OP</b>	<b>KB40G-OP</b>	<b>KBS40-OP</b>	<b>KBS40G-OP</b>	5	40	+13	62	0
<b>KB50-OP</b>	<b>KB50G-OP</b>	<b>KBS50-OP</b>	<b>KBS50G-OP</b>	5	50	– 2	75	–13
<b>KB60-OP</b>	<b>KB60G-OP</b>	<b>KBS60-OP</b>	<b>KBS60G-OP</b>	5	60		90	0
<b>KB80-OP</b>	–	–	–	5	80	+16/–4	120	–15

\* Accuracy is measured prior to machining open slit.

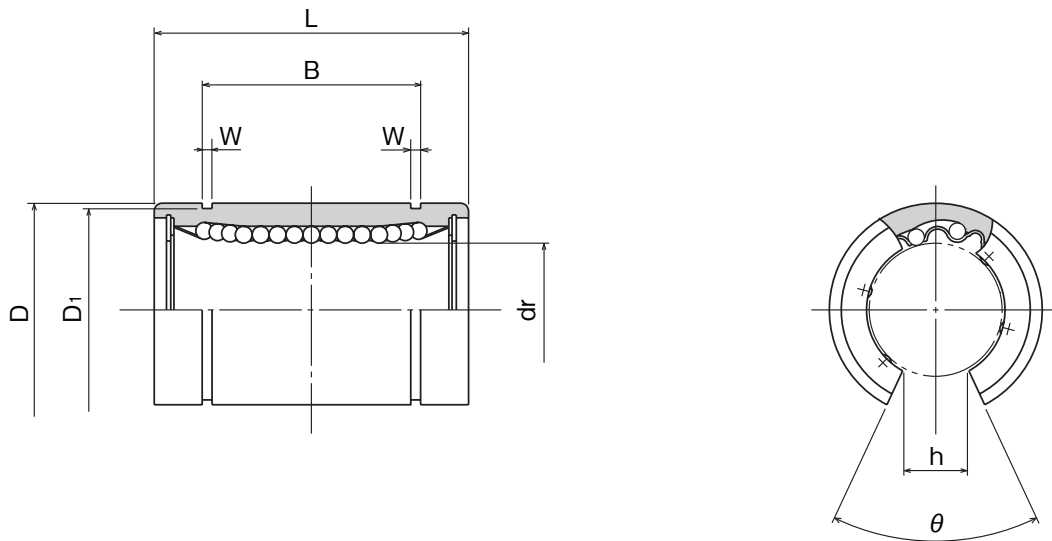SLIDE BUSH



SLIDE BUSH

mm	L tolerance mm	mm	B tolerance mm	W mm	D <sub>1</sub> mm	h mm	θ	eccentricity* μm	basic load rating		mass g	shaft diameter mm
									dynamic C N	static C <sub>0</sub> N		
29	0 -0.2	22	0 -0.2	1.3	18	6.8	80°	12	372	549	23	10
32		22.9		1.3	21	7.5	78°		510	784	35	12
36		24.9		1.3	24.9	10	78°		578	892	48	16
45	0 -0.3	31.5	0 -0.3	1.6	30.3	10	60°	15	862	1,370	84	20
58		44.1		1.85	37.5	12.5	60°		980	1,570	195	25
68		52.1		1.85	44.5	12.5	50°		1,570	2,740	309	30
80	-0.3	60.6	-0.3	2.15	59	16.8	50°	17	2,160	4,020	665	40
100		77.6		2.65	72	21	50°		3,820	7,940	1,080	50
125		101.7		3.15	86.5	27.2	54°		4,700	9,800	1,900	60
165	-0.4	133.7	-0.4	4.15	116	36.3	54°	20	7,350	16,000	4,380	80

1N≅0.102kgf

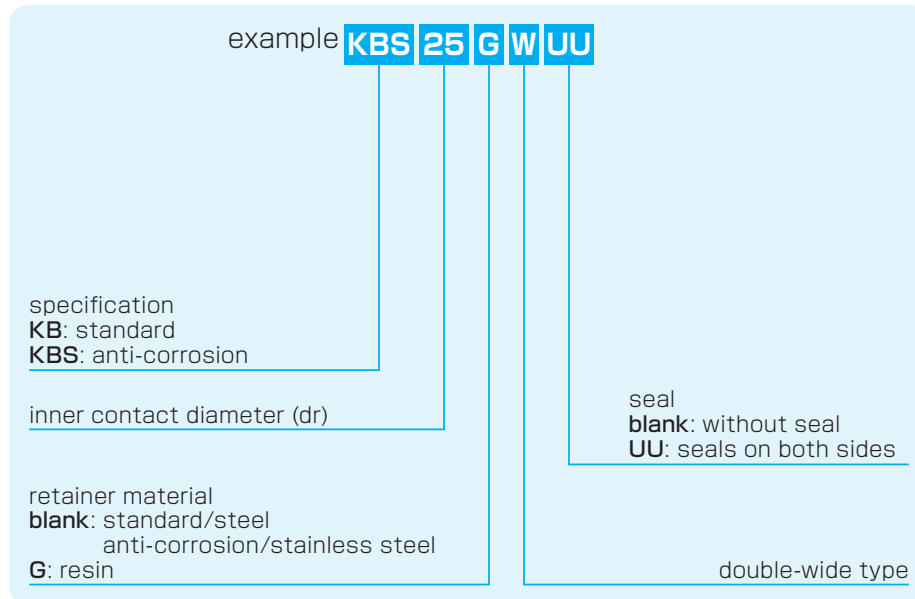
NIPPON BEARING

**KB-W TYPE** (Euro Standard)

– Double-Wide Type –




part number structure



part number				number of ball circuits	dr		major dimensions	
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer		mm	tolerance $\mu\text{m}$	D mm	tolerance $\mu\text{m}$
<b>KB 8W</b>	<b>KB 8GW</b>	<b>KBS 8W</b>	<b>KBS 8GW</b>	4	8	+ 9	16	0/-9
<b>KB12W</b>	<b>KB12GW</b>	<b>KBS12W</b>	<b>KBS12GW</b>	4	12	- 1	22	0
<b>KB16W</b>	<b>KB16GW</b>	<b>KBS16W</b>	<b>KBS16GW</b>	4	16	+11	26	-11
<b>KB20W</b>	<b>KB20GW</b>	<b>KBS20W</b>	<b>KBS20GW</b>	5	20	- 1	32	0
<b>KB25W</b>	<b>KB25GW</b>	<b>KBS25W</b>	<b>KBS25GW</b>	6	25	+13	40	-13
<b>KB30W</b>	<b>KB30GW</b>	<b>KBS30W</b>	<b>KBS30GW</b>	6	30	- 2	47	0
<b>KB40W</b>	<b>KB40GW</b>	<b>KBS40W</b>	<b>KBS40GW</b>	6	40	+16	62	0
<b>KB50W</b>	<b>KB50GW</b>	<b>KBS50W</b>	<b>KBS50GW</b>	6	50	- 4	75	-15
<b>KB60W</b>	<b>KB60GW</b>	<b>KBS60W</b>	<b>KBS60GW</b>	6	60		90	0/-20

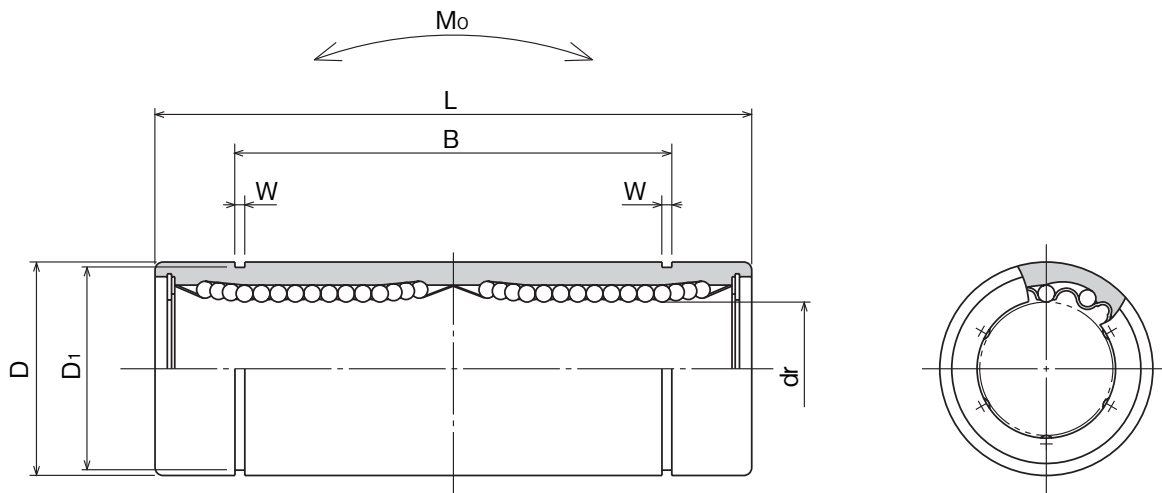SLIDE BUSH



SLIDE BUSH

mm	L	mm	B	mm	W	D <sub>1</sub>	eccentricity	basic load rating		allowable static moment	mass	shaft diameter
	tolerance		tolerance					C	Co			
mm	mm	mm	mm	mm	mm	$\mu\text{m}$	N	N	N · m	g	mm	
46		33		1.1	15.2	15	421	804	4.3	40	8	
61	0	45.8	0	1.3	21		813	1,570	11.7	80	12	
68	-0.3	49.8	-0.3	1.3	24.9		921	1,780	14.2	115	16	
80		61		1.6	30.5	17	1,370	2,740	25.0	180	20	
112		82		1.85	38		1,570	3,140	44.0	430	25	
123	0	104.2	0	1.85	44.5		2,500	5,490	78.9	615	30	
151	-0.4	121.2	-0.4	2.15	59	20	3,430	8,040	147	1,400	40	
192		155.2		2.65	72		6,080	15,900	396	2,320	50	
209		170		3.15	86.5		25	7,550	20,000	487	3,920	60

1N≅0.102kgf 1N · m≅0.102kgf · m

NIPPON BEARING

**KBF TYPE** (Euro Standard)

– Round Flange Type –



part number structure


example **KBSF 25 G UU-SK**

specification <b>KBF:</b> standard <b>KBSF:</b> anti-corrosion	inner contact diameter (dr)	retainer material <b>blank:</b> standard/steel anti-corrosion/stainless steel <b>G:</b> resin	outer cylinder surface treatment <b>blank:</b> no surface treatment <b>SK:</b> electroless nickel plating <b>LF:</b> low temperature black chrome treatment with fluoride coating <b>SB:</b> black oxide (not available on anti-corrosion type) <b>SC:</b> industrial chrome plating	seal <b>blank:</b> without seal <b>UU:</b> seals on both sides
--	-----------------------------	--	---	--

part number		number of ball circuits	major dimensions					
standard	anti-corrosion		dr	D	L			
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance $\mu\text{m}$	mm	tolerance $\mu\text{m}$	$\pm 0.3$ mm
–	<b>KBF 5G</b>	–	<b>KBSF 5G</b>	4	5	12	0	22
<b>KBF 8</b>	<b>KBF 8G</b>	<b>KBSF 8</b>	<b>KBSF 8G</b>	4	8	+ 8	–13	25
<b>KBF12</b>	<b>KBF12G</b>	<b>KBSF12</b>	<b>KBSF12G</b>	4	12	0	0	32
<b>KBF16</b>	<b>KBF16G</b>	<b>KBSF16</b>	<b>KBSF16G</b>	4	16	+ 9	–16	36
<b>KBF20</b>	<b>KBF20G</b>	<b>KBSF20</b>	<b>KBSF20G</b>	5	20	– 1	0	45
<b>KBF25</b>	<b>KBF25G</b>	<b>KBSF25</b>	<b>KBSF25G</b>	6	25	+11	–19	58
<b>KBF30</b>	<b>KBF30G</b>	<b>KBSF30</b>	<b>KBSF30G</b>	6	30	– 1	0	68
<b>KBF40</b>	<b>KBF40G</b>	<b>KBSF40</b>	<b>KBSF40G</b>	6	40	+13	0	80
<b>KBF50</b>	<b>KBF50G</b>	<b>KBSF50</b>	<b>KBSF50G</b>	6	50	– 2	–22	100
<b>KBF60</b>	<b>KBF60G</b>	<b>KBSF60</b>	<b>KBSF60G</b>	6	60	0	0	125
<b>KBF80</b>	–	–	–	6	80	+16/–4	–25	165



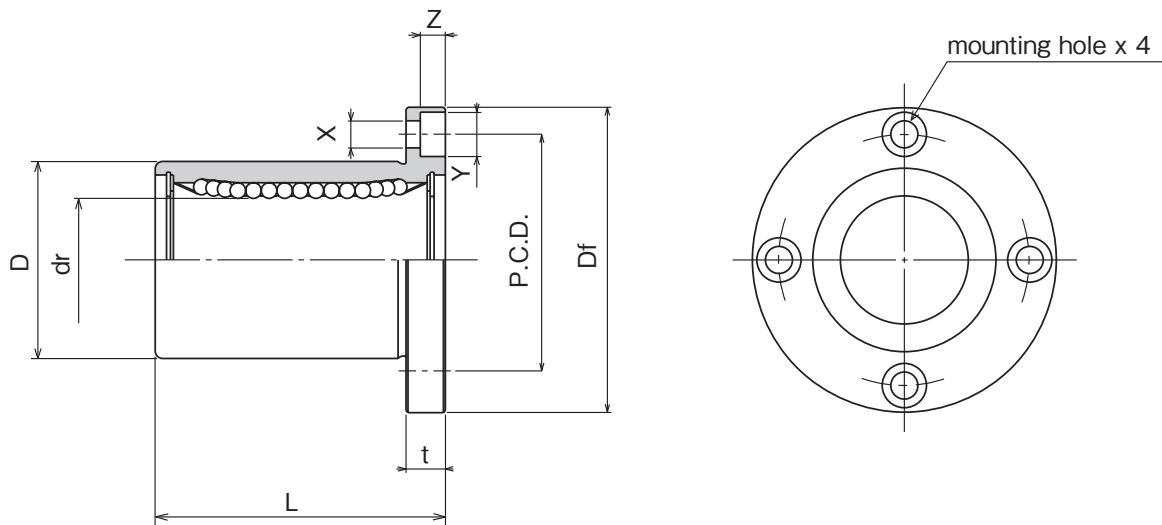SLIDE BUSH



SLIDE BUSH

Df mm	t mm	flange P.C.D. mm	X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating		mass g	shaft diameter mm
						dynamic C N	static Co N		
28	5	20	3.5×6×3.1	12	12	206	265	26	5
32	5	24	3.5×6×3.1			265	402	41	8
42	6	32	4.5×7.5×4.1			510	784	80	12
46	6	36	4.5×7.5×4.1			578	892	103	16
54	8	43	5.5×9×5.1	15	15	862	1,370	182	20
62	8	51	5.5×9×5.1			980	1,570	335	25
76	10	62	6.6×11×6.1			1,570	2,740	560	30
98	13	80	9×14×8.1	17	17	2,160	4,020	1,175	40
112	13	94	9×14×8.1			3,820	7,940	1,745	50
134	18	112	11×17×11.1	20	20	4,700	9,800	3,220	60
164	18	142	11×17×11.1			7,350	16,000	6,420	80

1N≅0.102kgf

NIPPON BEARING

**KBK TYPE** (Euro Standard)

– Square Flange Type –




part number structure

example **KBSK 25 G UU-SK**

specification <b>KBK</b> : standard <b>KBSK</b> : anti-corrosion	inner contact diameter (dr)	retainer material <b>blank</b> : standard/steel anti-corrosion/stainless steel <b>G</b> : resin	outer cylinder surface treatment <b>blank</b> : no surface treatment <b>SK</b> : electroless nickel plating <b>LF</b> : low temperature black chrome treatment with fluoride coating <b>SB</b> : black oxide (not available on anti-corrosion type) <b>SC</b> : industrial chrome plating	seal <b>blank</b> : without seal <b>UU</b> : seals on both sides
--	-----------------------------	--	--	--

part number				number of ball circuits	dr		major dimensions		
standard steel retainer	resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer		mm	tolerance $\mu\text{m}$	D mm	tolerance $\mu\text{m}$	L $\pm 0.3$ mm
–	<b>KBK 5G</b>	–	<b>KBSK 5G</b>	4	5		12	0	22
<b>KBK 8</b>	<b>KBK 8G</b>	<b>KBSK 8</b>	<b>KBSK 8G</b>	4	8	+ 8	16	-13	25
<b>KBK12</b>	<b>KBK12G</b>	<b>KBSK12</b>	<b>KBSK12G</b>	4	12	0	22	0	32
<b>KBK16</b>	<b>KBK16G</b>	<b>KBSK16</b>	<b>KBSK16G</b>	4	16	+ 9	26	-16	36
<b>KBK20</b>	<b>KBK20G</b>	<b>KBSK20</b>	<b>KBSK20G</b>	5	20	- 1	32		45
<b>KBK25</b>	<b>KBK25G</b>	<b>KBSK25</b>	<b>KBSK25G</b>	6	25	+11	40	0	58
<b>KBK30</b>	<b>KBK30G</b>	<b>KBSK30</b>	<b>KBSK30G</b>	6	30	- 1	47	-19	68
<b>KBK40</b>	<b>KBK40G</b>	<b>KBSK40</b>	<b>KBSK40G</b>	6	40		62	0	80
<b>KBK50</b>	<b>KBK50G</b>	<b>KBSK50</b>	<b>KBSK50G</b>	6	50	+13	75	-22	100
<b>KBK60</b>	<b>KBK60G</b>	<b>KBSK60</b>	<b>KBSK60G</b>	6	60	- 2	90	0	125
<b>KBK80</b>	–	–	–	6	80	+16/-4	120	-25	165

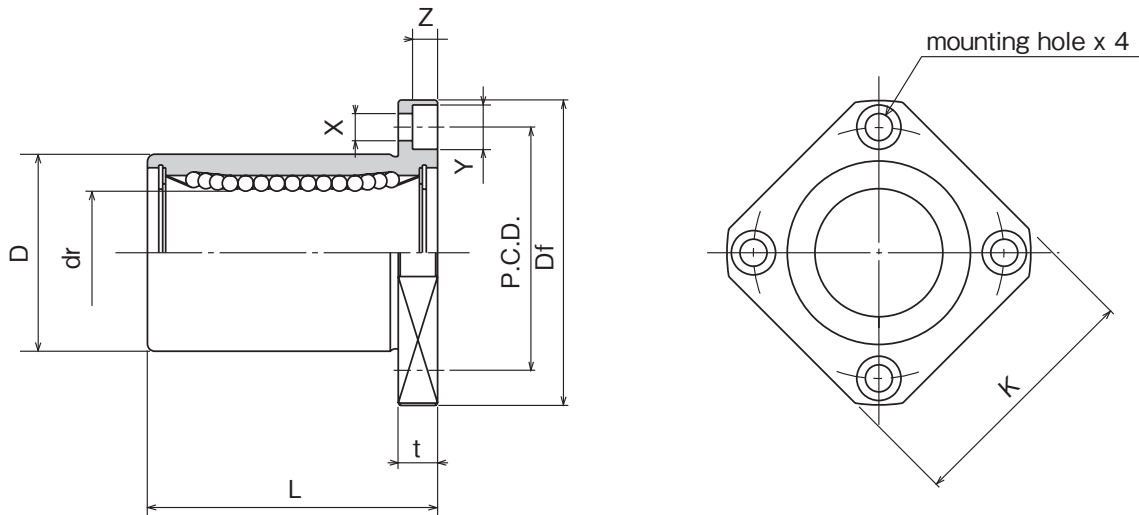SLIDE BUSH



SLIDE BUSH

Df mm	K mm	flange			eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		mass g	shaft diameter mm
		t mm	P.C.D. mm	X×Y×Z mm			dynamic C N	static Co N		
28	22	5	20	3.5×6×3.1	12	12	206	265	20	5
32	25	5	24	3.5×6×3.1			265	402	33	8
42	32	6	32	4.5×7.5×4.1			510	784	64	12
46	35	6	36	4.5×7.5×4.1			578	892	90	16
54	42	8	43	5.5×9×5.1	15	15	862	1,370	147	20
62	50	8	51	5.5×9×5.1			980	1,570	295	25
76	60	10	62	6.6×11×6.1			1,570	2,740	465	30
98	75	13	80	9×14×8.1			2,160	4,020	975	40
112	88	13	94	9×14×8.1	17	17	3,820	7,940	1,545	50
134	106	18	112	11×17×11.1			4,700	9,800	2,780	60
164	136	18	142	11×17×11.1			7,350	16,000	5,920	80

1N  $\approx$  0.102kgf

NIPPON BEARING

**KBF-W TYPE** (Euro Standard)

– Round Flange Double-Wide Type –




part number structure

example **KBSF 25 G W UU-SK**

specification <b>KBF:</b> standard <b>KBSF:</b> anti-corrosion	inner contact diameter (dr)	retainer material <b>blank:</b> standard/steel anti-corrosion/stainless steel <b>G:</b> resin	outer cylinder surface treatment <b>blank:</b> no surface treatment <b>SK:</b> electroless nickel plating <b>LF:</b> low temperature black chrome treatment with fluoride coating <b>SB:</b> black oxide (not available on anti-corrosion type) <b>SC:</b> industrial chrome plating	seal <b>blank:</b> without seal <b>UU:</b> seals on both sides	double-wide type
--	-----------------------------	--	---	--	------------------

part number				number of ball circuits	dr		major dimensions		
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer		mm	tolerance $\mu\text{m}$	D mm	tolerance $\mu\text{m}$	L $\pm 0.3$ mm
<b>KBF 8W</b>	<b>KBF 8GW</b>	<b>KBSF 8W</b>	<b>KBSF 8GW</b>	4	8	+ 9	16	0/-13	46
<b>KBF12W</b>	<b>KBF12GW</b>	<b>KBSF12W</b>	<b>KBSF12GW</b>	4	12	- 1	22	0	61
<b>KBF16W</b>	<b>KBF16GW</b>	<b>KBSF16W</b>	<b>KBSF16GW</b>	4	16	+11	26	-16	68
<b>KBF20W</b>	<b>KBF20GW</b>	<b>KBSF20W</b>	<b>KBSF20GW</b>	5	20	- 1	32	0	80
<b>KBF25W</b>	<b>KBF25GW</b>	<b>KBSF25W</b>	<b>KBSF25GW</b>	6	25	+13	40	-19	112
<b>KBF30W</b>	<b>KBF30GW</b>	<b>KBSF30W</b>	<b>KBSF30GW</b>	6	30	- 2	47	0	123
<b>KBF40W</b>	<b>KBF40GW</b>	<b>KBSF40W</b>	<b>KBSF40GW</b>	6	40	+16	62	0	151
<b>KBF50W</b>	<b>KBF50GW</b>	<b>KBSF50W</b>	<b>KBSF50GW</b>	6	50	- 4	75	-22	192
<b>KBF60W</b>	<b>KBF60GW</b>	<b>KBSF60W</b>	<b>KBSF60GW</b>	6	60		90	0/-25	209

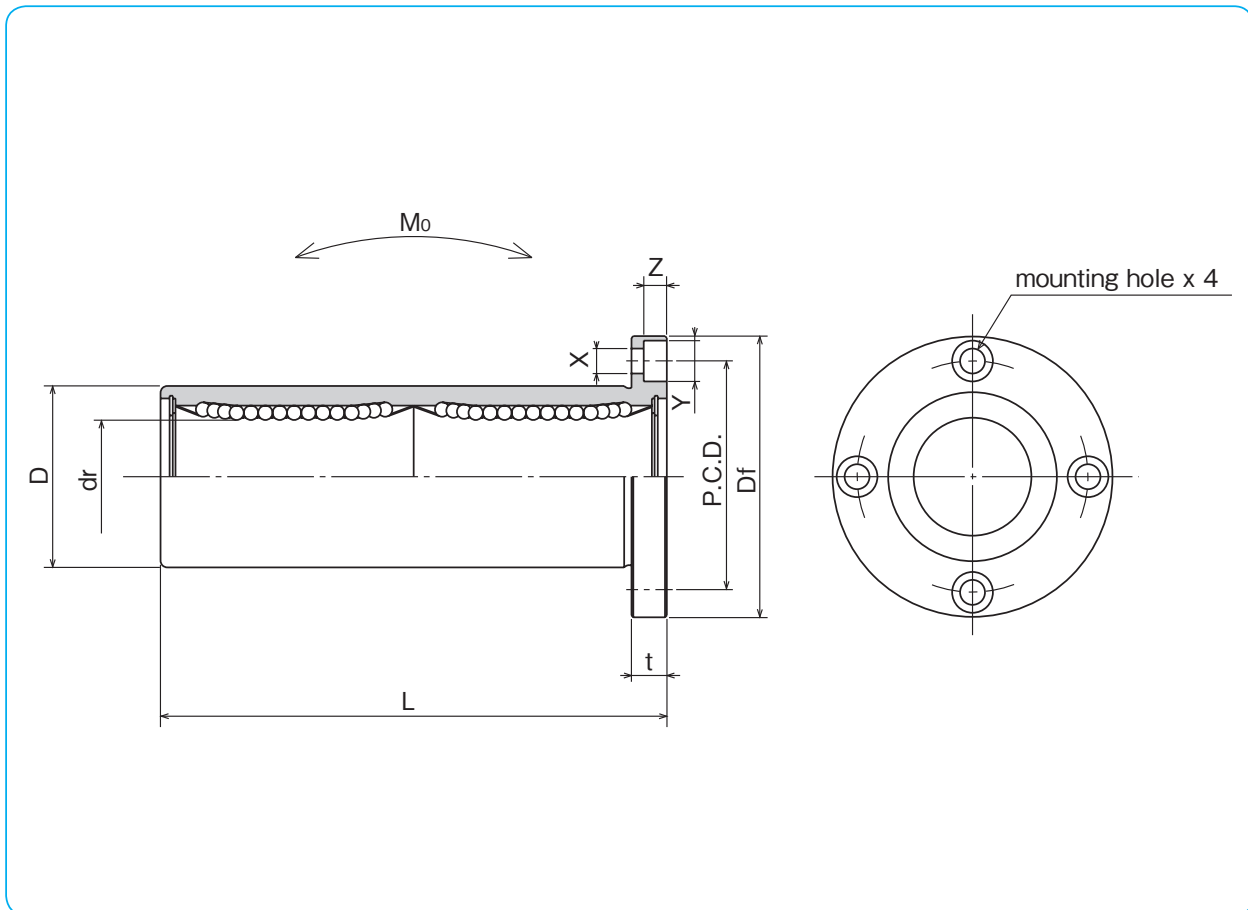SLIDE BUSH



SLIDE BUSH

Df mm	t mm	flange P.C.D. mm	X×Y×Z mm	eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		allowable static moment $M_o$ N · m	mass g	shaft diameter mm
						dynamic C N	static $C_o$ N			
32	5	24	3.5×6×3.1	15	15	421	804	4.3	59	8
42	6	32	4.5×7.5×4.1			813	1,570	11.7	110	12
46	6	36	4.5×7.5×4.1			921	1,780	14.2	160	16
54	8	43	5.5×9×5.1	17	17	1,370	2,740	25.0	260	20
62	8	51	5.5×9×5.1			1,570	3,140	44.0	540	25
76	10	62	6.6×11×6.1			2,500	5,490	78.9	815	30
98	13	80	9×14×8.1	20	20	3,430	8,040	147	1,805	40
112	13	94	9×14×8.1			6,080	15,900	396	2,820	50
134	18	112	11×17×11.1			25	25	7,550	20,000	487

1N≅0.102kgf 1N · m≅0.102kgf · m

NIPPON BEARING

**KBK-W TYPE** (Euro Standard)

– Square Flange Double-Wide Type –




part number structure

example **KBSK 25 G W UU-SK**

specification KBK: standard KBSK: anti-corrosion	inner contact diameter (dr)	retainer material blank: standard/steel anti-corrosion/stainless steel G: resin	outer cylinder surface treatment blank: no surface treatment SK: electroless nickel plating LF: low temperature black chrome treatment with fluoride coating SB: black oxide (not available on anti-corrosion type) SC: industrial chrome plating	seal blank: without seal UU: seals on both sides	double-wide type
--	-----------------------------	--	--	--	------------------

part number				number of ball circuits	dr		major dimensions		
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer		mm	tolerance $\mu\text{m}$	D mm	tolerance $\mu\text{m}$	L $\pm 0.3$ mm
KBK 8W	KBK 8GW	KBSK 8W	KBSK 8GW	4	8	+ 9	16	0/-13	46
KBK 12W	KBK 12GW	KBSK 12W	KBSK 12GW	4	12	- 1	22	0	61
KBK 16W	KBK 16GW	KBSK 16W	KBSK 16GW	4	16	+11	26	-16	68
KBK 20W	KBK 20GW	KBSK 20W	KBSK 20GW	5	20	- 1	32	0	80
KBK 25W	KBK 25GW	KBSK 25W	KBSK 25GW	6	25	+13	40	-19	112
KBK 30W	KBK 30GW	KBSK 30W	KBSK 30GW	6	30	- 2	47	0	123
KBK 40W	KBK 40GW	KBSK 40W	KBSK 40GW	6	40	+16	62	0	151
KBK 50W	KBK 50GW	KBSK 50W	KBSK 50GW	6	50	- 4	75	-22	192
KBK 60W	KBK 60GW	KBSK 60W	KBSK 60GW	6	60		90	0/-25	209

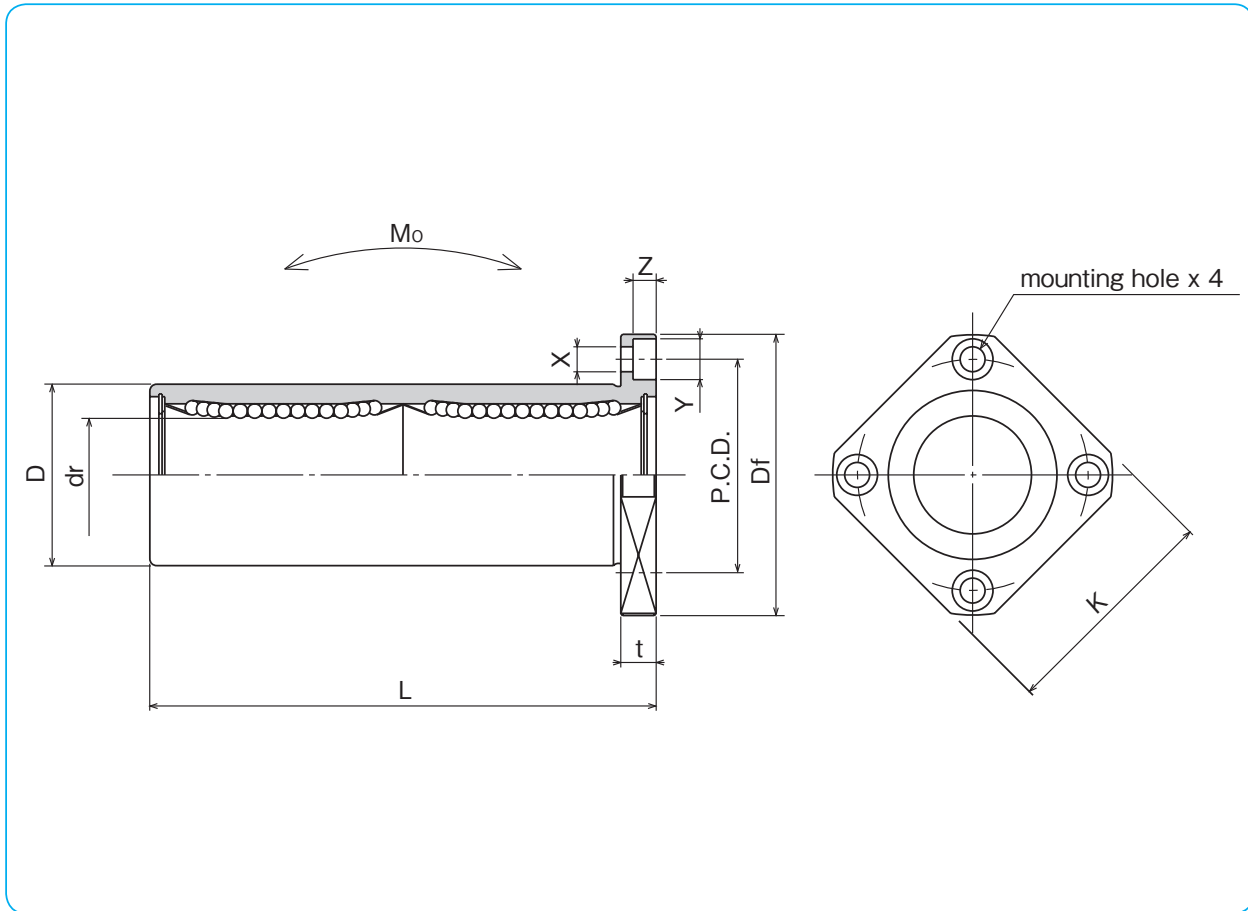SLIDE BUSH



SLIDE BUSH

Df mm	K mm	flange			eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		allowable static moment $M_o$ N · m	mass g	shaft diameter mm
		t mm	P.C.D. mm	X×Y×Z mm			dynamic C N	static Co N			
32	25	5	24	3.5×6×3.1	15	15	421	804	4.3	51	8
42	32	6	32	4.5×7.5×4.1			813	1,570	11.7	90	12
46	35	6	36	4.5×7.5×4.1			921	1,780	14.2	135	16
54	42	8	43	5.5×9×5.1	17	17	1,370	2,740	25.0	225	20
62	50	8	51	5.5×9×5.1			1,570	3,140	44.0	500	25
76	60	10	62	6.6×11×6.1			2,500	5,490	78.9	720	30
98	75	13	80	9×14×8.1	20	20	3,430	8,040	147	1,600	40
112	88	13	94	9×14×8.1			6,080	15,900	396	2,620	50
134	106	18	112	11×17×11.1			25	25	7,550	20,000	487

1N≅0.102kgf 1N · m≅0.102kgf · m

NIPPON BEARING

**KBFC TYPE** (Euro Standard)

– Center Mount Round Flange Type –



part number structure


example **KBSFC 25 G UU - SK**

specification <b>KBFC</b> : standard <b>KBSFC</b> : anti-corrosion	inner contact diameter (dr)	retainer material <b>blank</b> : standard/steel anti-corrosion/stainless steel <b>G</b> : resin	outer cylinder surface treatment <b>blank</b> : no surface treatment <b>SK</b> : electroless nickel plating <b>LF</b> : low temperature black chrome treatment with fluoride coating <b>SB</b> : black oxide (not available on anti-corrosion type) <b>SC</b> : industrial chrome plating	seal <b>blank</b> : without seal <b>UU</b> : seals on both sides
--	-----------------------------	--	--	--

part number				number of ball circuits	dr		major dimensions		
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer		mm	tolerance $\mu\text{m}$	D mm	tolerance $\mu\text{m}$	L $\pm 0.3$ mm
<b>KBFC 8</b>	<b>KBFC 8G</b>	<b>KBSFC 8</b>	<b>KBSFC 8G</b>	4	8	+ 9	16	0/-13	46
<b>KBFC12</b>	<b>KBFC12G</b>	<b>KBSFC12</b>	<b>KBSFC12G</b>	4	12	- 1	22	0	61
<b>KBFC16</b>	<b>KBFC16G</b>	<b>KBSFC16</b>	<b>KBSFC16G</b>	4	16	+11	26	-16	68
<b>KBFC20</b>	<b>KBFC20G</b>	<b>KBSFC20</b>	<b>KBSFC20G</b>	5	20	- 1	32	0	80
<b>KBFC25</b>	<b>KBFC25G</b>	<b>KBSFC25</b>	<b>KBSFC25G</b>	6	25	+13	40	-19	112
<b>KBFC30</b>	<b>KBFC30G</b>	<b>KBSFC30</b>	<b>KBSFC30G</b>	6	30	- 2	47	0	123
<b>KBFC40</b>	<b>KBFC40G</b>	<b>KBSFC40</b>	<b>KBSFC40G</b>	6	40	+16	62	0	151
<b>KBFC50</b>	<b>KBFC50G</b>	<b>KBSFC50</b>	<b>KBSFC50G</b>	6	50	- 4	75	-22	192
<b>KBFC60</b>	<b>KBFC60G</b>	<b>KBSFC60</b>	<b>KBSFC60G</b>	6	60		90	0/-25	209



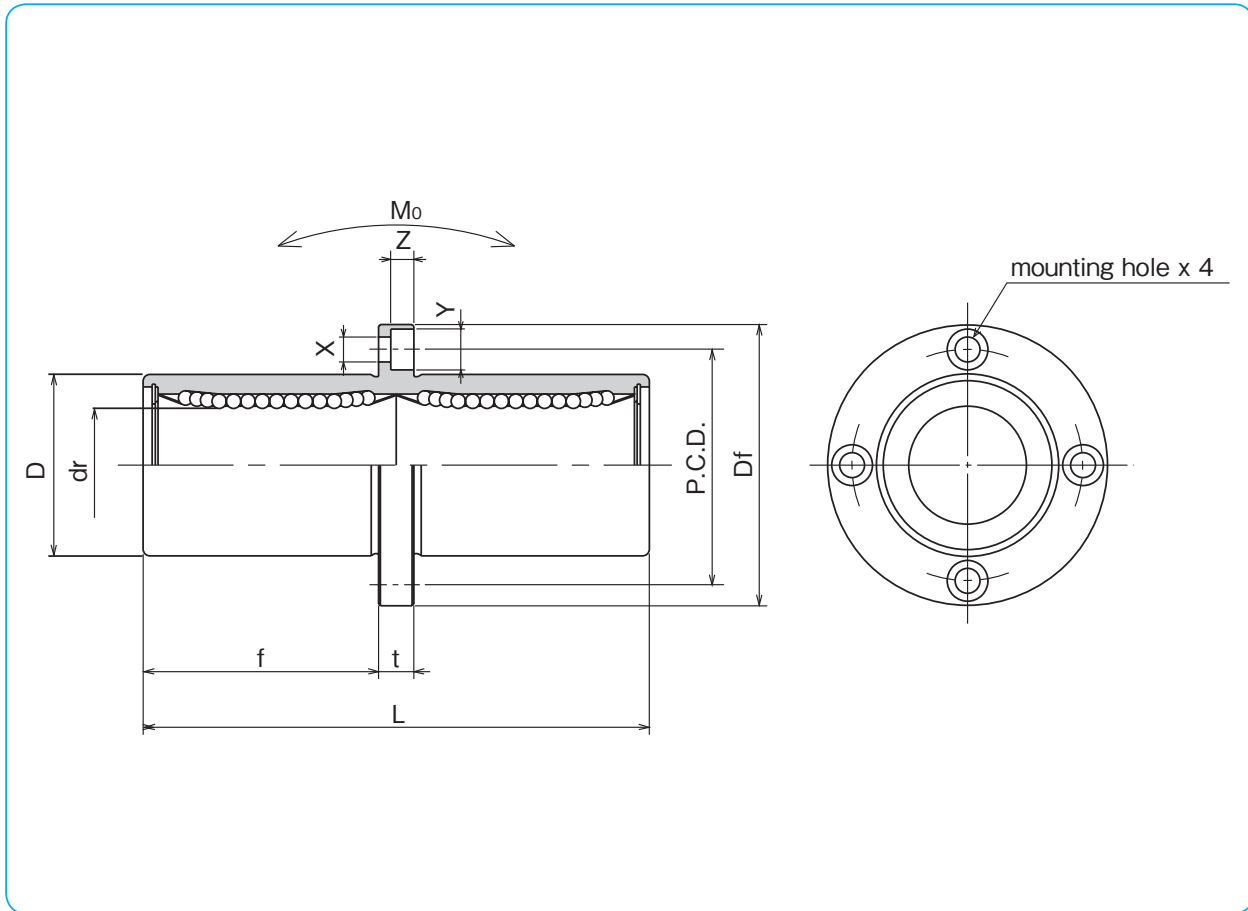SLIDE BUSH



SLIDE BUSH


f mm	Df mm	flange			eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		allowable static moment $\text{N} \cdot \text{m}$	mass g	shaft diameter mm
		t mm	P.C.D. mm	X×Y×Z mm			dynamic C N	static Co N			
20.5	32	5	24	3.5×6×3.1	15	15	421	804	4.3	59	8
27.5	42	6	32	4.5×7.5×4.1			813	1,570	11.7	110	12
31	46	6	36	4.5×7.5×4.1			921	1,780	14.2	160	16
36	54	8	43	5.5×9×5.1	17	17	1,370	2,740	25.0	260	20
52	62	8	51	5.5×9×5.1			1,570	3,140	44.0	540	25
56.5	76	10	62	6.6×11×6.1			2,500	5,490	78.9	815	30
69	98	13	80	9×14×8.1	20	20	3,430	8,040	147	1,805	40
89.5	112	13	94	9×14×8.1			6,080	15,900	396	2,820	50
95.5	134	18	112	11×17×11.1			7,550	20,000	487	4,920	60

1N≅0.102kgf 1N · m≅0.102kgf · m

NIPPON BEARING

**KBKC TYPE** (Euro Standard)

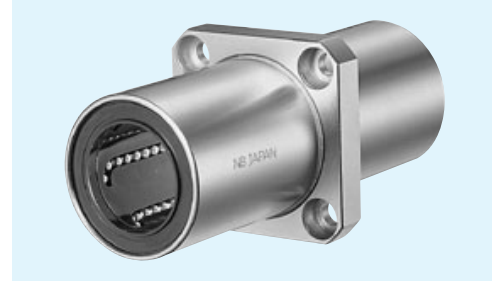– Center Mount Square Flange Type –




part number structure

example **KBSKC 25 G UU - SK**

specification <b>KBKC</b> : standard <b>KBSKC</b> : anti-corrosion	inner contact diameter (dr)	retainer material <b>blank</b> : standard/steel anti-corrosion/stainless steel <b>G</b> : resin	outer cylinder surface treatment <b>blank</b> : no surface treatment <b>SK</b> : electroless nickel plating <b>LF</b> : low temperature black chrome treatment with fluoride coating <b>SB</b> : black oxide (not available on anti-corrosion type) <b>SC</b> : industrial chrome plating	seal <b>blank</b> : without seal <b>UU</b> : seals on both sides
--	-----------------------------	--	--	--

part number				number of ball circuits	dr		major dimensions		
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer		mm	tolerance $\mu m$	D mm	tolerance $\mu m$	L $\pm 0.3$ mm
<b>KBKC 8</b>	<b>KBKC 8G</b>	<b>KBSKC 8</b>	<b>KBSKC 8G</b>	4	8	+ 9	16	0/-13	46
<b>KBKC12</b>	<b>KBKC12G</b>	<b>KBSKC12</b>	<b>KBSKC12G</b>	4	12	- 1	22	0	61
<b>KBKC16</b>	<b>KBKC16G</b>	<b>KBSKC16</b>	<b>KBSKC16G</b>	4	16	+11	26	-16	68
<b>KBKC20</b>	<b>KBKC20G</b>	<b>KBSKC20</b>	<b>KBSKC20G</b>	5	20	- 1	32	0	80
<b>KBKC25</b>	<b>KBKC25G</b>	<b>KBSKC25</b>	<b>KBSKC25G</b>	6	25	+13	40	-19	112
<b>KBKC30</b>	<b>KBKC30G</b>	<b>KBSKC30</b>	<b>KBSKC30G</b>	6	30	- 2	47	0	123
<b>KBKC40</b>	<b>KBKC40G</b>	<b>KBSKC40</b>	<b>KBSKC40G</b>	6	40	+16	62	0	151
<b>KBKC50</b>	<b>KBKC50G</b>	<b>KBSKC50</b>	<b>KBSKC50G</b>	6	50	- 4	75	-22	192
<b>KBKC60</b>	<b>KBKC60G</b>	<b>KBSKC60</b>	<b>KBSKC60G</b>	6	60		90	0/-25	209

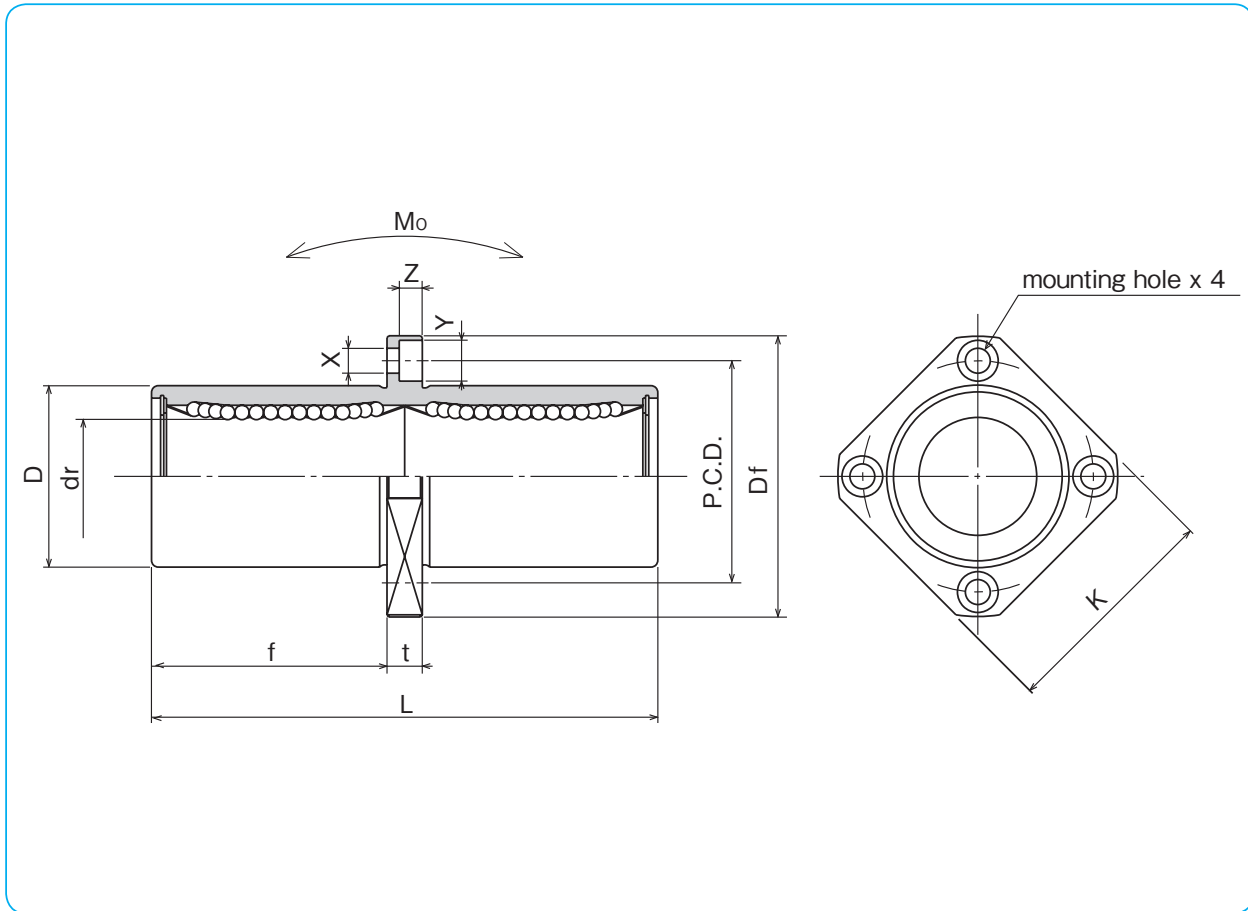SLIDE BUSH



SLIDE BUSH

f mm	Df mm	K mm	flange			eccentricity $\mu\text{m}$	perpendicularity $\mu\text{m}$	basic load rating		allowable static moment $M_o$ N · m	mass g	shaft diameter mm
			t mm	P.C.D. mm	X × Y × Z mm			dynamic C N	static Co N			
20.5	32	25	5	24	3.5 × 6 × 3.1	15	15	421	804	4.3	51	8
27.5	42	32	6	32	4.5 × 7.5 × 4.1			813	1,570	11.7	90	12
31	46	35	6	36	4.5 × 7.5 × 4.1			921	1,780	14.2	135	16
36	54	42	8	43	5.5 × 9 × 5.1	17	17	1,370	2,740	25.0	225	20
52	62	50	8	51	5.5 × 9 × 5.1			1,570	3,140	44.0	500	25
56.5	76	60	10	62	6.6 × 11 × 6.1			2,500	5,490	78.9	720	30
69	98	75	13	80	9 × 14 × 8.1	20	20	3,430	8,040	147	1,600	40
89.5	112	88	13	94	9 × 14 × 8.1			6,080	15,900	396	2,620	50
95.5	134	106	18	112	11 × 17 × 11.1			7,550	20,000	487	4,480	60

1N ≅ 0.102kgf 1N · m ≅ 0.102kgf · m

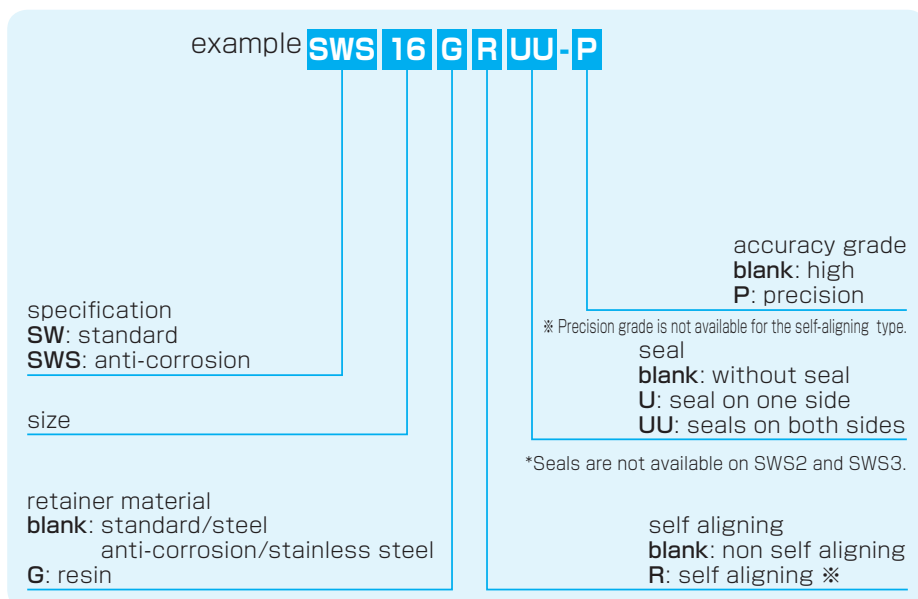
NIPPON BEARING

SW TYPE (Inch Standard)

– Standard Type –




part number structure



※Self-aligning is available only with resin retainer for size 4 to 32 of carbon steel cylinder.

steel retainer	partnumber		anti-corrosion		number of ball circuits	dr		majordimensions	
	standard	resinretainer	stainless retainer	resin retainer		inch (mm)	tolerance precision	inch/(μm) high	inch (mm)
-	-	-	<b>SWS2</b>	<b>SWS2G</b>	4	.1250 (3.175)	-	0 (7.938)	0 (-9)
-	-	-	<b>SWS3</b>	<b>SWS3G</b>	4	.1875 (4.763)	-	-.00035 (-8)	-.00040 (-9)
<b>SW4</b>	<b>SW4G</b>	<b>SW4GR</b>	<b>SWS4</b>	<b>SWS4G</b>	4	.2500 (6.350)	-	0 (12.700)	0 (-11)
<b>SW6</b>	<b>SW6G</b>	<b>SW6GR</b>	<b>SWS6</b>	<b>SWS6G</b>	4	.3750 (9.525)	0 (-6)	0 (-9)	0 (-13)
<b>SW8</b>	<b>SW8G</b>	<b>SW8GR</b>	<b>SWS8</b>	<b>SWS8G</b>	4	.5000 (12.700)	-	0 (22.225)	0 (-13)
<b>SW10</b>	<b>SW10G</b>	<b>SW10GR</b>	<b>SWS10</b>	<b>SWS10G</b>	4	.625 (15.875)	-	1.1250 (28.575)	-
<b>SW12</b>	<b>SW12G</b>	<b>SW12GR</b>	<b>SWS12</b>	<b>SWS12G</b>	5	.7500 (19.050)	0 (-7)	0 (-10)	0 (-16)
<b>SW16</b>	<b>SW16G</b>	<b>SW16GR</b>	<b>SWS16</b>	<b>SWS16G</b>	6	1.0000 (25.400)	-	1.5625 (39.688)	-
<b>SW20</b>	<b>SW20G</b>	<b>SW20GR</b>	<b>SWS20</b>	<b>SWS20G</b>	6	1.2500 (31.750)	0 (-8)	0 (-12)	0 (-19)
<b>SW24</b>	<b>SW24G</b>	<b>SW24GR</b>	<b>SWS24</b>	<b>SWS24G</b>	6	1.5000 (38.100)	-	2.3750 (60.325)	-
<b>SW32</b>	<b>SW32G</b>	<b>SW32GR</b>	<b>SWS32</b>	<b>SWS32G</b>	6	2.0000 (50.800)	-	3.0000 (76.200)	-
<b>SW40</b>	-	-	-	-	6	2.5000 (63.500)	0 (-9)	0 (-15)	0 (-22)
<b>SW48</b>	-	-	-	-	6	3.0000 (76.200)	-	4.5000 (114.300)	-
<b>SW64</b>	-	-	-	-	6	4.0000 (101.600)	0 (-10)	0 (-20)	0 (-25)

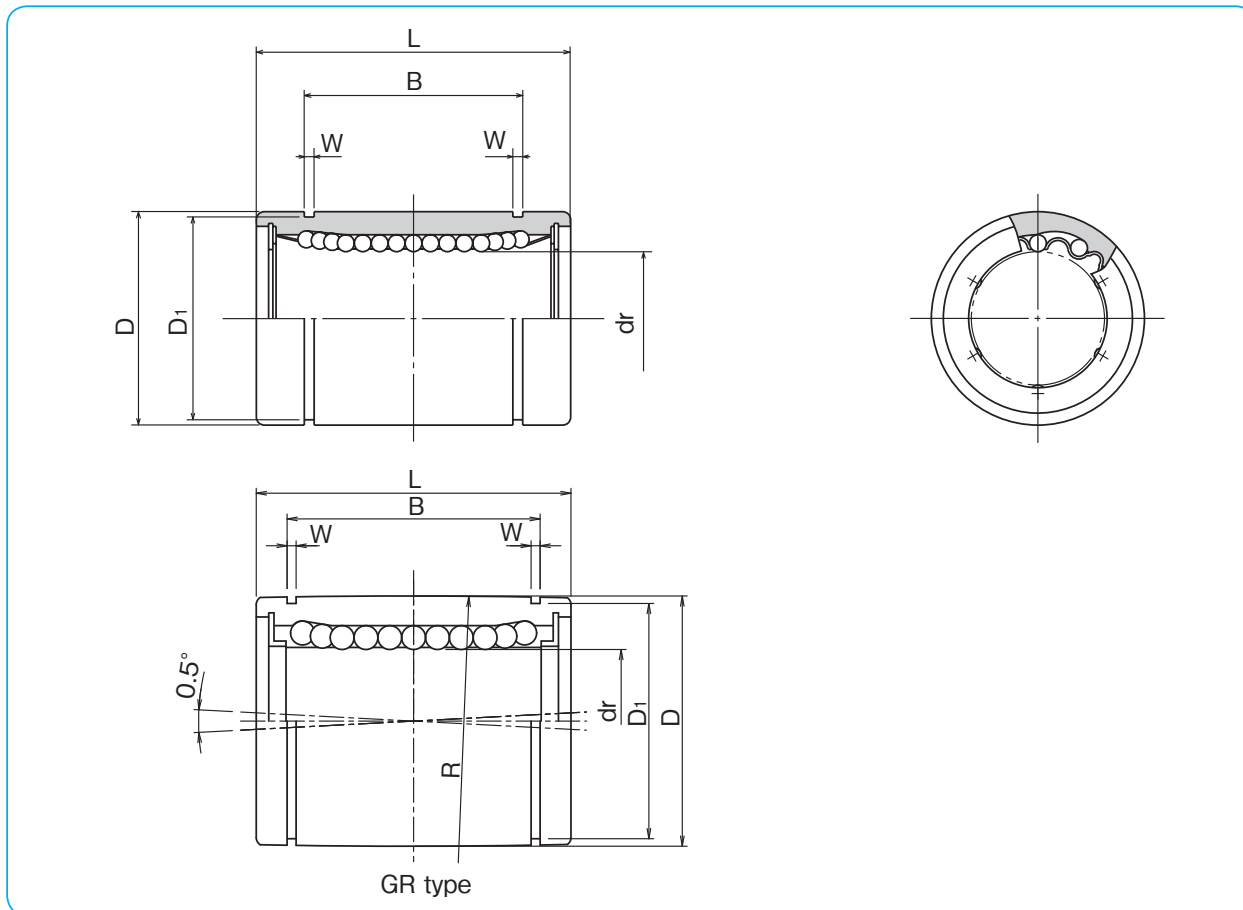SLIDE BUSH



SLIDE BUSH

L		B		W	D <sub>1</sub>	eccentricity		radial clearance (maximum)	basic load rating		mass	shaft diameter					
inch	tolerance	inch	tolerance	inch	inch	precision	high	(maximum)	dynamic C	static Co	g	inch					
(mm)	inch/(mm)	(mm)	inch/(mm)	(mm)	(mm)	inch/(μm)	inch/(μm)	inch/(μm)	N	N		(mm)					
.5000 (12.700)	0 (-0.2)	.3681 (9.35)	0 (-0.2)	.0280 (0.710)	.2902 (7.370)	.0003 (8)	.0003 (8)	-.0001 (-2)	59	76	2.8	1/8 (3.175)					
.5625 (14.275)		.4311 (10.95)		.0280 (0.710)	.3520 (8.940)				91	110	3.6	3/16 (4.763)					
.7500 (19.050)		.5110 (12.98)		.0390 (0.992)	.4687 (11.906)				206	265	9.5	1/4 (6.350)					
.8750 (22.225)		.6358 (16.15)		.0390 (0.992)	.5880 (14.935)								225	314	15	3/8 (9.525)	
1.2500 (31.750)		.9625 (24.46)		.0459 (1.168)	.8209 (20.853)				510	784	42	1/2 (12.700)					
1.5000 (38.100)		1.1039 (28.04)		.0559 (1.422)	1.0590 (26.899)								774	1,180	85	5/8 (15.875)	
1.6250 (41.275)		1.1657 (29.61)		.0559 (1.422)	1.1760 (29.870)				862	1,370	104	3/4 (19.050)					
2.2500 (57.150)		1.7547 (44.57)		.0679 (1.727)	1.4687 (37.306)								980	1,570	220	1 (25.400)	
2.6250 (66.675)		0 (-0.3)		2.0047 (50.92)	0 (-0.3)				.0679 (1.727)	1.8859 (47.904)	.0005 (12)	.0008 (20)	-.0003 (-8)	1,570	2,740	465	1-1/4 (31.750)
3.0000 (76.200)				2.4118 (61.26)					.0859 (2.184)	2.2389 (56.870)				2,180	4,020	720	1-1/2 (38.100)
4.0000 (101.600)	3.1917 (81.07)		.1029 (2.616)	2.8379 (72.085)		3,820	7,940	1,310	2 (50.800)								
5.0000 (127.000)	3.9760 (100.99)		.1200 (3.048)	3.5519 (90.220)						4,700				10,000	2,600	2-1/2 (63.500)	
6.0000 (152.400)	0 (-0.4)	4.726 (120.04)	0 (-0.4)	.1200 (3.048)	4.3100 (109.474)	.0007 (17)	.0010 (25)	-.0005 (-13)	7,350	16,000	4,380	3 (76.200)					
8.0000 (203.200)		6.258 (158.95)		.1389 (3.530)	5.745 (145.923)				14,100	34,800	10,200	4 (101.600)					

1N≅0.225lbf 1kg≅2.205lbs

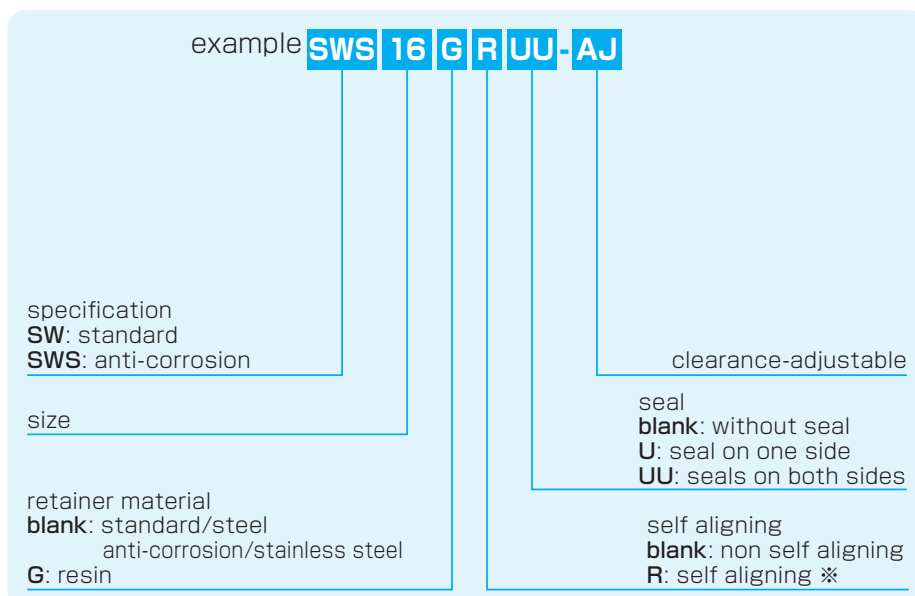
NIPPON BEARING

SW-AJ TYPE (Inch Standard)

– Clearance Adjustable Type –



part number structure




※Self-aligning is available only with resin retainer for size 8 to 32 of carbon steel cylinder.

steelretainer	partnumber		anti-corrosion		number ofball circuits	dr		majordimensions	
	standard	resinretainer	stainless retainer	resinretainer		inch (mm)	tolerance* inch/(μm)	inch (mm)	tolerance* inch/(μm)
-	SW4G-AJ	-	-	SWS4G-AJ	4	.2500 (6.350)	0 -0.00040 (-9)	.5000 (12.700)	0 -0.00045 (-11)
-	SW6G-AJ	-	-	SWS6G-AJ	4	.3750 (9.525)		.6250 (15.875)	0
SW8-AJ	SW8G-AJ	SW8GR-AJ	SWS8-AJ	SWS8G-AJ	4	.5000 (12.700)		.8750 (22.225)	-0.00050 (-13)
SW10-AJ	SW10G-AJ	SW10GR-AJ	SWS10-AJ	SWS10G-AJ	4	.625 (15.875)		1.1250 (28.575)	0
SW12-AJ	SW12G-AJ	SW12GR-AJ	SWS12-AJ	SWS12G-AJ	5	.7500 (19.050)	0 -0.00040 (-10)	1.2500 (31.750)	0 -0.00065 (-16)
SW16-AJ	SW16G-AJ	SW16GR-AJ	SWS16-AJ	SWS16G-AJ	6	1.0000 (25.400)	0	1.5625 (39.688)	0
SW20-AJ	SW20G-AJ	SW20GR-AJ	SWS20-AJ	SWS20G-AJ	6	1.2500 (31.750)	0	2.0000 (50.800)	0
SW24-AJ	SW24G-AJ	SW24GR-AJ	SWS24-AJ	SWS24G-AJ	6	1.5000 (38.100)	-0.00050 (-12)	2.3750 (60.325)	-0.00075 (-19)
SW32-AJ	SW32G-AJ	SW32GR-AJ	SWS32-AJ	SWS32G-AJ	6	2.0000 (50.800)	0	3.0000 (76.200)	0
SW40-AJ	-	-	-	-	6	2.5000 (63.500)	0 -0.00060 (-15)	3.7500 (95.250)	-0.00090 (-22)
SW48-AJ	-	-	-	-	6	3.0000 (76.200)	0	4.50000 (114.300)	0
SW64-AJ	-	-	-	-	6	4.0000 (101.600)	0 -0.00080 (-20)	6.0000 (152.400)	0 -0.0100 (-25)

\* Accuracy is measured prior to machining clearance slit.

SLIDE BUSH

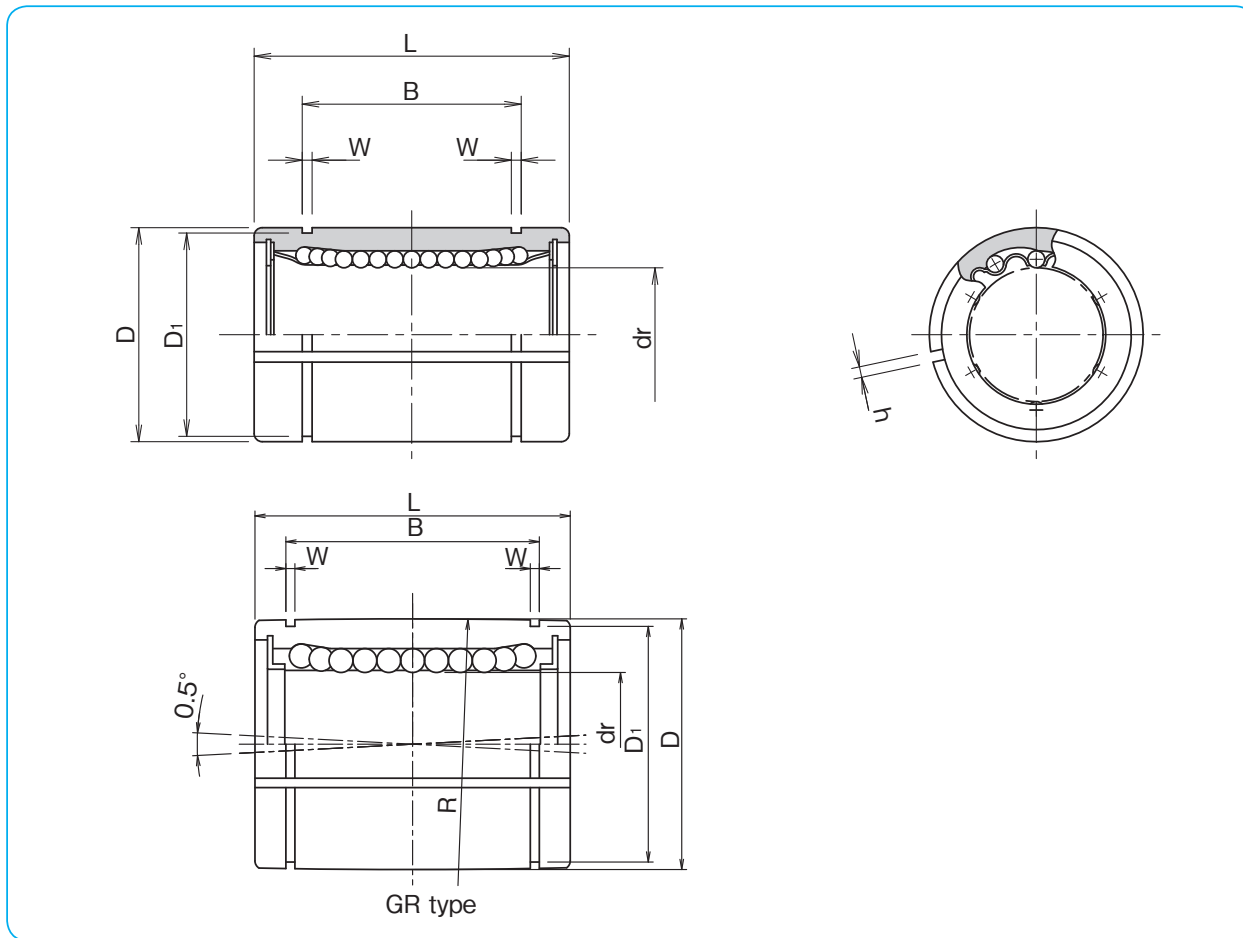SLIDE BUSH




L		B		W	D <sub>1</sub>	h	eccentricity* inch (μm)	basic load rating		mass g	shaft diameter inch (mm)
inch (mm)	tolerance inch/(mm)	inch (mm)	tolerance inch/(mm)	inch (mm)	inch (mm)	inch (mm)		dynamic C N	static C <sub>0</sub> N		
.7500 (19.050)	0 -0.008 (-0.2)	.5100 (12.98)	0 -0.008 (-0.2)	.0390 (0.992)	.4687 (11.906)	.04 (1)	.0005 (12)	206	265	7.5	1/4 (6.350)
.8750 (22.225)		.6358 (12.15)		.0390 (0.992)	.5880 (14.935)	.04 (1)		225	314	13.5	3/8 (9.525)
1.2500 (31.750)		.9625 (24.46)		.0459 (1.168)	.8209 (20.853)	.06 (1.5)		510	784	41	1/2 (12.700)
1.5000 (38.100)		1.1039 (28.04)		.0559 (1.422)	1.0590 (26.899)	.06 (1.5)		774	1,180	83	5/8 (15.875)
1.6250 (41.275)	0 -0.012 (-0.3)	1.1657 (29.61)	0 -0.012 (-0.3)	.0559 (1.422)	1.1760 (29.870)	.06 (1.5)	.0006 (15)	862	1,370	102	3/4 (19.050)
2.2500 (57.150)		1.7547 (44.57)		.0679 (1.727)	1.4687 (37.306)	.06 (1.5)		980	1,570	218	1 (25.400)
2.6250 (66.675)		2.0047 (50.92)		.0679 (1.727)	1.8859 (47.904)	.10 (2.5)		1,570	2,740	455	1-1/4 (31.750)
3.0000 (76.200)		2.4118 (61.26)		0.859 (2.184)	2.2389 (56.870)	.12 (3)		2,180	4,020	710	1-1/2 (38.100)
4.0000 (101.600)	0 -0.016 (-0.4)	3.1917 (81.07)	0 -0.016 (-0.4)	.1029 (2.616)	2.8379 (72.085)	.12 (3)	.0010 (25)	3,820	7,940	1,290	2 (50.800)
5.0000 (127.000)		3.9760 (100.99)		.1200 (3.048)	3.5519 (90.220)	.12 (3)		4,700	10,000	2,560	2-1/2 (63.500)
6.0000 (152.400)		4.726 (120.04)		.1200 (3.048)	4.3100 (109.474)	.12 (3)		7,350	16,000	4,350	3 (76.200)
8.0000 (203.200)		6.258 (158.95)		.1389 (3.530)	5.745 (145.923)	.12 (3)		14,100	34,800	10,150	4 (101.600)

1N≅0.225lbf 1kg≅2.205lbf


NIPPON BEARING

SW-OP TYPE (Inch Standard)

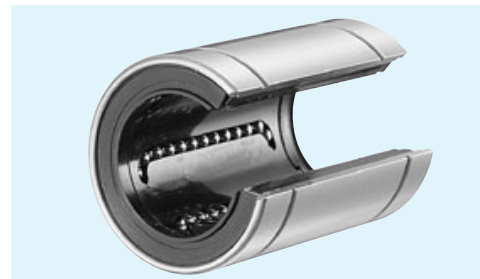– Open Type –



part number structure

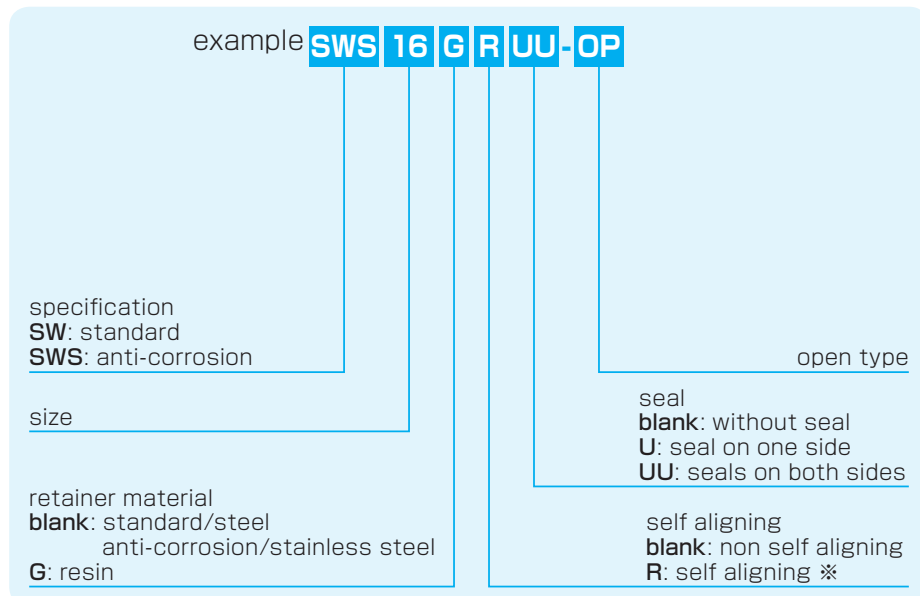


※Self-aligning is available only with resin retainer for size 8 to 32 of carbon steel cylinder.

steel retainer	part number		anti-corrosion		number of ball circuits	dr		major dimensions D	
	standard	resin retainer	steel retainer	resin retainer		inch (mm)	tolerance* inch/(μm)	inch (mm)	tolerance* inch/(μm)
SW 8-OP	SW 8G-OP	SW 8GR-OP	SWS 8-OP	SWS 8G-OP	3	.5000 (12.700)	0 - .00040 (-9)	.8750 (22.225)	0 - .00050 (-13)
SW10-OP	SW10G-OP	SW10GR-OP	SWS10-OP	SWS10G-OP	3	.625 (15.875)	0 - .00040 (-9)	1.1250 (28.575)	0 - .00065 (-16)
SW12-OP	SW12G-OP	SW12GR-OP	SWS12-OP	SWS12G-OP	4	.7500 (19.050)	0 - .00040 (-10)	1.2500 (31.750)	0 - .00075 (-19)
SW16-OP	SW16G-OP	SW16GR-OP	SWS16-OP	SWS16G-OP	5	1.0000 (25.400)	0 - .00050 (-12)	1.5625 (39.688)	0 - .00090 (-22)
SW20-OP	SW20G-OP	SW20GR-OP	SWS20-OP	SWS20G-OP	5	1.2500 (31.750)	0 - .00060 (-15)	2.0000 (50.800)	0 - .00100 (-25)
SW24-OP	SW24G-OP	SW24GR-OP	SWS24-OP	SWS24G-OP	5	1.5000 (38.100)	0 - .00080 (-20)	2.3750 (60.325)	0 - .00100 (-25)
SW32-OP	SW32G-OP	SW32GR-OP	SWS32-OP	SWS32G-OP	5	2.0000 (50.800)	0 - .00080 (-20)	3.0000 (76.200)	0 - .00100 (-25)
SW40-OP	-	-	-	-	5	2.5000 (63.500)	0 - .00080 (-20)	3.7500 (95.250)	0 - .00100 (-25)
SW48-OP	-	-	-	-	5	3.0000 (76.200)	0 - .00080 (-20)	4.5000 (114.300)	0 - .00100 (-25)
SW64-OP	-	-	-	-	5	4.0000 (101.600)	0 - .00080 (-20)	6.0000 (152.400)	0 - .00100 (-25)

\* Accuracy is measured prior to machining clearance slit.



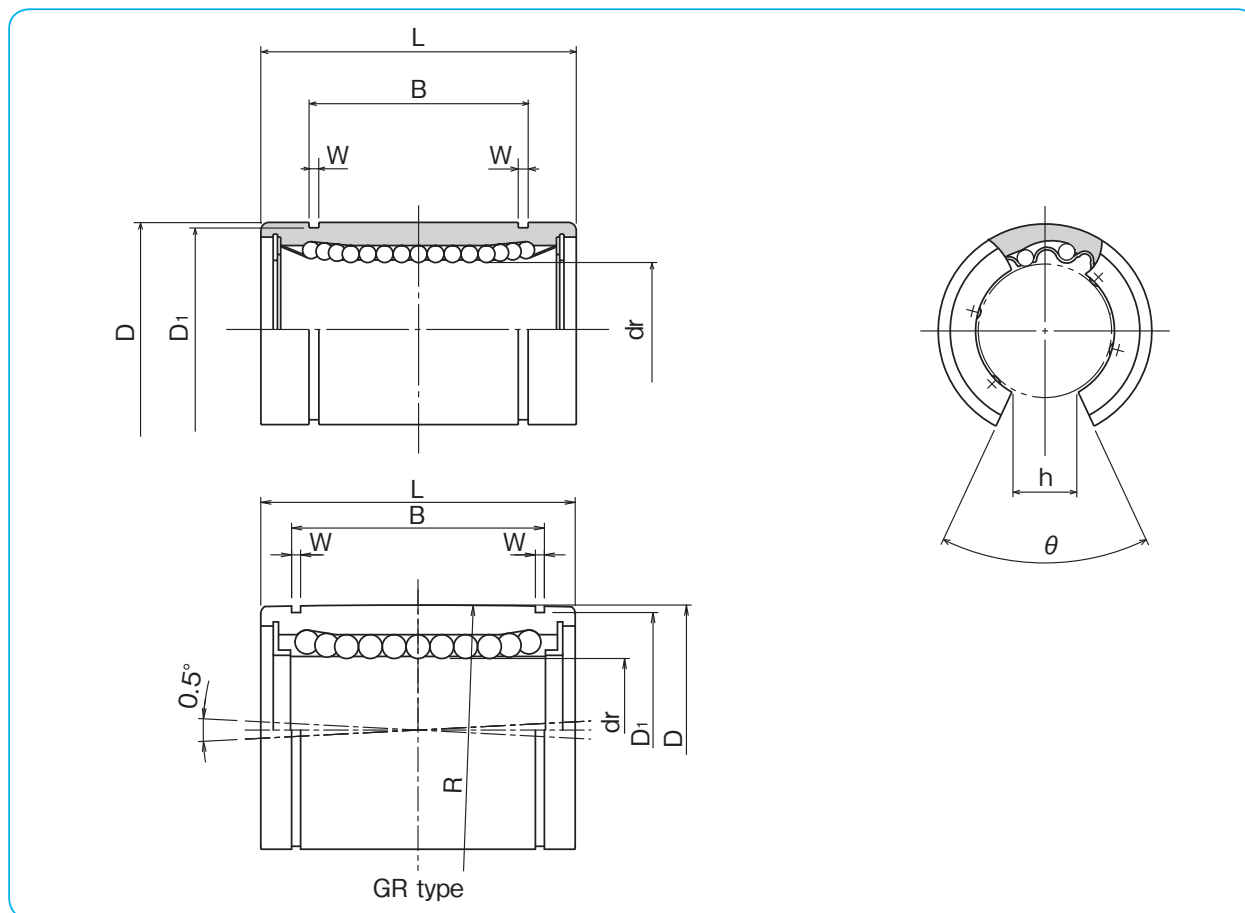SLIDE BUSH



SLIDE BUSH

L inch (mm)	tolerance inch/(mm)	B inch (mm)	tolerance inch/(mm)	W inch (mm)	D <sub>1</sub> inch (mm)	h inch (mm)	θ	eccentricity* inch (μm)	basic load rating		mass g	shaft diameter inch (mm)
									dynamic C N	static C <sub>0</sub> N		
1.2500 (31.750)	0 -0.08 (-0.2)	.9625 (24.46)	0 -0.08 (-0.2)	.0459 (1.168)	.8209 (20.853)	.3125 (7.9375)	80°	.0005 (12)	510	784	32	1/2 (12.700)
1.5000 (38.100)		1.1039 (28.04)		.0559 (1.422)	1.0590 (26.899)	.375 (9.5250)	80°		774	1,180	64	5/8 (15.875)
1.6250 (41.275)	0 -0.12 (-0.3)	1.1657 (29.61)	0 -0.12 (-0.3)	.0559 (1.422)	1.1760 (29.870)	.4375 (11.1125)	60°	.0006 (15)	862	1,370	86	3/4 (19.050)
2.2500 (57.150)		1.7547 (44.57)		.0679 (1.727)	1.4687 (37.306)	.5625 (14.2875)	50°		980	1,570	190	1 (25.400)
2.6250 (66.675)	0 -0.12 (-0.3)	2.0047 (50.92)	0 -0.12 (-0.3)	.0679 (1.727)	1.8859 (47.904)	.625 (15.875)	50°	.0008 (20)	1,570	2,740	390	1-1/4 (31.750)
3.0000 (76.200)		2.4118 (61.26)		.0859 (2.184)	2.2389 (56.870)	.75 (19.05)	50°		2,180	4,020	610	1-1/2 (38.100)
4.0000 (101.600)	0 -0.16 (-0.4)	3.1917 (81.07)	0 -0.16 (-0.4)	.1029 (2.616)	2.8379 (72.085)	1.0 (25.40)	50°	.0010 (25)	3,820	7,940	1,120	2 (50.800)
5.0000 (127.000)		3.9760 (100.99)		.1200 (3.048)	3.5519 (90.220)	1.25 (31.75)	50°		4,700	10,000	2,230	2-1/2 (63.500)
6.0000 (152.400)	0 -0.16 (-0.4)	4.726 (120.04)	0 -0.16 (-0.4)	.1200 (3.048)	4.3100 (109.474)	1.5 (38.10)	50°	.0012 (30)	7,350	16,000	3,750	3 (76.200)
8.0000 (203.200)		6.258 (158.95)		.1389 (3.530)	5.745 (145.923)	2.0 (50.80)	50°		14,100	34,800	8,740	4 (101.60)

1N≅0.225lbf 1kg≅2.205lbs

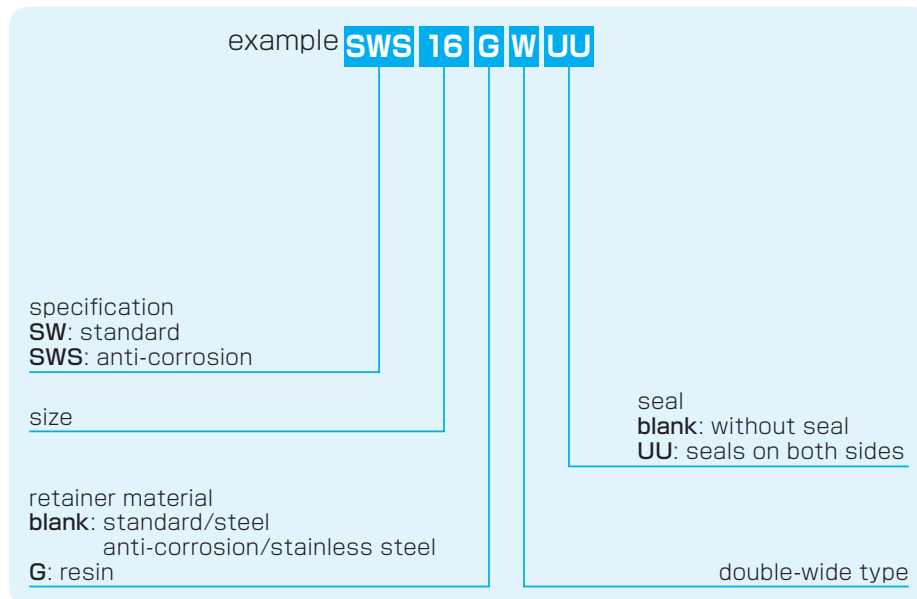
NIPPON BEARING

**SW-W TYPE** (Inch Standard)

– Double-Wide Type –




part number structure



part number				number of ball circuits	dr		major dimensions D	
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer		inch (mm)	tolerance inch/(μm)	inch (mm)	tolerance inch/(μm)
<b>SW 4W</b>	<b>SW 4GW</b>	<b>SWS 4W</b>	<b>SWS 4GW</b>	4	.2500 (6.350)	0 -.00040 (-10)	.5000 (12.700)	0 -.00050 (-13)
<b>SW 6W</b>	<b>SW 6GW</b>	<b>SWS 6W</b>	<b>SWS 6GW</b>	4	.3750 (9.525)		.6250 (15.875)	0
<b>SW 8W</b>	<b>SW 8GW</b>	<b>SWS 8W</b>	<b>SWS 8GW</b>	4	.5000 (12.700)		.8750 (22.225)	0 -.00065 (-16)
<b>SW10W</b>	<b>SW10GW</b>	<b>SWS10W</b>	<b>SWS10GW</b>	4	.6250 (15.875)		1.1250 (28.575)	
<b>SW12W</b>	<b>SW12GW</b>	<b>SWS12W</b>	<b>SWS12GW</b>	5	.7500 (19.050)	0 -.00050 (-12)	1.2500 (31.750)	0 -.00075 (-19)
<b>SW16W</b>	<b>SW16GW</b>	<b>SWS16W</b>	<b>SWS16GW</b>	6	1.0000 (25.400)		1.5625 (39.688)	
<b>SW20W</b>	<b>SW20GW</b>	<b>SWS20W</b>	<b>SWS20GW</b>	6	1.2500 (31.750)	0 -.00060 (-15)	2.0000 (50.800)	0
<b>SW24W</b>	<b>SW24GW</b>	<b>SWS24W</b>	<b>SWS24GW</b>	6	1.5000 (38.100)		2.3750 (60.325)	0 -.00090 (-22)
<b>SW32W</b>	<b>SW32GW</b>	<b>SWS32W</b>	<b>SWS32GW</b>	6	2.0000 (50.800)		3.0000 (76.200)	0 -.00100 (-25)

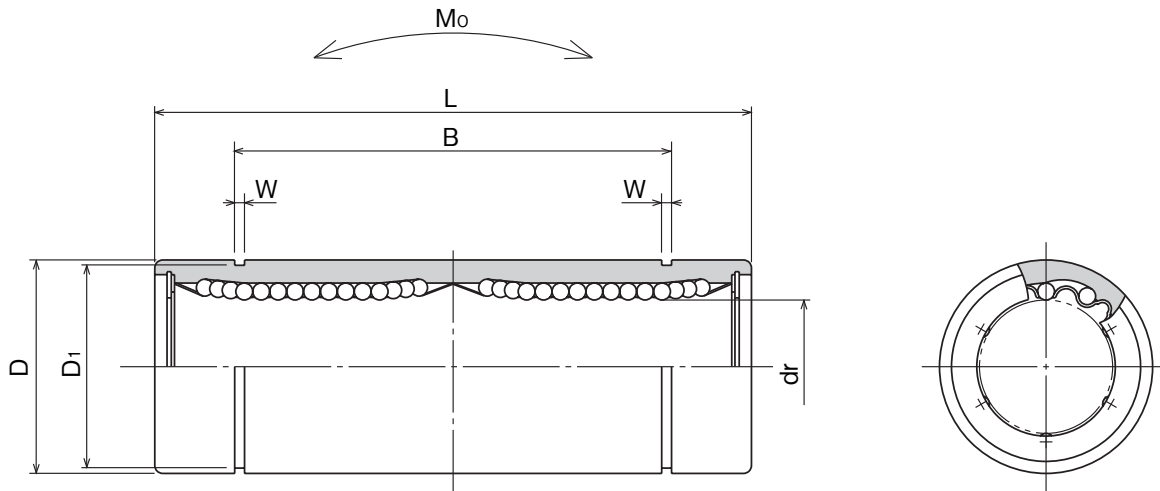SLIDE BUSH



SLIDE BUSH

L		B		W	D <sub>1</sub>	eccentricity inch ( $\mu$ m)	basic load rating		allowable static moment M <sub>o</sub> N · m	mass g	shaft diameter inch (mm)		
inch (mm)	tolerance inch/(mm)	inch (mm)	tolerance inch/(mm)	inch (mm)	inch (mm)		dynamic C N	static C <sub>o</sub> N					
1.3750 (34.925)	0 (-0.3)	1.0220 (25.959)	0 (-0.3)	.0390 (0.992)	.4687 (11.906)	.0006 (15)	323	530	2.0	17.5	1/4 (6.350)		
1.5938 (40.481)		1.2716 (32.298)		.0390 (0.992)	.5880 (14.935)		353	630			2.7	28	3/8 (9.525)
2.3750 (60.325)		1.9250 (48.895)		.0459 (1.168)	.8209 (20.853)		813	1,570			11.5	80	1/2 (12.700)
2.8125 (71.438)		2.2079 (56.080)		.0559 (1.422)	1.0590 (26.899)		1,230	2,350			20.0	160	5/8 (15.875)
3.0937 (78.581)		2.3314 (59.218)		.0559 (1.422)	1.1760 (29.870)		1,370	2,740			26.5	195	3/4 (19.050)
4.2813 (108.744)	0 (-0.4)	3.5094 (89.139)	0 (-0.4)	.0679 (1.727)	1.4687 (37.306)	.0008 (20)	1,570	3,140	41.2	410	1 (25.400)		
5.0000 (127.000)		4.0094 (101.839)		.0679 (1.727)	1.8859 (47.904)		2,500	5,490			84.8	820	1-1/4 (31.750)
5.6875 (144.463)		4.8236 (122.519)		.0859 (2.184)	2.2389 (56.870)		3,430	8,040			143	1,250	1-1/2 (38.100)
7.7500 (196.850)		6.3834 (162.138)		.1029 (2.616)	2.8379 (72.085)		6,080	15,900			399	2,350	2 (50.800)

1N  $\approx$  0.225lbf    1N · m  $\approx$  0.738lb · ft  
1kg  $\approx$  2.205lbs

NIPPON BEARING

SWF TYPE (Inch Standard)

– Round Flange Type –




part number structure

example **SWSF 16 G UU-SK**

specification <b>SWF</b> : standard <b>SWSF</b> : anti-corrosion	size	retainer material <b>blank</b> : standard/steel anti-corrosion/stainless steel <b>G</b> : resin	outer cylinder surface treatment <b>blank</b> : no surface treatment <b>SK</b> : electroless nickel plating <b>LF</b> : low temperature black chrome treatment with fluoride coating <b>SB</b> : black oxide (not available on anti-corrosion type) <b>SC</b> : industrial chrome plating	seal <b>blank</b> : without seal <b>UU</b> : seals on both sides
--	------	--	--	--

part number				number of ball circuits	dr		D		L
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer		inch (mm)	tolerance inch/(μm)	inch (mm)	tolerance inch/(μm)	±.012 (±0.3) inch/(mm)
<b>SWF 4</b>	<b>SWF 4G</b>	<b>SWSF 4</b>	<b>SWSF 4G</b>	4	.2500 (6.350)	0 -0.00040 (-9)	.5000 (12.700)	0 -0.00050 (-13)	.7500 (19.050)
<b>SWF 6</b>	<b>SWF 6G</b>	<b>SWSF 6</b>	<b>SWSF 6G</b>	4	.3750 (9.525)		.6250 (15.875)	0	.8750 (22.225)
<b>SWF 8</b>	<b>SWF 8G</b>	<b>SWSF 8</b>	<b>SWSF 8G</b>	4	.5000 (12.700)	0 -0.00050 (-12)	.8750 (22.225)	0 -0.00065 (-16)	1.2500 (31.750)
<b>SWF10</b>	<b>SWF10G</b>	<b>SWSF10</b>	<b>SWSF10G</b>	4	.6250 (15.875)		1.1250 (28.575)		1.5000 (38.100)
<b>SWF12</b>	<b>SWF12G</b>	<b>SWSF12</b>	<b>SWSF12G</b>	5	.7500 (19.050)	0 -0.00040 (-10)	1.2500 (31.750)	0 -0.00075 (-19)	1.6250 (41.275)
<b>SWF16</b>	<b>SWF16G</b>	<b>SWSF16</b>	<b>SWSF16G</b>	6	1.0000 (25.400)	0 -0.00050 (-12)	1.5625 (39.688)		2.2500 (57.150)
<b>SWF20</b>	<b>SWF20G</b>	<b>SWSF20</b>	<b>SWSF20G</b>	6	1.2500 (31.750)		2.0000 (50.800)	0	2.6250 (66.675)
<b>SWF24</b>	<b>SWF24G</b>	<b>SWSF24</b>	<b>SWSF24G</b>	6	1.5000 (38.100)	0 -0.00060 (-15)	2.3750 (60.325)	0 -0.00090 (-22)	3.0000 (76.200)
<b>SWF32</b>	<b>SWF32G</b>	<b>SWSF32</b>	<b>SWSF32G</b>	6	2.0000 (50.800)		3.0000 (76.200)		4.0000 (101.600)
<b>SWF40</b>	—	—	—	6	2.5000 (63.500)	0 -0.00060 (-15)	3.7500 (95.250)	0 -0.00100 (-25)	5.0000 (127.000)
<b>SWF48</b>	—	—	—	6	3.0000 (76.200)	0 -0.00080 (-20)	4.5000 (114.300)		6.0000 (152.400)
<b>SWF64</b>	—	—	—	6	4.0000 (101.600)		6.0000 (152.400)	0 -0.00115 (-29)	8.0000 (203.200)

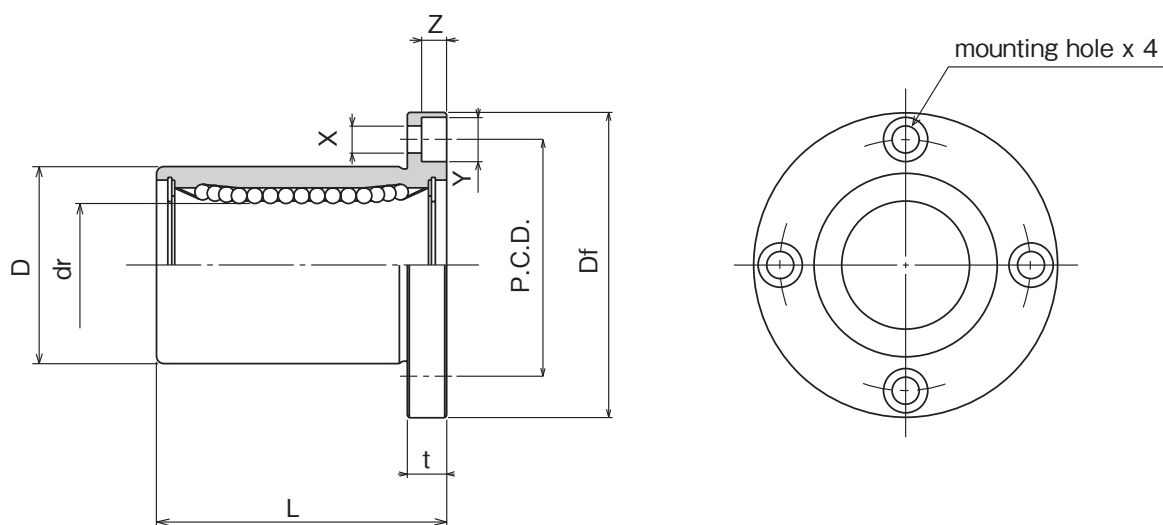SLIDE BUSH



SLIDE BUSH

Df inch/(mm)	t inch/(mm)	flange P.C.D. inch/(mm)	X×Y×Z inch/(mm)	eccentricity inch (μm)	perpendicularity inch (μm)	basic load rating		mass g	shaft diameter inch (mm)
						dynamic C N	static Co N		
1.2500 (31.750)	.2187 (5.556)	.8750 (22.225)	.1560×.2500×.1410 (3.969×6.350×3.572)	.0005 (12)	.0005 (12)	206	265	32	1/4 (6.350)
1.5000 (38.100)	.2500 (6.350)	1.0620 (26.988)	.1875×.2970×.1720 (4.763×7.541×4.366)			225	314	47	3/8 (9.525)
1.7500 (44.450)	.2500 (6.350)	1.312 (33.338)	.1875×.2970×.1720 (4.763×7.541×4.366)			510	784	88	1/2 (12.700)
2.0000 (50.800)	.2500 (6.350)	1.5620 (39.688)	.1875×.2970×.1720 (4.763×7.541×4.366)			774	1,180	140	5/8 (15.875)
2.1875 (55.563)	.3125 (7.938)	1.7180 (43.660)	.2187×.3440×.2030 (5.556×8.731×5.159)	.0006 (15)	.0006 (15)	862	1,370	190	3/4 (19.050)
2.5000 (63.500)	.3125 (7.938)	2.0310 (51.594)	.2187×.3440×.2030 (5.556×8.731×5.159)			980	1,570	325	1 (25.400)
3.1250 (79.375)	.3750 (9.525)	2.5625 (65.088)	.2812×.4060×.2656 (7.144×10.319×6.747)	.0008 (20)	.0008 (20)	1,570	2,740	665	1-1/4 (31.750)
3.7500 (95.250)	.5000 (12.700)	3.0625 (77.788)	.3440×.5000×.3280 (8.731×12.700×8.334)			2,180	4,020	1,100	1-1/2 (38.100)
4.3750 (111.125)	.5000 (12.700)	3.6875 (93.662)	.3440×.5000×.3280 (8.731×12.700×8.334)	.0010 (25)	.0010 (25)	3,820	7,940	1,760	2 (50.800)
5.3750 (136.525)	.7500 (19.050)	4.5625 (115.887)	.4062×.6250×.3750 (10.319×15.875×9.525)			4,700	10,000	3,570	2-1/2 (63.500)
6.1250 (155.575)	.7500 (19.050)	5.3125 (134.937)	.4062×.6250×.3750 (10.319×15.875×9.525)			7,350	16,000	5,600	3 (76.200)
8.0000 (203.200)	.8750 (22.225)	7.0000 (177.800)	.5000×.7125×.5000 (12.700×18.097×12.700)			14,100	34,800	12,000	4 (101.600)

1N≅0.225lbf 1kg≅2.205lbs

NIPPON BEARING

SWK TYPE (Inch Standard)

– Square Flange Type –




part number structure

example **SWSK 16 G UU-SK**

specification <b>SWK</b> : standard <b>SWSK</b> : anti-corrosion	size	retainer material <b>blank</b> : standard/steel anti-corrosion/stainless steel <b>G</b> : resin	outer cylinder surface treatment <b>blank</b> : no surface treatment <b>SK</b> : electroless nickel plating <b>LF</b> : low temperature black chrome treatment with fluoride coating <b>SB</b> : black oxide (not available on anti-corrosion type) <b>SC</b> : industrial chrome plating	seal <b>blank</b> : without seal <b>UU</b> : seals on both sides
--	------	--	--	--

part number				number of ball circuits	dr		D		L ±.012 (±0.3) inch/(mm)
standard steel retainer	resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer		inch (mm)	tolerance inch/(μm)	inch (mm)	tolerance inch/(μm)	
<b>SWK 4</b>	<b>SWK 4G</b>	<b>SWSK 4</b>	<b>SWSK 4G</b>	4	.2500 (6.350)	0 -0.00040 (-9)	.5000 (12.700)	0 -0.00050 (-13)	.7500 (19.050)
<b>SWK 6</b>	<b>SWK 6G</b>	<b>SWSK 6</b>	<b>SWSK 6G</b>	4	.3750 (9.525)		.6250 (15.875)	0	.8750 (22.225)
<b>SWK 8</b>	<b>SWK 8G</b>	<b>SWSK 8</b>	<b>SWSK 8G</b>	4	.5000 (12.700)		.8750 (22.225)	0 -0.00065 (-16)	1.2500 (31.750)
<b>SWK 10</b>	<b>SWK 10G</b>	<b>SWSK 10</b>	<b>SWSK 10G</b>	4	.6250 (15.875)	1.1250 (28.575)			1.5000 (38.100)
<b>SWK 12</b>	<b>SWK 12G</b>	<b>SWSK 12</b>	<b>SWSK 12G</b>	5	.7500 (19.050)	0 -0.00040 (-10)	1.2500 (31.750)	0 -0.00075 (-19)	1.6250 (41.275)
<b>SWK 16</b>	<b>SWK 16G</b>	<b>SWSK 16</b>	<b>SWSK 16G</b>	6	1.0000 (25.400)		1.5625 (39.688)		2.2500 (57.150)
<b>SWK 20</b>	<b>SWK 20G</b>	<b>SWSK 20</b>	<b>SWSK 20G</b>	6	1.2500 (31.750)	0	2.0000 (50.800)	0	2.6250 (66.675)
<b>SWK 24</b>	<b>SWK 24G</b>	<b>SWSK 24</b>	<b>SWSK 24G</b>	6	1.5000 (38.100)	0 -0.00050 (-12)	2.3750 (60.325)	0 -0.00090 (-22)	3.0000 (76.200)
<b>SWK 32</b>	<b>SWK 32G</b>	<b>SWSK 32</b>	<b>SWSK 32G</b>	6	2.0000 (50.800)		3.0000 (76.200)		4.0000 (101.600)
<b>SWK 40</b>	–	–	–	6	2.5000 (63.500)	0	3.7500 (95.250)	0 -0.00100 (-25)	5.0000 (127.000)
<b>SWK 48</b>	–	–	–	6	3.0000 (76.200)	0 -0.00060 (-15)	4.5000 (114.300)		6.0000 (152.400)
<b>SWK 64</b>	–	–	–	6	4.0000 (101.600)	0 -0.00080 (-20)	6.0000 (152.400)	0 -0.00115 (-29)	8.0000 (203.200)

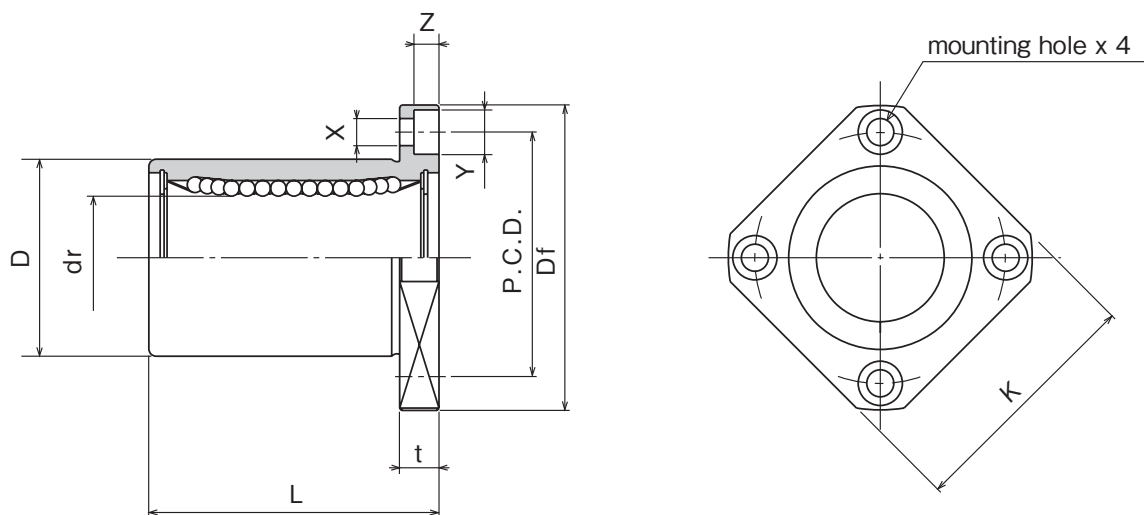SLIDE BUSH



SLIDE BUSH

Df inch/(mm)	K inch/(mm)	flange		X×Y×Z inch/(mm)	eccentricity inch (μm)	perpendicularity inch (μm)	basic load rating		mass g	shaft diameter inch (mm)
		t inch/(mm)	P.C.D. inch/(mm)				dynamic C N	static Co N		
1.2500 (31.750)	1.0000 (25.400)	.2187 (5.556)	.8750 (22.225)	.1560×.2500×.1410 (3.969×6.350×3.572)	.0005 (12)	.0005 (12)	206	265	25	1/4 (6.350)
1.5000 (38.100)	1.2500 (31.750)	.2500 (6.350)	1.0620 (26.988)	.1875×.2970×.1720 (4.763×7.541×4.366)			225	314	32	3/8 (9.525)
1.7500 (44.450)	1.3750 (34.925)	.2500 (6.350)	1.312 (33.338)	.1875×.2970×.1720 (4.763×7.541×4.366)			510	784	68	1/2 (12.700)
2.0000 (50.800)	1.5000 (38.100)	.2500 (6.350)	1.5620 (39.688)	.1875×.2970×.1720 (4.763×7.541×4.366)			774	1,180	124	5/8 (15.875)
2.1875 (55.563)	1.6875 (42.863)	.3125 (7.938)	1.7180 (43.660)	.2187×.3440×.2030 (5.556×8.731×5.159)	.0006 (15)	.0006 (15)	862	1,370	150	3/4 (19.050)
2.5000 (63.500)	2.0000 (50.800)	.3125 (7.938)	2.0310 (51.594)	.2187×.3440×.2030 (5.556×8.731×5.159)			980	1,570	280	1 (25.400)
3.1250 (79.375)	2.5000 (63.500)	.3750 (9.525)	2.5625 (65.088)	.2812×.4060×.2656 (7.144×10.319×6.747)			1,570	2,740	580	1-1/4 (31.750)
3.7500 (95.250)	3.0000 (76.200)	.5000 (12.700)	3.0625 (77.788)	.3440×.5000×.3280 (8.731×12.700×8.334)	.0008 (20)	.0008 (20)	2,180	4,020	930	1-1/2 (38.100)
4.3750 (111.125)	3.5000 (88.900)	.5000 (12.700)	3.6875 (93.662)	.3440×.5000×.3280 (8.731×12.700×8.334)			3,820	7,940	1,580	2 (50.800)
5.3750 (136.525)	4.3750 (111.125)	.7500 (19.050)	4.5625 (115.887)	.4062×.6250×.3750 (10.319×15.875×9.525)	.0010 (25)	.0010 (25)	4,700	10,000	3,200	2-1/2 (63.500)
6.1250 (155.575)	5.0000 (127.000)	.7500 (19.050)	5.3125 (134.937)	.4062×.6250×.3750 (10.319×15.875×9.525)			7,350	16,000	5,000	3 (76.200)
8.0000 (203.200)	6.7500 (171.450)	.8750 (22.225)	7.0000 (177.800)	.5000×.7125×.5000 (12.700×18.097×12.700)	.0012 (30)	.0012 (30)	14,100	34,800	11,300	4 (101.600)

1N≅0.225lbf 1kg≅2.205lbs

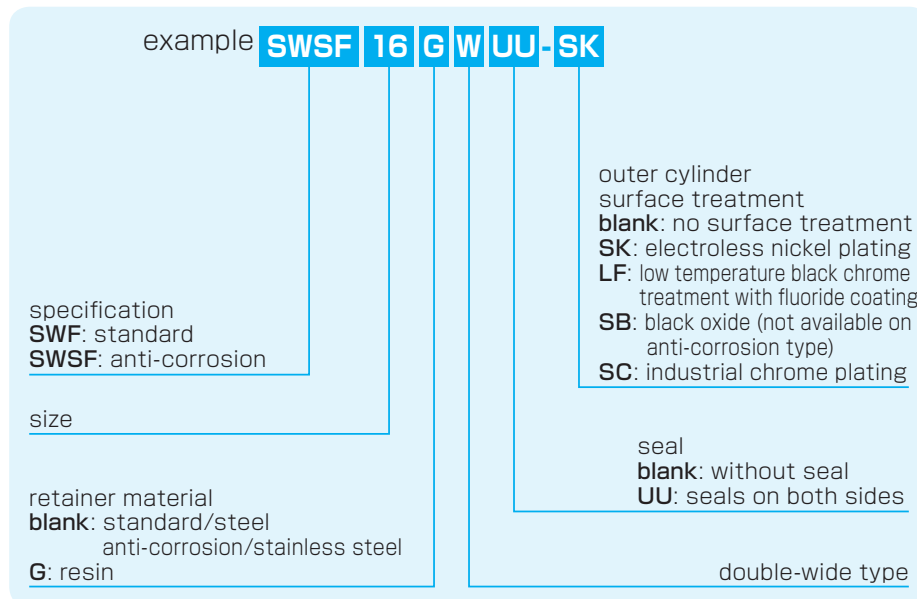
NIPPON BEARING

**SWF-W TYPE** (Inch Standard)

– Round Flange Double-Wide Type –




part number structure



part number				number of ball circuits	dr		D		L ±.012 (±0.3) inch/(mm)
standard steel retainer	standard resin retainer	anti-corrosion stainless retainer	anti-corrosion resin retainer		inch (mm)	tolerance inch/(μm)	inch (mm)	tolerance inch/(μm)	
<b>SWF 4W</b>	<b>SWF 4GW</b>	<b>SWSF 4W</b>	<b>SWSF 4GW</b>	4	.2500 (6.350)	0 -0.00040 (-10)	.5000 (12.700)	0 -0.00050 (-13)	1.3750 (34.925)
<b>SWF 6W</b>	<b>SWF 6GW</b>	<b>SWSF 6W</b>	<b>SWSF 6GW</b>	4	.3750 (9.525)		.6250 (15.875)	0	1.5938 (40.481)
<b>SWF 8W</b>	<b>SWF 8GW</b>	<b>SWSF 8W</b>	<b>SWSF 8GW</b>	4	.5000 (12.700)		.8750 (22.225)	0 -0.00065 (-16)	2.3750 (60.325)
<b>SWF10W</b>	<b>SWF10GW</b>	<b>SWSF10W</b>	<b>SWSF10GW</b>	4	.6250 (15.875)		1.1250 (28.575)		2.8125 (71.438)
<b>SWF12W</b>	<b>SWF12GW</b>	<b>SWSF12W</b>	<b>SWSF12GW</b>	5	.7500 (19.050)	0 -0.00050 (-12)	1.2500 (31.750)	0 -0.00075 (-19)	3.0937 (78.581)
<b>SWF16W</b>	<b>SWF16GW</b>	<b>SWSF16W</b>	<b>SWSF16GW</b>	6	1.0000 (25.400)	0 -0.00060 (-15)	1.5625 (39.688)	0 -0.00090 (-22)	4.2813 (108.744)
<b>SWF20W</b>	<b>SWF20GW</b>	<b>SWSF20W</b>	<b>SWSF20GW</b>	6	1.2500 (31.750)	0 -0.00060 (-15)	2.0000 (50.800)	0 -0.00090 (-22)	5.0000 (127.000)
<b>SWF24W</b>	<b>SWF24GW</b>	<b>SWSF24W</b>	<b>SWSF24GW</b>	6	1.5000 (38.100)	0 -0.00060 (-15)	2.3750 (60.325)	0 -0.00090 (-22)	5.6875 (144.463)
<b>SWF32W</b>	<b>SWF32GW</b>	<b>SWSF32W</b>	<b>SWSF32GW</b>	6	2.0000 (50.800)	0 -0.00100 (-25)	3.0000 (76.200)	0 -0.00100 (-25)	7.7500 (196.850)



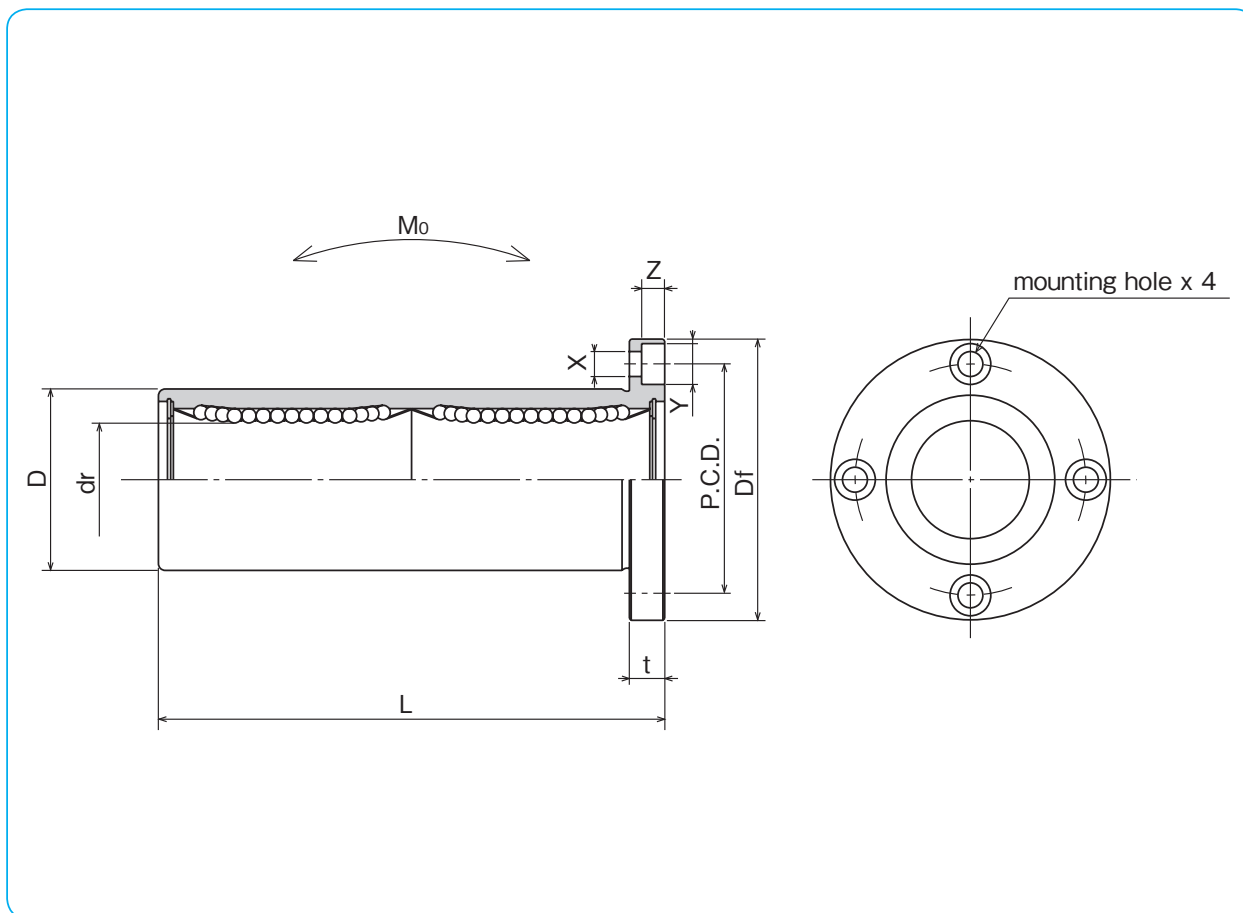SLIDE BUSH



SLIDE BUSH


Df inch/(mm)	t inch/(mm)	flange		eccentricity inch ( $\mu$ m)	perpendicularity inch ( $\mu$ m)	basic load rating		allowable static moment Mo N · m	mass g	shaft diameter inch (mm)
		P.C.D. inch/(mm)	X × Y × Z inch/(mm)			dynamic C N	static Co N			
1.2500 (31.750)	.2187 (5.556)	.8750 (22.225)	.1563 × .2500 × .1406 (3.969 × 6.350 × 3.572)	.0006 (15)	.0006 (15)	323	530	2.0	40	1/4 (6.350)
1.5000 (38.100)	.2500 (6.350)	1.0625 (26.988)	.1875 × .2969 × .1719 (4.763 × 7.541 × 4.366)			353	630	2.7	60	3/8 (9.525)
1.7500 (44.450)	.2500 (6.350)	1.3125 (33.338)	.1875 × .2969 × .1719 (4.763 × 7.541 × 4.366)			813	1,570	11.5	126	1/2 (12.700)
2.0000 (50.800)	.2500 (6.350)	1.5625 (39.688)	.1875 × .2969 × .1719 (4.763 × 7.541 × 4.366)			1,230	2,350	20.0	215	5/8 (15.875)
2.1875 (55.563)	.3125 (7.938)	1.7188 (43.656)	.2188 × .3438 × .2031 (5.556 × 8.731 × 5.159)	.0008 (20)	.0008 (20)	1,370	2,740	26.5	280	3/4 (19.050)
2.5000 (63.500)	.3125 (7.938)	2.0313 (51.594)	.2188 × .3438 × .2031 (5.556 × 8.731 × 5.159)			1,570	3,140	41.2	515	1 (25.400)
3.1250 (79.375)	.3750 (9.525)	2.5625 (65.088)	.2813 × .4063 × .2656 (7.144 × 10.319 × 6.747)	.0010 (25)	.0010 (25)	2,500	5,490	84.8	1,020	1-1/4 (31.750)
3.7500 (95.250)	.5000 (12.700)	3.0625 (77.788)	.3437 × .5000 × .3281 (8.731 × 12.700 × 8.334)			3,430	8,040	143	1,630	1-1/2 (38.100)
4.3750 (111.125)	.5000 (12.700)	3.6875 (93.662)	.3437 × .5000 × .3281 (8.731 × 12.700 × 8.334)	.0012 (30)	.0012 (30)	6,080	15,900	399	2,800	2 (50.800)

1N ≅ 0.225lbf    1N · m ≅ 0.738lb · ft  
1kg ≅ 2.205lbs

NIPPON BEARING

**SWK-W TYPE** (Inch Standard)

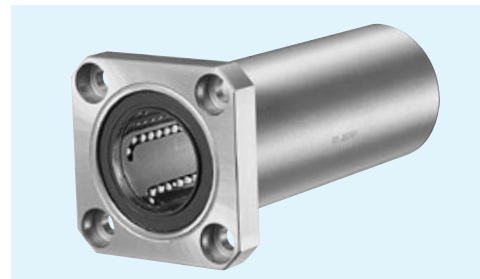– Square Flange Double-Wide Type –




part number structure

example **SWSK 16 G W UU-SK**

specification <b>SWK</b> : standard <b>SWSK</b> : anti-corrosion	size	retainer material <b>blank</b> : standard/steel anti-corrosion/stainless steel <b>G</b> : resin	outer cylinder surface treatment <b>blank</b> : no surface treatment <b>SK</b> : electroless nickel plating <b>LF</b> : low temperature black chrome treatment with fluoride coating <b>SB</b> : black oxide (not available on anti-corrosion type) <b>SC</b> : industrial chrome plating	seal <b>blank</b> : without seal <b>UU</b> : seals on both sides	double-wide type
--	------	--	--	--	------------------

part number				number of ball circuits	major dimensions				
standard steel retainer	anti-corrosion resin retainer	stainless retainer	resin retainer		dr		D		L
				inch (mm)	tolerance inch/(μm)	inch (mm)	tolerance inch/(μm)	±.012 (±0.3) inch/(mm)	
<b>SWK 4W</b>	<b>SWK 4GW</b>	<b>SWSK 4W</b>	<b>SWSK 4GW</b>	4	.2500 (6.350)	-0.00040 (-10)	.5000 (12.700)	<sup>0</sup> <sub>-0.00050 (-13)</sub>	1.3750 (34.925)
<b>SWK 6W</b>	<b>SWK 6GW</b>	<b>SWSK 6W</b>	<b>SWSK 6GW</b>	4	.3750 (9.525)		.6250 (15.875)	<sup>0</sup>	1.5938 (40.481)
<b>SWK 8W</b>	<b>SWK 8GW</b>	<b>SWSK 8W</b>	<b>SWSK 8GW</b>	4	.5000 (12.700)		.8750 (22.225)	<sup>0</sup> <sub>-0.00065 (-16)</sub>	2.3750 (60.325)
<b>SWK10W</b>	<b>SWK10GW</b>	<b>SWSK10W</b>	<b>SWSK10GW</b>	4	.6250 (15.875)		1.1250 (28.575)		2.8125 (71.438)
<b>SWK12W</b>	<b>SWK12GW</b>	<b>SWSK12W</b>	<b>SWSK12GW</b>	5	.7500 (19.050)	<sup>0</sup> <sub>-0.00050 (-12)</sub>	1.2500 (31.750)	<sup>0</sup> <sub>-0.00075 (-19)</sub>	3.0937 (78.581)
<b>SWK16W</b>	<b>SWK16GW</b>	<b>SWSK16W</b>	<b>SWSK16GW</b>	6	1.0000 (25.400)		1.5625 (39.688)		4.2813 (108.744)
<b>SWK20W</b>	<b>SWK20GW</b>	<b>SWSK20W</b>	<b>SWSK20GW</b>	6	1.2500 (31.750)	<sup>0</sup>	2.0000 (50.800)	<sup>0</sup>	5.0000 (127.000)
<b>SWK24W</b>	<b>SWK24GW</b>	<b>SWSK24W</b>	<b>SWSK24GW</b>	6	1.5000 (38.100)	<sup>0</sup> <sub>-0.00060 (-15)</sub>	2.3750 (60.325)	<sup>0</sup> <sub>-0.00090 (-22)</sub>	5.6875 (144.463)
<b>SWK32W</b>	<b>SWK32GW</b>	<b>SWSK32W</b>	<b>SWSK32GW</b>	6	2.0000 (50.800)		3.0000 (76.200)	<sup>0</sup> <sub>-0.00100 (-25)</sub>	7.7500 (196.850)

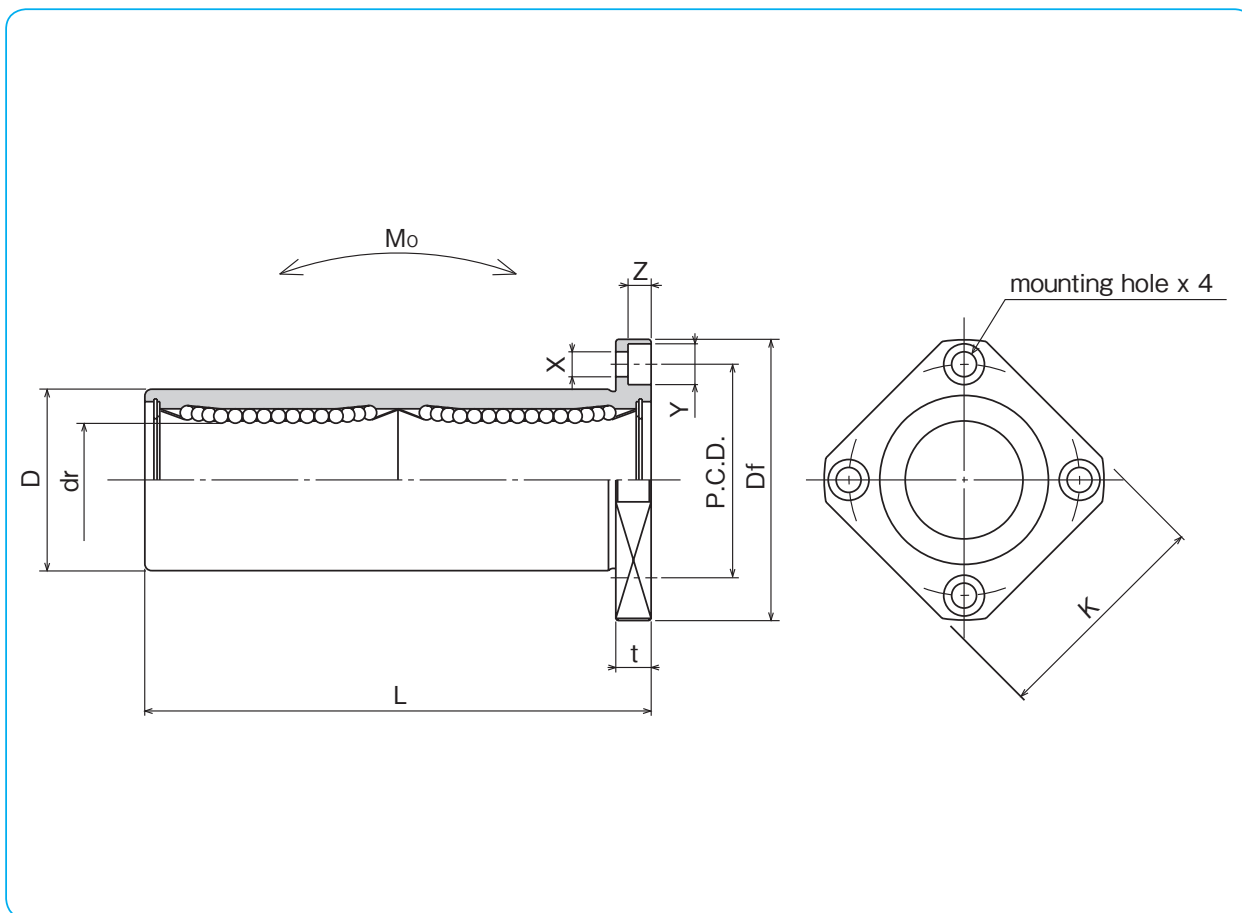SLIDE BUSH



SLIDE BUSH

Df inch/(mm)	K inch/(mm)	flange		X×Y×Z inch/(mm)	eccentricity inch (μm)	perpendicularity inch (μm)	basic load rating		allowable static moment Mo N·m	mass g	shaft diameter inch/(mm)
		t inch/(mm)	P.C.D. inch/(mm)				dynamic C N	static Co N			
1.2500 (31.750)	1.0000 (25.400)	.2188 (5.556)	.8750 (22.225)	.1563×.2500×.1406 (3.969×6.350×3.572)	.0006 (15)	.0006 (15)	323	530	2.0	33	1/4 (6.350)
1.5000 (38.100)	1.2500 (31.750)	.2500 (6.350)	1.0625 (26.988)	.1875×.2969×.1719 (4.763×7.541×4.366)			353	630	2.7	45	3/8 (9.525)
1.7500 (44.450)	1.3750 (34.925)	.2500 (6.350)	1.3125 (33.338)	.1875×.2969×.1719 (4.763×7.541×4.366)			813	1,570	11.5	106	1/2 (12.700)
2.0000 (50.800)	1.5000 (38.100)	.2500 (6.350)	1.5625 (39.688)	.1875×.2969×.1719 (4.763×7.541×4.366)			1,230	2,350	20.0	200	5/8 (15.875)
2.1875 (55.563)	1.6875 (42.863)	.3125 (7.938)	1.7188 (43.656)	.2188×.3438×.2031 (5.556×8.731×5.159)	.0008 (20)	.0008 (20)	1,370	2,740	26.5	240	3/4 (19.050)
2.5000 (63.500)	2.0000 (50.800)	.3125 (7.938)	2.0313 (51.594)	.2188×.3438×.2031 (5.556×8.731×5.159)			1,570	3,140	41.2	470	1 (25.400)
3.1250 (79.375)	2.5000 (63.500)	.3750 (9.525)	2.5625 (65.088)	.2813×.4063×.2656 (7.144×10.319×6.747)	.0010 (25)	.0010 (25)	2,500	5,490	84.8	935	1-1/4 (31.750)
3.7500 (95.250)	3.0000 (76.200)	.5000 (12.700)	3.0625 (77.788)	.3437×.5000×.3281 (8.731×12.700×8.334)			3,430	8,040	143	1,460	1-1/2 (38.100)
4.3750 (111.125)	3.5000 (88.900)	.5000 (12.700)	3.6875 (93.662)	.3437×.5000×.3281 (8.731×12.700×8.334)			6,080	15,900	399	2,620	2 (50.800)

1N ≅ 0.225lbf    1N·m ≅ 0.738lb·ft  
1kg ≅ 2.205lbs

NIPPON BEARING

GM TYPE

– Single Type –



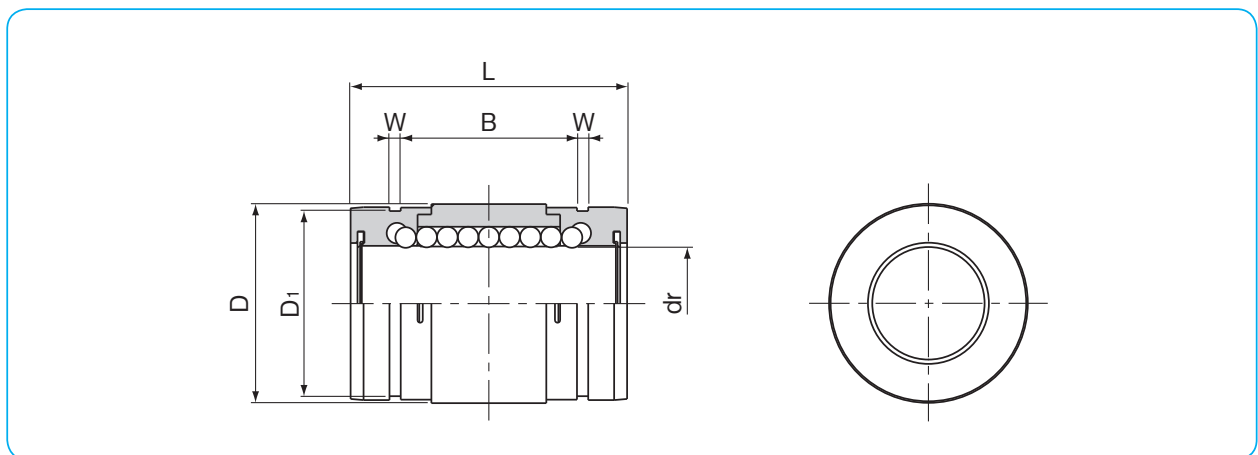
part number structure

example **GM 25 UU**

GM type

inner contact diameter (dr)

seal  
**blank**: without seal  
**UU**: seals on both sides



part number	number of ball circuits	dr mm	dr tolerance μm	major dimensions						basic load rating dynamic C N	static Co N	mass g
				D mm	D tolerance μm	L mm	B mm	W mm	D1 mm			
<b>GM 6</b>	4	6	0	12	0	19	11.3	1.1	11.5	206	265	5
<b>GM 8</b>	4	8		15	-11	24	15.3	1.1	14.3	274	392	10
<b>GM10</b>	4	10		19	-13	29	19.4	1.3	18	372	549	18
<b>GM12</b>	4	12	21	0		30	20.4	1.3	20	510	784	23
<b>GM13</b>	4	13	23	32		20.4	1.3	22	510	784	27	
<b>GM16</b>	4	16	28	37	23.3	1.6	27	774	1,180	45		
<b>GM20</b>	6	20	-10	32	0	42	27.3	1.6	30.5	882	1,370	70
<b>GM25</b>	6	25		40	-16	59	37.3	1.85	38	980	1,570	150
<b>GM30</b>	6	30		45	64	40.8	1.85	43	1,570	2,740	180	

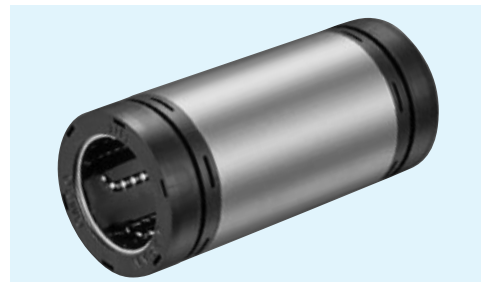
GM-AJ type (clearance adjustable type) is also manufactured. Please contact NB for details.

1N≐0.102kgf



SLIDE BUSH

GM-W TYPE

– Double-Wide Type –



part number structure

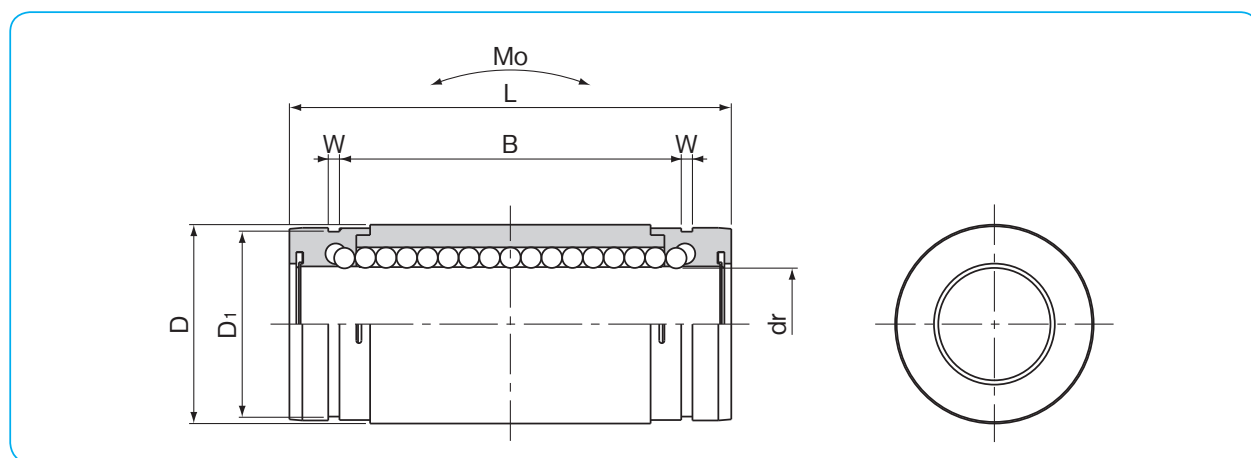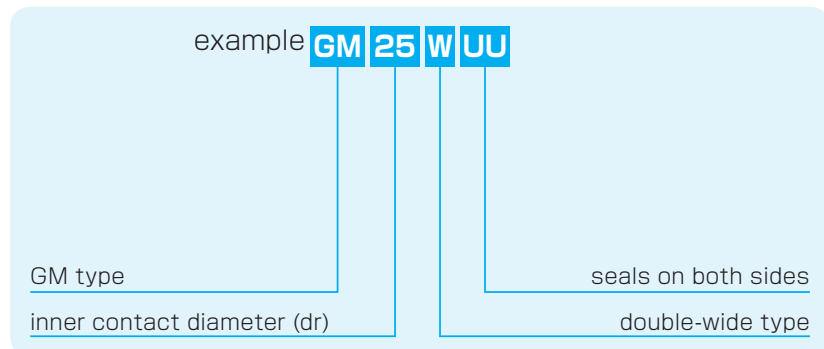

SLIDE BUSH

part number	number of ball circuits	dr		major dimensions						basic load rating		allowable	mass	
		mm	tolerance $\mu\text{m}$	D	L	B	W	D <sub>1</sub>	dynamic C	static Co	static moment Mo			
				mm	tolerance $\mu\text{m}$	mm	mm	mm	mm	mm	N	N	N · m	g
GM 6W UU	4	6	0	12	0	28	20.3	1.1	11.5	323	530	1.5	9	
GM 8W UU	4	8		15	-13	36	27.3	1.1	14.3	431	784	3.3	18	
GM10W UU	4	10		19	0	41	31.4	1.3	18	588	1,100	5.0	31	
GM12W UU	4	12		21	0	46	36.4	1.3	20	813	1,570	7.6	42	
GM13W UU	4	13		23	-16	48	36.4	1.3	22	813	1,570	8.1	50	
GM16W UU	4	16	28		53	39.3	1.6	27	1,230	2,350	13.8	76		
GM20W UU	6	20	-12	32	0	65	50.3	1.6	30.5	1,400	2,740	20.0	130	
GM25W UU	6	25		40	-19	91	69.3	1.85	38	1,560	3,140	34.8	280	
GM30W UU	6	30		45		99	75.8	1.85	43	2,490	5,490	57.5	334	

\*UU type is standard.

1N≐0.102kgf 1N · m≐0.102kgf · m

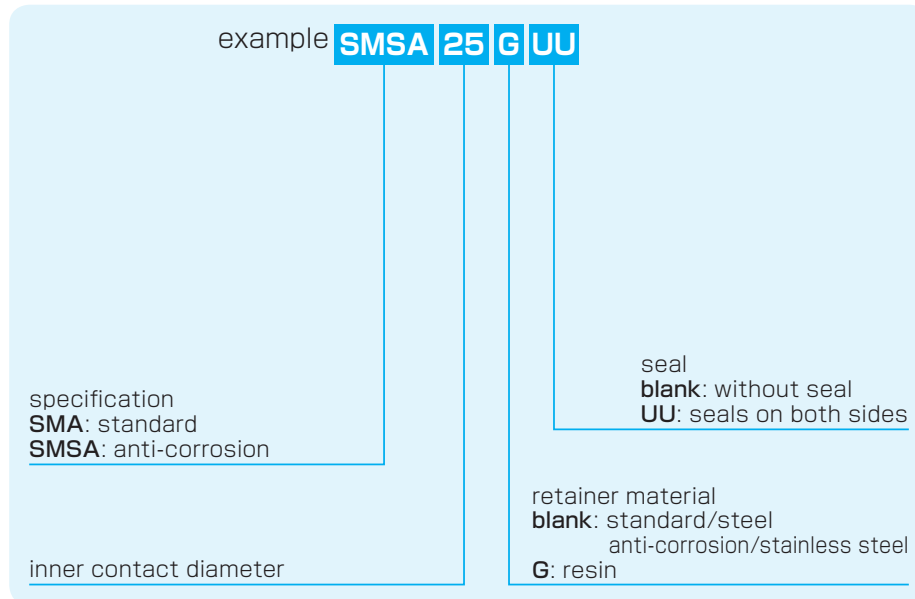
NIPPON BEARING

SMA TYPE

– Block Type –




part number structure



part number	inner contact diameter		outer dimensions					major dimensions	
	mm	tolerance μm	h mm	E mm	W mm	L mm	F mm	G mm	T mm
<b>SMA 3GUU</b>	3	0 - 8	5	8	16	13	10	8	—
<b>SMA 4GUU</b>	4		5.5	8.5	17	15	11	9	—
<b>SMA 5GUU</b>	5		7	11	22	18	14	11	—
<b>SMA 6GUU</b>	6	0 - 9	9	15	30	25	18	15	6
<b>SMA 8GUU</b>	8		11	17	34	30	22	18	6
<b>SMA 10GUU</b>	10		13	20	40	35	26	21	8
<b>SMA 12GUU</b>	12		15	21	42	36	28	24	8
<b>SMA 13GUU</b>	13		15	22	44	39	30	24.5	8
<b>SMA 16GUU</b>	16		19	25	50	44	38.5	32.5	9
<b>SMA 20GUU</b>	20	0 -10	21	27	54	50	41	35	11
<b>SMA 25GUU</b>	25		26	38	76	67	51.5	42	12
<b>SMA 30GUU</b>	30		30	39	78	72	59.5	49	15
<b>SMA 35GUU</b>	35	0 -12	34	45	90	80	68	54	18
<b>SMA 40GUU</b>	40		40	51	102	90	78	62	20
<b>SMA 50GUU</b>	50		52	61	122	110	102	80	25
<b>SMA 60GUU</b>	60		0/-15	58	66	132	122	114	94

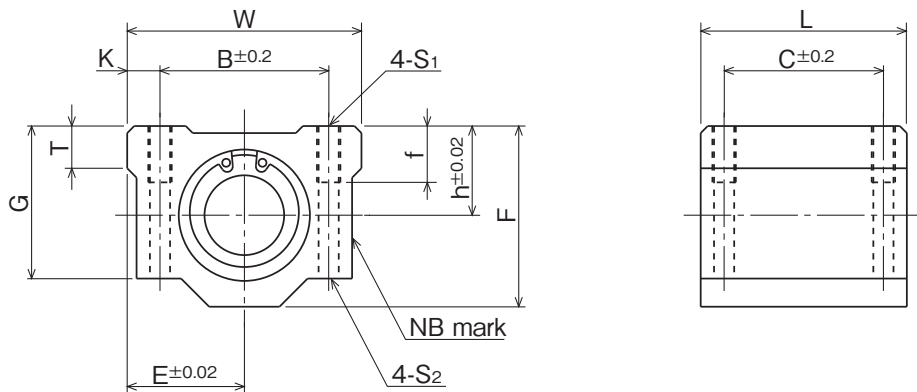SLIDE BUSH



SLIDE BUSH

B mm	C mm	mounting dimensions				basic load rating		mass g	shaft diameter mm
		K mm	S <sub>1</sub>	f mm	S <sub>2</sub> mm	dynamic C N	static C <sub>0</sub> N		
11	8	2.5	M2	—	—	69	105	5	3
12	10	2.5	M3	—	—	88	127	7	4
16	12	3	M3	—	—	167	206	14	5
20	15	5	M4	8	3.4	206	265	34	6
24	18	5	M4	8	3.4	274	392	52	8
28	21	6	M5	12	4.3	372	549	92	10
30.5	26	5.75	M5	12	4.3	510	784	102	12
33	26	5.5	M5	12	4.3	510	784	120	13
36	34	7	M5	12	4.3	774	1,180	200	16
40	40	7	M6	12	5.2	882	1,370	255	20
54	50	11	M8	18	7	980	1,570	600	25
58	58	10	M8	18	7	1,570	2,740	735	30
70	60	10	M8	18	7	1,670	3,140	1,100	35
80	60	11	M10	25	8.7	2,160	4,020	1,590	40
100	80	11	M10	25	8.7	3,820	7,940	3,340	50
108	90	12	M12	25	10.7	4,700	10,000	4,270	60

1N≅0.102kgf

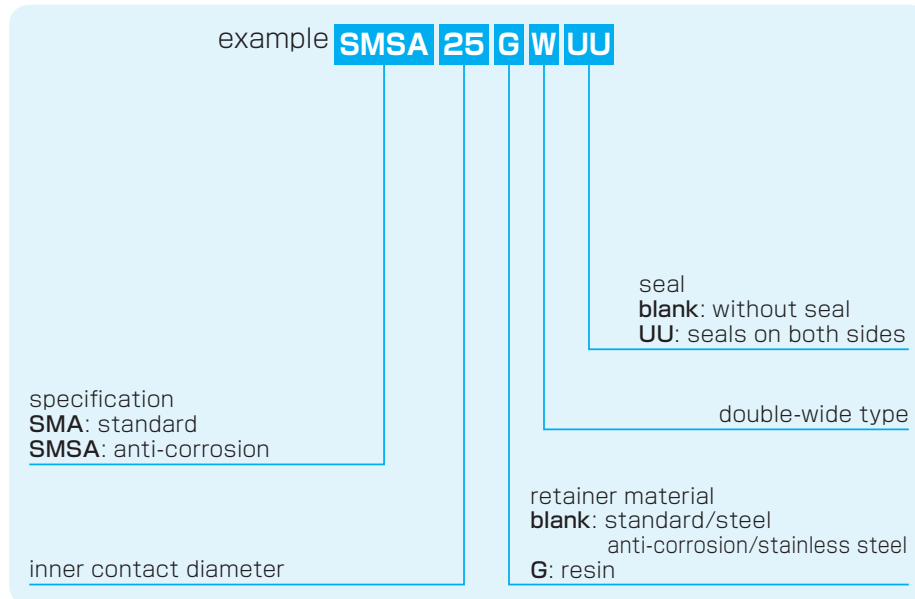
NIPPON BEARING

SMA-W TYPE

– Double-Wide Block Type –




part number structure



part number	inner contact diameter		outer dimensions					major dimensions		
	mm	tolerance μm	h mm	E mm	W mm	L mm	F mm	G mm	T mm	N mm
<b>SMA 3GWUU</b>	3	0 - 8	5	8	16	23	10	8	—	—
<b>SMA 4GWUU</b>	4		5.5	8.5	17	27	11	9	—	—
<b>SMA 5GWUU</b>	5		7	11	22	33	14	11	—	—
<b>SMA 6GWUU</b>	6	0 - 9	9	15	30	48	18	15	6	7
<b>SMA 8GWUU</b>	8		11	17	34	58	22	18	6	7
<b>SMA 10GWUU</b>	10		13	20	40	68	26	21	8	7
<b>SMA 12GWUU</b>	12		15	21	42	70	28	24	8	6.5
<b>SMA 13GWUU</b>	13		15	22	44	75	30	24.5	8	6.5
<b>SMA 16GWUU</b>	16		19	25	50	85	38.5	32.5	9	6
<b>SMA 20GWUU</b>	20	0 - 10	21	27	54	96	41	35	11	7
<b>SMA 25GWUU</b>	25		26	38	76	130	51.5	42	12	4
<b>SMA 30GWUU</b>	30		30	39	78	140	59.5	49	15	5
<b>SMA 35GWUU</b>	35	0 - 12	34	45	90	155	68	54	18	5.5
<b>SMA 40GWUU</b>	40		40	51	102	175	78	62	20	5
<b>SMA 50GWUU</b>	50		52	61	122	215	102	80	25	5
<b>SMA 60GWUU</b>	60		0/- 15	58	66	132	240	114	94	30



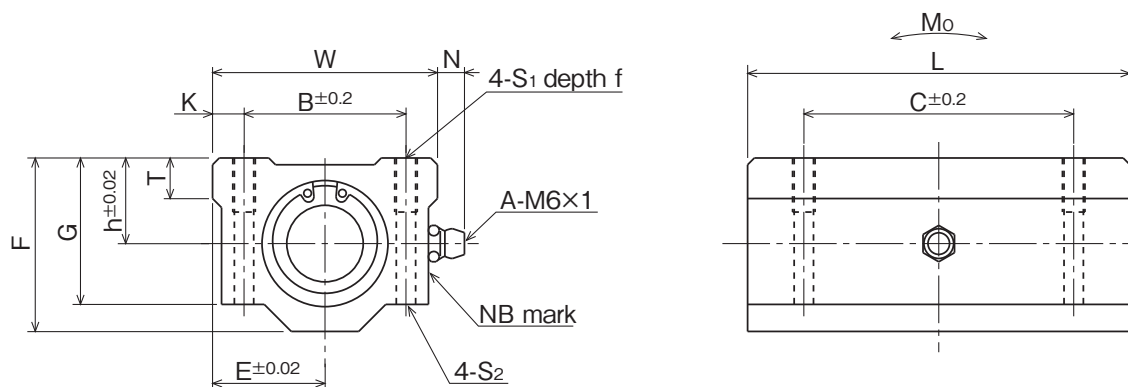SLIDE BUSH



※Grease fitting is not provided for size 3, 4, and 5.

SLIDE BUSH

B mm	mounting dimensions					basic load rating		allowable static moment Mo N · m	mass g	shaft diameter mm
	C mm	K mm	S <sub>1</sub>	f mm	S <sub>2</sub> mm	dynamic C N	static Co N			
11	16	2.5	M2	—	—	108	206	0.49	10	3
12	20	2.5	M3	—	—	137	255	0.72	13	4
16	25	3	M3	—	—	265	412	1.54	27	5
20	36	5	M4	8	3.4	323	530	2.18	63	6
24	42	5	M4	8	3.4	431	784	4.31	102	8
28	46	6	M5	12	4.3	588	1,100	7.24	180	10
30.5	50	5.75	M5	12	4.3	813	1,570	10.9	205	12
33	50	5.5	M5	12	4.3	813	1,570	11.6	240	13
36	60	7	M5	12	4.3	1,230	2,350	19.7	400	16
40	70	7	M6	12	5.2	1,400	2,740	26.8	570	20
54	100	11	M8	18	7	1,560	3,140	43.4	1,200	25
58	110	10	M8	18	7	2,490	5,490	82.8	1,480	30
70	120	10	M8	18	7	2,650	6,270	110	2,200	35
80	140	11	M10	25	8.7	3,430	8,040	147	3,200	40
100	160	11	M10	25	8.7	6,080	15,900	397	6,700	50
108	180	12	M12	25	10.7	7,550	20,000	530	8,560	60

1N≐0.102kgf 1N · m≐0.102kgf · m

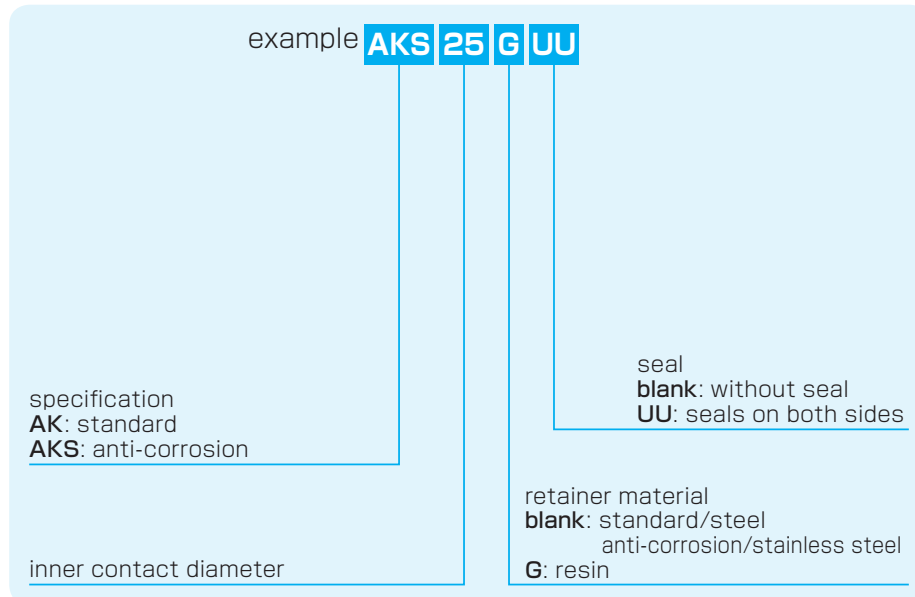
NIPPON BEARING

AK TYPE

– Compact Block Type –




part number structure



part number	inner contact diameter		outer dimensions					major dimensions	
	mm	tolerance μm	h mm	E mm	W mm	F mm	L mm	L <sub>2</sub> mm	S <sub>1</sub>
<b>AK 6GUU</b>	6	- 9	14	8	16	22	27	18	M4
<b>AK 8GUU</b>	8		16	10	20	26	32	20	M5
<b>AK10GUU</b>	10		19	13	26	32	39	27	M6
<b>AK12GUU</b>	12		20	14	28	34	40	27	M6
<b>AK13GUU</b>	13		25	15	30	43	42	28	M6
<b>AK16GUU</b>	16		27	18	36	49	47	32	M6
<b>AK20GUU</b>	20	-10	31	21	42	54	52	36	M8
<b>AK25GUU</b>	25		37	26	52	65	69	42	M10
<b>AK30GUU</b>	30		40	29	58	71	74	44	M10

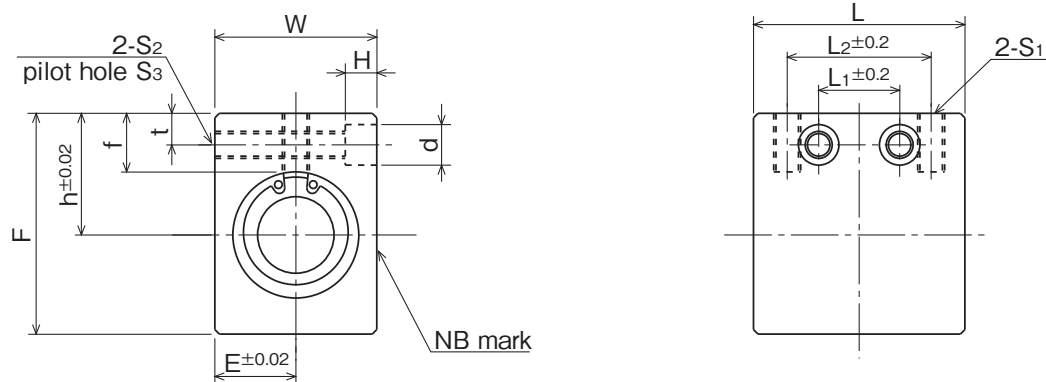SLIDE BUSH



SLIDE BUSH

mounting dimensions							basic load rating		mass	shaft diameter
f mm	L <sub>1</sub> mm	t mm	S <sub>2</sub>	S <sub>3</sub> mm	d mm	H mm	C N	Co N	g	mm
8	9	5	M4	3.5	6	5	206	265	25	6
8.5	10	5	M4	3.5	6	5	274	392	47	8
9.5	15	6	M5	4.5	8	6	372	549	98	10
9.5	15	6	M5	4.5	8	6	510	784	109	12
13.5	16	7	M6	5.2	9	7	510	784	154	13
13	18	7	M6	5.2	9	7	774	1,180	235	16
15	18	8	M8	7	11	8	882	1,370	302	20
17	22	9	M10	8.9	14	10	980	1,570	664	25
17.5	22	9	M10	8.9	14	10	1,570	2,740	800	30

1N≅0.102kgf


NIPPON BEARING

# AK-W TYPE

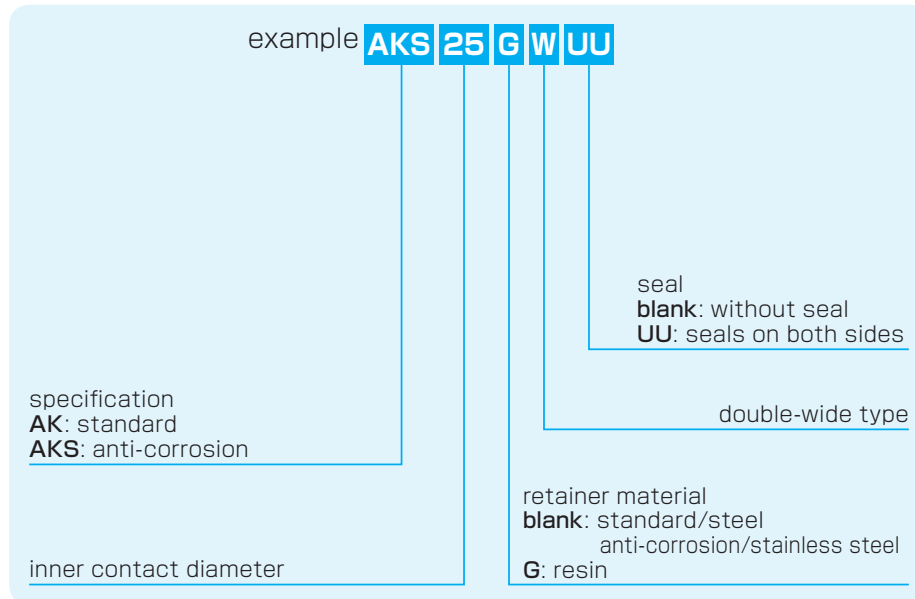– Double-Wide Compact Block Type –




## part number structure



part number	inner contact diameter		outer dimensions					major dimensions	
	mm	tolerance μm	h mm	E mm	W mm	F mm	L mm	L <sub>2</sub> mm	S <sub>1</sub>
<b>AK 6GWUU</b>	6	- 9	14	8	16	22	46	20	M4
<b>AK 8GWUU</b>	8		16	10	20	26	56	30	M5
<b>AK10GWUU</b>	10		19	13	26	32	68	36	M6
<b>AK12GWUU</b>	12		20	14	28	34	70	36	M6
<b>AK13GWUU</b>	13		25	15	30	43	74	42	M6
<b>AK16GWUU</b>	16		27	18	36	49	84	52	M6
<b>AK20GWUU</b>	20	-10	31	21	42	54	94	58	M8
<b>AK25GWUU</b>	25		37	26	52	65	128	80	M10
<b>AK30GWUU</b>	30		40	29	58	71	138	90	M10

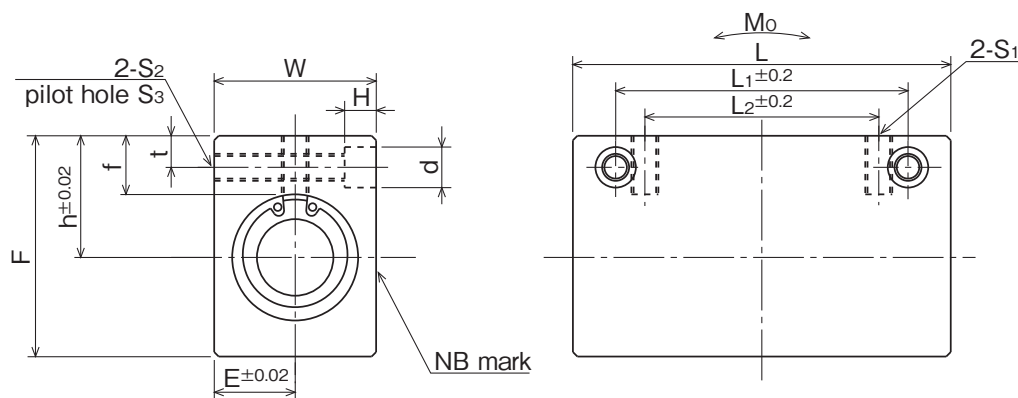SLIDE BUSH



SLIDE BUSH

f mm	mounting dimensions						basic load rating		allowable static moment $M_o$ N · m	mass g	shaft diameter mm
	$L_1$ mm	t mm	$S_2$	$S_3$ mm	d mm	H mm	C N	$C_o$ N			
8	30	5	M4	3.5	6	5	323	530	2.18	47	6
8.5	42	5	M4	3.5	6	5	431	784	4.31	89	8
9.5	50	6	M5	4.5	8	6	588	1,100	7.24	186	10
9.5	50	6	M5	4.5	8	6	813	1,570	10.9	206	12
13.5	55	7	M6	5.2	9	7	813	1,570	11.6	292	13
13	65	7	M6	5.2	9	7	1,230	2,350	19.7	445	16
15	70	8	M8	7	11	8	1,400	2,740	26.8	580	20
17	100	9	M10	8.9	14	10	1,560	3,140	43.4	1,300	25
17.5	110	9	M10	8.9	14	10	2,490	5,490	82.8	1,560	30

1N  $\approx$  0.102kgf    1N · m  $\approx$  0.102kgf · m

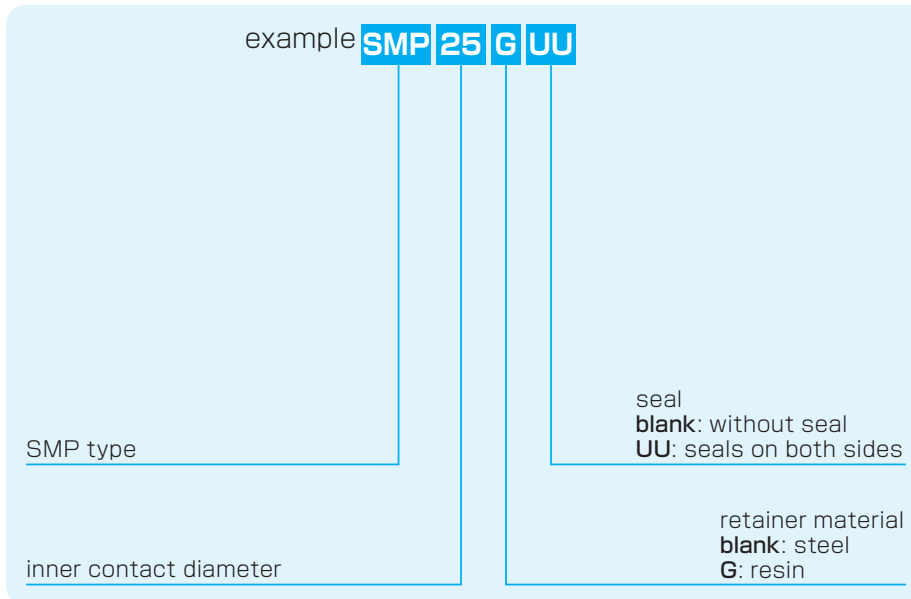
NIPPON BEARING

SMP TYPE

– Pillow Block Type –




part number structure



part number	inner contact diameter		outer dimensions					major dimensions	
	mm	tolerance μm	h mm	E mm	W mm	L mm	F mm	G mm	M mm
<b>SMP13GUU</b>	13	0	25	25	50	32	46	8	36
<b>SMP16GUU</b>	16	- 9	29	27.5	55	37	53	10	40
<b>SMP20GUU</b>	20	0	34	32.5	65	42	62	12	48
<b>SMP25GUU</b>	25	-10	40	38	76	59	73	12	59
<b>SMP30GUU</b>	30		45	42.5	85	64	84	15	69
<b>SMP35GUU</b>	35	0	50	49	98	70	94	15	76
<b>SMP40GUU</b>	40	-12	60	62	124	80	112	18	86
<b>SMP50GUU</b>	50		70	72	144	100	134	20	105
<b>SMP60GUU</b>	60	0/-15	82	84.5	169	110	154	23	115

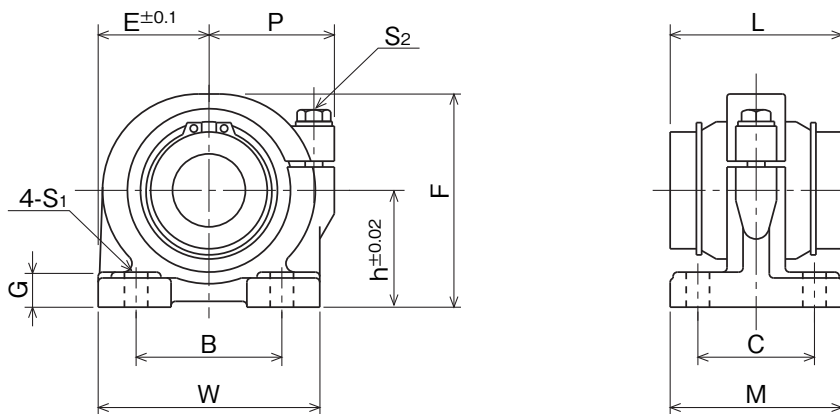SLIDE BUSH



SLIDE BUSH


P mm	mounting dimensions			adjustment screw		basic load rating		mass g	shaft diameter mm
	B mm	C mm	S <sub>1</sub> mm	size S <sub>2</sub>	recommended torque N · m	C N	static Co N		
30	30	26	7 (M5)	M5	3	510	784	270	13
32	35	29	7 (M5)	M5	3	774	1,180	380	16
37	40	35	8 (M6)	M6	5.5	882	1,370	680	20
43	50	40	8 (M6)	M6	5.5	980	1,570	1,000	25
49	58	46	10 (M8)	M8	13.5	1,570	2,740	1,400	30
58	62	53	12 (M10)	M10	29	1,670	3,140	2,100	35
68	76	64	12 (M10)	M10	29	2,160	4,020	3,700	40
80	100	70	14 (M12)	M12	29	3,820	7,940	6,100	50
88	115	80	14 (M12)	M12	29	4,700	10,000	8,700	60

1N ≅ 0.102kgf


NIPPON BEARING

# SMJ TYPE

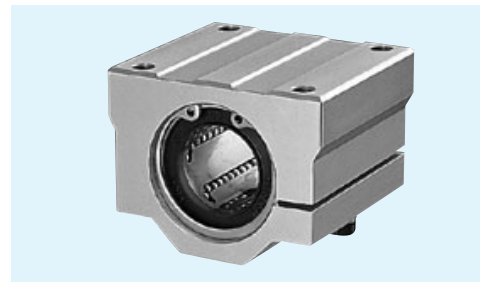– Clearance Adjustable Type –



## part number structure

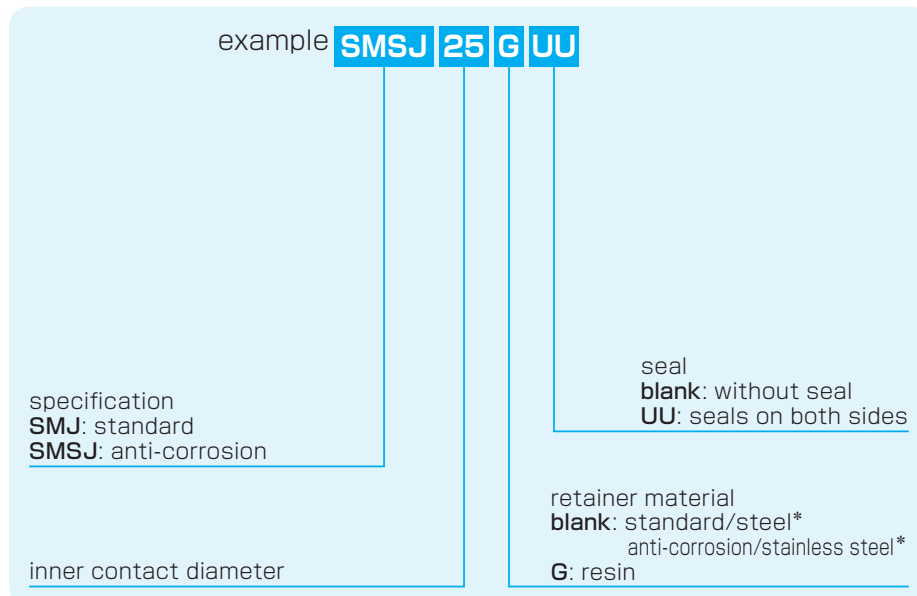


\*Size 10 is provided with resin retainer type only.

part number	inner contact diameter mm	outer dimensions					major dimensions		
		h mm	E mm	W mm	L mm	F mm	G mm	T mm	B mm
<b>SMJ10GUU</b>	10	13	20	40	35	26	21	8	28
<b>SMJ12GUU</b>	12	15	21	42	36	28	24	8	30.5
<b>SMJ13GUU</b>	13	15	22	44	39	30	24.5	8	33
<b>SMJ16GUU</b>	16	19	25	50	44	38.5	32.5	9	36
<b>SMJ20GUU</b>	20	21	27	54	50	41	35	11	40
<b>SMJ25GUU</b>	25	26	38	76	67	51.5	42	12	54
<b>SMJ30GUU</b>	30	30	39	78	72	59.5	49	15	58
<b>SMJ35GUU</b>	35	34	45	90	80	68	54	18	70
<b>SMJ40GUU</b>	40	40	51	102	90	78	62	20	80
<b>SMJ50GUU</b>	50	52	61	122	110	102	80	25	100
<b>SMJ60GUU</b>	60	58	66	132	122	114	94	30	108



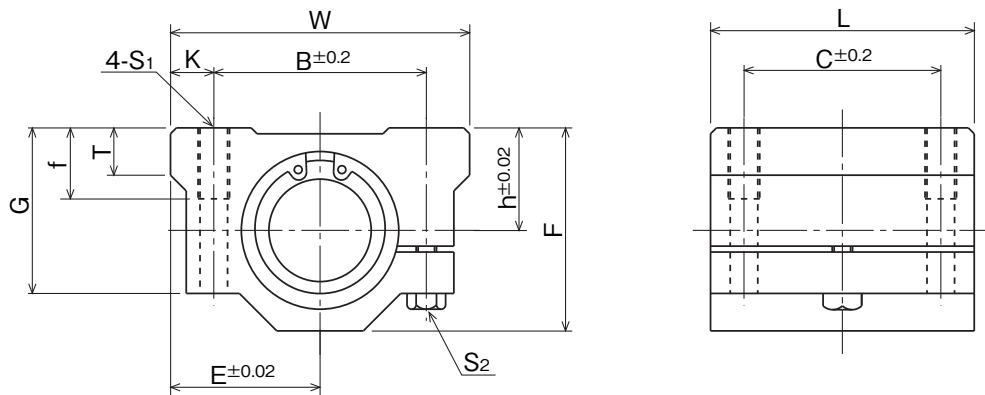SLIDE BUSH



SLIDE BUSH

mounting dimensions				adjustment screw size S <sub>2</sub>	basic load rating		mass g	shaft diameter mm
C mm	K mm	S <sub>1</sub>	f mm		dynamic C N	static Co N		
21	6	M5	12	M4	372	549	92	10
26	5.75	M5	12	M4	510	784	102	12
26	5.5	M5	12	M4	510	784	120	13
34	7	M5	12	M4	774	1,180	200	16
40	7	M6	12	M5	882	1,370	255	20
50	11	M8	18	M6	980	1,570	600	25
58	10	M8	18	M6	1,570	2,740	735	30
60	10	M8	18	M6	1,670	3,140	1,100	35
60	11	M10	25	M8	2,160	4,020	1,590	40
80	11	M10	25	M8	3,820	7,940	3,340	50
90	12	M12	25	M10	4,700	10,000	4,270	60

1N ≅ 0.102kgf

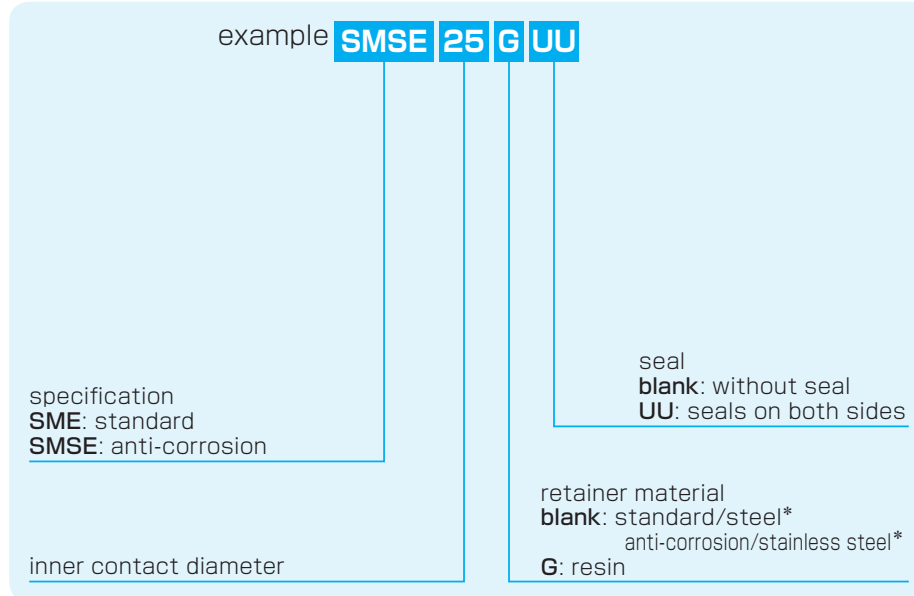
NIPPON BEARING

SME TYPE

– Open Block Type –




part number structure



\*Size 10 is provided with resin retainer type only.

part number	inner contact diameter mm	outer dimensions						major dimensions	
		h mm	E mm	W mm	L mm	F mm	T mm	h <sub>1</sub> mm	θ
<b>SME10GUU</b>	10	15	18	36	32	24	7	6	80°
<b>SME13GUU</b>	13	17	20	40	39	28	8	8.5	80°
<b>SME16GUU</b>	16	20	22.5	45	45	33	9	10	80°
<b>SME20GUU</b>	20	23	24	48	50	39	11	10	60°
<b>SME25GUU</b>	25	27	30	60	65	47	14	11.5	50°
<b>SME30GUU</b>	30	33	35	70	70	56	15	14	50°
<b>SME35GUU</b>	35	37	40	80	80	63	18	16	50°
<b>SME40GUU</b>	40	42	45	90	90	72	20	19	50°
<b>SME50GUU</b>	50	53	60	120	110	92	25	23	50°

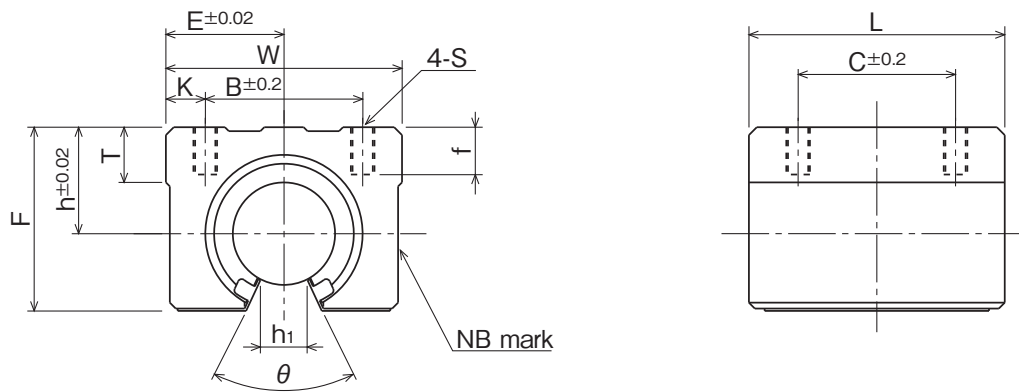SLIDE BUSH



SLIDE BUSH

B mm	mounting dimensions				basic load rating		mass g	shaft diameter mm
	C mm	K mm	S	f mm	dynamic C N	static Co N		
25	20	5.5	M5	10	372	549	65	10
28	26	6	M5	10	510	784	100	13
32	30	6.5	M5	12	774	1,180	150	16
35	35	6.5	M6	12	882	1,370	200	20
40	40	10	M6	12	980	1,570	450	25
50	50	10	M8	18	1,570	2,740	630	30
55	55	12.5	M8	18	1,670	3,140	925	35
65	65	12.5	M10	20	2,160	4,020	1,330	40
94	80	13	M10	20	3,820	7,940	3,000	50

1N≅0.102kgf

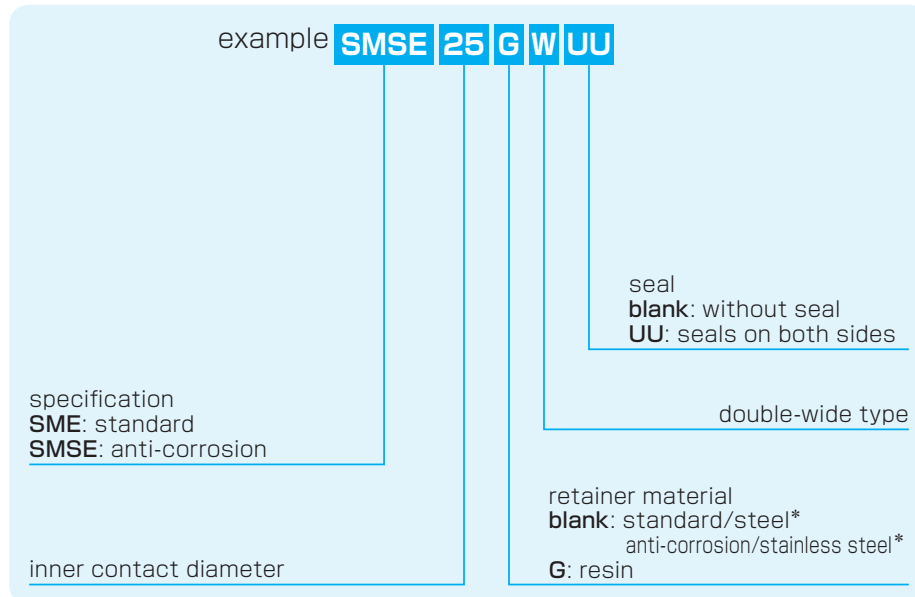
NIPPON BEARING

SME-W TYPE

– Double-wide Open Block Type –




part number structure



\*Size 10 is provided with resin retainer type only.

part number	inner contact diameter mm	outer dimensions						major dimensions		
		h mm	E mm	W mm	L mm	F mm	T mm	N mm	h <sub>1</sub> mm	θ
SME10GWUU	10	15	18	36	65	24	7	7.5	6	80°
SME13GWUU	13	17	20	40	75	28	8	7.5	8.5	80°
SME16GWUU	16	20	22.5	45	85	33	9	7.5	10	80°
SME20GWUU	20	23	24	48	95	39	11	7.5	10	60°
SME25GWUU	25	27	30	60	130	47	14	7.5	11.5	50°
SME30GWUU	30	33	35	70	140	56	15	7.5	14	50°

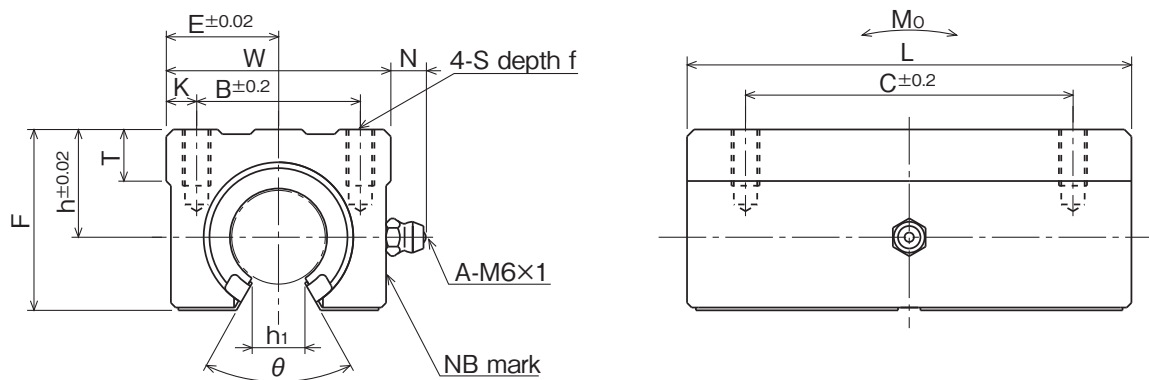SLIDE BUSH



SLIDE BUSH


B mm	mounting dimensions				basic load rating		allowable static moment $M_o$ N · m	mass g	shaft diameter mm
	C mm	K mm	S	f mm	dynamic C N	static $C_o$ N			
25	40	5.5	M5	10	588	1,100	4.63	140	10
28	50	6	M5	10	813	1,570	7.42	200	13
32	60	6.5	M5	12	1,230	2,350	12.6	300	16
35	70	6.5	M6	12	1,400	2,740	14.5	400	20
40	90	10	M6	12	1,560	3,140	24.7	900	25
50	100	10	M8	18	2,490	5,490	47.2	1,260	30

1N  $\doteq$  0.102kgf 1N · m  $\doteq$  0.102kgf · m


NIPPON BEARING

SMD TYPE

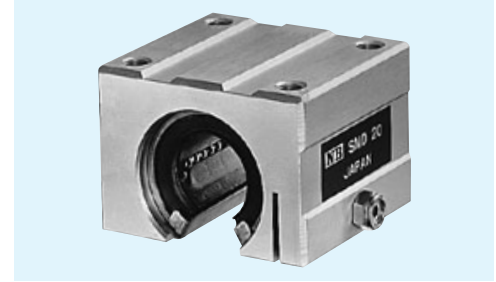— Open Block with Clearance Adjustable Type —




part number structure

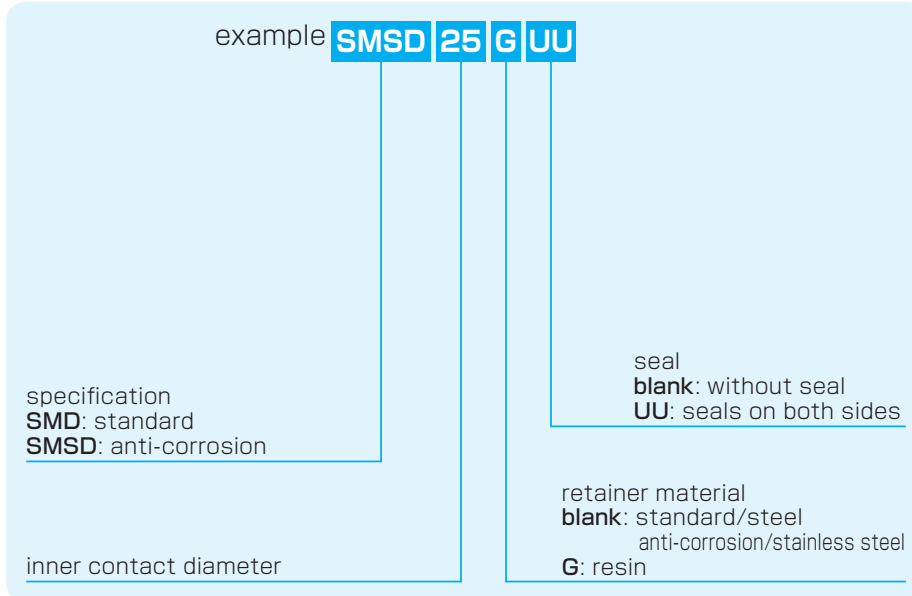

part number	inner contact diameter mm	outer dimensions						major dimensions		
		h mm	E mm	W mm	L mm	F mm	T mm	G mm	h <sub>1</sub> mm	θ
<b>SMD16GUU</b>	16	20	25	50	45	33	9	6	10	80°
<b>SMD20GUU</b>	20	23	27	54	50	39	11	7	10	60°
<b>SMD25GUU</b>	25	27	38	76	65	47	14	7	11.5	50°
<b>SMD30GUU</b>	30	33	39	78	70	56	15	7	14	50°

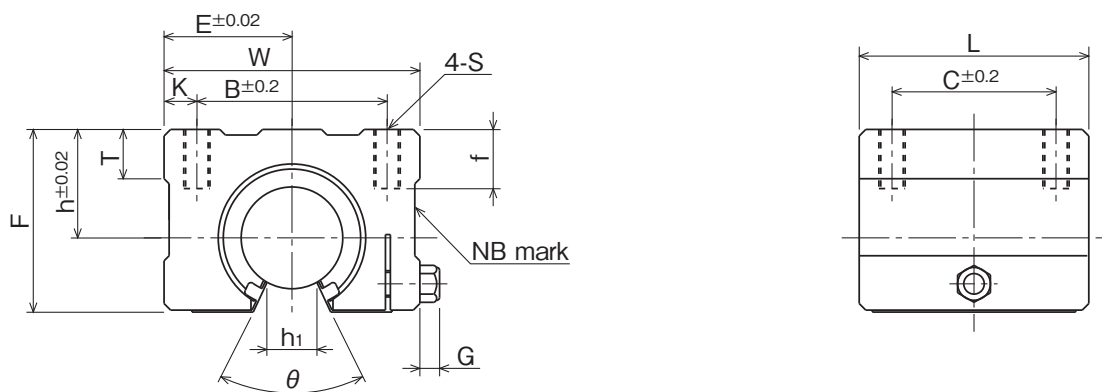SLIDE BUSH



SLIDE BUSH


B mm	mounting dimensions				basic load rating		mass g	shaft diameter mm
	C mm	K mm	S	f mm	dynamic C N	static Co N		
36	30	7	M5	12	774	1,180	170	16
40	35	7	M6	12	882	1,370	240	20
54	40	11	M6	12	980	1,570	580	25
58	50	10	M8	18	1,570	2,740	720	30

1N  $\approx$  0.102kgf


NIPPON BEARING

CE TYPE

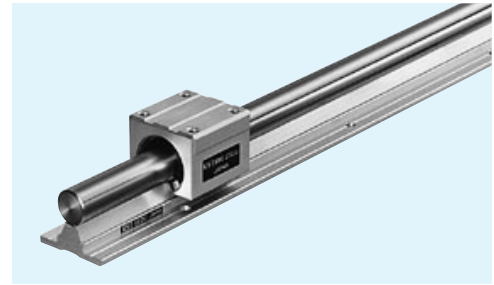– Non-Clearance Adjustable Type –



part number structure

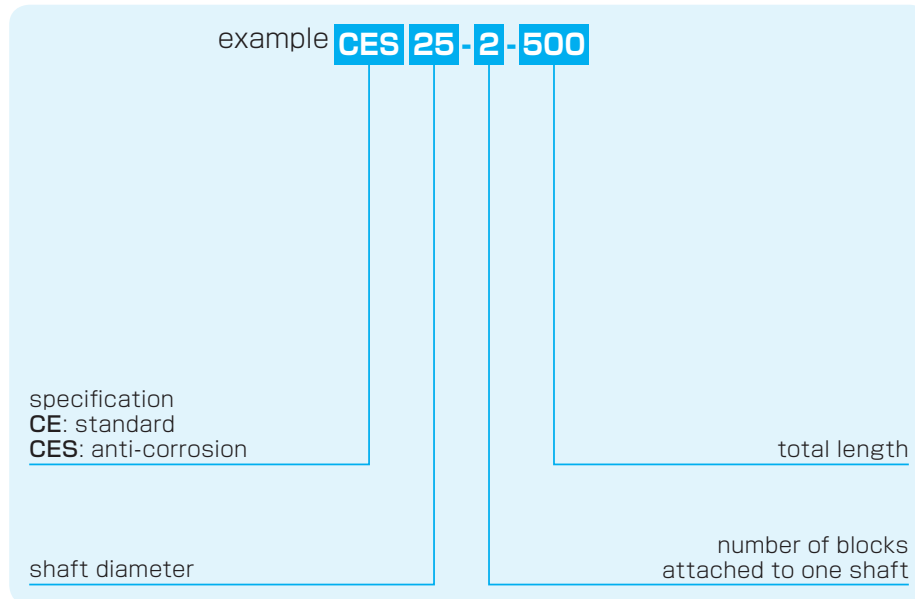


※Inside bush is a resin retainer type with seals.

part number		shaft diameter	tolerance	assembly dimension											major dimensions						
standard	anti-corrosion			mm	g6	μm	H	h	W <sub>1</sub>	W <sub>2</sub>	F	L <sub>1</sub>	B <sub>1</sub>	C	K	T <sub>1</sub>	S <sub>1</sub>	f	W <sub>3</sub>	B <sub>2</sub>	T <sub>2</sub>
CE16	CES16	16	-6	-17	45	25	2.5	45	33	45	32	30	6.5	9	M5	12	40	30	5	150	5.5
CE20	CES20	20			50	27	1.5	48	39	50	35	35	6.5	11	M6	12	45	30	5	150	5.5
CE25	CES25	25	-7	-20	60	33	2.5	60	47	65	40	40	10	14	M6	12	55	35	6	200	6.5
CE30	CES30	30			70	37	5	70	56	70	50	50	10	15	M8	18	60	40	7	200	6.5



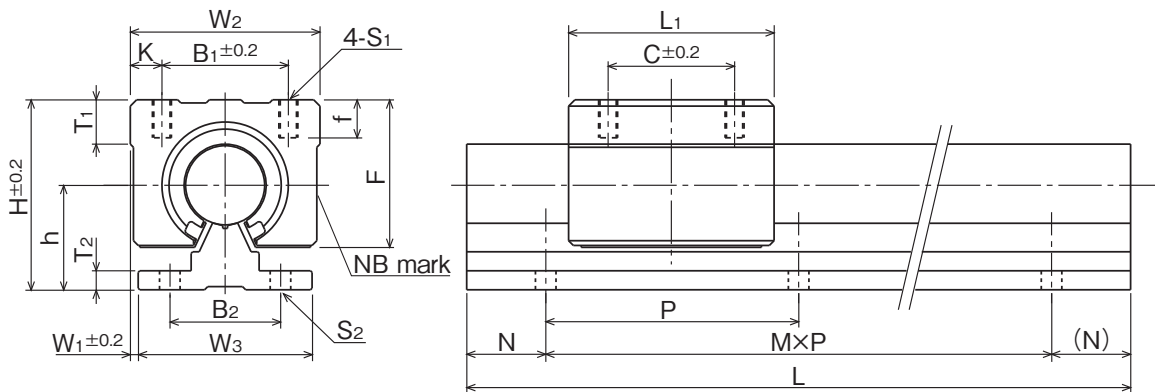SLIDE BUSH



SLIDE BUSH


support rail dimensions L (M,N) mm				basic load rating		mass		size
				dynamic C N	static Co N	block g	rail kg/m	
300 (1,75)	500 (3,25)	800 (5,25)	1,000 (6,50)	774	1,180	150	2.58	<b>16</b>
1,500 (9,75)	1,800 (11,75)	2,000 (13,25)						
300 (1,75)	500 (3,25)	800 (5,25)	1,000 (6,50)	882	1,370	200	3.49	<b>20</b>
1,500 (9,75)	1,800 (11,75)	2,000 (13,25)						
300 (1,50)	500 (2,50)	800 (3,100)	1,000 (4,100)	980	1,570	450	5.31	<b>25</b>
1,500 (7,50)	1,800 (8,100)	2,000 (9,100)						
300 (1,50)	500 (2,50)	800 (3,100)	1,000 (4,100)	1,570	2,740	630	7.39	<b>30</b>
1,500 (7,50)	1,800 (8,100)	2,000 (9,100)						

1N≅0.102kgf


NIPPON BEARING

CD TYPE

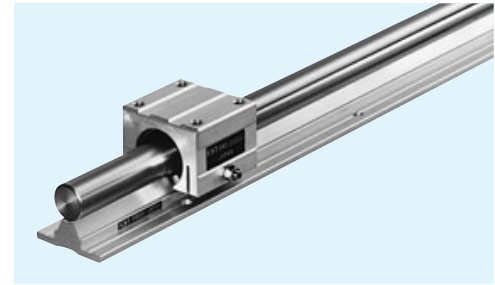– Clearance Adjustable Type –




part number structure

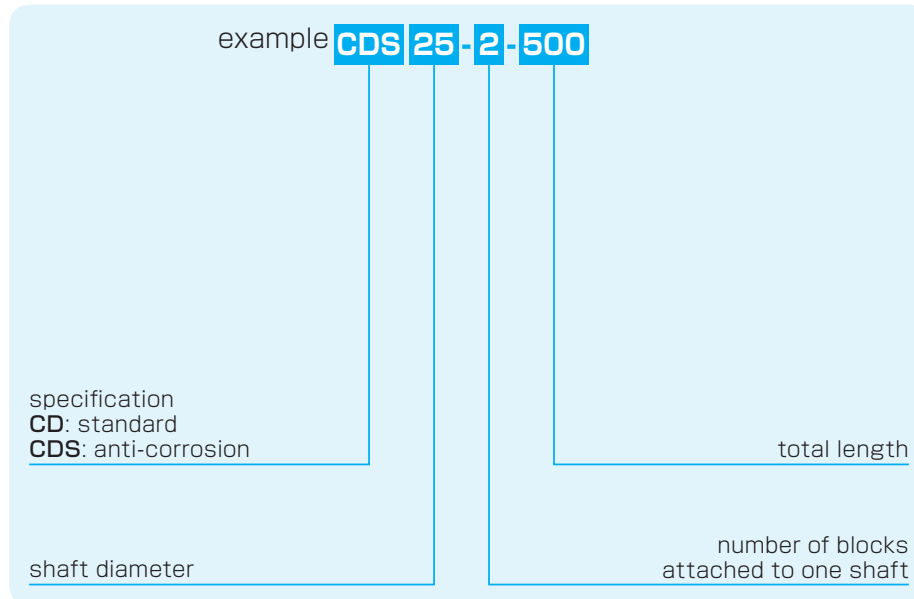

※Inside bush is a resin retainer type with seals.

part number		shaft diameter	assembly dimension	block dimension											major dimensions						
standard	anti-corrosion			tolerance	H	h	W <sub>1</sub>	W <sub>2</sub>	F	L <sub>1</sub>	B <sub>1</sub>	C	K	T <sub>1</sub>	S <sub>1</sub>	f	G	W <sub>3</sub>	B <sub>2</sub>	T <sub>2</sub>	P
		mm	g6 μm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
<b>CD16</b>	<b>CDS16</b>	16	-6 -17	45	25	5	50	33	45	36	30	7	9	M5	12	6	40	30	5	150	5.5
<b>CD20</b>	<b>CDS20</b>	20		50	27	4.5	54	39	50	40	35	7	11	M6	12	7	45	30	5	150	5.5
<b>CD25</b>	<b>CDS25</b>	25	-7 -20	60	33	10.5	76	47	65	54	40	11	12	M6	12	7	55	35	6	200	6.5
<b>CD30</b>	<b>CDS30</b>	30		70	37	9	78	56	70	58	50	10	15	M8	18	7	60	40	7	200	6.5

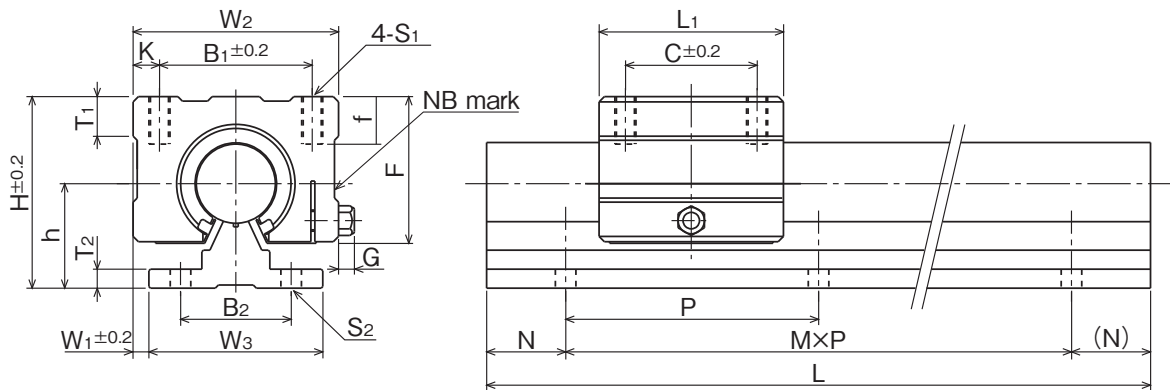SLIDE BUSH



SLIDE BUSH

support rail dimensions L (M,N) mm				basic load rating		mass		size
				dynamic C N	static Co N	block g	rail kg/m	
300 (1,75)	500 (3,25)	800 (5,25)	1,000 (6,50)	774	1,180	170	2.58	<b>16</b>
1,500 (9,75)	1,800 (11,75)	2,000 (13,25)						
300 (1,75)	500 (3,25)	800 (5,25)	1,000 (6,50)	882	1,370	240	3.49	<b>20</b>
1,500 (9,75)	1,800 (11,75)	2,000 (13,25)						
300 (1,50)	500 (2,50)	800 (3,100)	1,000 (4,100)	980	1,570	580	5.31	<b>25</b>
1,500 (7,50)	1,800 (8,100)	2,000 (9,100)						
300 (1,50)	500 (2,50)	800 (3,100)	1,000 (4,100)	1,570	2,740	720	7.39	<b>30</b>
1,500 (7,50)	1,800 (8,100)	2,000 (9,100)						

1N  $\approx$  0.102kgf

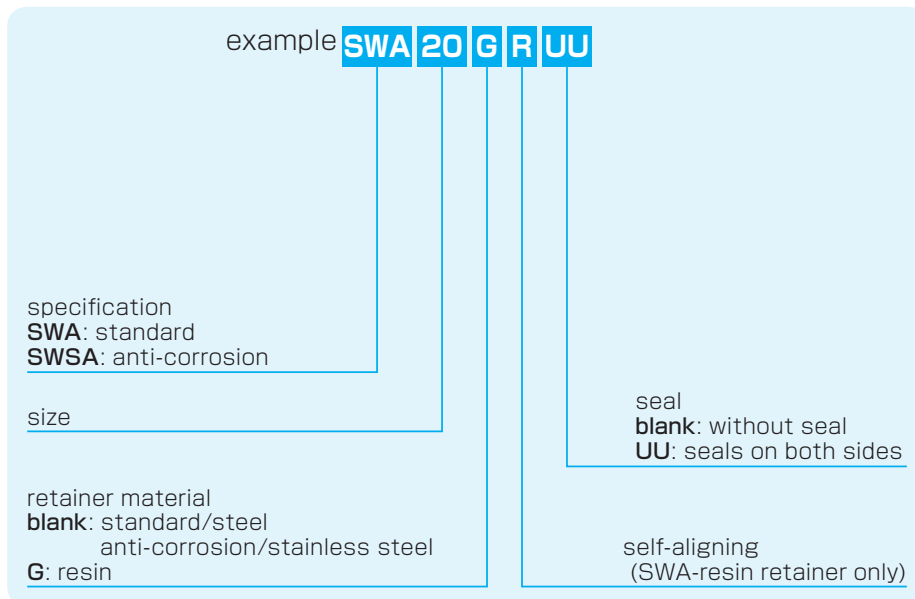
NIPPON BEARING

SWA TYPE (Inch Standard)

– Block Type –





part number structure



part number	inner contact diameter tolerance		major dimensions outer dimensions				
	inch/(mm)	inch/( $\mu$ m)	h $\pm .001/(\pm 0.02)$ inch/(mm)	E $\pm .001/(\pm 0.02)$ inch/(mm)	W inch/(mm)	L inch/(mm)	F inch/(mm)
<b>SWA 4GUU</b>	.2500 (6.350)	0 -.00040 (-9)	.4370 (11.100)	.8125 (20.638)	1.625 (41.28)	1.188 (30.16)	.813 (20.64)
<b>SWA 6GUU</b>	.3750 (9.525)		.5000 (12.700)	.8750 (22.225)	1.750 (44.45)	1.313 (33.34)	.938 (23.82)
<b>SWA 8GUU</b>	.5000 (12.700)		.6870 (17.450)	1.0000 (25.400)	2.000 (50.80)	1.688 (42.86)	1.250 (31.75)
<b>SWA 10GUU</b>	.6250 (15.875)		.8750 (22.225)	1.2500 (31.750)	2.500 (63.50)	1.938 (49.21)	1.625 (41.28)
<b>SWA 12GUU</b>	.7500 (19.050)		0 -.00040 (-10)	.9370 (23.800)	1.3750 (34.925)	2.750 (69.85)	2.063 (52.39)
<b>SWA 16GUU</b>	1.0000 (25.400)	1.1870 (30.150)		1.6250 (41.275)	3.250 (82.55)	2.813 (71.44)	2.188 (55.56)
<b>SWA 20GUU</b>	1.2500 (31.750)	0 -.00050 (-12)		1.5000 (38.100)	2.0000 (50.800)	4.000 (101.60)	3.625 (92.08)
<b>SWA 24GUU</b>	1.5000 (38.100)		1.7500 (44.450)	2.3750 (60.325)	4.750 (120.65)	4.000 (101.60)	3.250 (82.55)
<b>SWA 32GUU</b>	2.0000 (50.800)		2.1250 (53.975)	3.0000 (76.200)	6.000 (152.40)	5.000 (127.00)	4.063 (103.19)

Product of NB Corporation of America

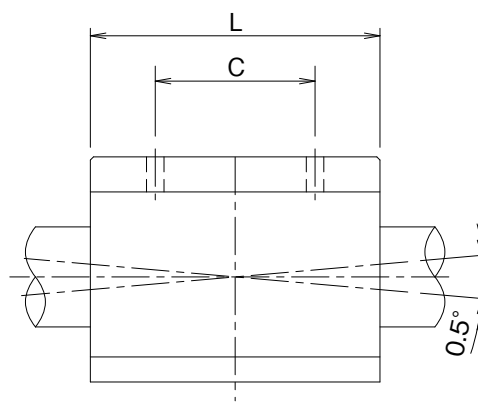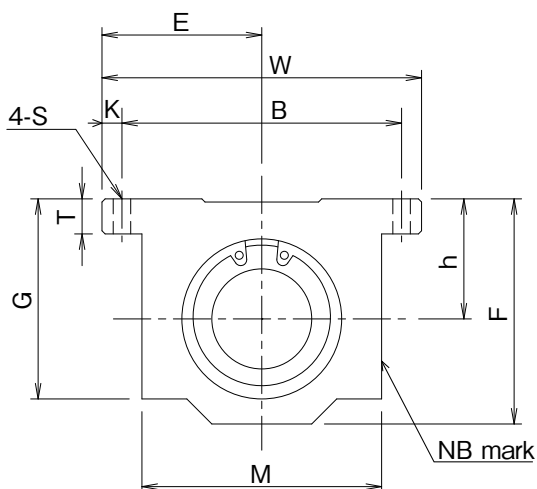SLIDE BUSH



self-aligning in all directions by using SWA...GRUU

SLIDE BUSH


T	G	M	mounting dimensions				basic load rating		mass
			B ±.01/(±0.2)	C ±.01/(±0.2)	K	S	dynamic C	static Co	
inch/(mm)	inch/(mm)	inch/(mm)	inch/(mm)	inch/(mm)	inch/(mm)	inch/(mm)	N	N	g
.188 (4.76)	.750 (19.05)	1.000 (25.40)	1.312 (33.33)	.750 (19.05)	.156 (3.96)	.156 (3.96)	206	265	45
.188 (4.76)	.875 (22.23)	1.125 (28.58)	1.437 (36.50)	.875 (22.23)	.156 (3.96)	.156 (3.96)	225	314	62
.250 (6.35)	1.125 (28.58)	1.375 (34.93)	1.688 (42.88)	1.000 (25.40)	.156 (3.96)	.156 (3.96)	510	784	130
.281 (7.14)	1.437 (36.50)	1.750 (44.45)	2.125 (53.98)	1.125 (28.58)	.188 (4.76)	.188 (4.76)	774	1,180	240
.313 (7.94)	1.563 (39.69)	1.875 (47.63)	2.375 (60.33)	1.250 (31.75)	.188 (4.76)	.188 (4.76)	862	1,370	290
.375 (9.53)	1.938 (49.21)	2.375 (60.33)	2.875 (73.03)	1.750 (44.45)	.188 (4.76)	.219 (5.56)	980	1,570	615
.438 (11.11)	2.500 (63.50)	3.000 (76.20)	3.500 (88.90)	2.000 (50.80)	.250 (6.35)	.219 (5.56)	1,570	2,740	1,300
.500 (12.70)	2.875 (73.03)	3.500 (88.90)	4.125 (104.78)	2.500 (63.50)	.313 (7.94)	.281 (7.14)	2,160	4,020	1,900
.625 (15.88)	3.625 (92.08)	4.500 (114.30)	5.250 (133.35)	3.250 (82.55)	.375 (9.53)	.413 (10.50)	3,820	7,940	3,600

SI UNIT 1N≅0.225lbf  
1kg≅2.205lbs


NIPPON BEARING

**SWJ TYPE** (Inch Standard)

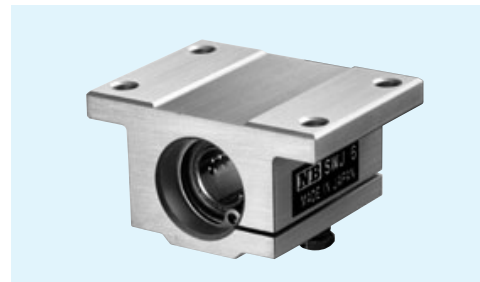– Clearance Adjustable Block Type –





part number structure

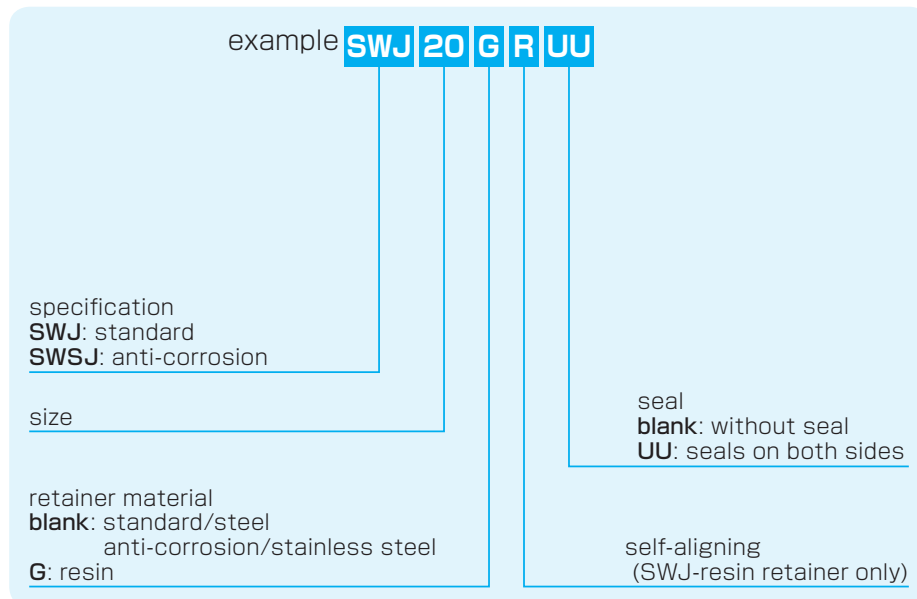

part number	inner contact diameter inch/(mm)	major dimensions outer dimensions				
		h ±.001/(±0.02) inch/(mm)	E ±.001/(±0.02) inch/(mm)	W inch/(mm)	L inch/(mm)	F inch/(mm)
<b>SWJ 4GUU</b>	.2500 (6.350)	.4370 (11.100)	.8125 (20.638)	1.625 (41.28)	1.188 (30.16)	.813 (20.64)
<b>SWJ 6GUU</b>	.3750 (9.525)	.5000 (12.700)	.8750 (22.225)	1.750 (44.45)	1.313 (33.34)	.938 (23.82)
<b>SWJ 8GUU</b>	.5000 (12.700)	.6870 (17.450)	1.0000 (25.400)	2.000 (50.80)	1.688 (42.86)	1.250 (31.75)
<b>SWJ 10GUU</b>	.6250 (15.875)	.8750 (22.225)	1.2500 (31.750)	2.500 (63.50)	1.938 (49.21)	1.625 (41.28)
<b>SWJ 12GUU</b>	.7500 (19.050)	.9370 (23.800)	1.3750 (34.925)	2.750 (69.85)	2.063 (52.39)	1.750 (44.45)
<b>SWJ 16GUU</b>	1.0000 (25.400)	1.1870 (30.150)	1.6250 (41.275)	3.250 (82.55)	2.813 (71.44)	2.188 (55.56)
<b>SWJ 20GUU</b>	1.2500 (31.750)	1.5000 (38.100)	2.0000 (50.800)	4.000 (101.60)	3.625 (92.08)	2.813 (71.44)
<b>SWJ 24GUU</b>	1.5000 (38.100)	1.7500 (44.450)	2.3750 (60.325)	4.750 (120.65)	4.000 (101.60)	3.250 (82.55)
<b>SWJ 32GUU</b>	2.0000 (50.800)	2.1250 (53.975)	3.0000 (76.200)	6.000 (152.40)	5.000 (127.00)	4.063 (103.19)

Product of NB Corporation of America

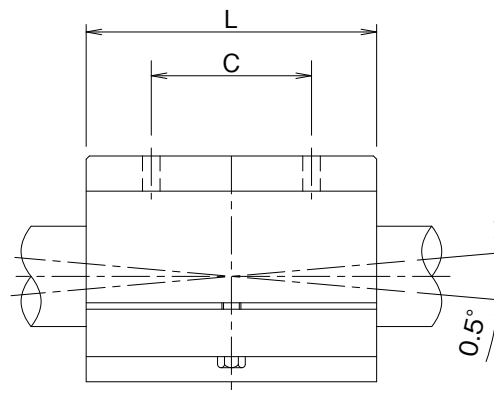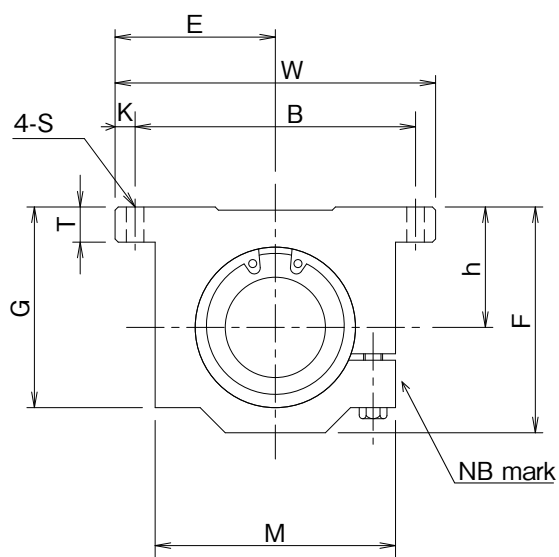SLIDE BUSH



self-aligning in all directions  
by using SWJ...GRUU

SLIDE BUSH

T	G	M	mounting dimensions				basic load rating		mass
			B ±.01/(±0.2)	C ±.01/(±0.2)	K	S	dynamic C	static Co	
inch/(mm)	inch/(mm)	inch/(mm)	inch/(mm)	inch/(mm)	inch/(mm)	inch/(mm)	N	N	g
.188 (4.76)	.750 (19.05)	1.000 (25.40)	1.312 (33.33)	.750 (19.05)	.156 (3.96)	.156 (3.96)	206	265	45
.188 (4.76)	.875 (22.23)	1.125 (28.58)	1.437 (36.50)	.875 (22.23)	.156 (3.96)	.156 (3.96)	225	315	62
.250 (6.35)	1.125 (28.58)	1.375 (34.93)	1.688 (42.88)	1.000 (25.40)	.156 (3.96)	.156 (3.96)	510	784	130
.281 (7.14)	1.437 (36.50)	1.750 (44.45)	2.125 (53.98)	1.125 (28.58)	.188 (4.76)	.188 (4.76)	774	1,180	240
.313 (7.94)	1.563 (39.69)	1.875 (47.63)	2.375 (60.33)	1.250 (31.75)	.188 (4.76)	.188 (4.76)	862	1,370	290
.375 (9.53)	1.938 (49.21)	2.375 (60.33)	2.875 (73.03)	1.750 (44.45)	.188 (4.76)	.219 (5.56)	980	1,570	615
.438 (11.11)	2.500 (63.50)	3.000 (76.20)	3.500 (88.90)	2.000 (50.80)	.250 (6.35)	.219 (5.56)	1,570	2,740	1,300
.500 (12.70)	2.875 (73.03)	3.500 (88.90)	4.125 (104.78)	2.500 (50.80)	.313 (7.94)	.281 (7.14)	2,160	4,020	1,900
.625 (15.88)	3.625 (92.08)	4.500 (114.30)	5.250 (133.35)	3.250 (82.55)	.375 (9.53)	.413 (10.50)	3,820	7,940	3,600

SI UNIT 1N≅0.225lbf  
1kg≅2.205lbs

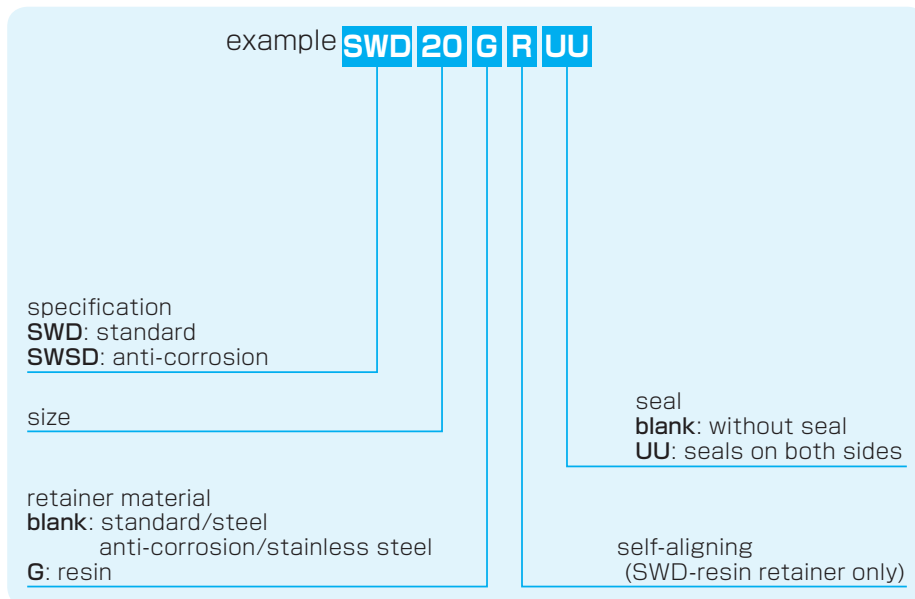
NIPPON BEARING

**SWD TYPE** (Inch Standard)

– Open Block Type –



part number structure




part number	inner contact diameter inch/(mm)	major dimensions outer dimensions						
		h ±.001/(±0.02) inch/(mm)	E ±.001/(±0.02) inch/(mm)	W inch/(mm)	L inch/(mm)	F inch/(mm)	T inch/(mm)	G inch/(mm)
<b>SWD 8GUU</b>	.5000 (12.700)	.6870 (17.450)	1.0000 (25.400)	2.000 (50.80)	1.500 (38.10)	1.100 (27.94)	.250 (6.35)	.688 (17.5)
<b>SWD 10GUU</b>	.6250 (15.875)	.8750 (22.225)	1.2500 (31.750)	2.500 (63.50)	1.750 (44.45)	1.375 (34.93)	.281 (7.14)	.875 (22.23)
<b>SWD 12GUU</b>	.7500 (19.050)	.9370 (23.800)	1.3750 (34.950)	2.750 (69.85)	1.875 (47.63)	1.535 (39.00)	.315 (8.00)	.937 (23.80)
<b>SWD 16GUU</b>	1.0000 (25.400)	1.1870 (30.150)	1.6250 (41.300)	3.250 (82.55)	2.625 (66.68)	1.975 (50.17)	.375 (9.53)	1.188 (30.18)
<b>SWD 20GUU</b>	1.2500 (31.750)	1.5000 (38.100)	2.0000 (50.800)	4.000 (101.60)	3.375 (85.73)	2.485 (63.12)	.437 (11.10)	1.500 (38.10)
<b>SWD 24GUU</b>	1.5000 (38.100)	1.7500 (44.450)	2.3750 (60.325)	4.750 (120.65)	3.750 (95.25)	2.910 (73.90)	.500 (12.70)	1.750 (44.45)
<b>SWD 32GUU</b>	2.0000 (50.800)	2.1250 (53.975)	3.0000 (76.200)	6.000 (152.4)	4.750 (120.65)	3.660 (92.90)	.625 (15.88)	2.250 (57.15)

Product of NB Corporation of America



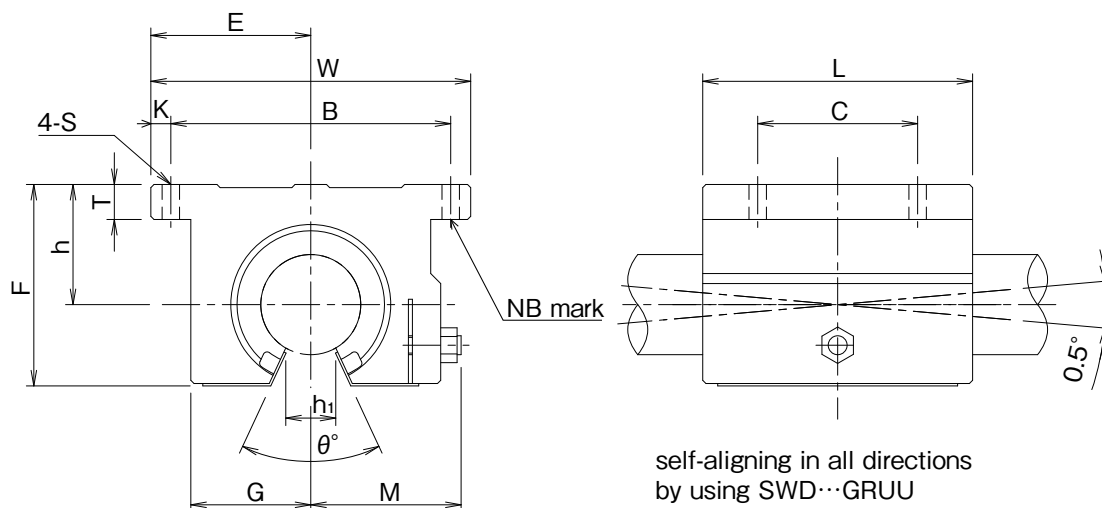SLIDE BUSH



SLIDE BUSH

M	h <sub>1</sub>	$\theta$	mounting dimensions				basic load rating dynamic C	static Co	mass
			B $\pm 0.01/(\pm 0.2)$ inch/(mm)	C $\pm 0.01/(\pm 0.2)$ inch/(mm)	K inch/(mm)	S inch/(mm)			
.98 (24.89)	.3425 (8.70)	80°	1.688 (42.88)	1.000 (25.40)	.156 (3.96)	.156 (3.96)	510	784	98
1.15 (29.21)	.375 (9.53)	80°	2.125 (53.98)	1.125 (28.58)	.188 (4.76)	.188 (4.76)	774	1,180	185
1.23 (31.24)	.4375 (11.11)	60°	2.375 (60.33)	1.250 (31.75)	.188 (4.76)	.188 (4.76)	862	1,370	235
1.48 (37.59)	.5625 (14.29)	50°	2.875 (73.03)	1.750 (44.45)	.188 (4.76)	.219 (5.56)	980	1,570	530
1.88 (47.75)	.625 (15.88)	50°	3.500 (88.90)	2.000 (50.80)	.250 (6.35)	.219 (5.56)	1,570	2,740	1,080
2.12 (53.85)	.750 (19.05)	50°	4.125 (104.78)	2.500 (63.50)	.313 (7.94)	.281 (7.14)	2,160	4,020	1,620
2.70 (68.58)	1.00 (25.40)	50°	5.250 (133.35)	3.250 (82.55)	.375 (9.53)	.413 (10.50)	3,820	7,940	3,100

SI UNIT 1N $\approx$ 0.225lbf  
1kg $\approx$ 2.205lbs