

Remaches Cup-Lock / Cup-Lock Rivets

Descripción:

El remache Cup-lock forma parte de la gama estructural y se caracteriza por su excepcional resistencia, perfecto llenado de agujeros y función multigrip. El remache Cup-lock es excelente para la fijación duradera en aplicaciones de grandes espacios y evita el movimiento de la chapa metálica. La alta resistencia mecánica permite la fijación con menos uso de remaches que otros tipos.


Description:

Cup-lock belongs to the High strength range of rivets with exceptional tensile and share resistance, perfect hole filling and its multigrip function Cup-lock rivet is excellent for tough fixing in applications with large empty spaces and avoids sheet movements. The high mechanical strength allows fixing with a lower consumption of rivets compared to other types.



Tipo de contra - cabeza:
Counterhead type:

Contra-cabeza a bulbo.
Bulb open counterhead.



Estanqueidad entre el cuerpo y el vástago.
Water tightness between body and mandrel.

SI/YES

Aplicación:
Application:

Espesor total de al menos 1,6 mm.
Total thickness 1,6 mm.

Utilizable en superficies irregulares.
Suitable on irregular surfaces.

Partes metálicas y componentes plásticas.
Metal sheet and plastic components.



Cup-Lock / Cup-Lock


Cabeza Alomada / Dome Head



ALUMINIO 5% MG
ALUMINIUM 5% MG



ALUMINIO 7A03
ALUMINIUM 7A03

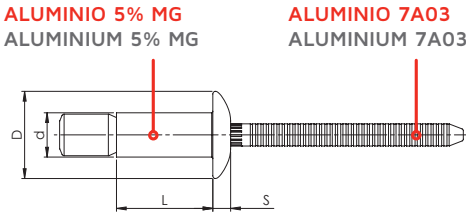


d		Dimensiones		L		Código											
Ø mm.		Sizes		mm.		Code		mm.									
4,8	D= 9,5 mm. S= 2,2 mm. 	10	R0524810	1,6 - 6,9		2000	2400	500	5.000								
	Ø 4,9 - 5,1 mm.	14	R0524814	1,6 - 11,0				500	5.000								
6,4	D= 12,7 mm. S= 3,0 mm. 	14	R0526414	2,0 - 9,5		3600	5600	250	2.500								
	Ø 6,6 - 6,9 mm.	20	R0526420	2,0 - 15,9				200	2.000								
9,8	D= 19,0 mm. S= 4,4 mm. 	21	R0529821	3,1 - 14,5		8455	13100	50	500								
Ø 10,0 - 10,4 mm.																	

No es necesaria boquilla especial para su instalación.
It is not necessary a special nosepiece for its installation.

Cabeza Avellanada / Countersunk Head

Cup-Lock / Cup-Lock

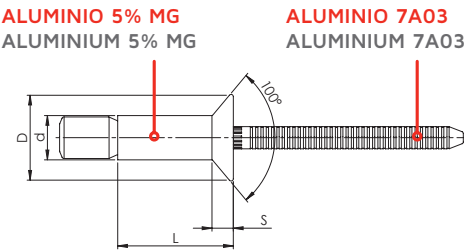

ALUMINIO 5% MG
ALUMINIUM 5% MG

ALUMINIO 7A03
ALUMINIUM 7A03

d Ø mm.	Dimensiones Sizes	L mm.	Código Code	E mm.	N	N	500	5.000
4,8	D= 8,8 mm. S= 1,8 mm. Ø 4,9 - 5,1 mm.	13	R0534813	3,2 - 8,4	2000	2400	500	5.000
		17	R0534817	7,7 - 12,7			500	5.000
6,4	D= 10,6 mm. S= 2,0 mm. Ø 6,6 - 6,9 mm.	17	R0536417	4,1 - 12,1	3600	5600	250	2.500
		23,5	R05364235	10,5 - 18,4			200	2.000

No es necesaria boquilla especial para su instalación.
It is not necessary a special nosepiece for its installation.

Cup-Lock / Cup-Lock


Cabeza Alomada / Dome Head



ACERO CINCADO
ZINC PLATED STEEL



ACERO CINCADO
ZINC PLATED STEEL

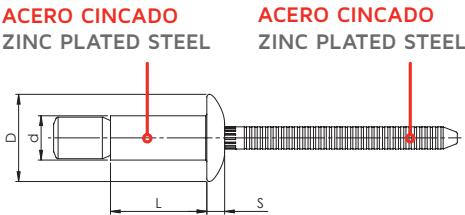


d Ø mm.	Dimensiones Sizes	L mm.	Código Code	 E mm.	 N mm.	 N mm.		
4,8	D= 9,5 mm. S= 2,2 mm.  Ø 4,9 - 5,1 mm.	10	R0504810	1,6 - 6,9	4400	5700	500	5.000
		14	R0504814	1,6 - 11,0			500	5.000
6,4	D= 12,7 mm. S= 3,0 mm.  Ø 6,6 - 6,9 mm.	14	R0506414	2,0 - 9,5	8200	10600	250	2.500
		20	R0506420	2,0 - 15,9			200	2.000
		26	R0506426	14,7 - 22,2			200	2.000
		33	R0506433	21,1 - 28,6			200	2.000
		39	R0506439	27,4 - 35,0			150	1.500
9,8	D= 19,0 mm. S= 4,4 mm.  Ø 10,0 - 10,4 mm.	21	R0509821	3,1 - 14,5	17800	24920	50	500

No es necesaria boquilla especial para su instalación.
It is not necessary a special nosepiece for its installation.

Cabeza Avellanada / Countersunk Head

Cup-Lock / Cup-Lock

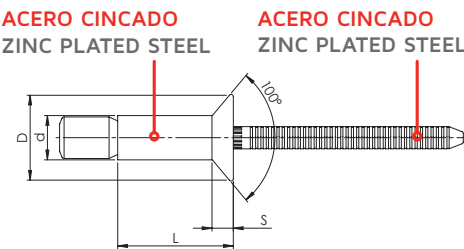


ACERO CINCADO
ZINC PLATED STEEL


ACERO CINCADO
ZINC PLATED STEEL

d Ø mm.	Dimensiones Sizes	L mm.	Código Code	 mm.	 N	 N		
4,8	D= 8,8 mm. S= 1,8 mm.  Ø 4,9 - 5,1 mm.	13	R0514813	3,2 - 8,4	4400	5700	500	5.000
		17	R0514817	7,7 - 12,7			500	5.000
6,4	D= 10,6 mm. S= 2,0 mm.  Ø 6,6 - 6,9 mm.	17	R0516417	4,1 - 12,1	8200	10600	250	2.500
		23,5	R05164235	10,5 - 18,4			200	2.000
9,8	D= 16,0 mm. S= 3,4 mm.  Ø 10,0 - 10,4 mm.	25	R0519825	6,1 - 19,1	17800	24920	50	500

No es necesaria boquilla especial para su instalación.
It is not necessary a special nosepiece for its installation.

Cup-Lock / Cup-Lock


Cabeza Alomada / Dome Head



ACERO INOXIDABLE A2
STAINLESS STEEL A2



ACERO INOXIDABLE A2
STAINLESS STEEL A2

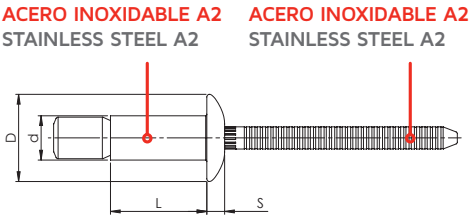


d Ø mm.	Dimensiones Sizes	L mm.	Código Code	 E mm.	 N mm.	 N mm.		
4,8	D= 9,5 mm. S= 2,2 mm.  Ø 4,9 - 5,1 mm.	10,5	R07248105	1,6 - 6,9	4400	5700	500	5.000
		14,5	R07248145	1,6 - 11,0			500	5.000
6,4	D= 12,7 mm. S= 3,0 mm.  Ø 6,6 - 6,9 mm.	14,5	R07264145	2,0 - 9,5	8200	10500	250	2.500
		20,5	R07264205	2,0 - 15,9			200	2.000
9,8	D= 19,0 mm. S= 4,4 mm.  Ø 10,0 - 10,4 mm.	21	R0729821	3,0 - 15,9	19200	26080	50	500

No es necesaria boquilla especial para su instalación.
It is not necessary a special nosepiece for its installation.

Cabeza Avellanada / Countersunk Head

Cup-Lock / Cup-Lock

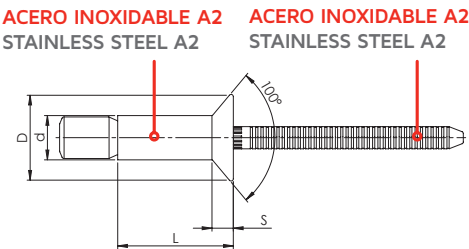


ACERO INOXIDABLE A2
STAINLESS STEEL A2


ACERO INOXIDABLE A2
STAINLESS STEEL A2



d Ø mm.	Dimensiones Sizes	L mm.	Código Code	 E mm.	 N	 N		
4,8	D= 8,8 mm. S= 1,8 mm.  Ø 4,9 - 5,1 mm.	13	R0734813	3,2 - 8,4	4400	5700	500	5.000
		17	R0734817	4,1 - 12,1			500	5.000
6,4	D= 10,6 mm. S= 2,0 mm.  Ø Ø 6,6 - 6,9 mm.	17	R0736417	4,1 - 12,1	8200	10500	250	2.500
		23,5	R07364235	10,5 - 18,4			200	2.000

No es necesaria boquilla especial para su instalación.
It is not necessary a special nosepiece for its installation.