

Remaches Double Mate / Double Mate Rivets

Descripción:

El remache Doublemate es un remache de aluminio y acero que consta de dos partes separadas: Remache desgarrable + tubular. Esta combinación permite la fijación de un gran espesor que se puede fijar sobre una gran superficie de forma homogénea en ambos lados. Su técnica de conformación y fijación permite la aplicación sobre materiales ligeros, frágiles o blandos como el aluminio, la madera, la fibra de vidrio y el plástico.

Description:


Doublemate rivet is an aluminium or steel rivet divided in two separate parts: A blind rivet + one separate tubular. This combination allows the fixing of a wide grip that can be fixed on a large surface homogeneously on both sides. Its conformation and fixing technique allows the application on light, brittle or soft materials such as aluminium, wood, fiberglass and plastic.



Tipo de contra - cabeza:

Counterhead type:

Doble cabeza alomada.
Double dome head.



Estanqueidad entre el cuerpo y el vástago Water tightness between body and mandrel.	NO
--	----

Aplicación:


Application:

Espesor total de al menos 15.0 mm. Total thickness 15,00 mm.	 15,00 mm
Aplicable en materiales blandos. Applicable on thin materials.	



Cabeza Alomada / Dome Head

Double Mate / Double Mate

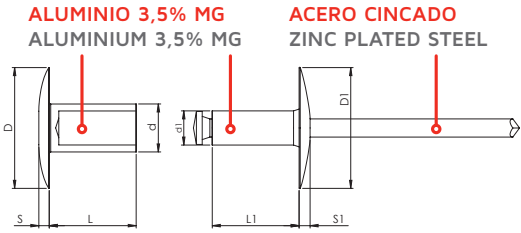

ALUMINIO 3,5% MG
ALUMINIUM 3,5% MG

ACERO CINCADO
ZINC PLATED STEEL



d	Dimensiones	L	L1	Código	E				
Ø mm.	Sizes	mm.	mm.	Code	mm.				
4,8	D= 9,5 mm S= 1,4 mm d= 4,8 mm Ø 6,4 mm. D1= 9,50 mm S1= 1,4 mm d1= 3,2 mm Ø 3,3 mm	14,8	13,3	R20448148	15,8 - 19,0		-	3.000	
		16,4		R20448164	17,5 - 22,2		-	3.000	
		20,9		R20448209	22,2 - 27,0		-	2.000	
		25,7		R20448257	27,0 - 31,7		-	2.000	
		30,5		R20448305	31,7 - 36,5		-	1.500	
		35,2		R20448352	36,5 - 41,3		-	1.500	
		40		R20448400	41,3 - 46,0		-	1.500	
6,4	D= 16,0 mm S= 2,4 mm d= 6,4 mm Ø 7,8 mm D1= 16,0 mm S1= 2,4 mm d1= 4,8 mm Ø 4,9 mm	14,7	11,23	R20464147	15,9 - 19,0		-	2.000	
		17,6		R20464176	19,0 - 22,2		-	2.000	
		20,8	15,44	R20464208	22,2 - 28,6		-	1.500	
		27,2		R20464272	28,6 - 34,9		-	1.500	
		33,5		R20464335	34,9 - 41,3		-	1.000	
		39,9		R20464399	41,3 - 47,6		-	1.000	
		46,2		R20464462	47,6 - 54,0		-	500	
		52,6		R20464525	54,0 - 60,3		-	500	