

Remaches Speed-Vert / Speed-Vert Rivets


Descripción: Speed-vert es un sistema de remachado con repetición. Este sistema le permite controlar el proceso de instalación de manera constante y calibrado porque, su luz pero reduce la posibilidad de que se produzcan daños en el o desmenuzar los materiales sofisticados. Speed-vert ofrece un llenado máximo del agujero con un considerable ahorro de tiempo y costes. Nuestros sistemas Speed-vert se pueden suministrar sueltos o en cartuchos precargados, lo que acelera el proceso de recarga del husillo.

Description: Speed-vert is a rapid riveting system. This system allows to control the installation process constantly. Its light but consistent clamping reduces the possibility of damaging or crumbling soft materials. Speed-vert offers maximum hole filling with significant time and cost savings. Our Speed-vert systems can be supplied in carton boxes or paper pod, which allow to accelerate the mandrel refilling process.



Tipo de contra - cabeza:
Counterhead type:

Contra-cabeza estandard.
Standard counterhead.



Estanqueidad entre el cuerpo y el vástago. Water tightness between body and mandrel.	NO
---	----

Aplicación:
Application:

Espesor total de al menos 5,0 mm.
Total thickness 0,5 mm.

Metal, plástico y aleaciones de aluminio.
Metal, plastic and aluminium alloy.




Speed-Vert / Speed-Vert

Cabeza Alomada / Dome Head

ALUMINIO

ALUMINIUM


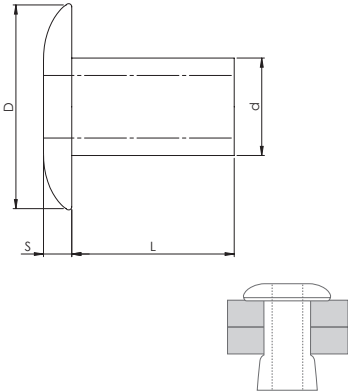


d	Dimensiones	L	Código						
Ø mm.	Sizes	mm.	Code	mm.					
3,2	D= 5,5 mm. S= 1,1 mm.  Ø 3,3 mm.	3,2	SA0232032	0,0 - 1,6			500	71	10.000
		4,7	SA0232047	1,6 - 3,2				51	10.000
		6,3	SA0232063	3,2 - 4,7				39	10.000
		7,9	SA0232079	4,7 - 6,3				32	10.000
		9,5	SA0232095	6,3 - 7,9				27	10.000
		11,1	SA0232111	7,9 - 9,5				25	10.000
4,0	D= 6,5 mm. S= 1,5 mm.  Ø 4,1 mm.	4,7	SA0240047	1,5 - 3,2			700	47	10.000
		6,4	SA0240063	3,2 - 4,7				38	10.000
		7,9	SA0240079	4,7 - 6,3				31	10.000
		9,5	SA0240095	6,3 - 7,9				27	10.000
		11,1	SA0240111	7,9 - 9,5				23	10.000
		12,7	SA0240127	9,5 - 11,1				21	10.000
		14,4	SA0240144	11,1 - 12,7				20	10.000
		16	SA0240160	12,7 - 14,3				18	10.000
4,8	D= 8,9 mm. S= 1,8 mm.  Ø 4,9 mm.	4	SA0248040	0,0 - 1,6			1000	50	10.000
		5,5	SA0248055	1,6 - 3,2				38	10.000
		7,1	SA0248071	3,2 - 4,7				33	10.000
		8,7	SA0248087	4,7 - 6,3				28	10.000
		10,3	SA0248103	6,3 - 7,9				24	10.000
		11,9	SA0248119	7,5 - 9,5				21	10.000
		13,5	SA0248135	9,5 - 11,1				19	10.000
		15,1	SA0248151	11,1 - 12,7				17	10.000

Bajo petición se puede suministrar con vástago.
On request can be supplied with mandrel.

Cabeza Alomada / Dome Head

Speed-Vert / Speed-Vert



ACERO CINCADO
ZINC PLATED STEEL

d	Dimensiones	L	Código						
Ø mm.	Sizes	mm.	Code	mm.	N	N			
3,2	D= 5,5 mm. S= 1,1 mm.  Ø 3,3mm.	3,2	SA0132032	0,0 - 1,6			1100	71	10.000
		4	SA0132040	0,8 - 2,4				57	10.000
		4,8	SA0132048	1,6 - 3,2				51	10.000
		6,4	SA0132064	3,2 - 4,7				39	10.000
		7,9	SA0132079	4,7 - 6,3				32	10.000
		9,5	SA0132095	6,3 - 7,9				27	10.000
4,0	D= 6,5 mm. S= 1,5 mm.  Ø 4,1 mm.	4,8	SA0140048	1,6 - 3,2			1300	47	10.000
		6,4	SA0140064	3,2 - 4,7				38	10.000
		7,9	SA0140079	4,7 - 6,3				31	10.000
		9,5	SA0140095	6,3 - 7,9				27	10.000
		11,1	SA0140111	7,9 - 9,5				23	10.000
		12,7	SA0140127	9,5 - 11,1				21	10.000
4,8	D= 8,9 mm. S= 1,8 mm.  Ø 4,9 mm.	4	SA0148040	0,0 - 1,6			2500	50	10.000
		5,6	SA0148056	1,6 - 3,2				38	10.000
		7,2	SA0148072	3,2 - 4,7				33	10.000
		8,8	SA0148088	4,7 - 6,3				28	10.000
		10	SA0148100	6,3 - 7,9				24	10.000
		12	SA0148120	7,5 - 9,5				21	10.000
		13,5	SA0148135	9,5 - 11,1				19	10.000
		15,1	SA0148151	11,1 - 12,7				17	10.000

Bajo petición se puede suministrar con vástago.
On request can be supplied with mandrel.