

Remaches Tudinox / Tudinox Rivets

Descripción:

El remache Tudinox forma parte de la gama estructural y tiene un gran número de aplicaciones en todos los sectores industriales. Su particular contra-cabeza a forma de "bulbo", junto con la retención del vástago, permite un rellenado de agujeros más eficaz, garantizando una fijación fiable y resistente a la corrosión y a las altas temperaturas. La contra-cabeza especial permite la aplicación incluso en agujeros irregulares.


Description:

Tudinox is a high strength rivet suitable to fix a large number of applications in every industrial sector. Its particular bulb counter-head, together with the retention of the mandrel, allows the application even on irregular holes and good performance of the hole filling for a reliable and resistant fixing against corrosion and high temperature.



Tipo de contra - cabeza:
Counterhead type:

Contra-cabeza a bulbo.
Bulb open counterhead.



Estanqueidad entre el cuerpo y el vástago. Water tightness between body and mandrel.	NO
---	----

Aplicación:
Application:

Espesor total de al menos 1,0 mm. Total thickness 1,0 mm. Utilizable en superficies irregulares. Suitable on irregular surfaces. Partes metálicas. Metal sheet.	
--	--




Cabeza Alomada / Dome Head

Tudinox / Tudinox



ACERO INOXIDABLE A2
STAINLESS STEEL A2

ACERO INOXIDABLE A2
STAINLESS STEEL A2

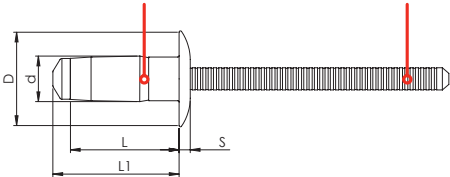



ACERO INOXIDABLE A2
STAINLESS STEEL A2



ACERO INOXIDABLE A2
STAINLESS STEEL A2



d Ø mm.	Dimensiones Sizes	L mm.	L1 mm.	Código Code	E mm.	N	N		
3,2	D= 6,3 mm. S= 1,0 mm. Ø 3,3 mm.	6,5	8,9	R0463289	1,0 - 3,0	2000	1600	1.000	10.000
		9	11,4	R04632114	3,0 - 5,0			1.000	10.000
		11,5	13,6	R04632136	5,0 - 7,0			1.000	10.000
4,0	D= 8,0 mm. S= 1,3 mm. Ø 4,1 mm.	7,5	10,1	R04640101	1,0 - 3,0	4000	2800	1.000	10.000
		9,5	12,5	R04640125	3,0 - 5,0			500	5.000
		12,5	15,1	R04640151	5,0 - 7,0			500	5.000
4,8	D= 9,5 mm. S= 1,5 mm. Ø 4,9 mm.	9	12,9	R04648129	1,5 - 3,5	5000	3900	500	5.000
		11,5	15,5	R04648155	3,5 - 6,0			500	5.000
		14,5	18,5	R04648185	6,0 - 8,5			500	5.000
6,0	D= 12,0 mm. S= 1,8 mm. Ø 6,1 mm.	10	14,2	R04660142	1,5 - 4,0	7500	13800	250	2.500
		13	17,2	R04660172	3,0 - 6,0			250	2.500
		16	20,2	R04660202	6,0 - 9,0			250	2.500
		19	23,2	R04660232	9,0 - 12,0			250	2.500
6,4	D= 13,0 mm. S= 2,2 mm. Ø 6,6 mm.	13	16,8	R04664168	1,5 - 5,5	8000	14300	-	1.500
		16,5	20,8	R04664208	5,0 - 9,0			-	1.000