




VICES

EDITION 8.1



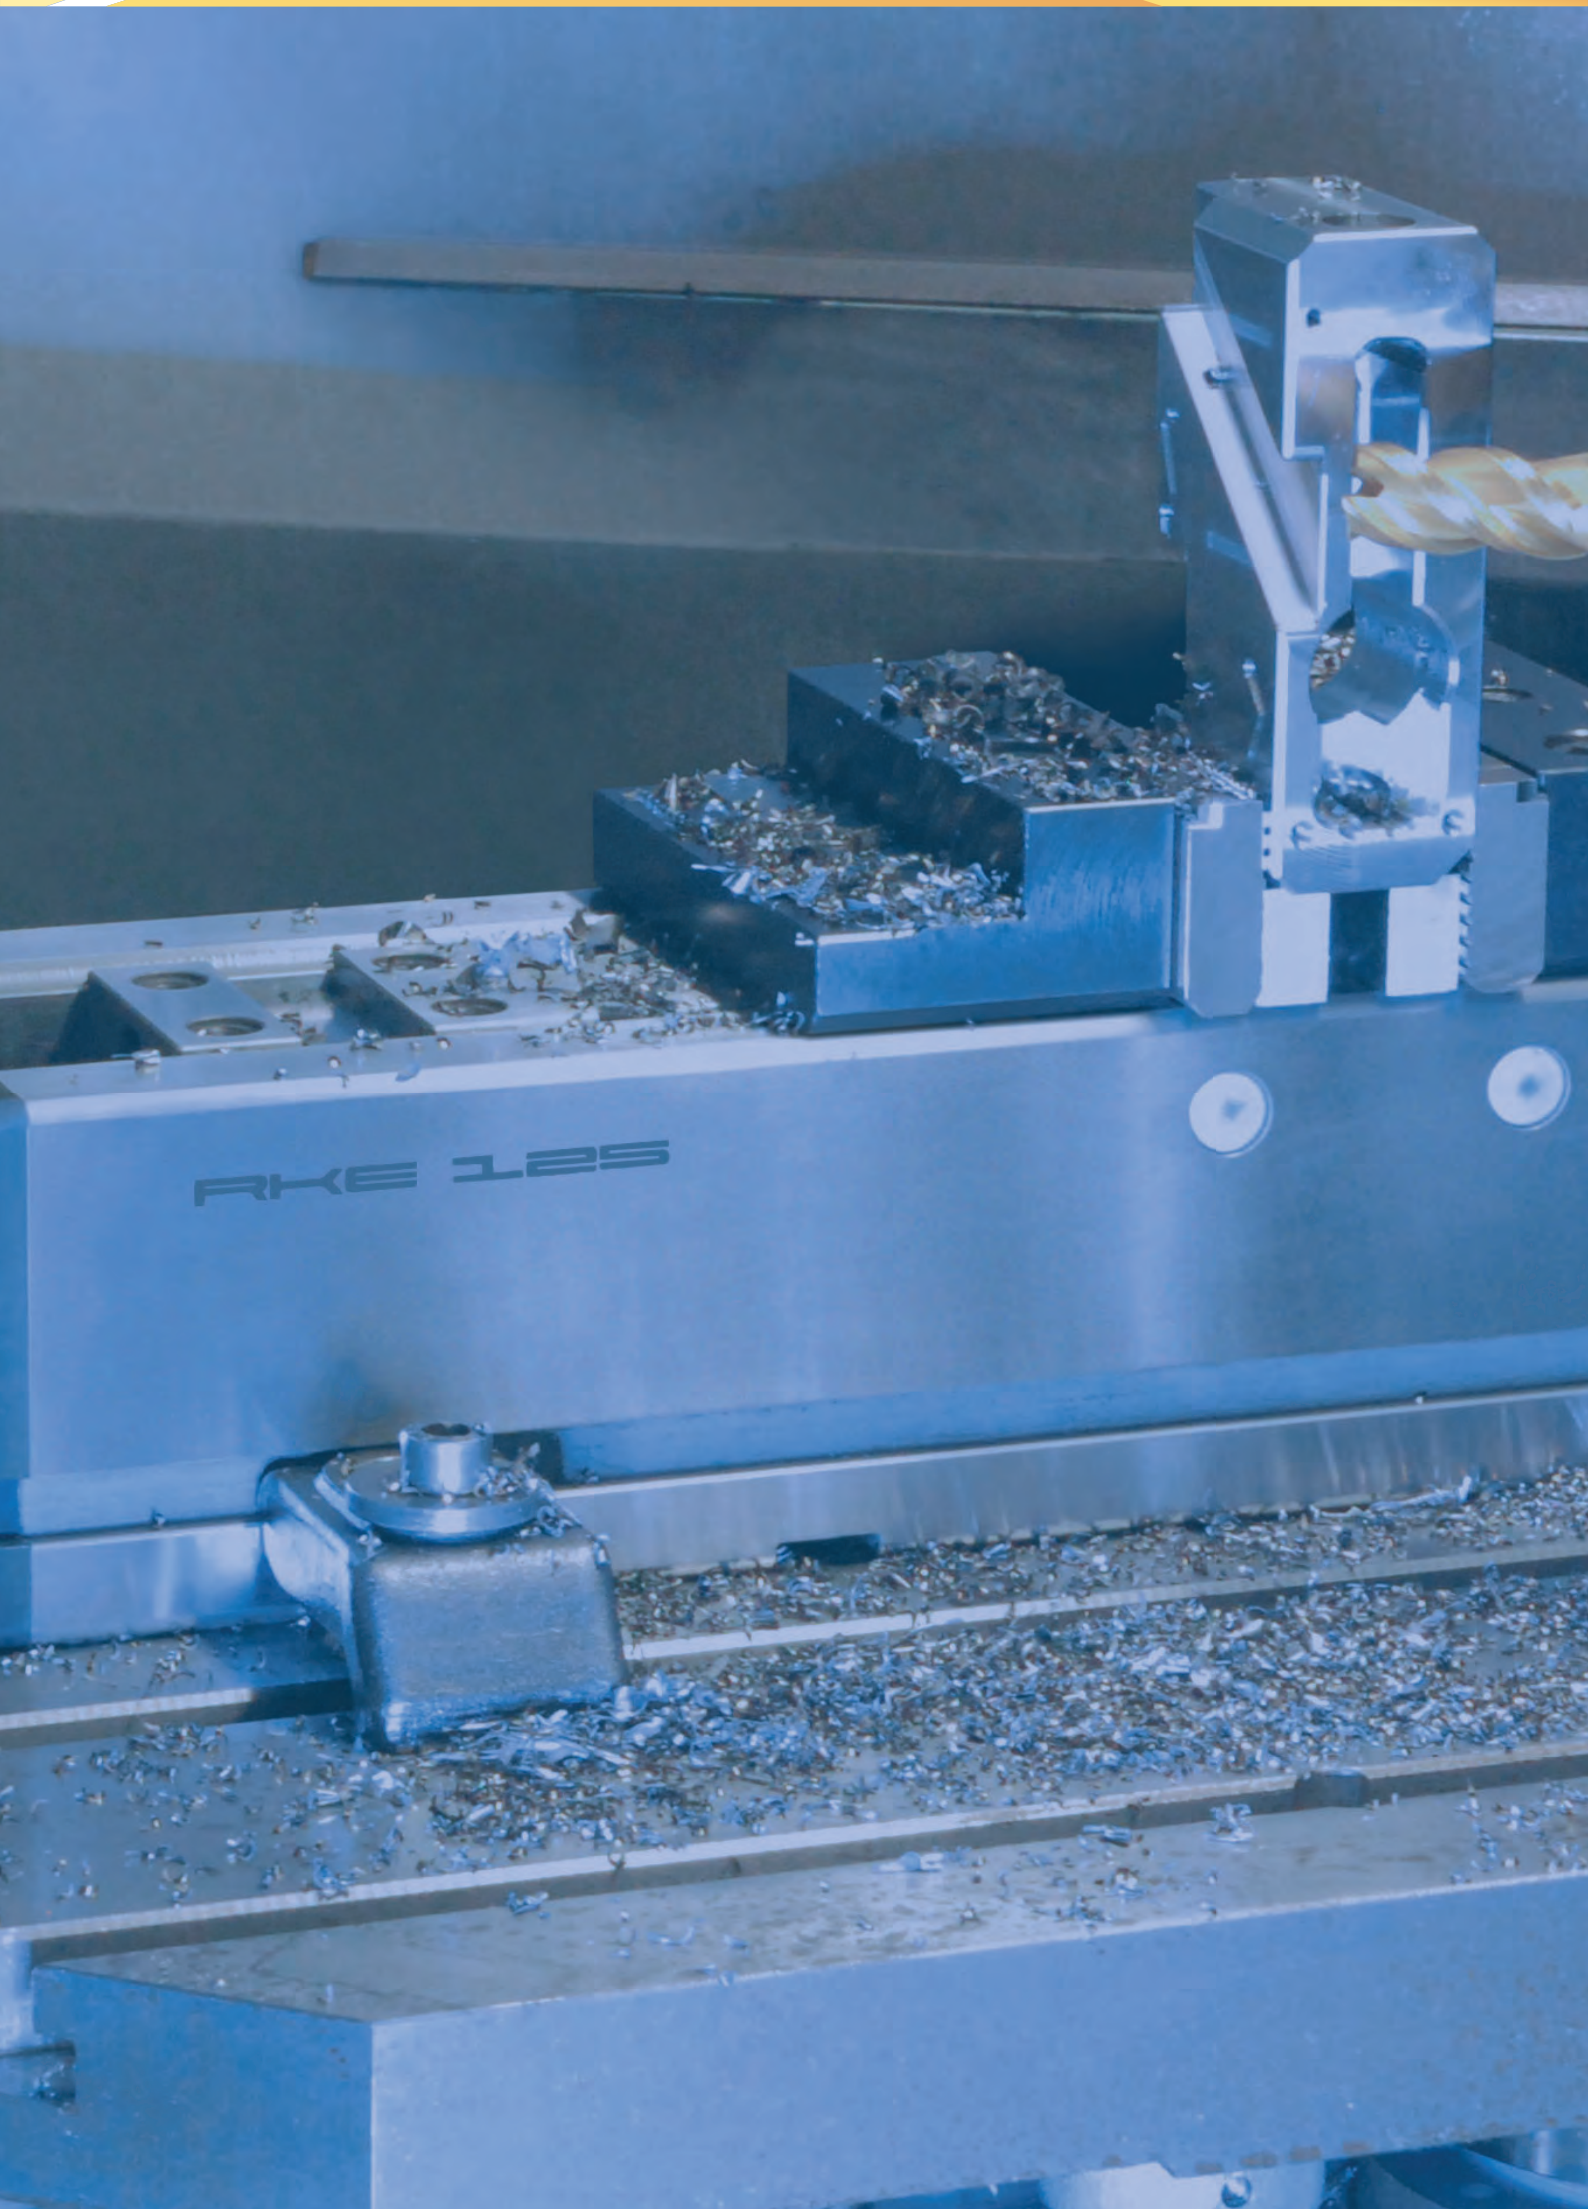



EASYLOCK zero point clamping system

## EASYLOCK zero point clamping system



Palletising systems such as the EASYLOCK zero point clamping system from RÖHM achieve a considerable productivity increase. This modular system meets the requirements of customer-specific solutions with the best-possible utilisation of machine capacity. Although the machine tool had to stop for the set-up time until now, the workpiece can now be clamped and positioned on the pallet outside the machine tool. The set-up time is now only limited to loading and unloading the pallet, which happens in seconds. If multiple manufacturing processes are necessary for machining, then the pallet including the workpiece can be used without zero point loss. Due to the robust and rust-resistant construction, EASYLOCK zero point clamping can be used throughout, starting with machining up to the measuring machines.

EASYLOCK zero point clamping system

## THE BENEFITS AT A GLANCE

### INCREASED PRODUCTIVITY

- ⊕ Free machine capacity through reduction of set-up time by up to 90%
- ⊕ Very rapid change of workpiece and clamping fixtures on tilt-free clamping and positioning with long insert

### HIGH PRECISION

- ⊕ Repeat accuracy of < 0.005 mm thanks to precision balls
- ⊕ Positive-locking self-inhibition unaffected by tensile and lateral forces

### HIGHEST MODULARITY

- ⊕ Modular base carrier design variants for maximum flexibility
- ⊕ Flexible extension options



EASYLOCK zero point clamping system

# The pin system

## HOW IT WORKS

With the RÖHM EASYLOCK zero point clamping system, the clamping pin is the interface between the machine table and the workpiece or fixture. The exact positioning guarantees secure clamping. At the same time the resulting machining forces are transferred via the clamping pin to the pressure cup. The high-precision pressure cups of the EASYLOCK system ensure an absolutely secure hold of the workpiece or fixture. The high locking and holding forces make the system suitable for all kinds of use.



EASYLOCK zero point clamping system

### Machining with EASYLOCK?

EASYLOCK is ideally suited to all machining processes like grinding, milling, drilling and measuring.

### What is meant by holding force?

Holding force is the force at which the pallet still rests securely on the clamping system. This force must not be exceeded during machining.

### What is meant by repeat accuracy?


The repeat accuracy gives the tolerance range for the recorded workpiece references when the workpiece is removed and subsequently reclamped. The repeat accuracy of the EASYLOCK system is around < 0.005 mm.

## REDUCED SET-UP TIMES BY UP TO 90%

### Without palletising system



### With EASYLOCK zero point clamping system

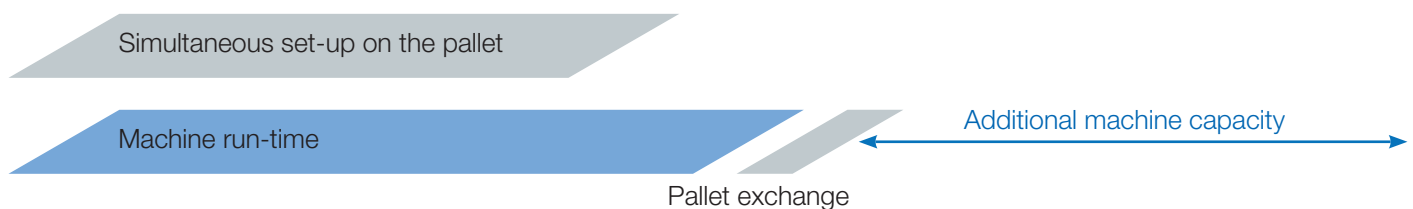



EASYLOCK zero point clamping system

## Palletising and clamping tools from a single source


### THE SYSTEM SOLUTION

As a system supplier, RÖHM offers high quality clamping tools as well as the appropriate palleting solutions with zero point clamping. Coordinated with one another, base carriers and universal pallets support a wide range of combination options together with RÖHM vices, lathe chucks

and collet chucks as well as with pneumatically or hydraulically operated chucks and centric vices. The EASYLOCK base carriers can be provided with a variety of options on a modular basis.

### BASE CARRIER EASYLOCK

- + optional with position sensing and cleaning function\*
- + optional with indexing
- + optional with release control\*
- + optional with media feed-through\*

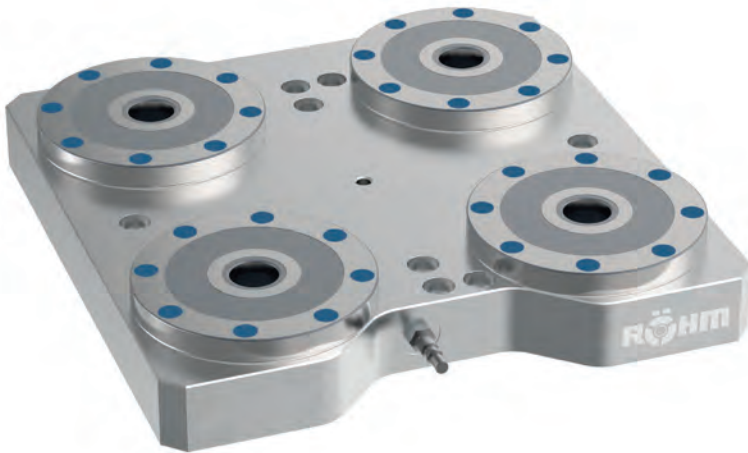

#### INDEXING:

Securing of the individual pallet against turning, so ensuring exact positioning every 90°.

#### MEDIA FEED-THROUGH:

Media transmission through the pallet, e.g. for activation of the pneumatically/hydraulically operated centric vices.

#### POSITION SENSING INCLUDING CLEANING FUNCTION:

This option includes a ventilation system for cleaning chips and monitoring the contact face.

#### RELEASE CONTROL:

Based on automated processes, this communicates to the robot that the insertion pins of the pallet have come loose.

\* Further accessories are required (not included in the scope of delivery)



EASYLOCK zero point clamping system

## The right pallet makes the difference

### PALLET VICES

suitable for NC-Compact vices RKE, RKE-LV, RZM, RKD-M, RKZ-M



### PALLET MANUAL CHUCKS

suitable for DURO-T / DURO-TA chucks, CAPTIS-M collet chucks




### PALLET PNEUMATIC CENTRIC VICE

suitable for centric vice KZS-P / KZS-PG



### PALLET PNEUMATIC CHUCK

suitable for chuck SSP






EASYLOCK zero point clamping system

## Technical data - standard carriers


### 1 PALLET CARRIER

ID	Operation	Diameter	Dimensions	Inside micrometer	Options
1314883	hydraulic	112	200x200x58	-	with indexing
1314882	pneumatic	112	200x200x58	-	with indexing
1313929	hydraulic	138	200x200x58	-	with indexing
1313928	pneumatic	138	200x200x58	-	with indexing




### 2 PALLET CARRIER

ID	Operation	Diameter	Dimensions	Inside micrometer	Options
1314885	hydraulic	112	200x400x58	200	-
1314884	pneumatic	112	200x400x58	200	-
1313931	hydraulic	138	200x400x58	200	-
1313930	pneumatic	138	200x400x58	200	-

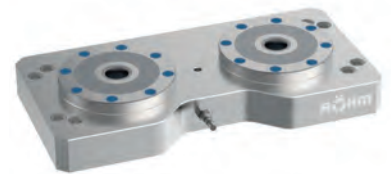


### 4 PALLET CARRIER

ID	Operation	Diameter	Dimensions	Inside micrometer	Options
1314887	hydraulic	112	350x350x58	200	-
1314886	pneumatic	112	350x350x58	200	-
1313933	hydraulic	138	350x350x58	200	-
1313932	pneumatic	138	350x350x58	200	-

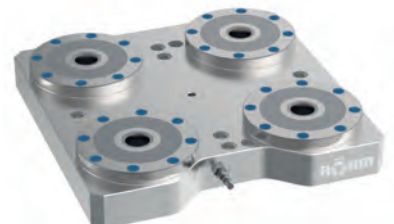

### 6 PALLET CARRIER

ID	Operation	Diameter	Dimensions	Inside micrometer	Options
1313940	hydraulic	112	350x600x58	200	-
1352604	pneumatic	112	350x600x58	200	-
1313935	hydraulic	138	350x600x64	200	-
1313934	pneumatic	138	350x600x64	200	-

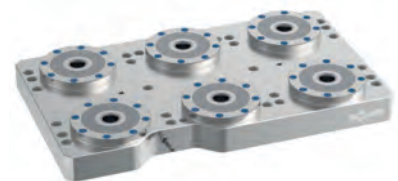

Further sizes on request



EASYLOCK zero point clamping system

## Technical data - Pallet

### 1 PALETT

ID	Diameter	Dimensions
1313941	112	200x200x40
1313936	138	200x200x40



### 2 PALETT

ID	Diameter	Dimensions
1313942	112	200x400x40
1313937	138	200x400x40



EASYLOCK zero point clamping system

### 4 PALETT

ID	Diameter	Dimensions
1313943	112	350x350x40
1313938	138	350x350x40



### 6 PALETT

ID	Diameter	Dimensions
1313944	112	350x600x40
1313939	138	350x600x40



Further sizes on request





# The headquarters: our main plant in Sontheim/Brenz

The RÖHM main plant is located in Sontheim/Brenz. In this ultra-modern production facility comprising 41,000 m<sup>2</sup> optimum conditions have been achieved in order to solve the extensive range of discerning construction and production tasks making the company even better, faster and more efficient in the future.



Sontheim/Brenz

**Sontheim** | All national and international activities are planned and coordinated at the administrative headquarters in Sontheim. Thanks to the excellent infrastructure and transport routes, this location is ideal for a company relying on perfect product quality as well as maximum flexibility. Furthermore, the region around Sontheim offers another key basis for the success of our company: it is rich in quality awareness and motivated employees with the result that we are ideally prepared for the challenges of the future. The main plant uniquely unites mass production, serial production and customised individual production under a single roof.



# Key locations for the company: Dillingen and St. Georgen

Such strong growth on the part of the RÖHM Group is also obviously associated with higher requirements on development and production capacities. The demands of today and tomorrow can be complied with the two facilities in Dillingen and St. Georgen.



Dillingen/Danube



St. Georgen

**Plant Dillingen/Danube** | This branch plant in Dillingen was put into operation by the RÖHM Group as early as 1953. Thanks to extremely positive development, the plant is subject to constant expansion and modernisation. For this reason, new modern production facilities were built in 1982 and 1991. In 2007 RÖHM built a new production hall for two portal turning and milling machines. This enables machining of workpieces up to 4 metres in length which will secure a leading market position for RÖHM in the future. More than 300 employees are primarily involved in engineering and manufacturing lathechucks, machine vices and special clamping equipment for turning and milling machinery as well as for machining centres.

**Engineering and sales department St. Georgen** | Apart from standard mandrels, tailor-made solutions for a wide variety of requirements are also manufactured here in this small but accomplished high-tech forge. RÖHM retains mechanical or power-operated mandrels, sliding jaw mandrels and hydraulic mandrels for its customers for tensioning workpieces in drill holes or interior contours.







