

B-510



BROCAS

Microbroca 5xD
sin refrigeración interior

5xD Without internal spiral coolant holes

Microbroca de metal duro integral 5 xD con recubrimiento TiAlN, sin refrigeración interior y corte a derechas. Ángulo de la punta 135°. Fabricado de alta precisión que garantiza una concentricidad de 0,005 mm.

5 xD Without internal spiral coolant holes with TiAlN coating, without internal cooling and right-hand cutting. Tip angle 135°. Manufactured with high precision that guarantees concentricity.

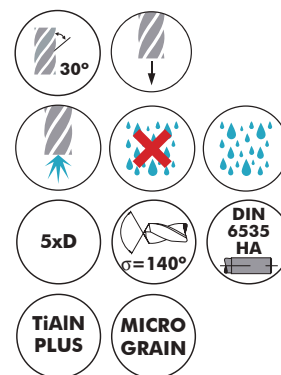

STEEL
<55
HRC

INOX

GG

GGG

NI
ALLOYS

TITAN
INCONEL

UNI

Ejemplo de pedido				Ref. final
B510	004	↓	210	B510004210
	d1=0,4			
B510	255	↓	210	B510255210
	d2=2,55			

Condiciones de corte | Cutting data pag. 211

d1	d2	l1	l2	
m7	h6			
0,40	3	38	3,6	
0,45	3	38	3,8	
0,50	3	38	4,0	
0,55	3	38	4,6	
0,60	3	38	4,8	
0,65	3	38	5,0	
0,70	3	38	6,0	
0,75	3	38	6,2	
0,80	3	38	6,4	
0,85	3	38	6,7	
0,90	3	38	7,0	
0,95	3	38	7,25	
1,00	3	38	7,50	
1,05	3	38	7,75	
1,10	3	38	8,0	
1,15	3	38	8,25	
1,20	3	38	8,50	
1,25	3	38	8,75	
1,30	3	38	9,0	
1,35	3	38	9,5	
1,40	3	38	10,0	
1,45	3	38	10,5	
1,50	3	38	11,0	
1,55	3	38	11,25	
1,60	3	38	11,50	
1,65	3	38	11,75	

d1	d2	l1	l2	
m7	h6			
1,70	3	38	12,00	
1,75	3	38	12,25	
1,80	3	38	12,50	
1,85	3	38	12,75	
1,90	3	38	13,00	
1,95	3	38	13,50	
2,00	3	46	14,00	
2,05	3	46	14,50	
2,10	3	46	15,00	
2,15	3	46	15,50	
2,20	3	46	16,0	
2,25	3	46	16,50	
2,30	3	46	17,00	
2,35	3	46	17,50	
2,40	3	46	18,00	
2,45	3	46	18,50	
2,50	3	50	19,00	
2,55	3	50	19,50	
2,60	3	50	20,00	
2,65	3	50	20,50	
2,70	3	50	21,00	
2,75	3	50	21,50	
2,80	3	50	22,00	
2,85	3	50	22,50	
2,90	3	50	23,00	
2,95	3	50	23,50	