


Métrica ISO
ISO Metric



P	●
M	●
K	●
N	○
S	○
H	●

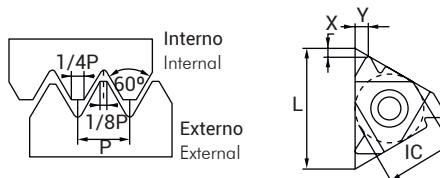


Ref.		Kp125	Inclinación Pitch		Medidas Dimensions				
ER	IR		mm	TPI	IC	S	L	X	Y
	11IR0.50 ISO-B	✓	0,50	0,50	6,350	3,18	11	0,6	0,6
	11IR0.75 ISO-B	✓	0,75	0,75	6,350	3,18	11	0,6	0,6
	11IR1.00 ISO-B	✓	1,00	1,00	6,350	3,18	11	0,7	0,7
	11IR1.25 ISO-B	✓	1,25	1,25	6,350	3,18	11	0,8	0,9
	11IR1.50 ISO-B	✓	1,50	1,50	6,350	3,18	11	0,8	1,0
	11IR1.75 ISO-B	✓	1,75	1,75	6,350	3,18	11	0,8	1,1
	11IR2.00 ISO-B	✓	2,00	2,00	6,350	3,18	11	-	-
16ER1.00 ISO-B	16IR1.00 ISO-B	✓	1,00	1,00	9,525	3,97	16	0,7	0,7
16ER1.25 ISO-B	16IR1.25 ISO-B	✓	1,25	1,25	9,525	3,97	16	0,8	0,9
16ER1.50 ISO-B	16IR1.50 ISO-B	✓	1,50	1,50	9,525	3,97	16	0,8	1,0
16ER1.75 ISO-B	16IR1.75 ISO-B	✓	1,75	1,75	9,525	3,97	16	0,9	1,2
16ER2.00 ISO-B	16IR2.00 ISO-B	✓	2,00	2,00	9,525	3,97	16	1,0	1,3
16ER2.50 ISO-B	16IR2.50 ISO-B	✓	2,50	2,50	9,525	3,97	16	1,1	1,5
16ER3.00 ISO-B	16IR3.00 ISO-B	✓	3,00	3,00	9,525	3,97	16	1,2	1,6

Plaquitas Whitworth de 55°
55° Whitworth inserts



P	●
M	●
K	●
N	○
S	○
H	●

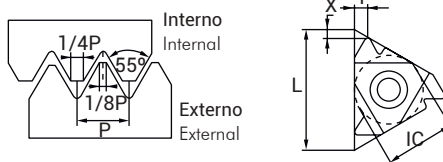

Ref.		Kp125	Inclinación Pitch		Medidas Dimensions				
ER	IR		mm	TPI	IC	S	L	X	Y
16ER 19W-B	16IR 19W-B	✓	19	19	9,525	3,97	16	0,8	1,0
16ER 14W-B	16IR 14W-B	✓	14	14	9,525	3,97	16	0,9	1,2
16ER 11W-B	16IR 11W-B	✓	11	11	9,525	3,97	16	1,1	1,5

