



TRONZADO
PARTING

SGWHR/L

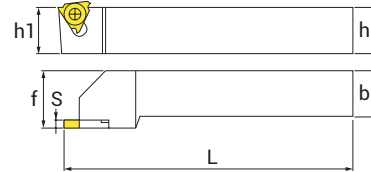

Ref.	Plaquita Inserts	Medidas Dimensions (mm)					
		h	b	L	f	S	h1
SGWHR/L1212H3200	GBA32...	12	12	100	16	0,5-1,8	12
SGWHR/L1212H3215	GBA32...	12	12	100	16	1,8-2,3	12
SGWHR/L1616H3200	GBA32...	16	16	100	20	0,5-1,8	16
SGWHR/L1616H3215	GBA32...	16	16	100	20	1,8-2,3	16
SGWHR/L2020K3200	GBA32...	20	20	125	25	0,5-1,8	20
SGWHR/L2020K3215	GBA32...	20	20	125	25	1,8-2,3	20
SGWHR/L2020K3223	GBA32...	20	20	125	25	2,3-3,3	20
SGWHR/L2525M3200	GBA32...	25	25	150	32	0,5-1,8	25
SGWHR/L2525M3215	GBA32...	25	25	150	32	1,8-2,3	25
SGWHR/L2525M3223	GBA32...	25	25	150	32	2,3-3,3	25

MGWHR/L

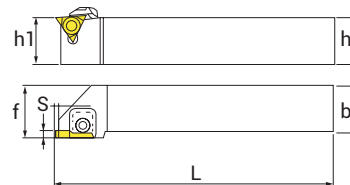





Ref.	Plaquita Inserts	Medidas Dimensions (mm)					
		h	b	L	f	S	h1
MGWHR/L1616H4315A	GBA43...	16	16	100	20	1,25-1,5	16
MGWHR/L1616H4315	GBA43...	16	16	100	20	1,5-2,3	16
MGWHR/L1616H4325	GBA43...	16	16	100	20	2,3-3,3	16
MGWHR/L2020K4315A	GBA43...	20	20	125	25	1,25-1,5	20
MGWHR/L2020K4315	GBA43...	20	20	125	25	1,5-2,3	20
MGWHR/L2020K4323	GBA43...	20	20	125	25	2,3-3,3	20
MGWHR/L2525K4315A	GBA43...	25	25	150	32	1,25-1,5	25
MGWHR/L2525K4315	GBA43...	25	25	150	32	1,5-2,3	25
MGWHR/L2525K4323	GBA43...	25	25	150	32	2,3-3,3	25
MGWHR/L2525K4333	GBA43...	25	25	150	32	3,3-4,7	25


Herramientas para ranurar y cortar
Grooving and parting tools

GBA



-  Interrupción baja
Light interrupted
-  General
-  Interrumpido
Interrupted


P	
M	
K	
N	
S	



Ref.	Kp125	Stock		Medidas Dimensions (mm)					
		R	L	W	R	B	d	H	A
GBA32050R	✓	✓		0,50	0,05	1,30	4,50	3,18	9,52
GBA32075R/L	✓	✓	✓	0,75	0,10	2,10	4,50	3,18	9,52
GBA32080R/L	✓	✓	✓	0,80	0,10	2,10	4,50	3,18	9,52
GBA32090R	✓	✓		0,85	0,10	2,10	4,50	3,18	9,52
GBA32100R/L	✓	✓	✓	1,00	0,10	2,30	4,50	3,18	9,52
GBA32125R/L	✓	✓	✓	1,25	0,10	2,30	4,50	3,18	9,52
GBA32150R/L	✓	✓	✓	1,50	0,10	2,30	4,50	3,18	9,52
GBA32175R	✓	✓		1,75	0,10	2,30	4,50	3,18	9,52
GBA32200R/L	✓	✓	✓	2,00	0,10	2,80	4,50	3,18	9,52
GBA32250R/L	✓	✓	✓	2,50	0,10	2,80	4,50	3,18	9,52
GBA32300R	✓	✓		3,00	0,20	2,80	4,50	3,18	9,52
GBA43125R	✓	✓		1,25	0,20	2,00	5,40	4,76	12,70
GBA43150R	✓	✓		1,50	0,20	3,50	5,40	4,76	12,70
GBA43175R	✓	✓		1,75	0,20	3,50	5,40	4,76	12,70
GBA43200R	✓	✓		2,00	0,20	3,50	5,40	4,76	12,70
GBA43250R	✓	✓		2,50	0,30	4,00	5,40	4,76	12,70
GBA43300R	✓	✓		3,00	0,30	4,00	5,40	4,76	12,70

TRONZADO
PARTING

THCR/L

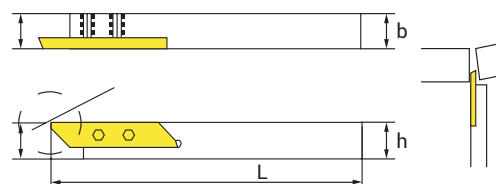

Ref.	Plaqueta Inserts	Stock		Medidas Dimensions (mm)					
		R	L	D	h	b	H	F	L
THCR/L1010J42	THC42...	○	○	21	10	10	10	12	85
THCR/L1212J42	THC42...	○	○	21	12	12	12	16	100
THCR/L1616J42	THC42...	○	○	21	16	16	150	20	100
THCR/L2020K42	THC42...	○	○	21	20	20	125	25	125
THCR/L2525M42	THC42...	○	○	21	25	25	150	32	150


● Stock ○ Bajo pedido
Under delivery

THC




- Interrupción baja
Light interrupted
- Gen-
eral
Interrumpido
Interrupted

P	
M	
K	
N	
S	



Ref.	KP125	Medidas Dimensions (mm)					
		W	R	B	L	H	A
THC42R100-CE	✓	1,0	0,06	3,04	5,0	7,94	0
THC42R100-CE15R	✓	1,0	0,06	3,04	5,0	7,94	15
THC42R150-CE	✓	1,5	0,06	3,04	8,5	7,94	0
THC42R150-CE15R	✓	1,5	0,06	3,04	8,5	7,94	15
THC42R200-CE	✓	2,0	0,10	3,04	11,5	7,94	0
THC42R200-CE15R	✓	2,0	0,10	3,04	11,5	7,94	15
THC42R250-CE	✓	2,5	0,10	3,04	11,5	7,94	0
THC42R250-CE15R	✓	2,5	0,10	3,04	11,5	7,94	15
THC42R300-CE	✓	3,0	0,20	3,04	11,5	7,94	0
THC42R300-CE15R	✓	3,0	0,20	3,04	11,5	7,94	15
THC42R200-CN	✓	2,0	0,10	3,04	11,5	7,94	0
THC42R200-CU15R	✓	2,0	0,10	3,04	11,5	7,94	15
THC42R250-CN	✓	2,5	0,10	3,04	11,5	7,94	0
THC42R250-CU15R	✓	2,5	0,10	3,04	11,5	7,94	15
THC42R300-CN	✓	3,0	0,20	3,04	11,5	7,94	0
THC42R300-CU15R	✓	3,0	0,20	3,04	11,5	7,94	15

KTKFR/L

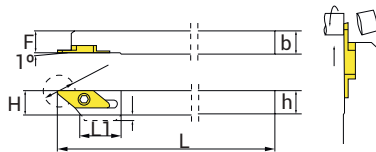



Ref.	Plaquita Inserts	Medidas Dimensions (mm)						
		D	h	b	L	L1	f	H
KTKFR/L1010K12	TKFT12...	12	10	10	125	15	10	10
KTKFR/L1212M12	TKFT12...	12	12	12	150	15	12	12
KTKFR/L1616M12	TKFT12...	12	16	16	150	15	16	16
KTKFR/L1010K16	TKFT16...	16	10	10	125	20	10	10
KTKFR/L1212M16	TKFT16...	16	12	12	150	20	12	12
KTKFR/L1616M16	TKFT16...	16	16	16	150	20	16	16

TKF



- Interrupción baja
Light interrupted
- General
- Interrumpido
Interrupted

P	
M	
K	
N	
S	



Ref.	KP125	Medidas Dimensions (mm)						
		W	R	B	d	L	H	A
TKF12R/L050-S	✓	0,5	0,03	3	5	0	8,7	5
TKF12R/L070-S	✓	0,7	0,03	3	5	0	8,7	8
TKF12R/L100-S	✓	1,0	0,03	3	5	0	8,7	12
TKF12R/L150-S	✓	1,5	0,03	3	5	0	8,7	12
TKF12R/L200-S	✓	2,0	0,03	3	5	0	8,7	12
TKF12R/L050-S16R	✓	0,5	0,05	3	5	16	8,7	5
TKF12R/L070-S16R	✓	0,7	0,05	3	5	16	8,7	8
TKF12R/L100-S16R	✓	1,0	0,05	3	5	16	8,7	12
TKF12R/L150-S16R	✓	1,5	0,05	3	5	16	8,7	12
TKF12R/L200-S16R	✓	2,0	0,05	3	5	16	8,7	12
TKF16R/L150-S	✓	0,5	0,05	4	5	0	9,5	16
TKF16R/L200-S	✓	0,7	0,05	4	5	0	9,5	16
TKF16R/L250-S	✓	1,0	0,05	4	5	0	9,5	16
TKF16R/L300-S	✓	3,0	0,05	4	5	0	9,5	16
TKF16R/L150-S16R	✓	1,5	0,05	4	5	16	9,5	16
TKF16R/L200-S16R	✓	2,0	0,05	4	5	16	9,5	16
TKF16R/L250-S16R	✓	2,5	0,05	4	5	16	9,5	16
TKF16R/L300-S16R	✓	3,0	0,05	4	5	16	9,5	16