



TI-P087-02  
EMM Issue 6

# Spiratec R1 and R12 Remote Test Point

## Description

The Spiratec trap fault detection system indicates if a steam trap is leaking steam. The Spiratec **R1** provides a remote test point for one Spiratec sensor. The Spiratec **R12** provides the same facility for up to twelve Spiratec sensors. A PT2 or PT3 plug tail is used to connect the SS1 sensor in the sensor chamber or steam trap to the R1 or R12 remote test point at any convenient location. Trap checking is then carried out by plugging a Spiratec Type 30 indicator into the R1 or R12.

**Note:** The R1 and R12 remote test points can only be used with sensors for steam leak applications. **They are not suitable for use with WLS1 waterlogging sensors.**

## WARNING

The R1 and R12 are not suitable for use in hazardous areas in the EC.



## Available types

R1	Test point, suitable for a single steam trap.
R12	Test point has a selection switch which can be used for checking up to twelve steam traps.
PT2	Plug tail with screw on connection and brass straight pattern housing. Provides protection to IP67
PT3	Plug tail is available with screw-on connection and brass 90° housing. Provides protection to IP67.

The plug tail is supplied with 1.25 m of cable. Any additional cable must be provided by the installer in accordance with the Installation and Maintenance Instructions supplied with the product. By removing the nut (1) a conduit adaptor can be connected to the M16 conduit thread on the housing, if cable protection is required.

## How to use the R1 and R12 remote test point:

R1	Plug the indicator cable into the socket provided and use the Type 30 or Type 40 indicator in accordance with its instructions.
R12	Use the rotary switch to select the sensor to be checked.

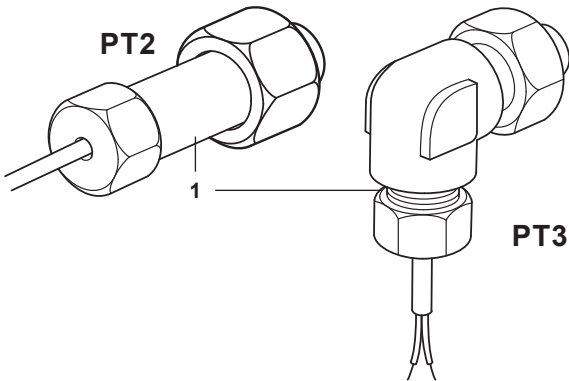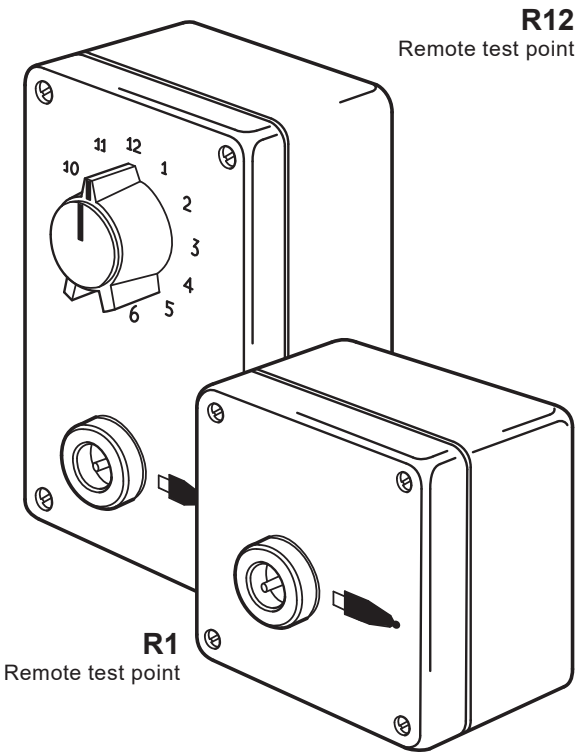


A typical application is shown on page 2

Steam traps

Steam trap management




Typical application

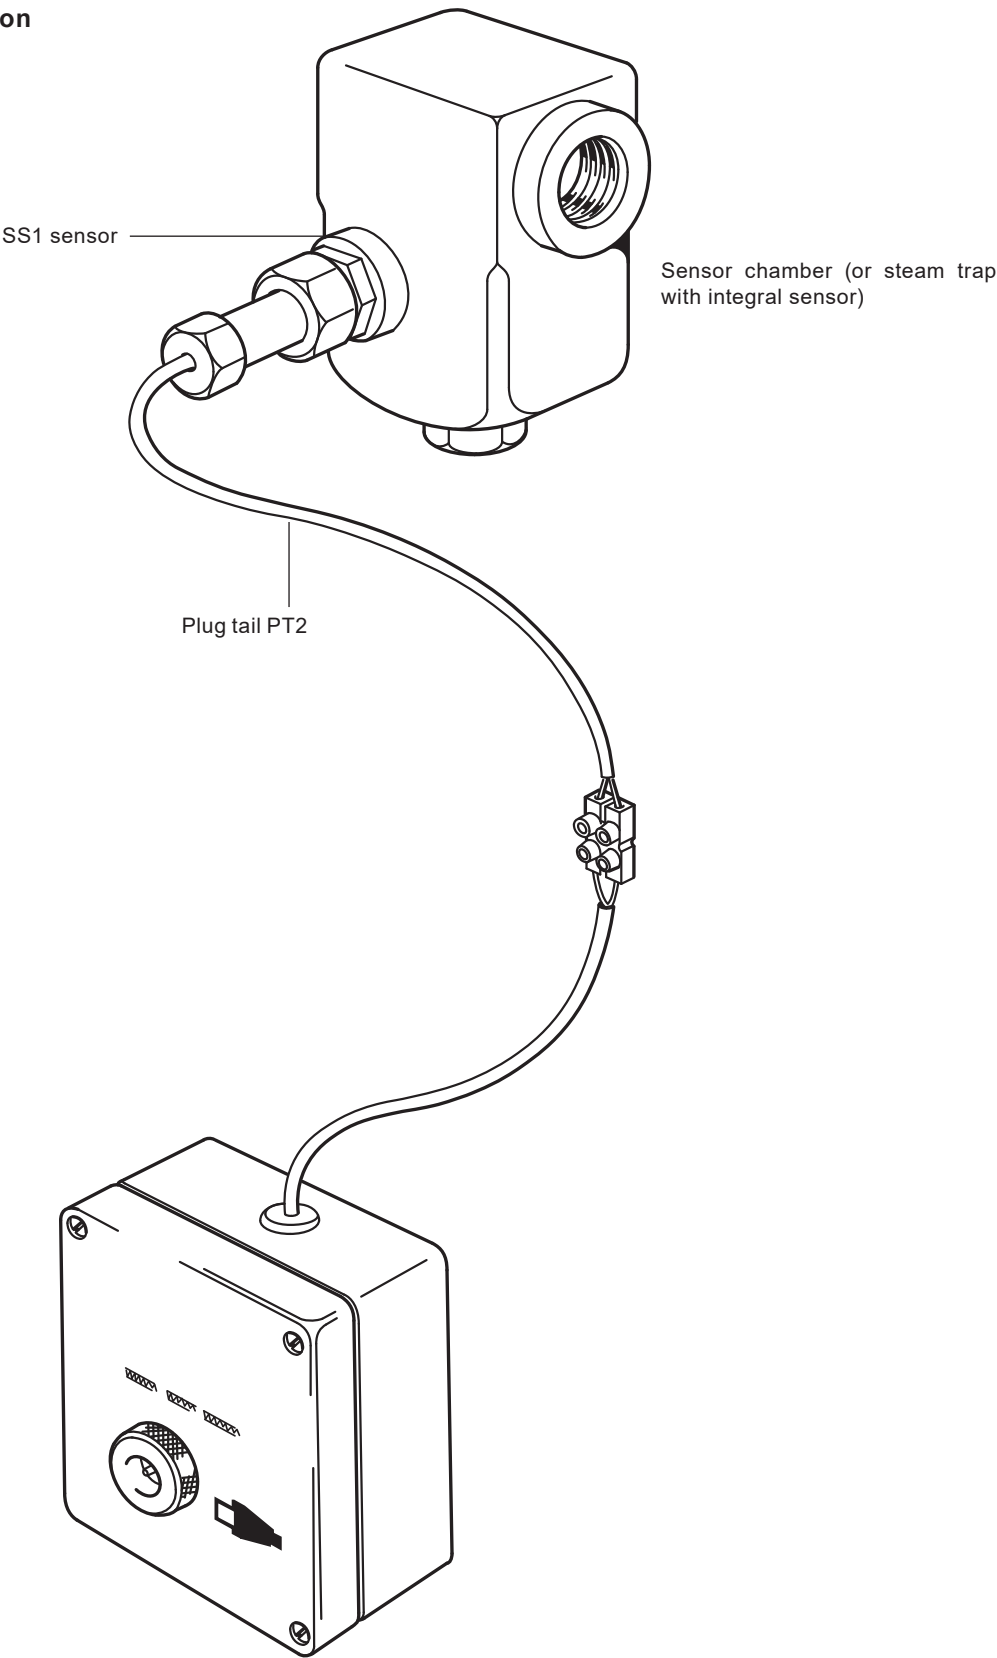

Dimensions/weights (approximate) in mm and kg

Type	A	B	C	Weight
R1	82	80	55	0.2
R12	80	120	55	0.3

Sensor chamber size	D (PT2)	D (PT3)
1/2"	135	110
3/4"	135	110
1"	140	115
1 1/2"	185	155
2"	185	155

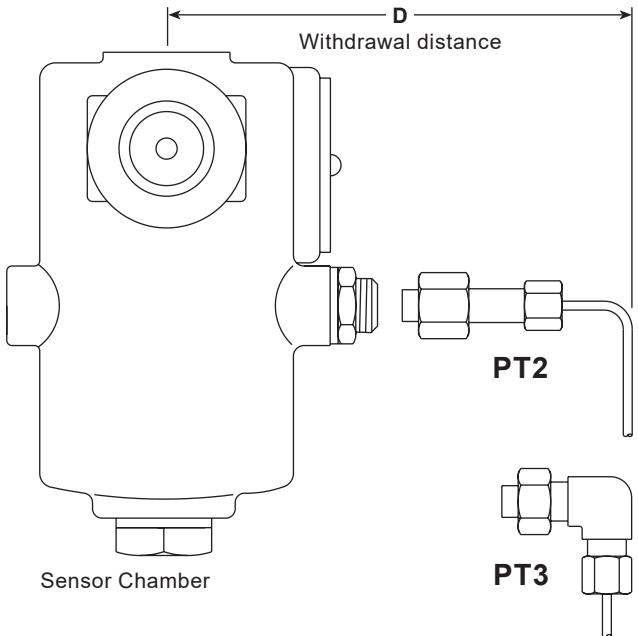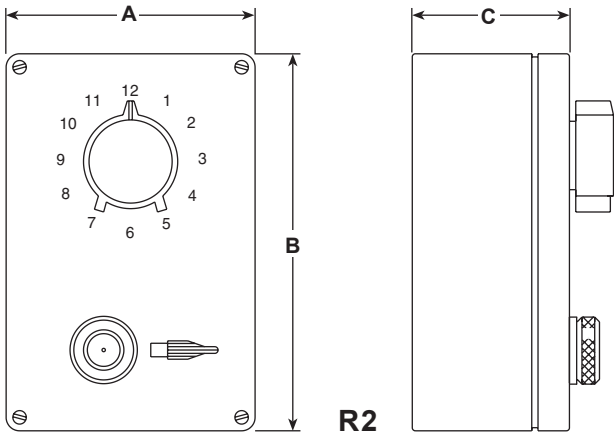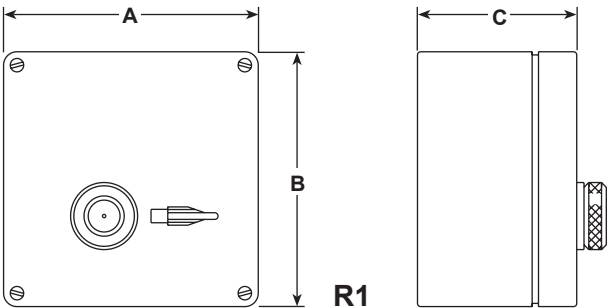

**How to order**  
Example: 1 off Spirax Sarco R1 remote test point.