


TI-P067-10  
CMGT Issue 3

## IBV Series C Carbon Steel Inverted Bucket Vertical Steam Trap

### Description

The IBV series C inverted bucket steam trap is manufactured using carbon steel for the body and cover; with internal components being made of stainless steel. It is suitable for use with saturated and superheated steam and in high pressure and high temperature applications. The IBV is fully automatic and has been designed in such a way that there is minimal friction from mechanism movement; valve closure is immediate, without any steam loss and the discharge action is positive with no equivocal phases. The standard version will be supplied with bolted support brackets.

**On the cover of the IBV** there is a  $\frac{3}{8}$ " hole, threaded and plugged, to eliminate any water discharge after being hydraulically tested before leaving the factory. This hole can be reopened on site for the customer to perform periodic hydro testing.

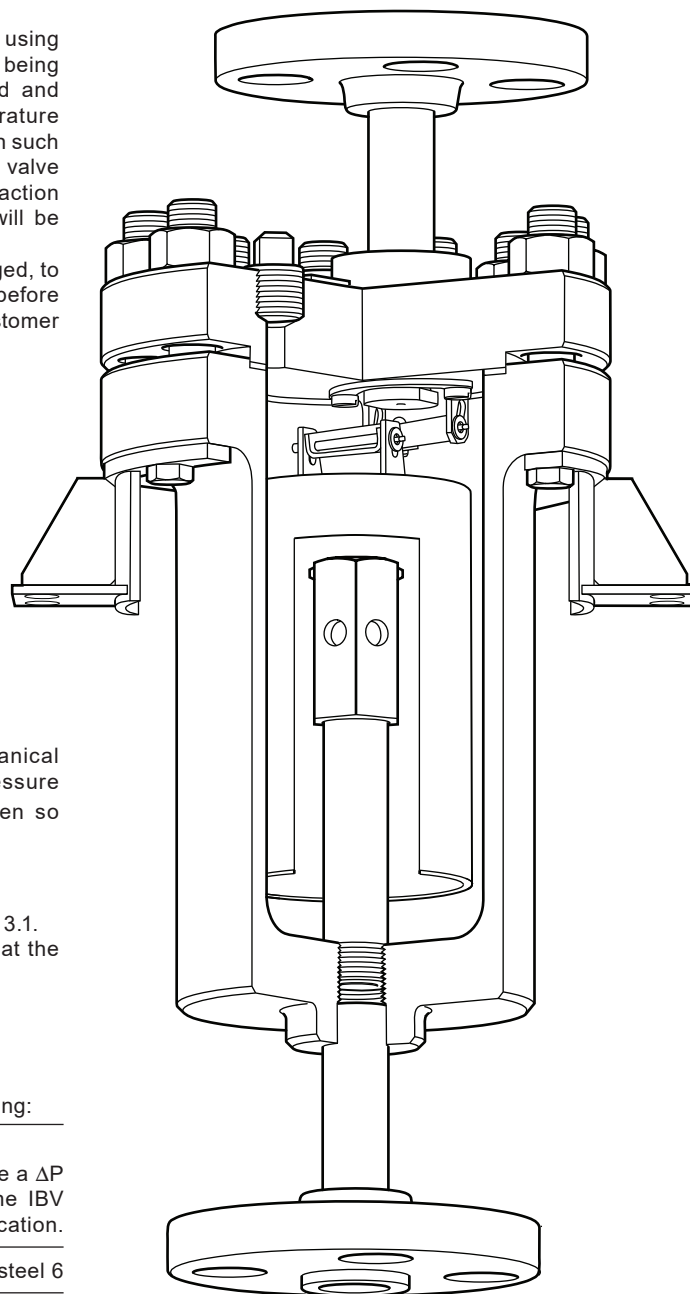

### Standards

This steam trap is designed following the ASME VIII Mechanical Design Code and complies with the requirements of the Pressure Equipment Directive (PED) and carries the **CE** mark when so required.

### Certification

The product is available with material certification to EN 10204 3.1.

**Note:** All certification/inspection requirements must be stated at the time of order placement.

### Optional extras

On request the IBV steam trap can be equipped with the following:

#### An inbuilt stainless steel check valve

**Please note** that this option is only available for units that have a  $\Delta P$  maximum differential pressure of 40 bar and above - See the IBV product nomenclature and selection guide on page 13 for clarification.

#### A Stellite plug and seat

Alloy steel 6

8.6

33

Steam traps  
Inverted bucket

Available types

|              |   |                |
|--------------|---|----------------|
| Series C     | Carbon steel body and cover   |                |
| Series C-LF2 | Carbon steel body and cover with a material specification of A350 LF2 for low temperature applications down to -46 °C | See TI-P067-13 |
| Series Z     | Alloy steel body and cover  | See TI-P067-15 |

Sizes and pipe connections


Please note that all standard flanges (as noted below) will be slip-on type. Weld-neck type flanges can be supplied to special order and must be specified at the time of order placement.

|   |
|---|
| 1/2", 3/4", 1", 1 1/2", 2" and 3"                           |
| Screwed BSP or NPT  |
| Socket weld, according to ASME B 16.11                      |
| 1/2", 3/4", 1", 1 1/2", 2" and 3"                           |
| Flanged ASME B 16.5 ASME Class 150, 300, 600, 900 and 1500* |
| DN15, DN20, DN25, DN40, DN50 and DN80                       |
| Flanged EN 1092 PN16, PN25, PN40, PN63, PN100 and PN160*    |

\* Note: that the flanged ASME Class 1500 units are limited to a body rating of ASME Class 900.


Materials

| No. | Part             | Material            |                 |
|-----|------------------|---------------------|-----------------|
| 1   | Body             | Carbon steel        | SA105           |
| 2   | Cover            | Carbon steel        | SA105           |
|     | Stud bolts       | Carbon steel        | SA193 Gr.B7     |
|     | Nuts             | Carbon steel        | SA194 Gr 2H     |
| 3   |                  | (external only)     | ASTM A479 XM-19 |
|     | Nace version     | Stud Bolts          | SA479XM-19      |
|     |                  | Nuts                | SA194 Gr.8M     |
| 4   | Cover gasket     | Reinforced graphite |                 |
| 5   | Channelling pipe | Stainless steel     | SA106 Gr. B     |
| 6   | Bucket           | Stainless steel     | AISI 316        |
| 7   | Support bracket  | Stainless steel     | SA516 Gr.60     |
| 8   | Bracket screw    | Stainless steel     | AISI 316        |
| 9   | Lever pin        | Stainless steel     | AISI 316        |
| 10  | Split pin        | Stainless steel     | AISI 316        |
| 11  | Valve seat       | Stainless steel     | 400 series      |
| 12  | Valve head       | Stainless steel     | 400 series      |
| 13  | Valve lever      | Stainless steel     | AISI 316        |

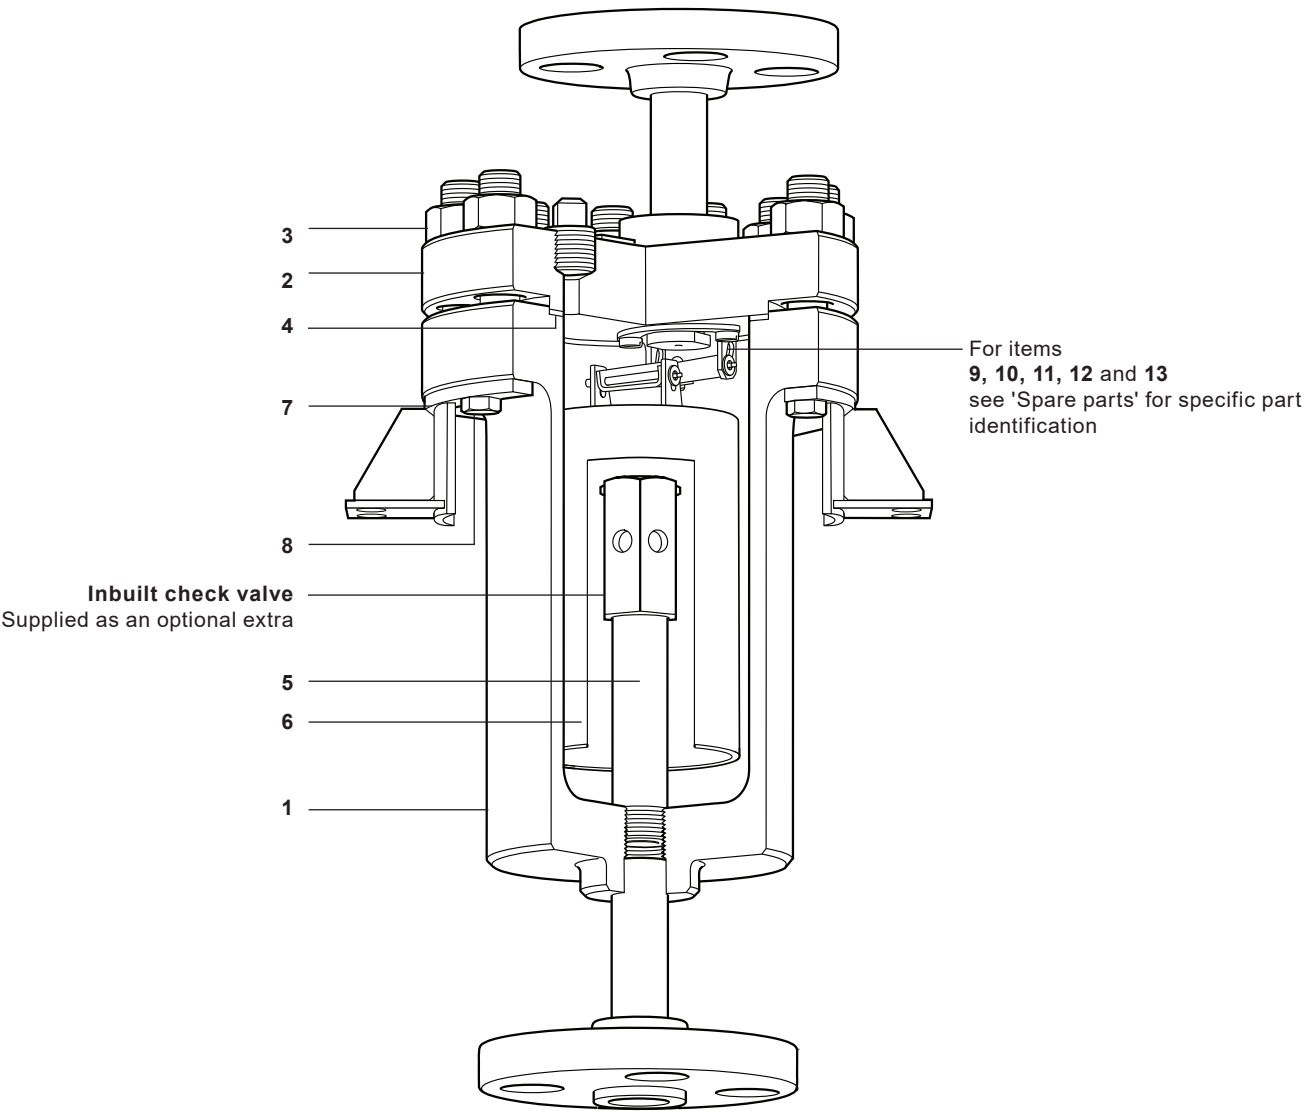

Steam traps  
Inverted bucket

Pressure/temperature limits (ISO 6552) - Screwed, Socket weld and Flanged ASME

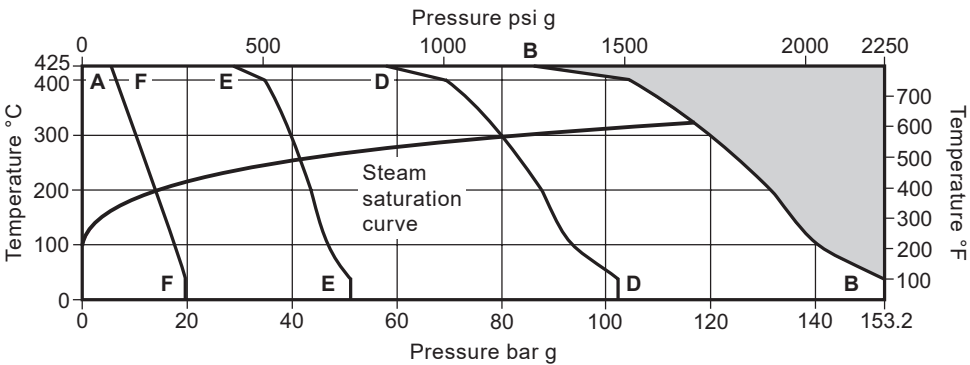


The product **must not** be used in this region or beyond the parameter of the PMA or TMA of the relative end connection.

\* Please note that the PMO (PS) is limited to the maximum ΔP of the selected IBV.

| Body design conditions |  |  | ASME Class 900       |                      |
|------------------------|--|--|----------------------|----------------------|
| A-B-B                  | Screwed and Socket weld ASME Class 900 | PMA - Maximum allowable pressure                                     | 153.2 bar g @ 38 °C  | 2 220 psi g @ 100    |
|                        |  | TMA - Maximum allowable temperature                                  | 425 °C @ 86.3 bar g  | 800 @ 1235 psi g     |
|                        |  | Minimum allowable temperature  | -29 °C               | -20 °F               |
|                        |  | * PMO (PS) - Maximum operating pressure for saturated steam service  | 116.3 bar g @ 323 °C | 1 688 psi g @ 613 °F |
|                        |  | TMO (TS) - Maximum operating temperature for saturated steam service | 323 °C @ 116.3 bar g | 613 °F @ 1 688 psi g |
|                        |  | Designed for a maximum cold hydraulic test pressure of:              | 229.8 bar g          | 3 330 psi g          |
|                        |  |  |                      |                      |
| A-D-D                  | ASME Class 600                         | PMA - Maximum allowable pressure                                     | 102.1 bar g @ 38 °C  | 1 480 @ 100 °F       |
|                        |  | TMA - Maximum allowable temperature                                  | 425 @ 57.5 bar g     | 800 @ 825            |
|                        |  | Minimum allowable temperature  | -29 °C               | -20 °F               |
|                        |  | * PMO (PS) - Maximum operating pressure for saturated steam service  | 79.9 bar g @ 295 °C  | 1 159 psi g @ 564 °F |
|                        |  | TMO (TS) - Maximum operating temperature for saturated steam service | 295 °C @ 79.9 bar g  | 564 °F @ 1 159 psi g |
|                        |  | Designed for a maximum cold hydraulic test pressure of:              | 153.1 bar g          | 2 175 psi g          |
|                        |  |  |                      |                      |
| A-E-E                  | ASME Class 300                         | PMA - Maximum allowable pressure                                     | 51.1 bar g @ 38 °C   | 740 psi g @ 100      |
|                        |  | TMA - Maximum allowable temperature                                  | 425 °C @ 28.8 bar g  | 800 °F @ 410 psi g   |
|                        |  | Minimum allowable temperature  | -29 °C               | -20 °F               |
|                        |  | * PMO (PS) - Maximum operating pressure for saturated steam service  | 41.7 bar g @ 254 °C  | 605 psi g @ 489 °F   |
|                        |  | TMO (TS) - Maximum operating temperature for saturated steam service | 254 °C @ 41.7 bar g  | 489 °F @ 605 psi g   |
|                        |  | Designed for a maximum cold hydraulic test pressure of:              | 76.6 bar g           | 1110 psi g           |
|                        |  |  |                      |                      |
| A-F-F                  | ASME Class 150                         | PMA - Maximum allowable pressure                                     | 19.6 bar g @ 38 °C   | 285 psi g @ 100 °F   |
|                        |  | TMA - Maximum allowable temperature                                  | 425 °C @ 5.5 bar g   | 800 °F @ 80 psi g    |
|                        |  | Minimum allowable temperature  | -29 °C               | -20 °F               |
|                        |  | * PMO (PS) - Maximum operating pressure for saturated steam service  | 13.8 bar g @ 197 °C  | 200 psi g @ 387 °F   |
|                        |  | TMO (TS) - Maximum operating temperature for saturated steam service | 197 °C @ 13.8 bar g  | 387 °F @ 200 psi g   |
|                        |  | Designed for a maximum cold hydraulic test pressure of:              | 29.4 bar g           | 427 psi g            |
|                        |  |  |                      |                      |

Pressure/temperature limits (ISO 6552) - Flanged EN1092-1

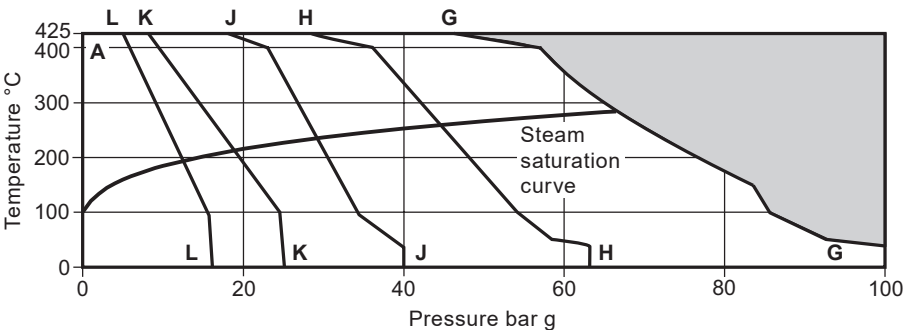

The product **must not** be used in this region or beyond the parameter of the PMA or TMA of the relative end connection.

\* **Please note** that the PMO (PS) is limited to the maximum ΔP of the selected IBV.

| Body design conditions |       | PN100   |
|------------------------|-------|---|
| A-G-G                  | PN100 | PMA - Maximum allowable pressure100 bar g @ 50 °C                                       |
|                        |       | TMA - Maximum allowable temperature425 °C @ 44.9 bar g                                  |
|                        |       | Minimum allowable temperature-29 °C   |
|                        |       | * PMO (PS) - Maximum operating pressure for saturated steam service66 bar g             |
|                        |       | TMO (TS) - Maximum operating temperature for saturated steam service283 °C @ 44.9 bar g |
|                        |       | Designed for a maximum cold hydraulic test pressure of:143 bar g                        |
| A-H-H                  | PN63  | PMA - Maximum allowable pressure63 bar g @ 50 °C  |
|                        |       | TMA - Maximum allowable temperature425 °C @ 28.3 bar g                                  |
|                        |       | Minimum allowable temperature-29 °C   |
|                        |       | * PMO (PS) - Maximum operating pressure for saturated steam service44 bar g             |
|                        |       | TMO (TS) - Maximum operating temperature for saturated steam service257 °C @ 28.3 bar g |
|                        |       | Designed for a maximum cold hydraulic test pressure of:90 bar g                         |
| A-J-J                  | PN40  | PMA - Maximum allowable pressure40 bar g @ 50 °C  |
|                        |       | TMA - Maximum allowable temperature425 °C @ 17.9 bar g                                  |
|                        |       | Minimum allowable temperature-29 °C   |
|                        |       | * PMO (PS) - Maximum operating pressure for saturated steam service29 bar g             |
|                        |       | TMO (TS) - Maximum operating temperature for saturated steam service234 °C @ 17.5 bar g |
|                        |       | Designed for a maximum cold hydraulic test pressure of:57.2 bar g                       |
| A-K-K                  | PN25  | PMA - Maximum allowable pressure25 bar g @ 50 °C  |
|                        |       | TMA - Maximum allowable temperature425 °C @ 11.2 bar g                                  |
|                        |       | Minimum allowable temperature-29 °C   |
|                        |       | * PMO (PS) - Maximum operating pressure for saturated steam service19 bar g             |
|                        |       | TMO (TS) - Maximum operating temperature for saturated steam service212 °C @ 11.2 bar g |
|                        |       | Designed for a maximum cold hydraulic test pressure of:35.7 bar g                       |
| A-L-L                  | PN16  | PMA - Maximum allowable pressure16 bar g @ 50 °C  |
|                        |       | TMA - Maximum allowable temperature425 °C @ 7.1 bar g                                   |
|                        |       | Minimum allowable temperature-29 °C   |
|                        |       | * PMO (PS) - Maximum operating pressure for saturated steam service12 bar g             |
|                        |       | TMO (TS) - Maximum operating temperature for saturated steam service191 °C @ 7.1 bar g  |
|                        |       | Designed for a maximum cold hydraulic test pressure of:22.8 bar g                       |

Steam traps  
Inverted bucket

Capacities - DN15

**Note:** IBV inverted bucket steam traps should be selected for use at the most appropriate working differential pressure and not on the basis of load.

**Condensate discharge capacities (kg/h)** - The discharge capacities in the table are referring to the operating temperature of the saturated steam and the PMO (PS) of the steam trap shall be the relevant  $\Delta P$  maximum differential pressure of each specific model.

For optimum trap selection you need to know the following criteria:


- a) The hourly amount of condensate to be discharged, inclusive of the safety factor: x 1.5 for continuous use, x 2 to x 3 for intermittent use.
- b) The effective differential pressure.

Working example:

Condensate discharge = 500 kg/h  
Effective differential pressure = 30 bar  
Upstream pressure = 45 bar g  
Backpressure = 15 bar g

The unit of choice would have a  $\Delta P$  max. differential pressure of **70 bar** which is greater than the upstream pressure.

For full product selection and nomenclature follow the guide on page 13.

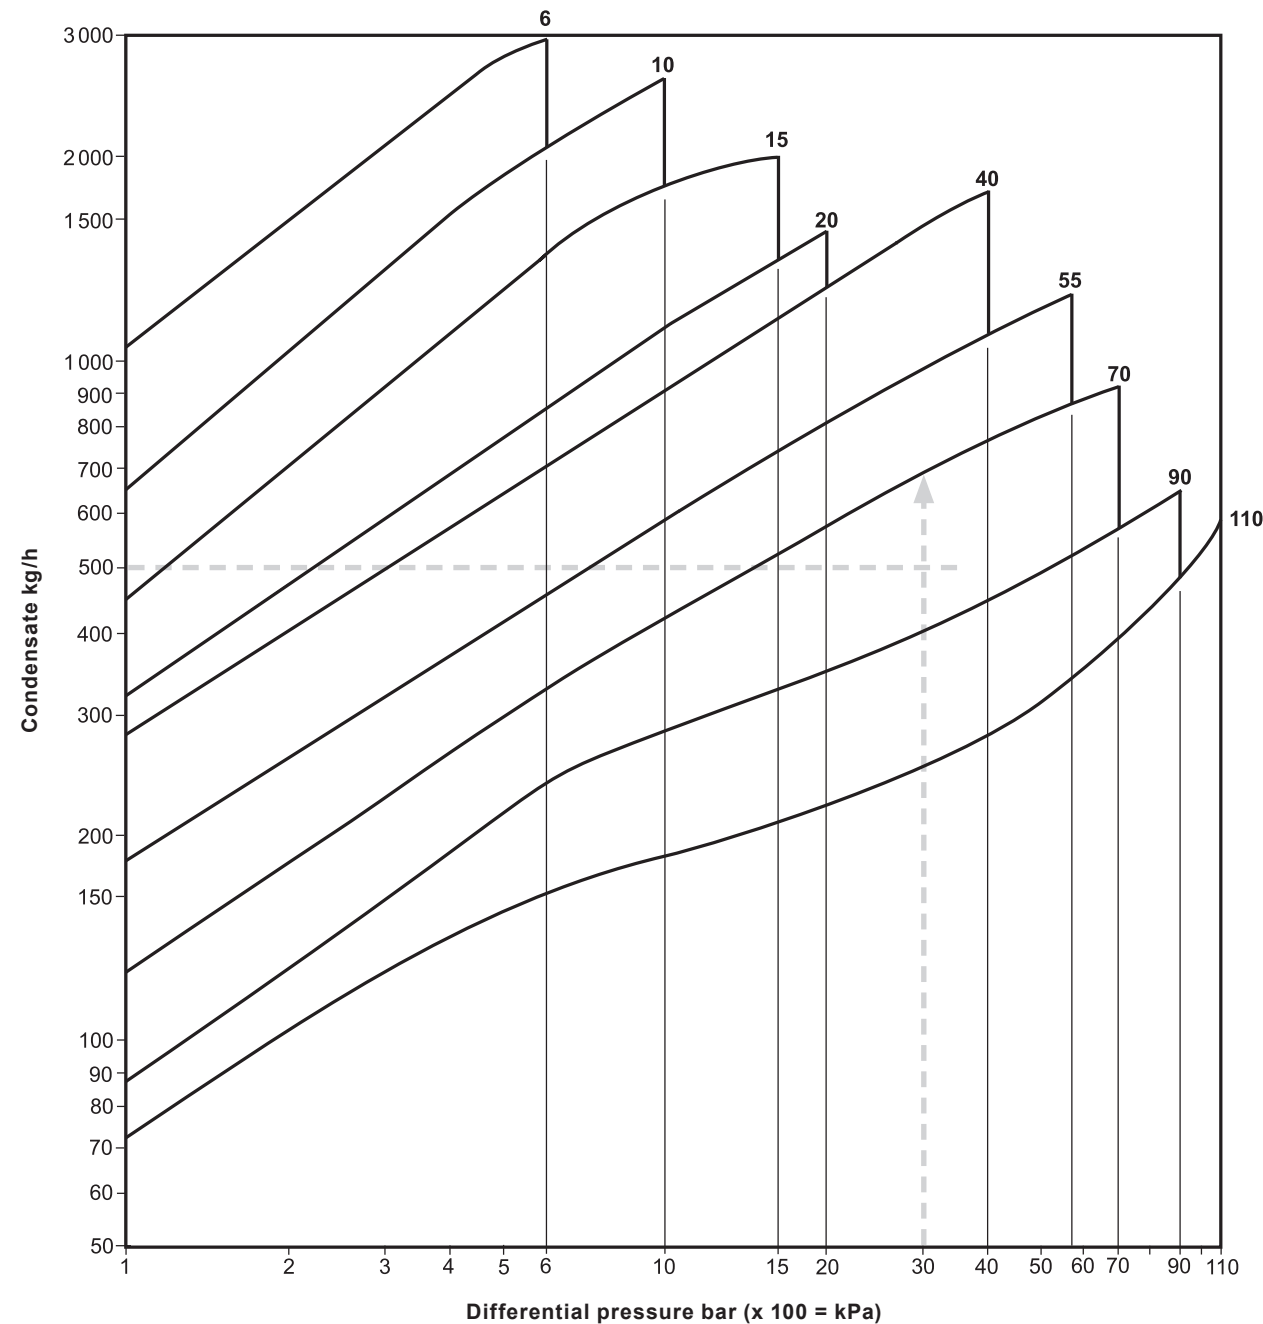

Capacities - DN20

**Note:** IBV inverted bucket steam traps should be selected for use at the most appropriate working differential pressure and not on the basis of load.

**Condensate discharge capacities (kg/h)** - The discharge capacities in the table are referring to the operating temperature of the saturated steam and the PMO (PS) of the steam trap shall be the relevant  $\Delta P$  maximum differential pressure of each specific model.

For optimum trap selection you need to know the following criteria:


- a) The hourly amount of condensate to be discharged, inclusive of the safety factor: x 1.5 for continuous use, x 2 to x 3 for intermittent use.
- b) The effective differential pressure.

Working example:

Condensate discharge = 1050 kg/h  
Effective differential pressure = 30 bar  
Upstream pressure = 45 bar g  
Backpressure = 15 bar g

The unit of choice would have a  $\Delta P$  max. differential pressure of **55 bar** which is greater than the upstream pressure.

For full product selection and nomenclature follow the guide on page 13.

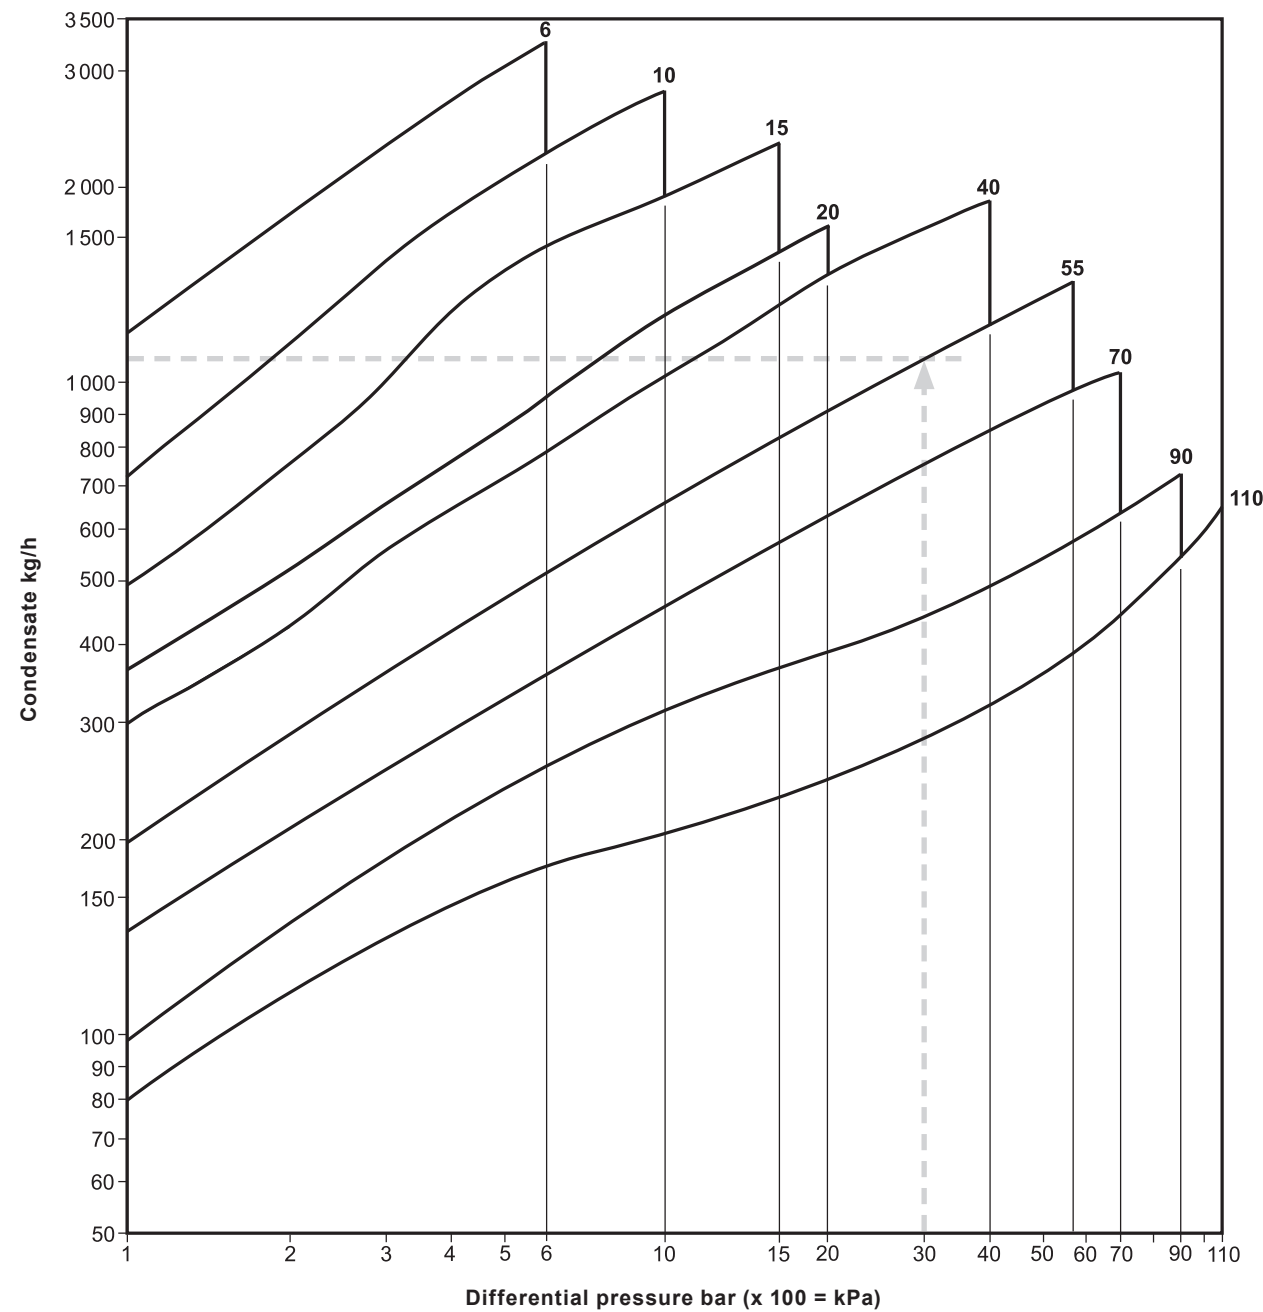

Steam traps  
Inverted bucket

Capacities - DN25

**Note:** IBV inverted bucket steam traps should be selected for use at the most appropriate working differential pressure and not on the basis of load.

**Condensate discharge capacities (kg/h)** - The discharge capacities in the table are referring to the operating temperature of the saturated steam and the PMO (PS) of the steam trap shall be the relevant  $\Delta P$  maximum differential pressure of each specific model.

For optimum trap selection you need to know the following criteria:


- a) The hourly amount of condensate to be discharged, inclusive of the safety factor: x 1.5 for continuous use, x 2 to x 3 for intermittent use.
- b) The effective differential pressure.

Working example:

Condensate discharge = 2000 kg/h  
Effective differential pressure = 4 bar  
Upstream pressure = 5 bar g  
Backpressure = 1 bar g

The unit of choice would have a  $\Delta P$  max. differential pressure of **15 bar** which is greater than the upstream pressure.

For full product selection and nomenclature follow the guide on page 13.

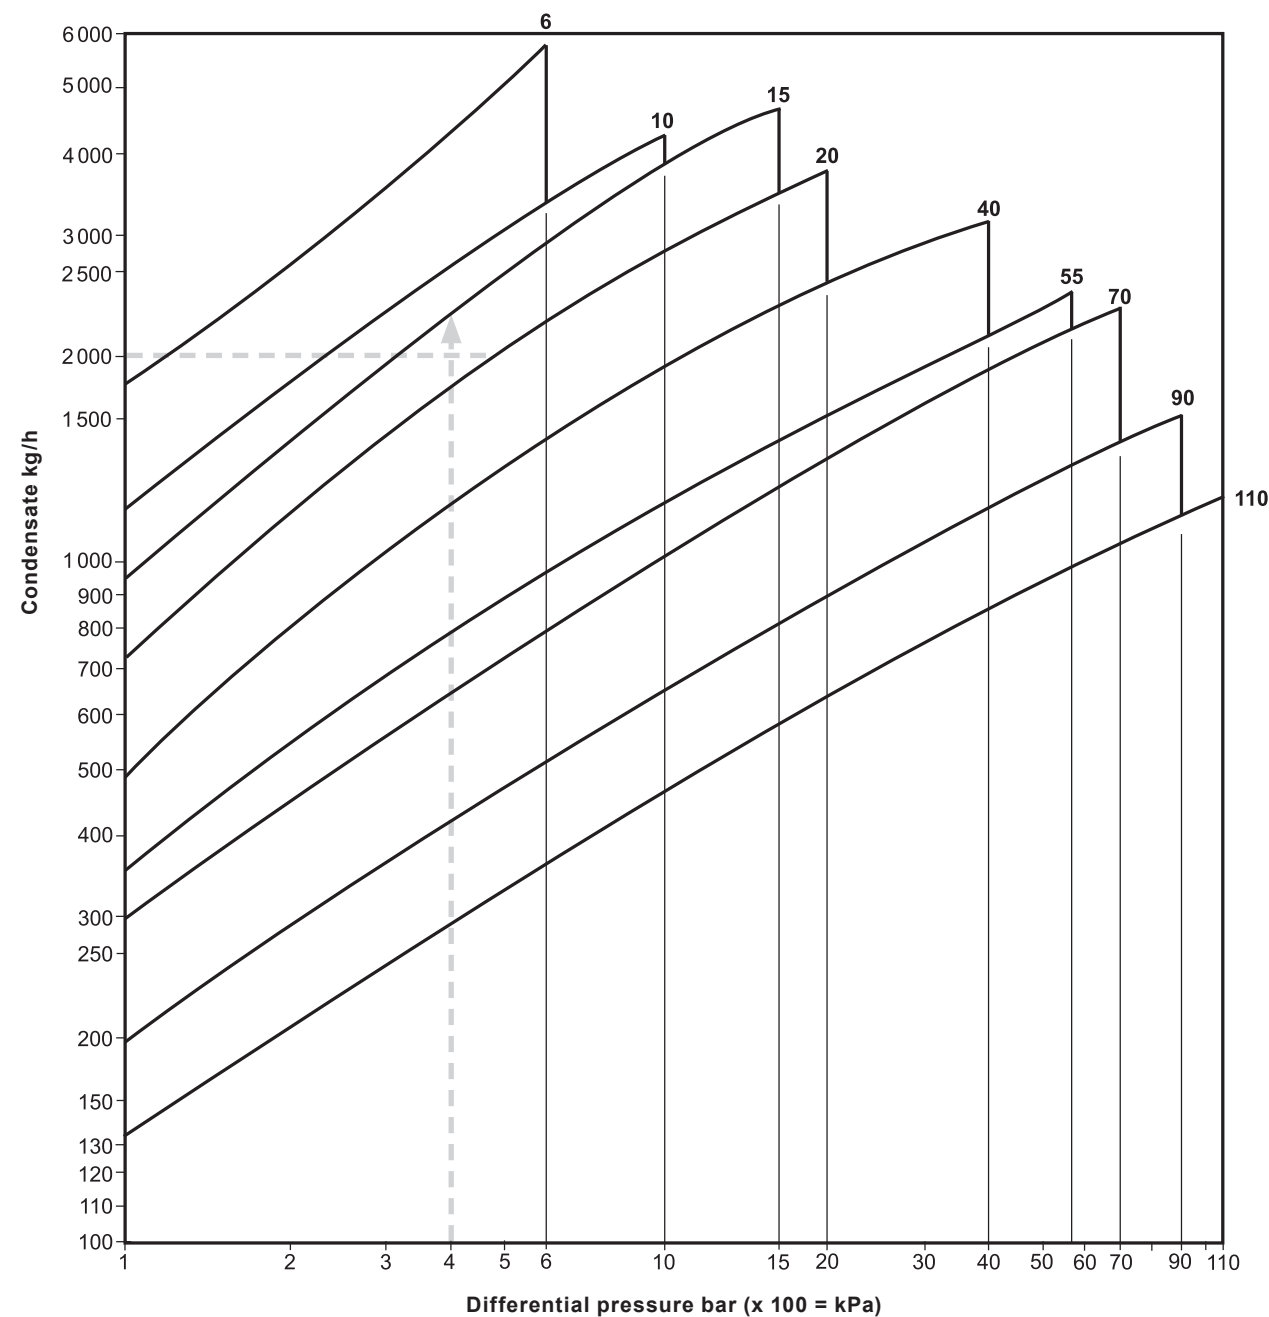



Capacities - DN40

**Note:** IBV inverted bucket steam traps should be selected for use at the most appropriate working differential pressure and not on the basis of load.

**Condensate discharge capacities (kg/h)** - The discharge capacities in the table are referring to the operating temperature of the saturated steam and the PMO (PS) of the steam trap shall be the relevant  $\Delta P$  maximum differential pressure of each specific model.


For optimum trap selection you need to know the following criteria:

- a) The hourly amount of condensate to be discharged, inclusive of the safety factor: x 1.5 for continuous use, x 2 to x 3 for intermittent use.
- b) The effective differential pressure.

Working example:

Condensate discharge = 2000 kg/h  
Effective differential pressure = 50 bar  
Upstream pressure = 75 bar g  
Backpressure = 25 bar g

The unit of choice would have a  $\Delta P$  max. differential pressure of **110 bar** which is greater than the upstream pressure.  
For full product selection and nomenclature follow the guide on page 13.

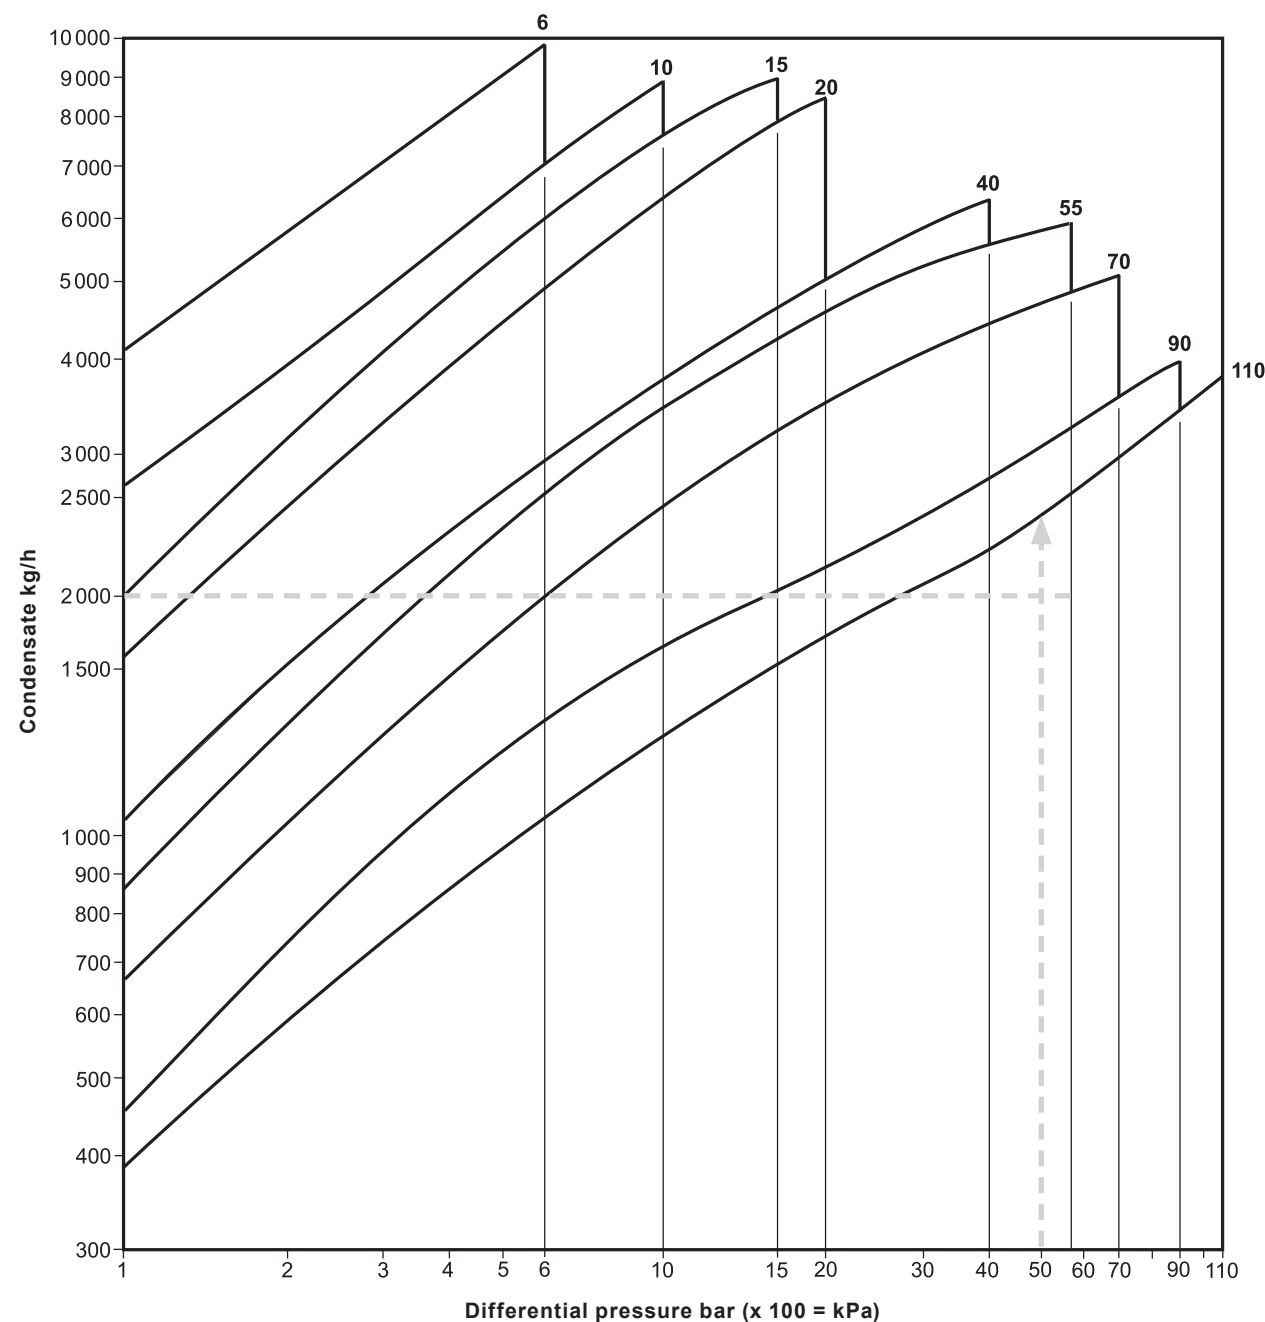

Steam traps  
Inverted bucket

Capacities - DN50

**Note:** IBV inverted bucket steam traps should be selected for use at the most appropriate working differential pressure and not on the basis of load.

**Condensate discharge capacities (kg/h)** - The discharge capacities in the table are referring to the operating temperature of the saturated steam and the PMO (PS) of the steam trap shall be the relevant  $\Delta P$  maximum differential pressure of each specific model.

For optimum trap selection you need to know the following criteria:


- a) The hourly amount of condensate to be discharged, inclusive of the safety factor: x 1.5 for continuous use, x 2 to x 3 for intermittent use.
- b) The effective differential pressure.

Working example:

Condensate discharge = 6000 kg/h  
Effective differential pressure = 8 bar  
Upstream pressure = 10 bar g  
Backpressure = 2 bar g

The unit of choice would have a  $\Delta P$  max. differential pressure of **20 bar** which is greater than the upstream pressure.

For full product selection and nomenclature follow the guide on page 13.

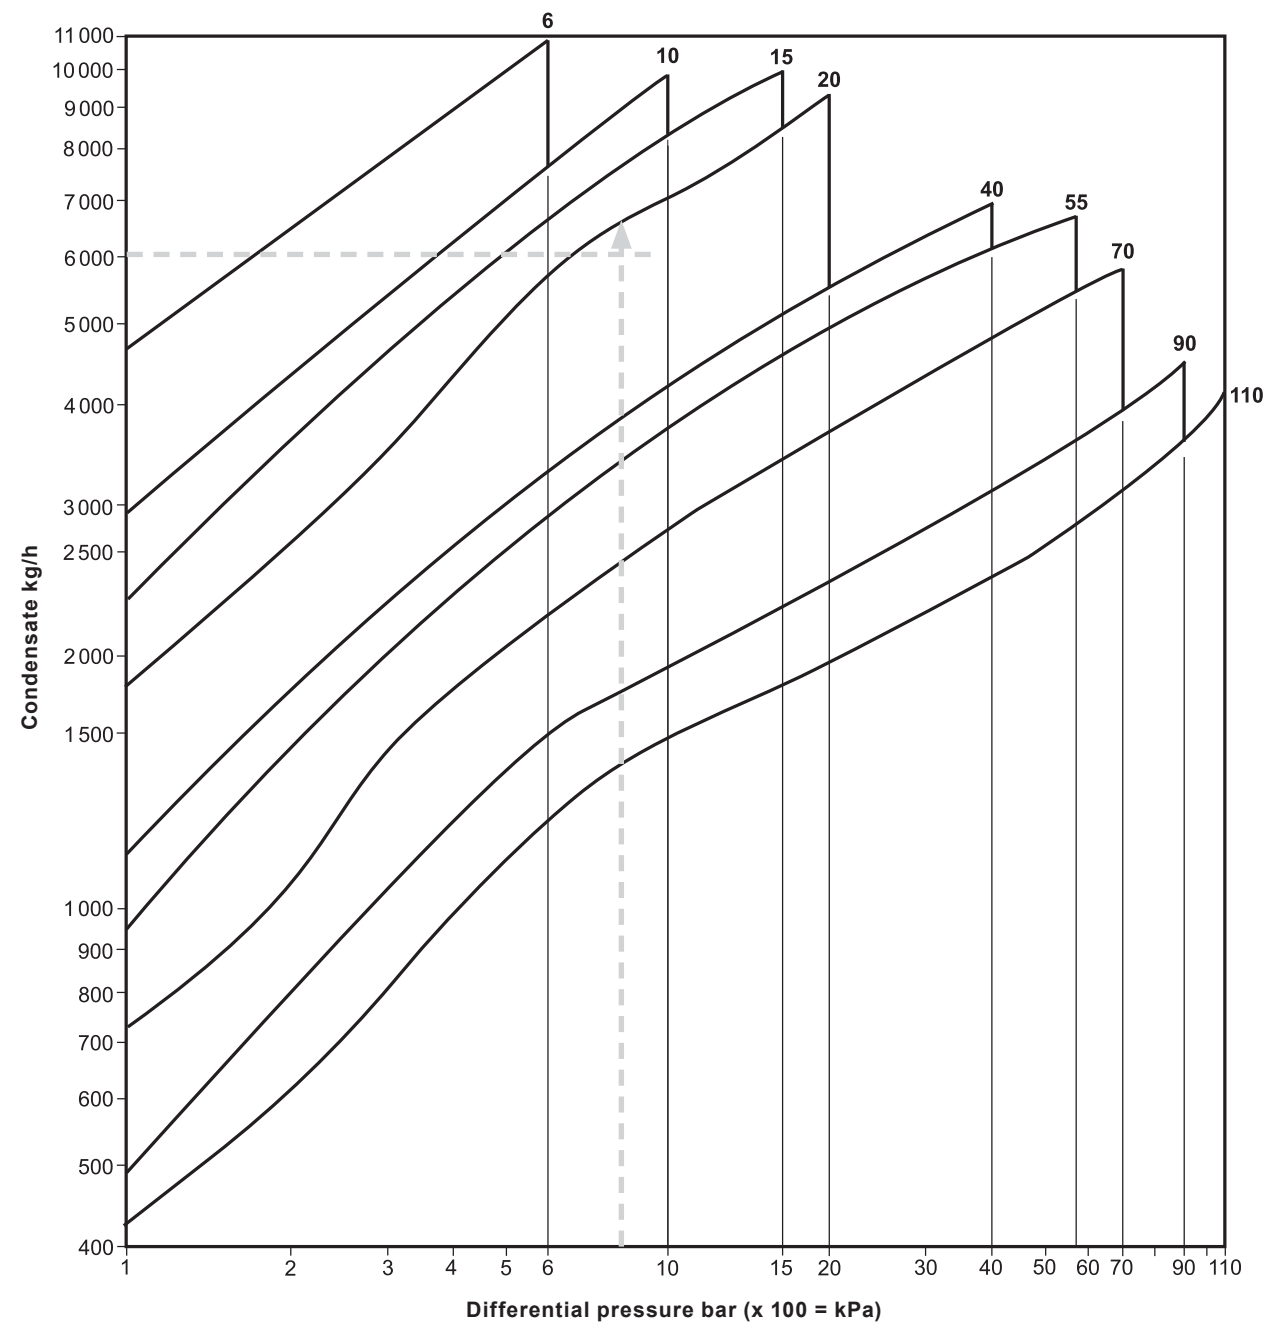

Capacities - DN80

**Note:** IBV inverted bucket steam traps should be selected for use at the most appropriate working differential pressure and not on the basis of load.

**Condensate discharge capacities (kg/h)** - The discharge capacities in the table are referring to the operating temperature of the saturated steam and the PMO (PS) of the steam trap shall be the relevant  $\Delta P$  maximum differential pressure of each specific model.

For optimum trap selection you need to know the following criteria:


- a) The hourly amount of condensate to be discharged, inclusive of the safety factor: x 1.5 for continuous use, x 2 to x 3 for intermittent use.
- b) The effective differential pressure.

Working example:

Condensate discharge = 5000 kg/h  
Effective differential pressure = 30 bar  
Upstream pressure = 55 bar g  
Backpressure = 25 bar g

The unit of choice would have a  $\Delta P$  max. differential pressure of **90 bar** which is greater than the upstream pressure.

For full product selection and nomenclature follow the guide on page 13.

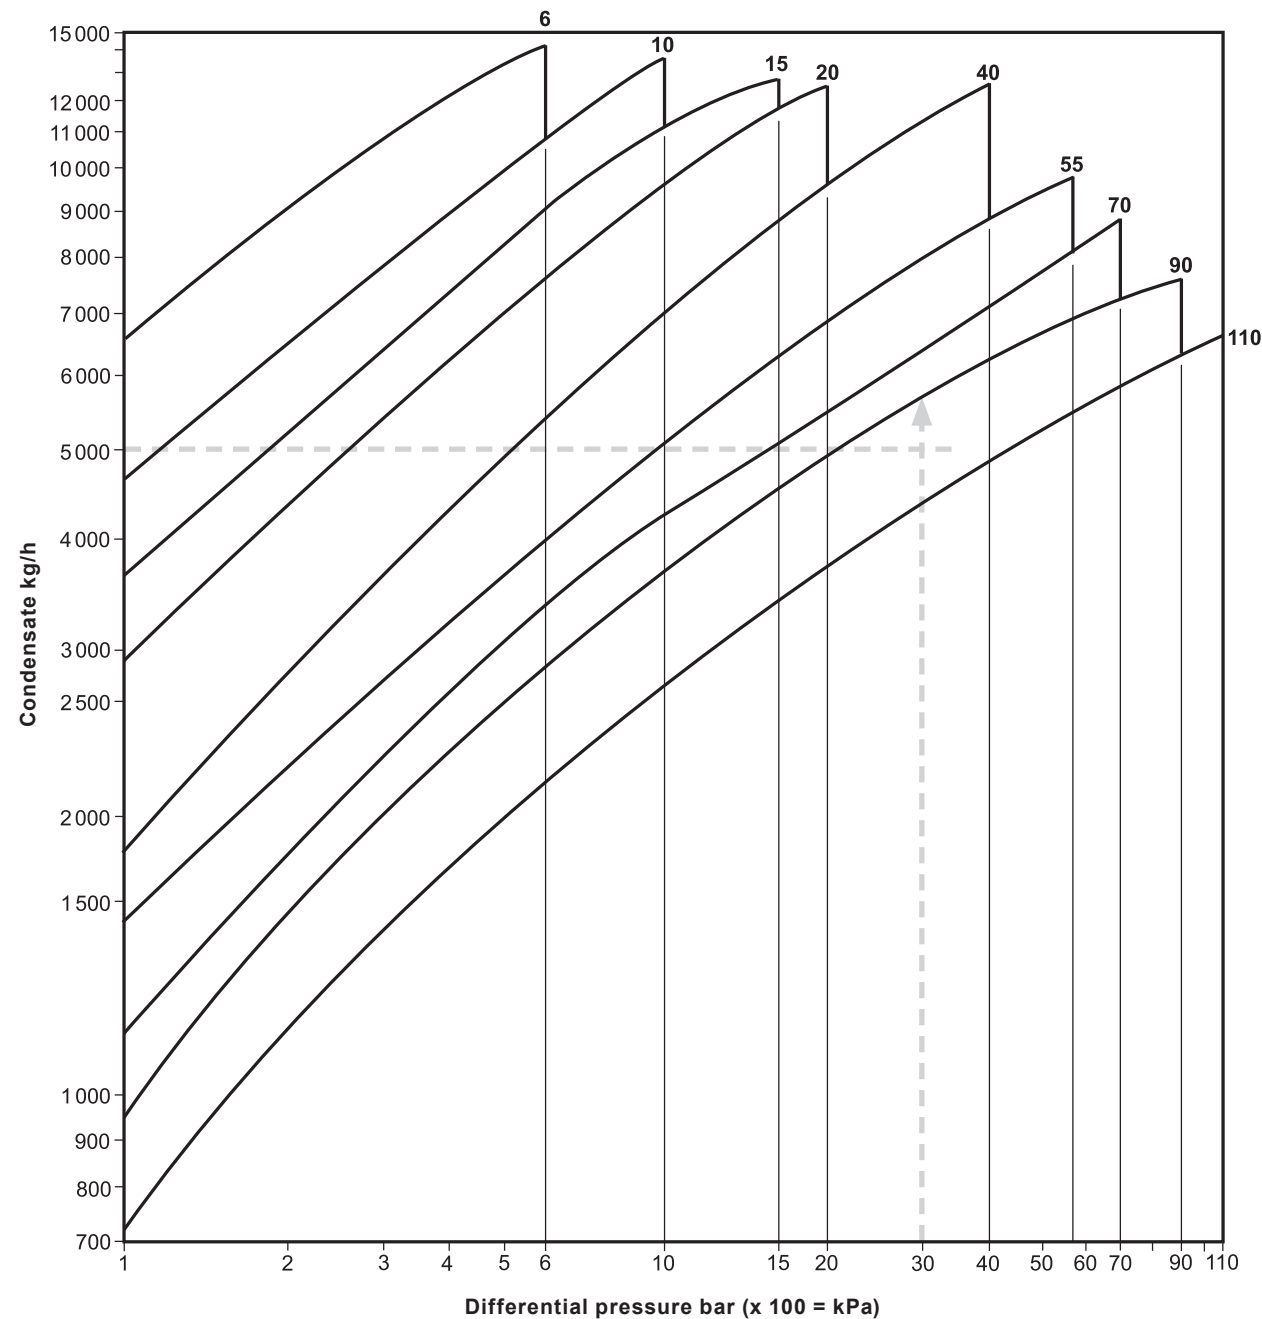


8.6

43

Steam traps  
Inverted bucket

Dimensions/weights (approximate) in mm and kg

| IBV size | Dimensions |       |     |    |     |
|----------|------------|-------|-----|----|-----|
|          | A          | B     | C   | D  | E   |
| DN15 ½"  | 260        | 488   | 420 | 25 | 165 |
| DN20 ¾"  | 260        | 488   | 420 | 25 | 165 |
| DN25 1"  | 345        | 616   | 530 | 40 | 210 |
| DN40 1½" | 411        | 774   | 650 | 39 | 265 |
| DN50 2"  | 411        | 782   | 650 | 39 | 265 |
| DN80 3"  | 532        | 1 026 | 850 | 36 | 305 |

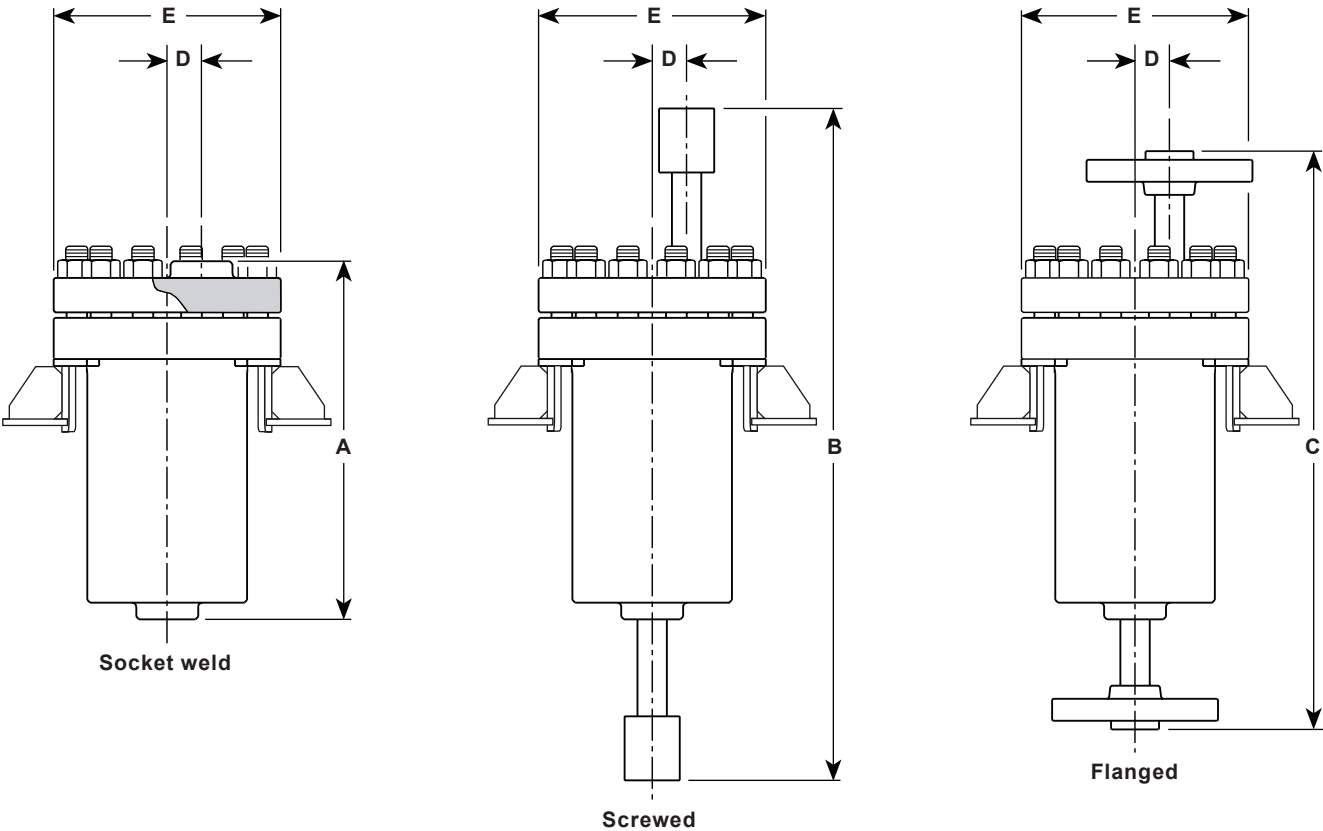

| IBV size |     | Weights         |                |                     |     |     |     |       |                  |      |      |      |       |
|----------|-----|-----------------|----------------|---------------------|-----|-----|-----|-------|------------------|------|------|------|-------|
|          |     | BSP<br>+<br>NPT | Socket<br>weld | Flanged ASME Class: |     |     |     |       | Flanged EN 1092: |      |      |      |       |
|          |     |                 |                | 150                 | 300 | 600 | 900 | 1500* | PN16             | PN25 | PN40 | PN63 | PN100 |
| DN15     | ½"  | 20              | 18             | 20                  | 20  | 20  | 22  | 22    | 20               | 20   | 20   | 20   | 22    |
| DN20     | ¾"  | 26              | 24             | 26                  | 28  | 28  | 30  | 30    | 28               | 28   | 28   | 28   | 30    |
| DN25     | 1"  | 42              | 39             | 42                  | 44  | 44  | 48  | 48    | 42               | 42   | 42   | 42   | 46    |
| DN40     | 1½" | 68              | 65             | 70                  | 72  | 72  | 78  | 78    | 70               | 70   | 70   | 70   | 74    |
| DN50     | 2"  | 68              | 65             | 72                  | 74  | 76  | 88  | 88    | 72               | 72   | 72   | 74   | 78    |
| DN80     | 3"  | 125             | 120            | 132                 | 136 | 138 | 152 | 162   | 130              | 130  | 130  | 134  | 138   |

\* on request

IBV product nomenclature and selection guide:

Please note that other units are available on request to suit the specifics of a particular process application.

|   |              |  |                   |
|---|--------------|--|-------------------|
| Series  |              | C = Carbon steel   | C                 |
| PMO (PS) @<br>Saturated steam<br>temperature for the<br>body rating | Carbon steel | 116 bar g = ASME Class 900 body  | 116               |
|   |              |  |                   |
| ΔP maximum differential pressure                                    |              | ΔP = 6, 10, 15, 20, 40, 55, 70, 90, 110 bar  | 110               |
| Connections   | Size         | 1½", ¾", 1", 1½", 2", 3"<br>= <b>or</b><br>DN15, DN20, DN25, DN40, DN50, DN80  | 3"                |
|   | Screwed      | = BSP or NPT   | ASME<br>Class 300 |
|   | Socket weld  | = According to ASME B 16.11  |                   |
|   | Flanged      | ASME = ASME Class 150, 300, 600, 900, (*1500 available on request)   |                   |
|   |              | EN 1092 = PN16, PN25, PN40, PN63, PN100  |                   |
| Optional extras   | Blank        | = Standard   |                   |
|   | NACE         | = NACE compliancy  |                   |
|   | CV           | Check valve<br><b>Please note</b> that this option is only available for units that have a ΔP maximum differential pressure of 40 bar and above - See above. |                   |

IBV product selection example: 

IBV

 - 

C

 - 

116

 - 

110

 - 

3"

 - 

ASME Class 300

 -

How to order

1 off Spirax Sarco IBV - C - 116 - 110 - 3" - Flanged ASME Class 300 inverted bucket vertical steam trap having a carbon steel body and cover with stainless steel internals.

The following will be supplied, if specified, at the time of order placement:

1. A special name-plate when a U-STAMP has been specified.

Steam traps  
Inverted bucket

Safety information, installation and maintenance

For full details see the Installation and Maintenance Instructions supplied with the product.

Installation note:

The trap must be installed below the drain point with the body upright in a vertical position, the cover at the top and the inlet connection at the bottom; this orientation will ensure that the bucket mechanism will rise and fall vertically without any friction. It is recommended that a strainer is installed upstream of the IBV to protect it from contamination.  
To permit safe inspection for cleaning or maintenance purpose it is again recommended that suitable shut-off valves are installed upstream and downstream of the IBV application.  
It needs to be appreciated that there is blast discharge with this device, consequently the downstream accessories, if any, should be installed at a minimum distance of 1 m from the IBV.

Disposal

This product is recyclable. No ecological hazard is anticipated with the disposal of this product providing due care is taken.

Spare parts

The spare parts available are shown in heavy outline. Parts drawn in a grey line are not supplied as spares.


Available spares

|                            |                            |
|----------------------------|----------------------------|
| Valve assembly             | 4, 7, 8, 9, 10, 11, 12, 13 |
| Bucket assembly            | 4, 6, 9, 10                |
| Cover gasket (packet of 3) | 4                          |

How to order spares


Always order spares by using the description given in the column headed 'Available spares' and state the type of trap, pressure rating and size and type of the connections.

**Example:** 1 - Valve assembly for a Spirax Sarco IBV - C - 116 - 110 - 3" - Flanged ASME Class 300 inverted bucket vertical steam trap.

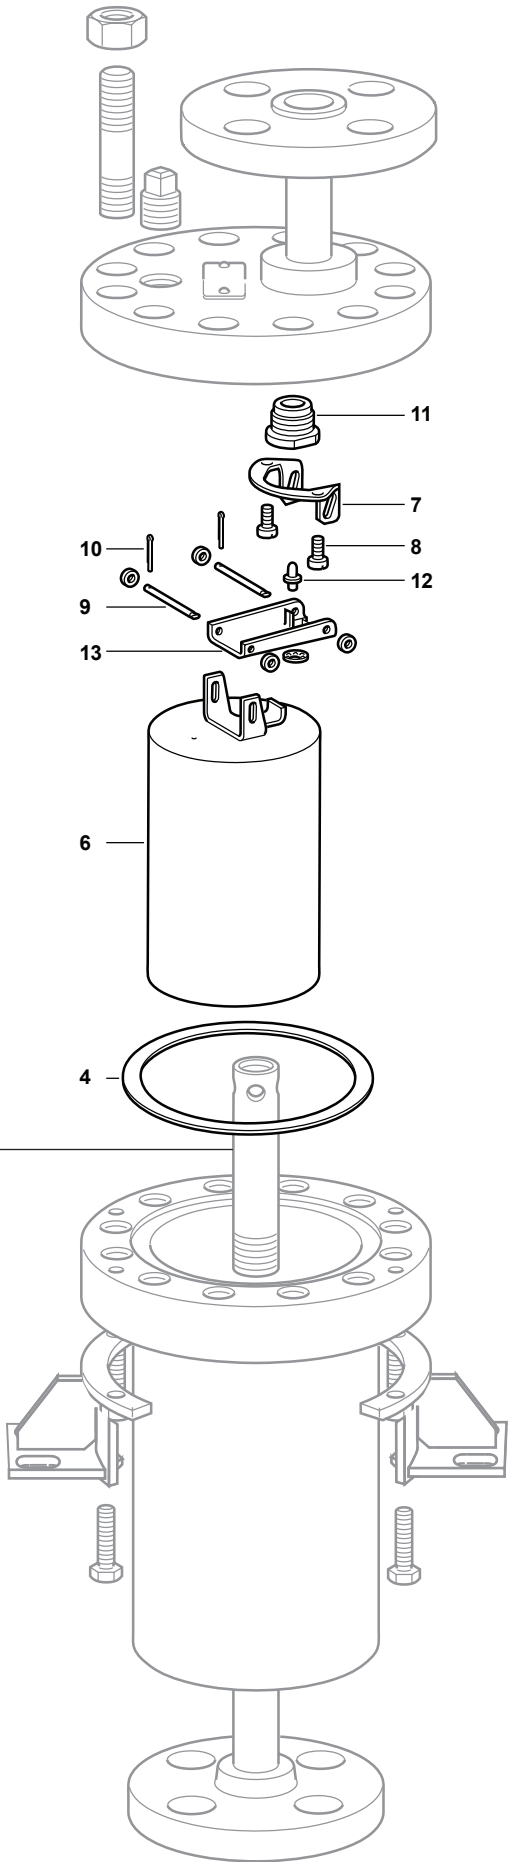

Optional extra

Inbuilt stainless steel check valve

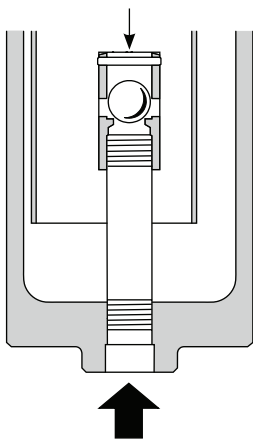

Please note that this option is only available for units that have a DP maximum differential pressure of 40 bar and above - See the IBV product nomenclature and selection guide on page 13 for clarification.


TI-P067-13  
CMGT Issue 3

## IBV Series C-LF2 Carbon Steel Inverted Bucket Vertical Steam Trap

### Description

The IBV series C-LF2 inverted bucket steam trap is manufactured using carbon steel (A350 LF2) for the body and cover; with internal components being made of stainless steel. It is suitable for use with saturated and superheated steam and in high pressure and high temperature applications. The IBV is fully automatic and has been designed in such a way that there is minimal friction from mechanism movement; valve closure is immediate, without any steam loss and the discharge action is positive with no equivocal phases. The standard version will be supplied with bolted support brackets.

**On the cover of the IBV** there is a  $\frac{1}{8}$ " hole, threaded and plugged, to eliminate any water discharge after being hydraulically tested before leaving the factory. This hole can be reopened on site for the customer to perform periodic hydro testing.

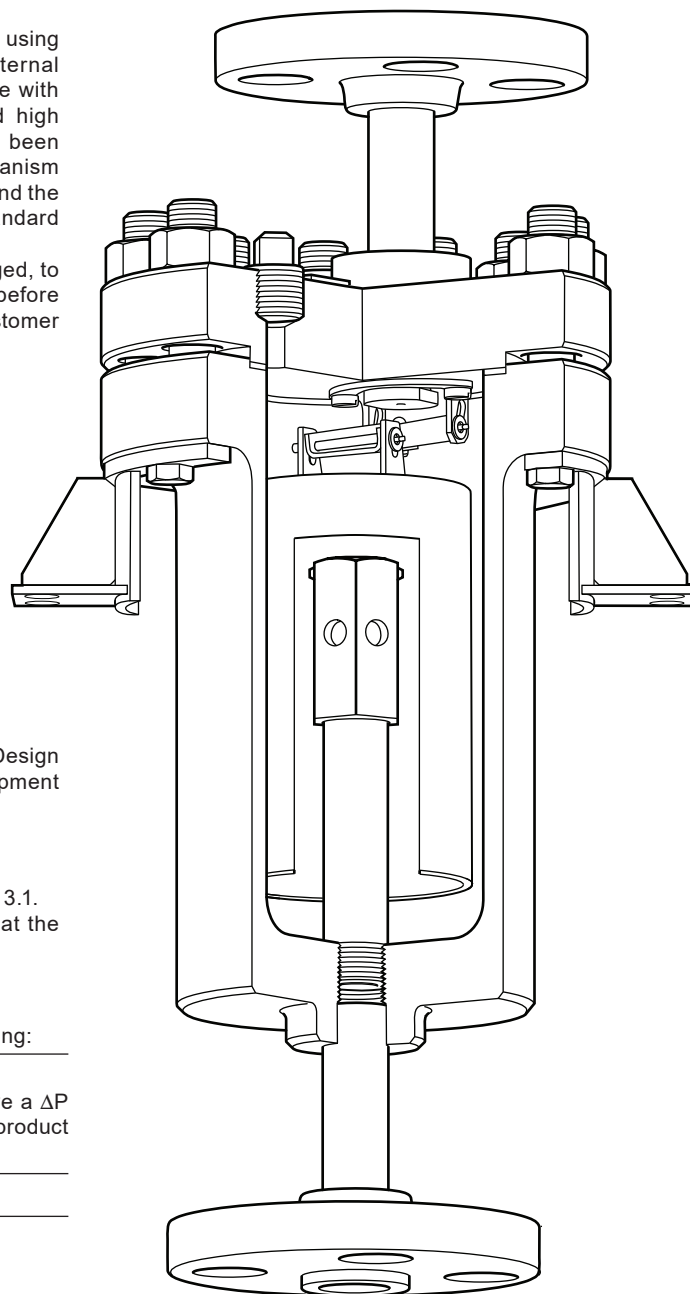

### Standards

This steam trap is designed following the ASME VIII Mechanical Design Code and complies with the requirements of the Pressure Equipment Directive and carries the **CE** mark when so required.

### Certification

The product is available with material certification to EN 10204 3.1.

**Note:** All certification/inspection requirements must be stated at the time of order placement.

### Optional extras

On request the IBV steam trap can be equipped with the following:

#### An inbuilt stainless steel check valve

**Please note** that this option is only available for units that have a  $\Delta P$  maximum differential pressure of 40 bar and above - See the IBV product nomenclature and selection guide on page 13 for clarification.

#### A Stellite plug and seat.

8.6

47

Steam traps  
Inverted bucket

Available types

|              |  |                |
|--------------|--|----------------|
| Series C     | Carbon steel body and cover  | See TI-P067-10 |
| Series C-LF2 | Carbon steel body and cover with a material specification of <b>A350 LF2</b> for low temperature applications down to -46 °C |                |
| Series Z     | Alloy steel body and cover   | See TI-P067-15 |

Sizes and pipe connections

**Please note** that all standard flanges (as noted below) will be slip-on type. Weld-neck type flanges can be supplied to special order and must be specified at the time of order placement.


|   |
|---|
| 1/2", 3/4", 1", 1 1/2", 2" and 3"<br>Screwed BSP or NPT<br>Socket weld, according to ASME B 16.11   |
| 1/2", 3/4", 1", 1 1/2", 2" and 3"<br>Flanged ASME B 16.5 ASME Class 150, 300, 600 and 900 (1500 available to special request Series C only) |
| DN15, DN20, DN25, DN40, DN50 and DN80<br>Flanged EN 1092 PN16, PN25, PN40, PN63 and PN100   |

**Note:** that the flanged **ASME Class 1500** units are **limited to a body rating of ASME Class 900**.




Materials

| No. | Part             | Material            |                         |
|-----|------------------|---------------------|-------------------------|
| 1   | Body             | Carbon steel        | PED ASTM A350 LF2 CL. 1 |
| 2   | Cover            | Carbon steel        | ASTM A350 LF2           |
|     | Stud bolts       |                     | ASTM A193 Gr. B8 CL.2   |
|     | Nuts             |                     | ASTM A194 Gr. 8         |
| 3   |                  | (External only)     |                         |
|     | NACE Version     | Stud bolts          | ASTM A479XM-19          |
|     |                  | Nuts                | ASTM A194 Gr. 8M        |
| 4   | Cover gasket     | Reinforced graphite |                         |
| 5   | Channelling pipe | Stainless steel     | A333 Gr. 6              |
| 6   | Bucket           | Stainless steel     | AISI 316                |
| 7   | Bracket          | Carbon steel        | A516 Gr. 70             |
| 8   | Bracket screw    | Stainless steel     | AISI 316                |
| 9   | Lever pin        | Stainless steel     | AISI 316                |
| 10  | Split pin        | Stainless steel     | AISI 316                |
| 11  | Valve seat       | Stainless steel     | 400 series              |
| 12  | Valve head       | Stainless steel     | 400 series              |
| 13  | Valve lever      | Stainless steel     | AISI 316                |

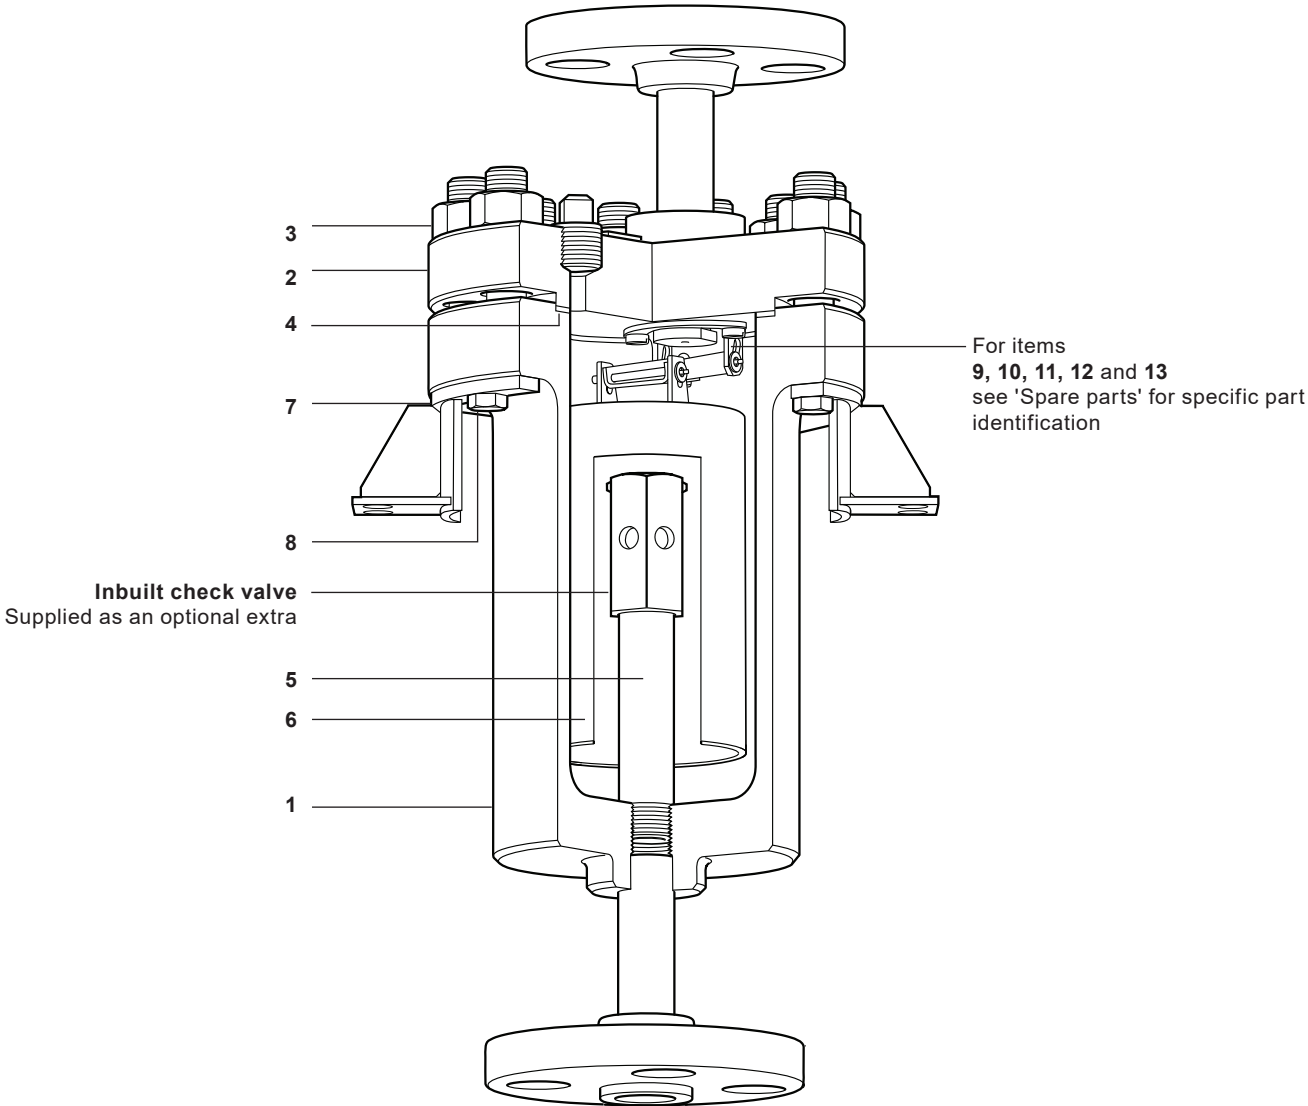

Steam traps  
Inverted bucket

Pressure/temperature limits (ISO 6552) - Screwed, Socket weld and Flanged ASME

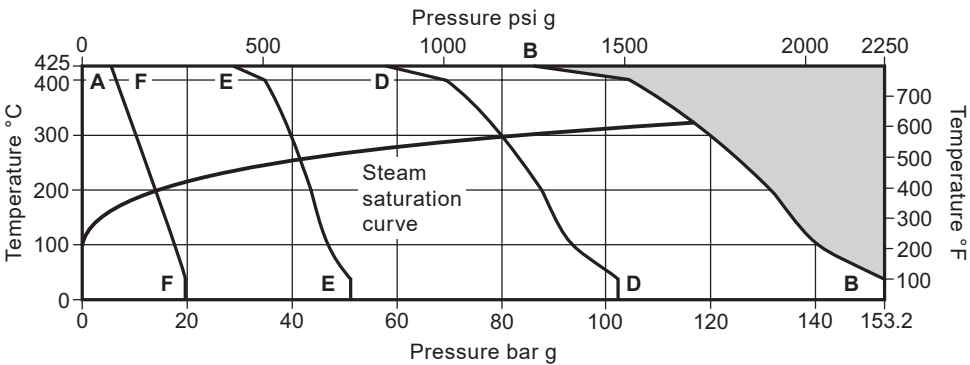


The product **must not** be used in this region or beyond the parameter of the PMA or TMA of the relative end connection.

\* **Please note** that the PMO (PS) is limited to the maximum ΔP of the selected IBV.

| Body design conditions                             |  | ASME Class 900       |                      |
|--|--|----------------------|----------------------|
| A-B-B<br>Screwed and Socket weld<br>ASME Class 900 | PMA - Maximum allowable pressure                                     | 153.2 bar g @ 38 °C  | 2222 psi g @ 100 °F  |
|  | TMA - Maximum allowable temperature                                  | 425 bar g @ 86.3 °C  | 800 °F @ 1 235 psi g |
|  | Minimum allowable temperature  | -46 °C               | -50 °F               |
|  | * PMO (PS) - Maximum operating pressure for saturated steam service  | 116.3 bar g          | 1687 psi g           |
|  | TMO (TS) - Maximum operating temperature for saturated steam service | 323 °C @ 112.7 bar g | 613 °F @ 1635 psi g  |
|  | Designed for a maximum cold hydraulic test pressure of:              | 229.8 bar g          | 3330 psi g           |
| A-D-D<br>ASME Class 600                            | PMA - Maximum allowable pressure                                     | 102.1 bar g @ 38 °C  | 1480 psi g @ 100 °F  |
|  | TMA - Maximum allowable temperature                                  | 425 °C @ 57.5 bar g  | 800 °F @ 825 psi g   |
|  | Minimum allowable temperature  | -46 °C               | -50 °F               |
|  | * PMO (PS) - Maximum operating pressure for saturated steam service  | 79.9 bar g           | 1 159 psi g          |
|  | TMO (TS) - Maximum operating temperature for saturated steam service | 295 °C @ 75.1 bar g  | 564 °F @ 1089 psi g  |
|  | Designed for a maximum cold hydraulic test pressure of:              | 153.1 bar g          | 2 220 psi g          |
| A-E-E<br>ASME Class 300                            | PMA - Maximum allowable pressure                                     | 51.1 bar g @ 38 °C   | 741 psi g @ 100 °F   |
|  | TMA - Maximum allowable temperature                                  | 425 °C @ 28.8 bar g  | 800 °F @ 410 psi g   |
|  | Minimum allowable temperature  | -46 °C               | -50 °F               |
|  | * PMO (PS) - Maximum operating pressure for saturated steam service  | 41.7 bar g           | 605 psi g            |
|  | TMO (TS) - Maximum operating temperature for saturated steam service | 254 °C @ 37.6 bar g  | 489 °F @ 545 psi g   |
|  | Designed for a maximum cold hydraulic test pressure of:              | 76.6 bar g           | 1 110 psi g          |
| A-F-F<br>ASME Class 150                            | PMA - Maximum allowable pressure                                     | 19.6 bar g @ 38 °C   | 284 psi g @ 100 °F   |
|  | TMA - Maximum allowable temperature                                  | 425 °C @ 5.5 bar g   | 800 °F @ 80 psi g    |
|  | Minimum allowable temperature  | -46 °C               | -50 °F               |
|  | * PMO (PS) - Maximum operating pressure for saturated steam service  | 14 bar g             | 203 psi g            |
|  | TMO (TS) - Maximum operating temperature for saturated steam service | 197 °C @ 8.4 bar g   | 387 °F @ 122 psi g   |
|  | Designed for a maximum cold hydraulic test pressure of:              | 29.4 bar g           | 427 psi g            |

Pressure/temperature limits (ISO 6552) - Screwed, Socket weld and Flanged EN1092-1

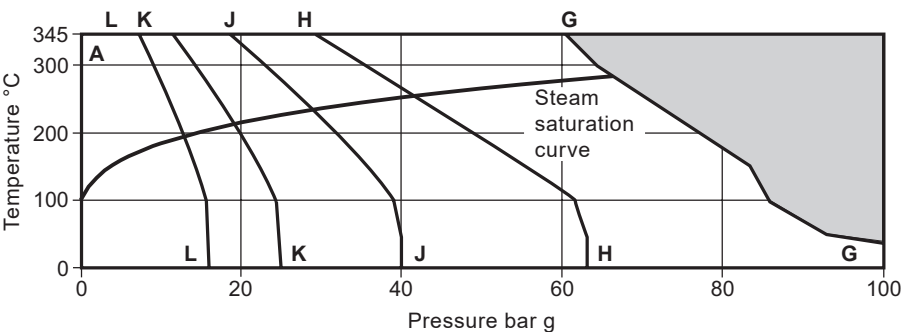

The product **must not** be used in this region or beyond the parameter of the PMA or TMA of the relative end connection.

\* Please note that the PMO (PS) is limited to the maximum ΔP of the selected IBV.

| Body design conditions |       | PN100   |
|------------------------|-------|---|
| A-G-G                  | PN100 | PMA - Maximum allowable pressure100 bar g @ 50 °C                                       |
|                        |       | TMA - Maximum allowable temperature425 °C @ 44.9 bar g                                  |
|                        |       | Minimum allowable temperature-46 °C   |
|                        |       | * PMO (PS) - Maximum operating pressure for saturated steam service66 bar g             |
|                        |       | TMO (TS) - Maximum operating temperature for saturated steam service283 °C @ 60.4 bar g |
|                        |       | Designed for a maximum cold hydraulic test pressure of:143 bar g                        |
|                        |       |   |
| A-H-H                  | PN63  | PMA - Maximum allowable pressure63 bar g @ 50 °C  |
|                        |       | TMA - Maximum allowable temperature425 °C @ 28.3 bar g                                  |
|                        |       | Minimum allowable temperature-46 °C   |
|                        |       | * PMO (PS) - Maximum operating pressure for saturated steam service44 bar g             |
|                        |       | TMO (TS) - Maximum operating temperature for saturated steam service257 °C @ 29.4 bar g |
|                        |       | Designed for a maximum cold hydraulic test pressure of:90 bar g                         |
|                        |       |   |
| A-J-J                  | PN40  | PMA - Maximum allowable pressure40 bar g @ 50 °C  |
|                        |       | TMA - Maximum allowable temperature425 °C @ 17.9 bar g                                  |
|                        |       | Minimum allowable temperature-46 °C   |
|                        |       | * PMO (PS) - Maximum operating pressure for saturated steam service29 bar g             |
|                        |       | TMO (TS) - Maximum operating temperature for saturated steam service234 °C @ 18.6 bar g |
|                        |       | Designed for a maximum cold hydraulic test pressure of:57.2 bar g                       |
|                        |       |   |
| A-K-K                  | PN25  | PMA - Maximum allowable pressure25 bar g @ 50 °C  |
|                        |       | TMA - Maximum allowable temperature425 °C @ 11.2 bar g                                  |
|                        |       | Minimum allowable temperature-46 °C   |
|                        |       | * PMO (PS) - Maximum operating pressure for saturated steam service19 bar g             |
|                        |       | TMO (TS) - Maximum operating temperature for saturated steam service212 °C @ 11.6 bar g |
|                        |       | Designed for a maximum cold hydraulic test pressure of:35.7 bar g                       |
|                        |       |   |
| A-L-L                  | PN16  | PMA - Maximum allowable pressure16 bar g @ 50 °C  |
|                        |       | TMA - Maximum allowable temperature425 °C @ 7.1 bar g                                   |
|                        |       | Minimum allowable temperature-46 °C   |
|                        |       | * PMO (PS) - Maximum operating pressure for saturated steam service12 bar g             |
|                        |       | TMO (TS) - Maximum operating temperature for saturated steam service191 °C @ 7.4 bar g  |
|                        |       | Designed for a maximum cold hydraulic test pressure of:22.8 bar g                       |
|                        |       |   |

8.6

51

Steam traps  
Inverted bucket

Capacities - DN15

**Note:** IBV inverted bucket steam traps should be selected for use at the most appropriate working differential pressure and not on the basis of load.

**Condensate discharge capacities (kg/h)** - The discharge capacities in the table are referring to the operating temperature of the saturated steam and the PMO (PS) of the steam trap shall be the relevant  $\Delta P$  maximum differential pressure of each specific model.

For optimum trap selection you need to know the following criteria:


- a) The hourly amount of condensate to be discharged, inclusive of the safety factor: x 1.5 for continuous use, x 2 to x 3 for intermittent use.
- b) The effective differential pressure.

Working example:

Condensate discharge = 500 kg/h  
Effective differential pressure = 30 bar  
Upstream pressure = 45 bar g  
Backpressure = 15 bar g

The unit of choice would have a  $\Delta P$  max. differential pressure of **70 bar** which is greater than the upstream pressure.

For full product selection and nomenclature follow the guide on page 13.

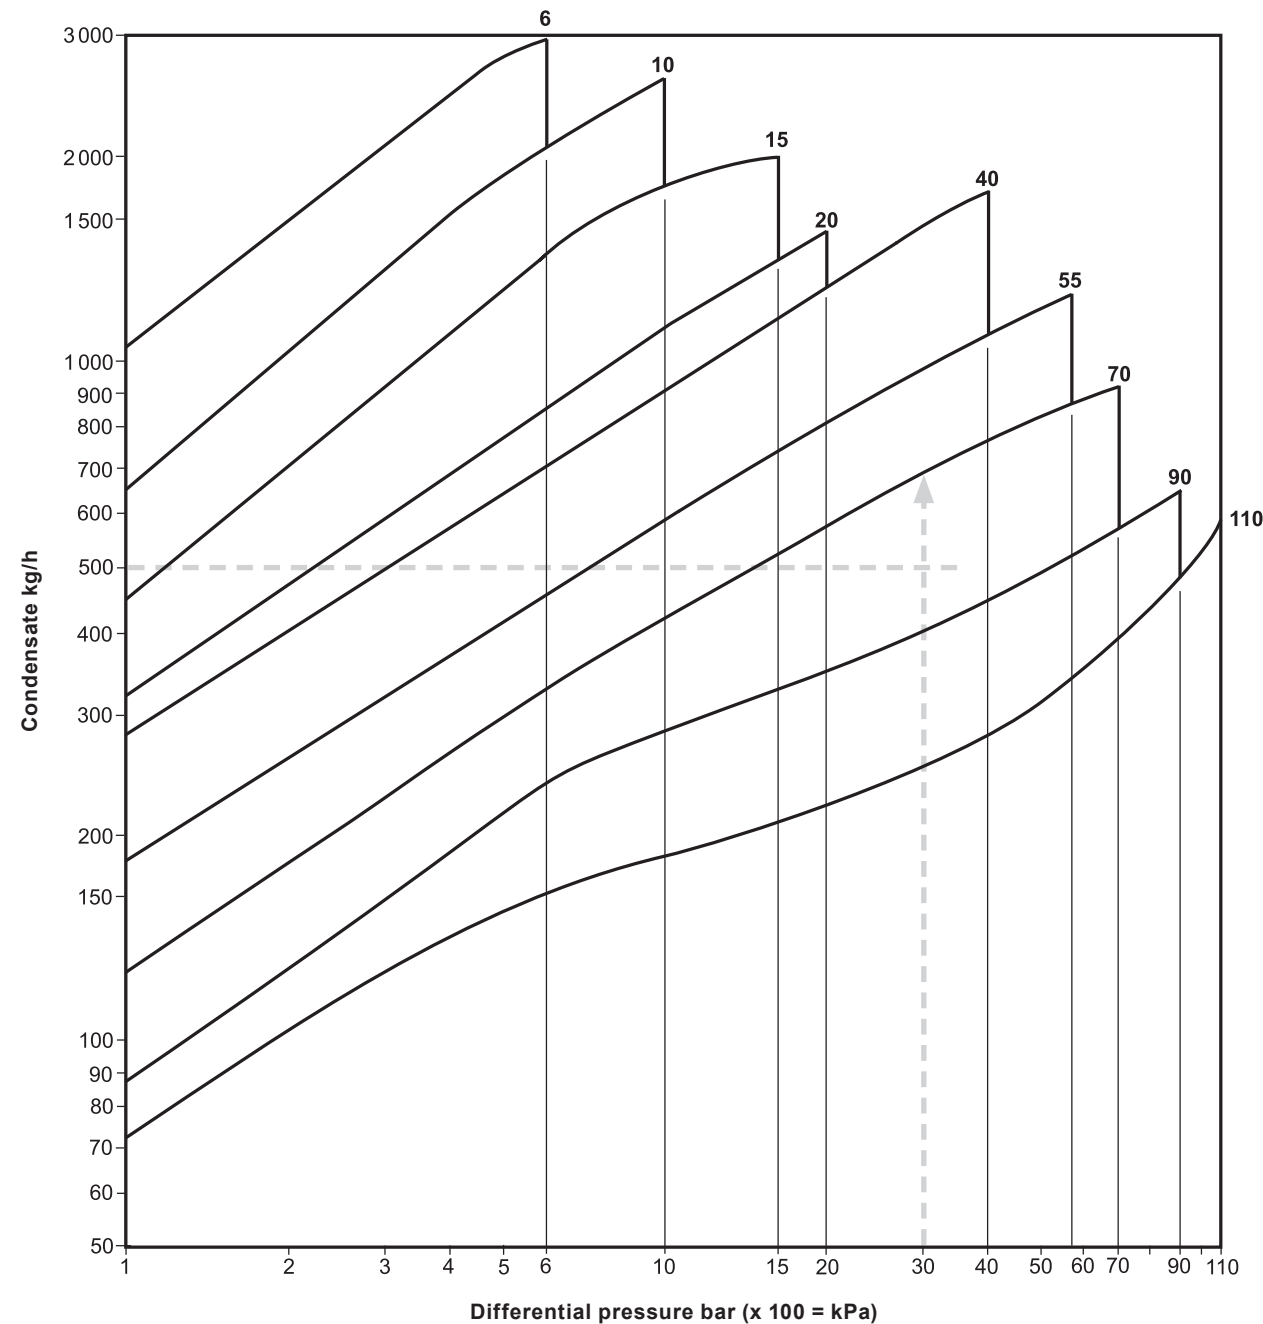

Capacities - DN20

**Note:** IBV inverted bucket steam traps should be selected for use at the most appropriate working differential pressure and not on the basis of load.

**Condensate discharge capacities (kg/h)** - The discharge capacities in the table are referring to the operating temperature of the saturated steam and the PMO (PS) of the steam trap shall be the relevant  $\Delta P$  maximum differential pressure of each specific model.

For optimum trap selection you need to know the following criteria:


- a) The hourly amount of condensate to be discharged, inclusive of the safety factor: x 1.5 for continuous use, x 2 to x 3 for intermittent use.
- b) The effective differential pressure.

Working example:

Condensate discharge = 1050 kg/h  
Effective differential pressure = 30 bar  
Upstream pressure = 45 bar g  
Backpressure = 15 bar g

The unit of choice would have a  $\Delta P$  max. differential pressure of **55 bar** which is greater than the upstream pressure.

For full product selection and nomenclature follow the guide on page 13.

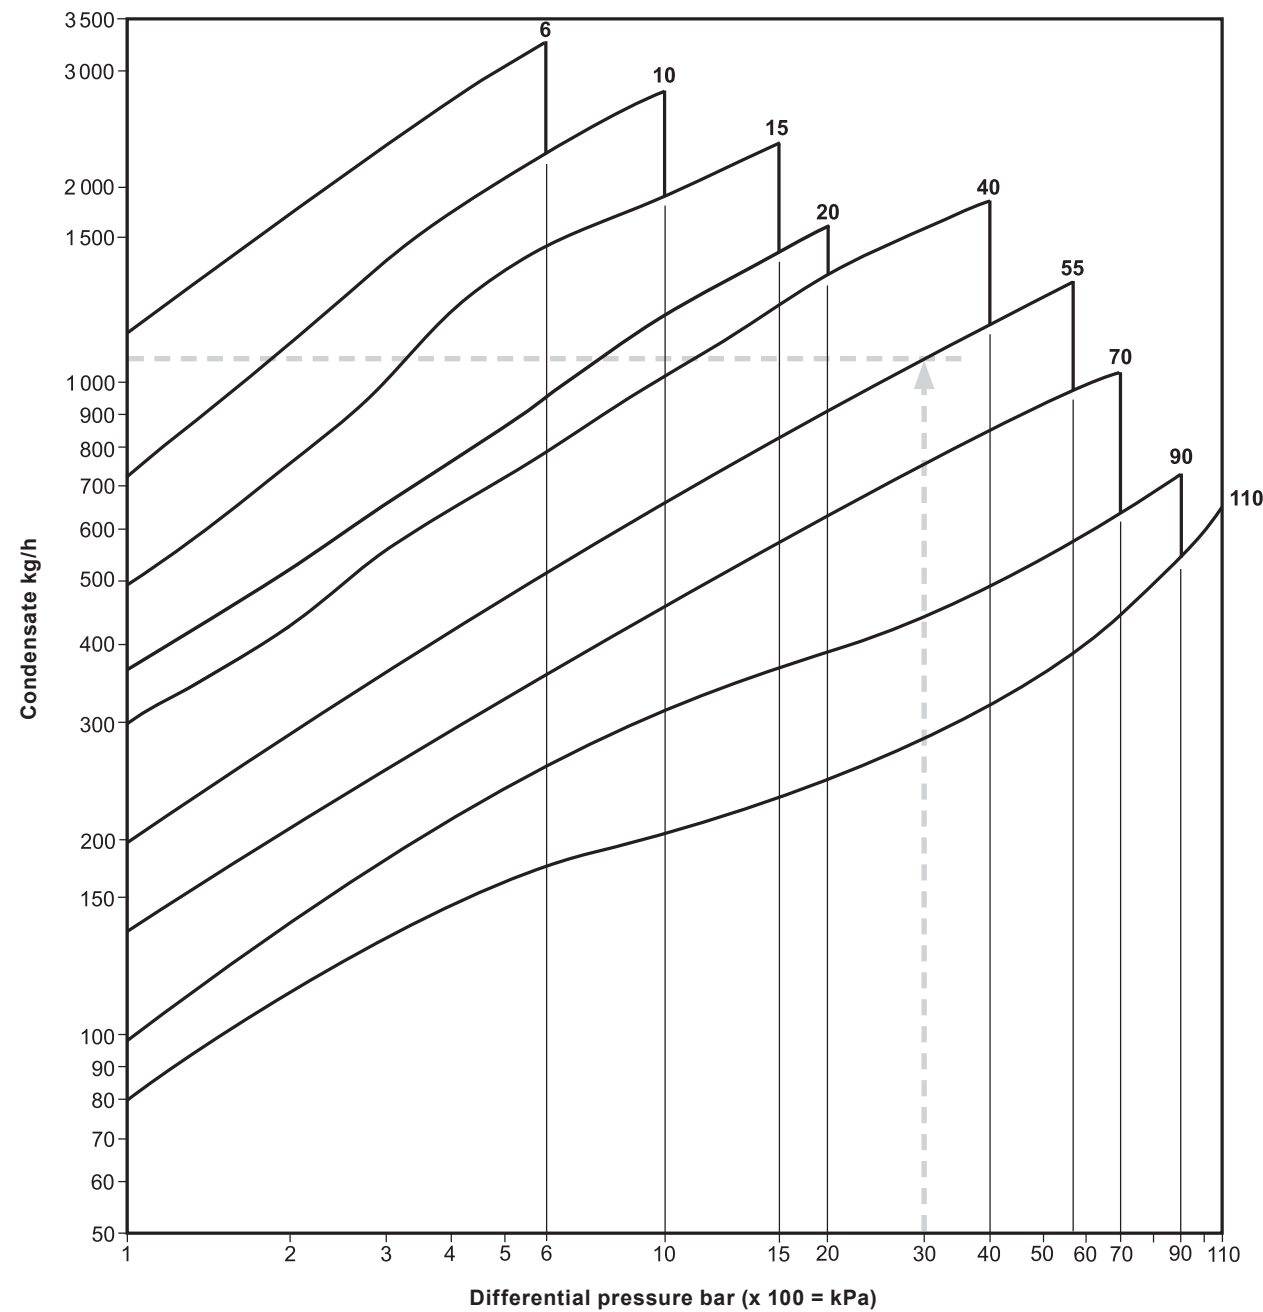

Steam traps  
Inverted bucket

Capacities - DN25

**Note:** IBV inverted bucket steam traps should be selected for use at the most appropriate working differential pressure and not on the basis of load.

**Condensate discharge capacities (kg/h)** - The discharge capacities in the table are referring to the operating temperature of the saturated steam and the PMO (PS) of the steam trap shall be the relevant  $\Delta P$  maximum differential pressure of each specific model.

**For optimum trap selection you need to know the following criteria:**


- a) The hourly amount of condensate to be discharged, inclusive of the safety factor: x 1.5 for continuous use, x 2 to x 3 for intermittent use.
- b) The effective differential pressure.

Working example:

Condensate discharge = 2000 kg/h  
Effective differential pressure = 4 bar  
Upstream pressure = 5 bar g  
Backpressure = 1 bar g

The unit of choice would have a  $\Delta P$  max. differential pressure of **15 bar** which is greater than the upstream pressure.

For full product selection and nomenclature follow the guide on page 13.

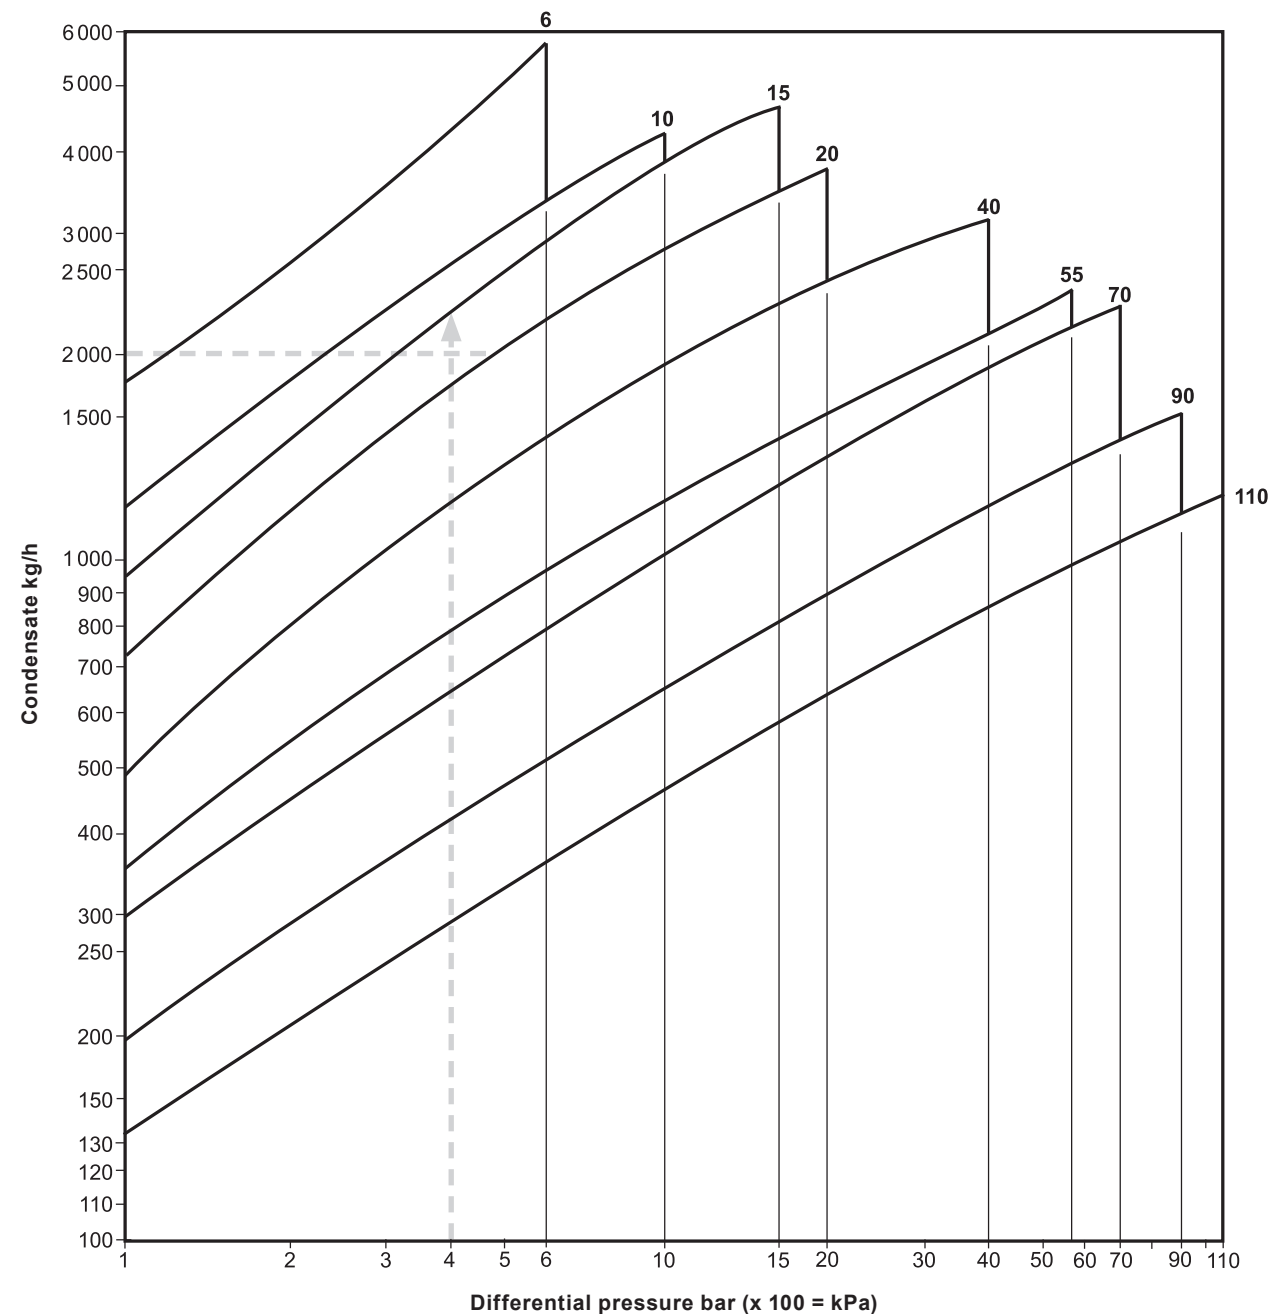

Capacities - DN40

**Note:** IBV inverted bucket steam traps should be selected for use at the most appropriate working differential pressure and not on the basis of load.

**Condensate discharge capacities (kg/h)** - The discharge capacities in the table are referring to the operating temperature of the saturated steam and the PMO (PS) of the steam trap shall be the relevant  $\Delta P$  maximum differential pressure of each specific model.

For optimum trap selection you need to know the following criteria:


- a) The hourly amount of condensate to be discharged, inclusive of the safety factor: x 1.5 for continuous use, x 2 to x 3 for intermittent use.
- b) The effective differential pressure.

Working example:

Condensate discharge = 2000 kg/h  
Effective differential pressure = 50 bar  
Upstream pressure = 75 bar g  
Backpressure = 25 bar g

The unit of choice would have a  $\Delta P$  max. differential pressure of **110 bar** which is greater than the upstream pressure.

For full product selection and nomenclature follow the guide on page 13.

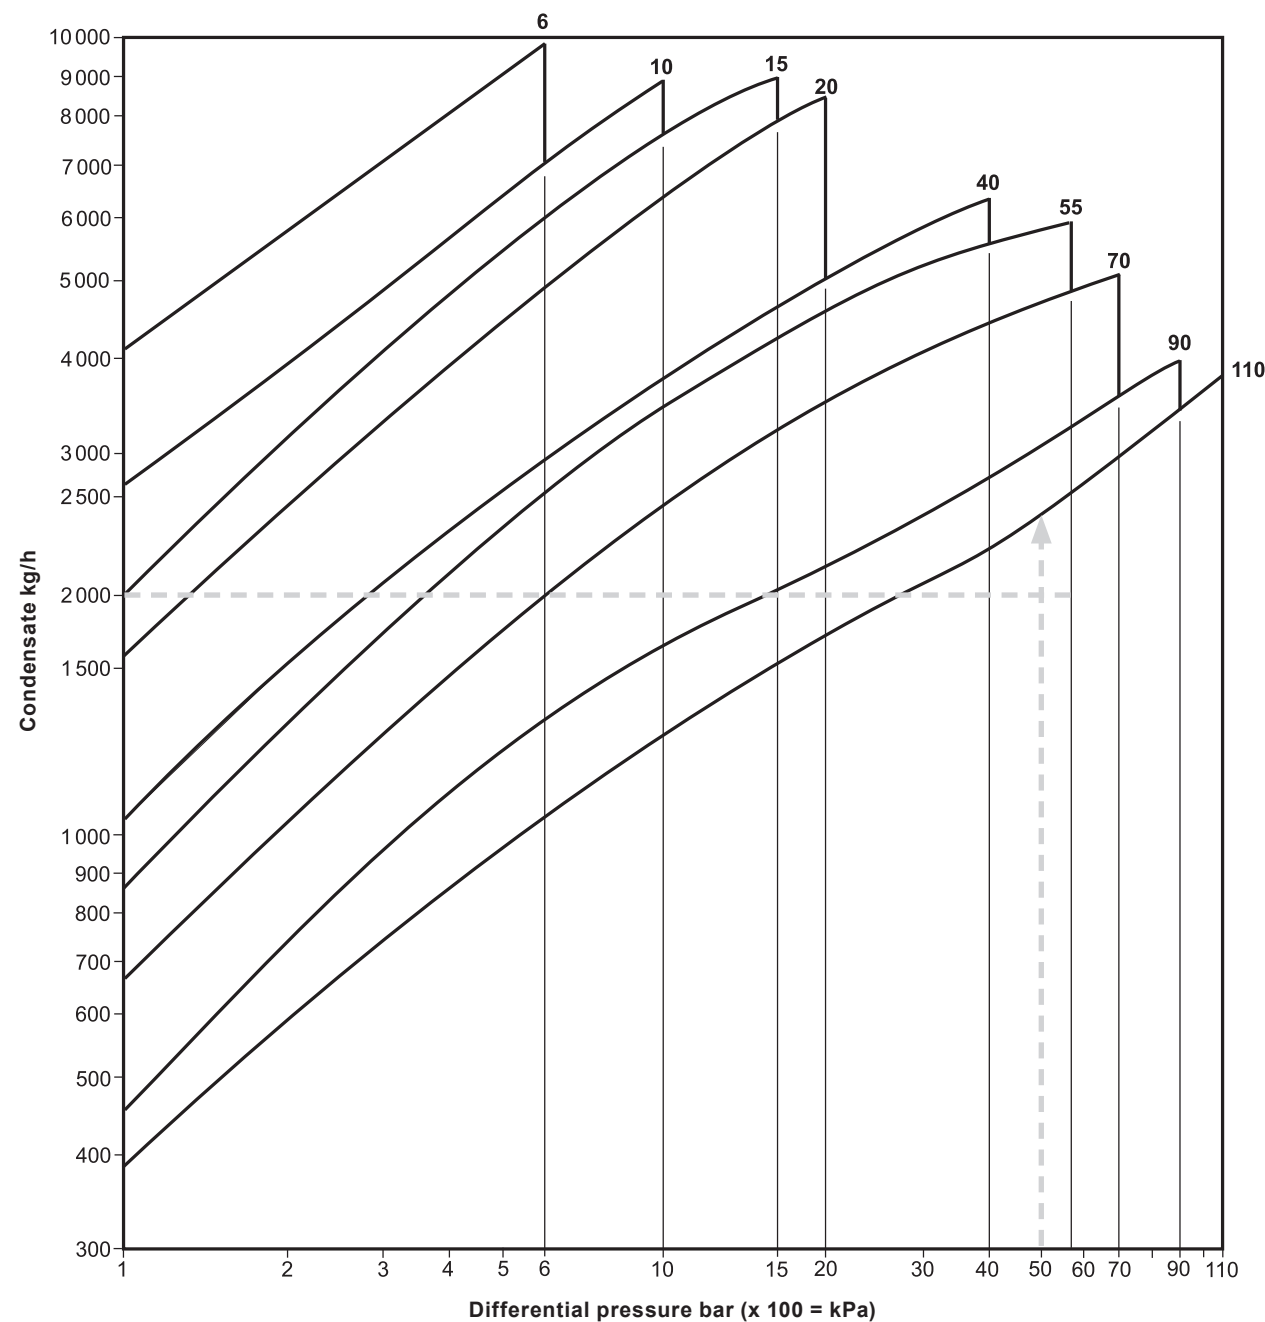

8.6

55



Steam traps  
Inverted bucket

Capacities - DN50

**Note:** IBV inverted bucket steam traps should be selected for use at the most appropriate working differential pressure and not on the basis of load.

**Condensate discharge capacities (kg/h)** - The discharge capacities in the table are referring to the operating temperature of the saturated steam and the PMO (PS) of the steam trap shall be the relevant  $\Delta P$  maximum differential pressure of each specific model.


For optimum trap selection you need to know the following criteria:

- a) The hourly amount of condensate to be discharged, inclusive of the safety factor: x 1.5 for continuous use, x 2 to x 3 for intermittent use.
- b) The effective differential pressure.

Working example:

Condensate discharge = 6000 kg/h  
Effective differential pressure = 8 bar  
Upstream pressure = 10 bar g  
Backpressure = 2 bar g

The unit of choice would have a  $\Delta P$  max. differential pressure of **20 bar** which is greater than the upstream pressure.  
For full product selection and nomenclature follow the guide on page 13.

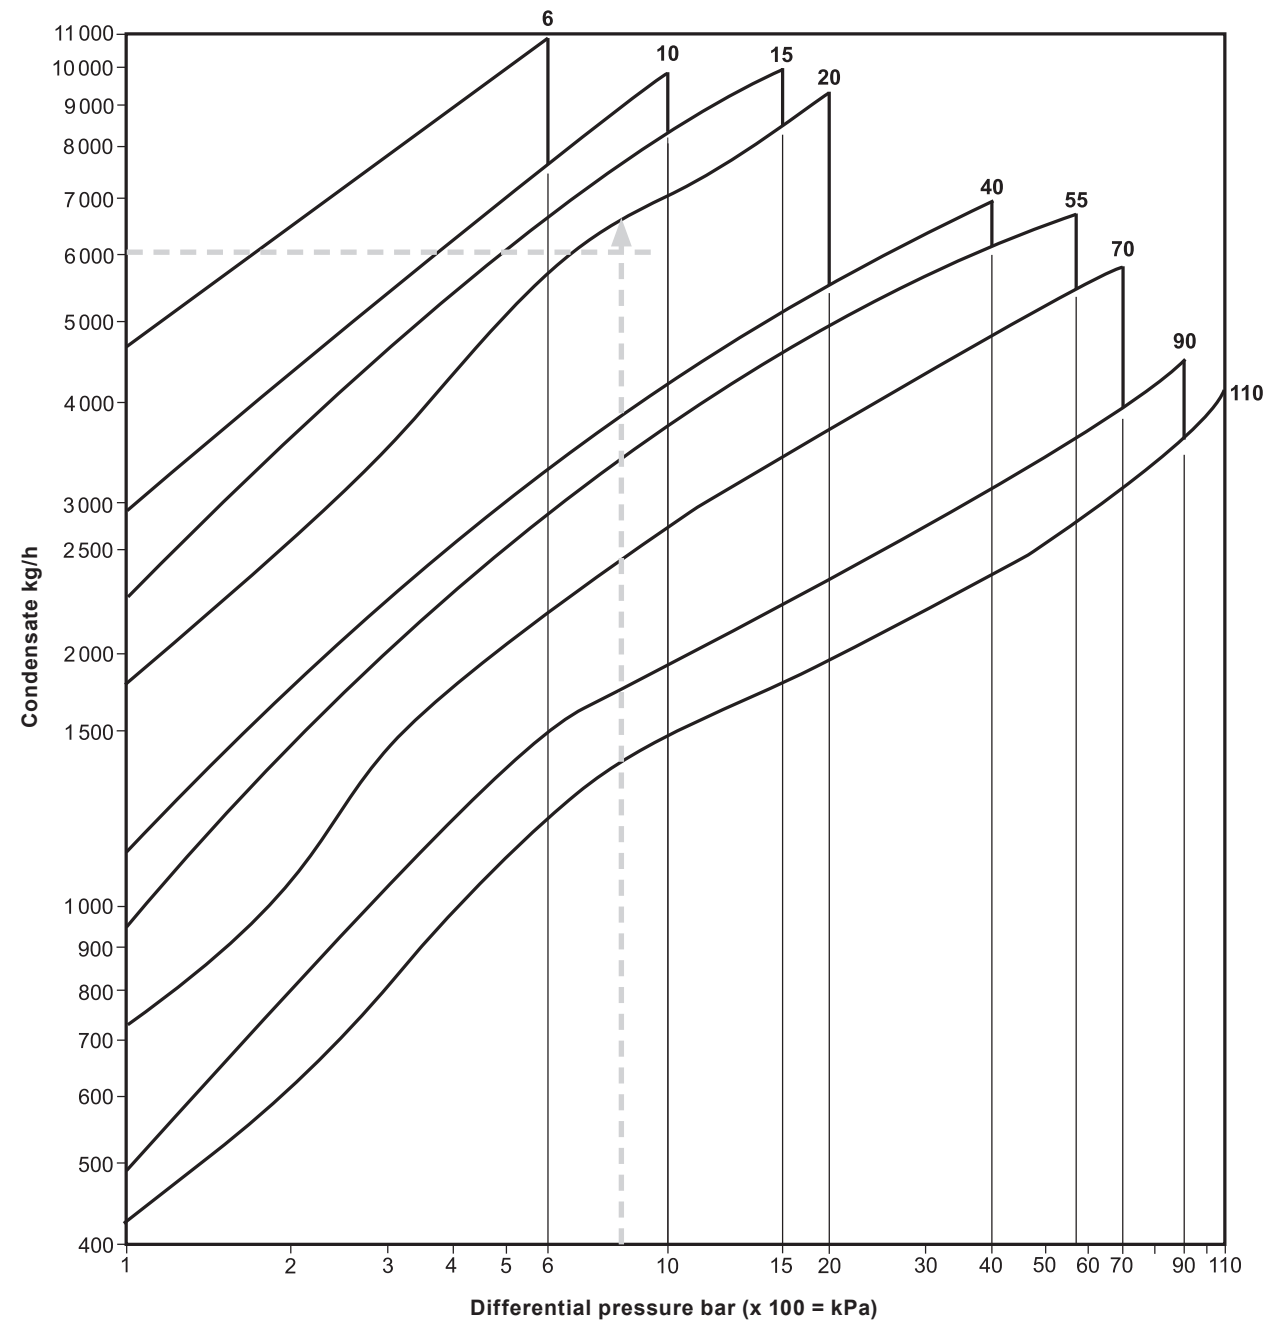



Capacities - DN80

**Note:** IBV inverted bucket steam traps should be selected for use at the most appropriate working differential pressure and not on the basis of load.

**Condensate discharge capacities (kg/h)** - The discharge capacities in the table are referring to the operating temperature of the saturated steam and the PMO (PS) of the steam trap shall be the relevant  $\Delta P$  maximum differential pressure of each specific model.

For optimum trap selection you need to know the following criteria:


- a) The hourly amount of condensate to be discharged, inclusive of the safety factor: x 1.5 for continuous use, x 2 to x 3 for intermittent use.
- b) The effective differential pressure.

Working example:

Condensate discharge = 5000 kg/h  
Effective differential pressure = 30 bar  
Upstream pressure = 55 bar g  
Backpressure = 25 bar g

The unit of choice would have a  $\Delta P$  max. differential pressure of **90 bar** which is greater than the upstream pressure.


For full product selection and nomenclature follow the guide on page 13.

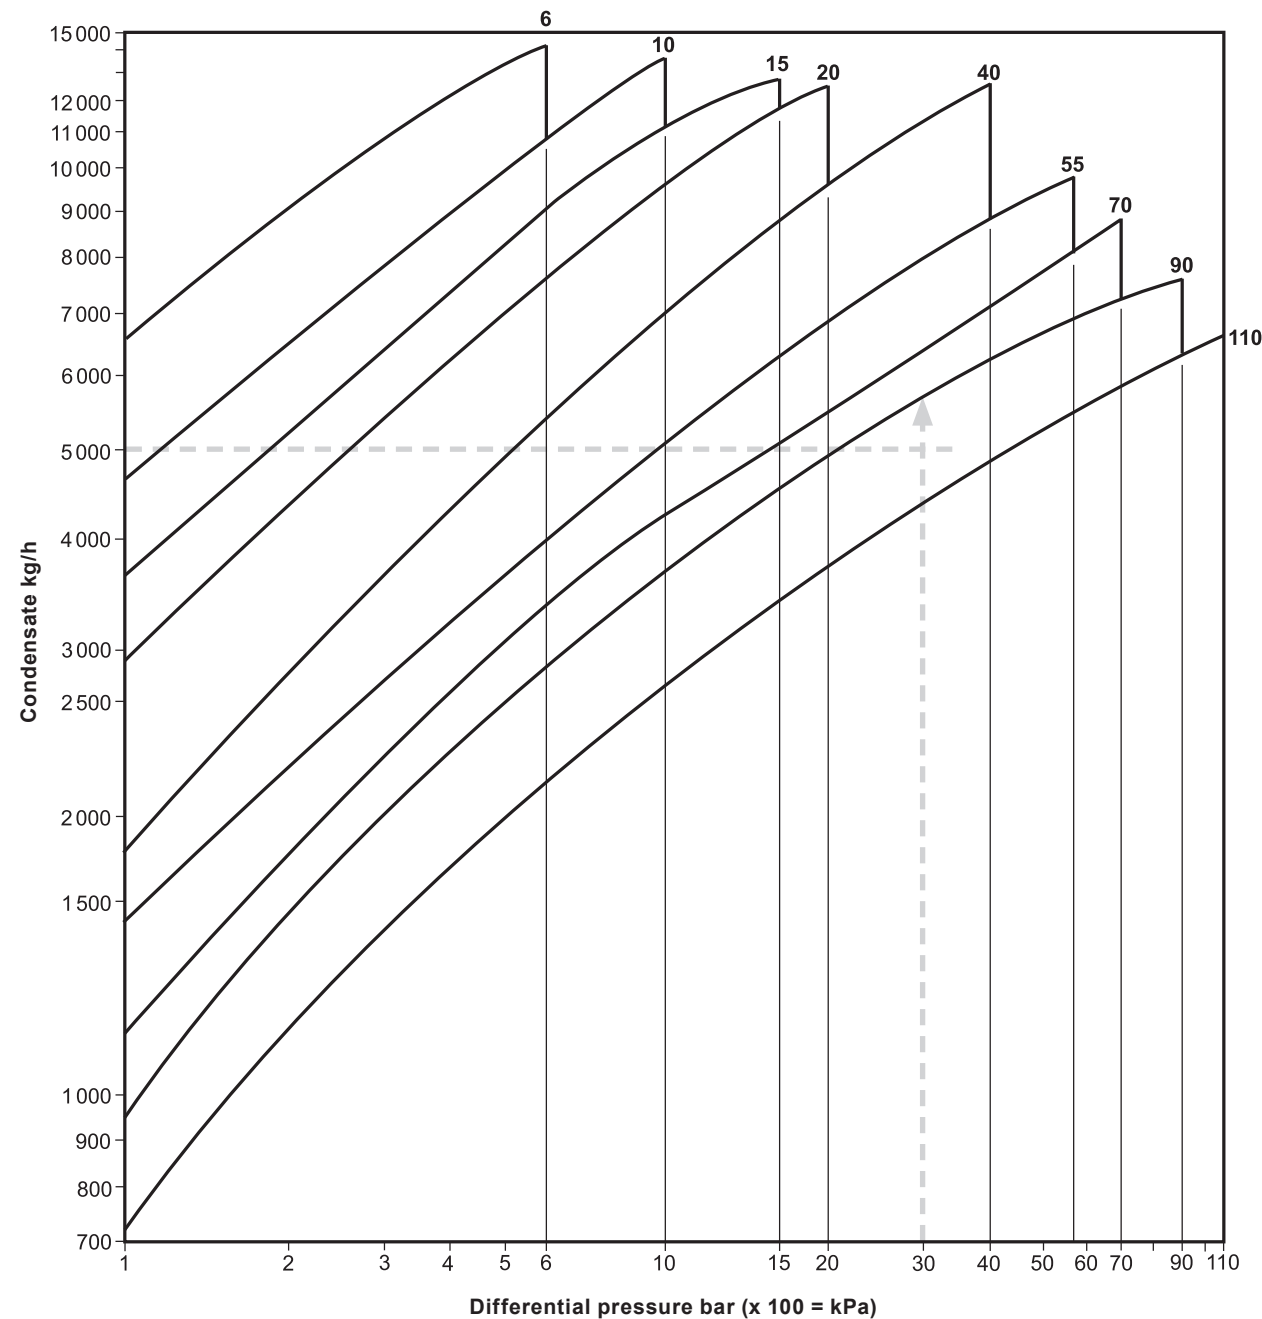

Steam traps  
Inverted bucket

Dimensions/weights (approximate) in mm and kg

| IBV size | Dimensions |      |     |    |     |
|----------|------------|------|-----|----|-----|
|          | A          | B    | C   | D  | E   |
| DN15 ½"  | 260        | 488  | 420 | 25 | 165 |
| DN20 ¾"  | 260        | 488  | 420 | 25 | 165 |
| DN25 1"  | 345        | 616  | 530 | 40 | 210 |
| DN40 1½" | 411        | 774  | 650 | 39 | 265 |
| DN50 2"  | 411        | 782  | 650 | 39 | 265 |
| DN80 3"  | 532        | 1026 | 850 | 36 | 305 |

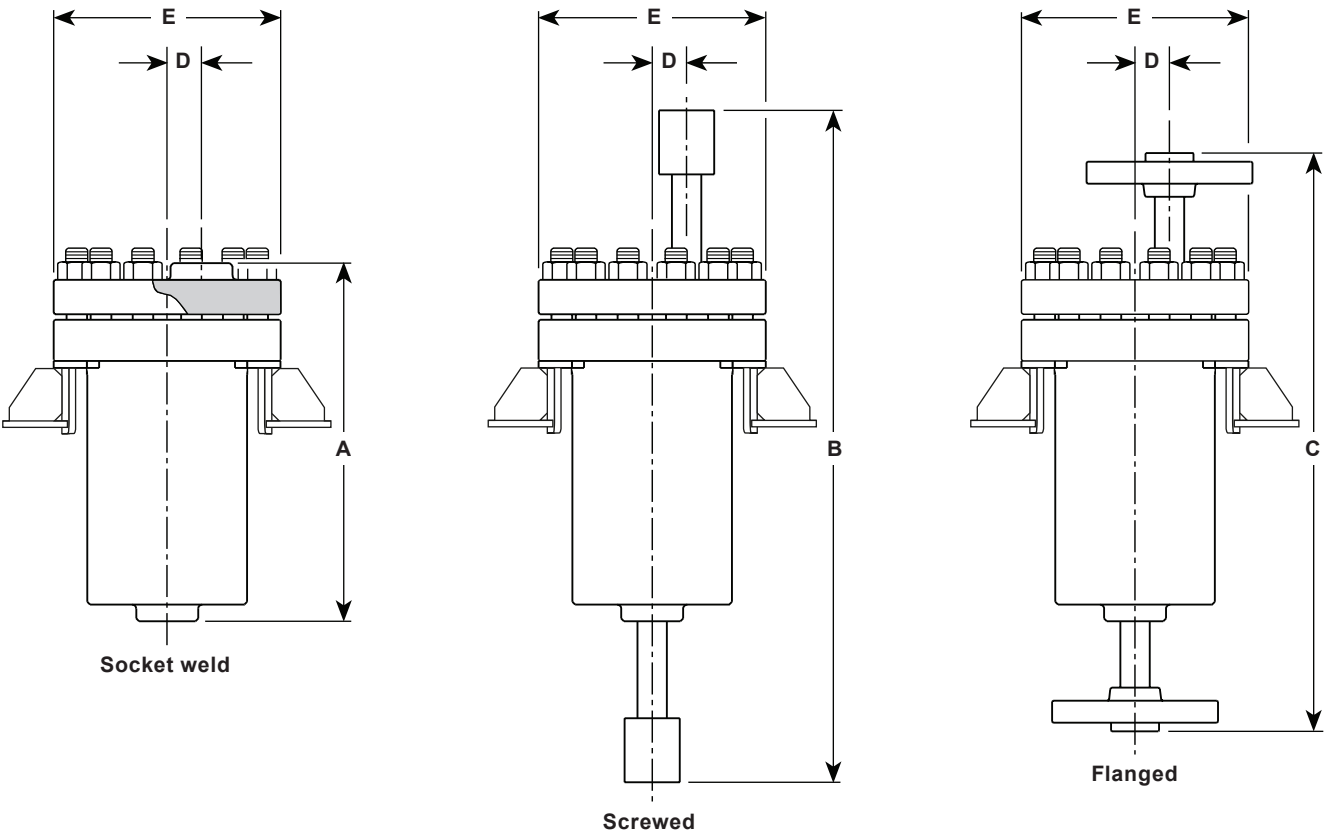

| IBV size | Weights   |             |                     |     |     |     |       |                  |      |      |      |       |
|----------|-----------|-------------|---------------------|-----|-----|-----|-------|------------------|------|------|------|-------|
|          | BSP + NPT | Socket weld | Flanged ASME Class: |     |     |     |       | Flanged EN 1092: |      |      |      |       |
|          |           |             | 150                 | 300 | 600 | 900 | 1500* | PN16             | PN25 | PN40 | PN63 | PN100 |
| DN15 ½"  | 20        | 18          | 20                  | 20  | 20  | 22  | 22    | 20               | 20   | 20   | 20   | 22    |
| DN20 ¾"  | 26        | 24          | 26                  | 28  | 28  | 30  | 30    | 28               | 28   | 28   | 28   | 30    |
| DN25 1"  | 42        | 39          | 42                  | 44  | 44  | 48  | 48    | 42               | 42   | 42   | 42   | 46    |
| DN40 1½" | 68        | 65          | 70                  | 72  | 72  | 78  | 78    | 70               | 70   | 70   | 70   | 74    |
| DN50 2"  | 68        | 65          | 72                  | 74  | 76  | 88  | 88    | 72               | 72   | 72   | 74   | 78    |
| DN80 3"  | 125       | 120         | 132                 | 136 | 138 | 152 | 162   | 130              | 130  | 130  | 134  | 138   |

\* on request

IBV product nomenclature and selection guide:

Please note that other units are available on request to suit the specifics of a particular process application.

|  |              |   |                |
|--|--------------|---|----------------|
| Series   |              | C-LF2 = Carbon steel  | C              |
| PMO (PS) @ Saturated steam temperature for the body rating | Carbon steel | 116 bar g = ASME Class 900 body   | 116            |
|  |              |   |                |
| ΔP maximum differential pressure                           |              | ΔP = 6, 10, 15, 20, 40, 55, 70, 90, 110 bar   | 110            |
| Connections  | Size         | 1/2", 3/4", 1", 1 1/2", 2", 3"<br>or<br>DN15, DN20, DN25, DN40, DN50, DN80  | 3"             |
|  | Screwed      | = BSP or NPT  | ASME Class 300 |
|  | Socket weld  | = According to ASME B 16.11   |                |
|  | Flanged      | ASME = ASME Class 150, 300, 600, 900, (*1500 available on request)  |                |
|  |              | EN 1092 = PN16, PN25, PN40, PN63, PN100   |                |
| Optional extras  | Blank        | = Standard  |                |
|  | NACE         | = NACE compliancy   |                |
|  | CV           | Check valve<br><b>Please note</b> that this option is only available for units that have a ΔP maximum differential pressure of 40 bar and above<br>- See above. |                |
|  |              |   |                |

IBV product selection example: 

IBV

 - 

C-LF2

 - 

116

 - 

110

 - 

3"

 - 

ASME Class 300

 -

How to order

1 off Spirax Sarco IBV-C-LF2-116-110-3"-Flanged ASME Class 300 inverted bucket vertical steam trap having a carbon steel body and cover with stainless steel internals.

The following will be supplied, if specified, at the time of order placement:

1. A special name-plate when a U-STAMP has been specified.

Steam traps  
Inverted bucket

Safety information, installation and maintenance

For full details see the Installation and Maintenance Instructions supplied with the product.

Installation note:

The trap must be installed below the drain point with the body upright in a vertical position, the cover at the top and the inlet connection at the bottom; this orientation will ensure that the bucket mechanism will rise and fall vertically without any friction. It is recommended that a strainer is installed upstream of the IBV to protect it from contamination.  
To permit safe inspection for cleaning or maintenance purpose it is again recommended that suitable shut-off valves are installed upstream and downstream of the IBV application.  
It needs to be appreciated that there is blast discharge with this device, consequently the downstream accessories, if any, should be installed at a minimum distance of 1 m from the IBV.

Disposal

This product is recyclable. No ecological hazard is anticipated with the disposal of this product providing due care is taken.

Spare parts

The spare parts available are shown in heavy outline. Parts drawn in a grey line are not supplied as spares.


Available spares

|                 |                            |
|-----------------|----------------------------|
| Valve assembly  | 4, 7, 8, 9, 10, 11, 12, 13 |
| Bucket assembly | 4, 6, 9, 10                |
| Cover gasket    | (packet of 3) 4            |


How to order spares

Always order spares by using the description given in the column headed 'Available spares' and state the type of trap, pressure rating and size and type of the connections.

**Example:** 1 - Valve assembly for a Spirax Sarco IBV-C-LF2 - 116 - 110 - 3" - Flanged ASME Class 300 inverted bucket vertical steam trap.

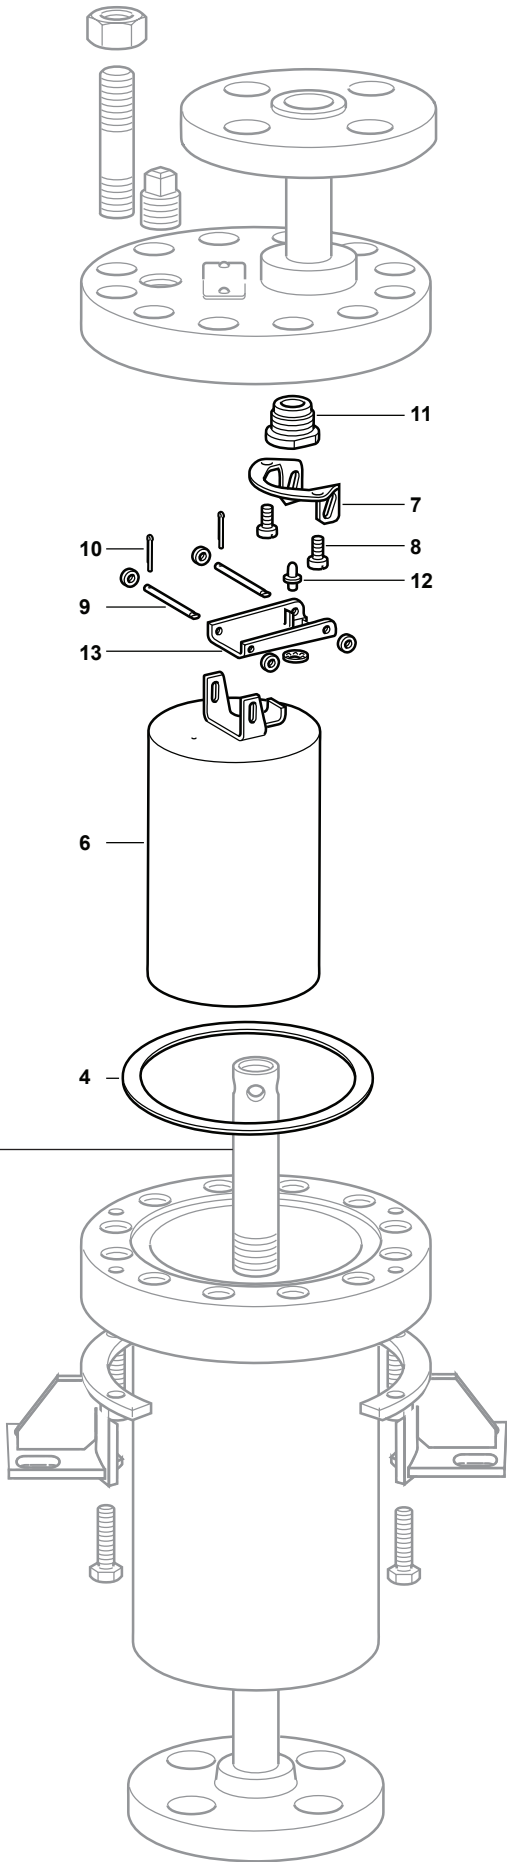

Optional extra

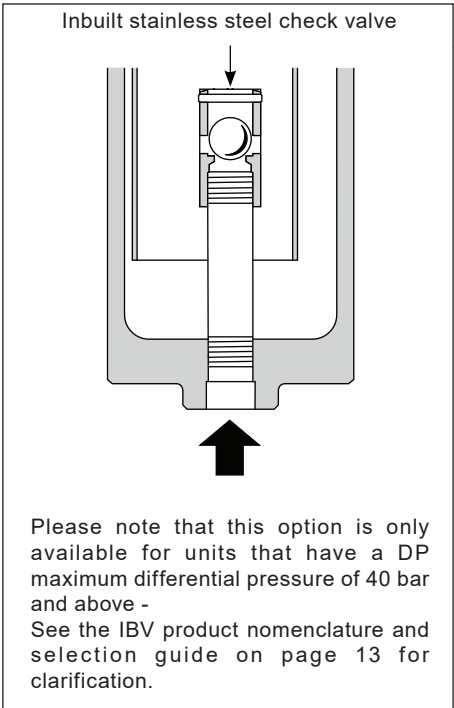

Please note that this option is only available for units that have a DP maximum differential pressure of 40 bar and above - See the IBV product nomenclature and selection guide on page 13 for clarification.