

spirax

sarco

DRV4 and DRV4G

Cast Steel

Pressure Reducing Valves

TI-P203-01

CTLS Issue 19

Description

The **DRV4** is a cast steel direct acting bellows sealed pressure reducing valve. **The standard version** has an EPDM diaphragm and is suitable for steam, water and air applications. The DRV4 is available with a Nitrile rubber diaphragm (suffix 'N') for oil applications. A Nitrile rubber soft seated version (suffix 'G', limited to 90 °C) is also available for applications that require tight shut-off. It is recommended that for these applications, a maximum pressure turndown ratio of 10:1 is observed.

Note: To protect the actuator diaphragm on steam applications a WS4 water seal pot must be installed in the downstream pressure signal line to the actuator. Refer to TI-S12-03 for details.

Available types

DRV4 and **DRV4G** are available in 6 pressure ranges (suffix 1-6).

Downstream pressure ranges:

Range	Valve type	Actuator type	Spring colour	Pressure range (bar)	PN rating
1	DRV4(G)B1(N)	1 or 1N	Yellow	*0.1 - 0.6	2.5
2	DRV4(G)B2(N)	2 or 2N	Yellow	**0.2 - 1.2	2.5
3	DRV4(G)B3(N)	3 or 3N	Blue	0.8 - 2.5	6.0
4	DRV4(G)B4(N)	4 or 4N	Blue	2.0 - 5.0	16.0
5	DRV4(G)B5(N)	5 or 5N	Blue	4.5 - 10.0	25.0
6	DRV4(G)B6(N)	5 or 5N	Red	8.0 - 20.0	25.0

* DN32 to DN50 Range 0.15 - 0.6, DN65 to DN100 Range 0.3 - 0.6

** DN65 to DN100 Range 0.4 - 1.2.

Sizes and pipe connections

DN15, DN20, DN25, DN32, DN40, DN50, DN65, DN80 and DN100
Flanged EN 1092 PN40.
JIS and ASME 150 and ASME 300 flanges are also available on request.

Certification


This product is available with certification to EN 10204 3.1.

Note : All certification/inspection requirements must be stated at the time of order placement.

K_{vs} values

Size DN	15	20	25	32	40	50	65	80	100
K _{vs}	3.4	6.5	11.4	16.4	24	40	58	92	145

Note: The K_{vs} values shown above are full capacities and should be used for safety valve sizing purposes where they are required.

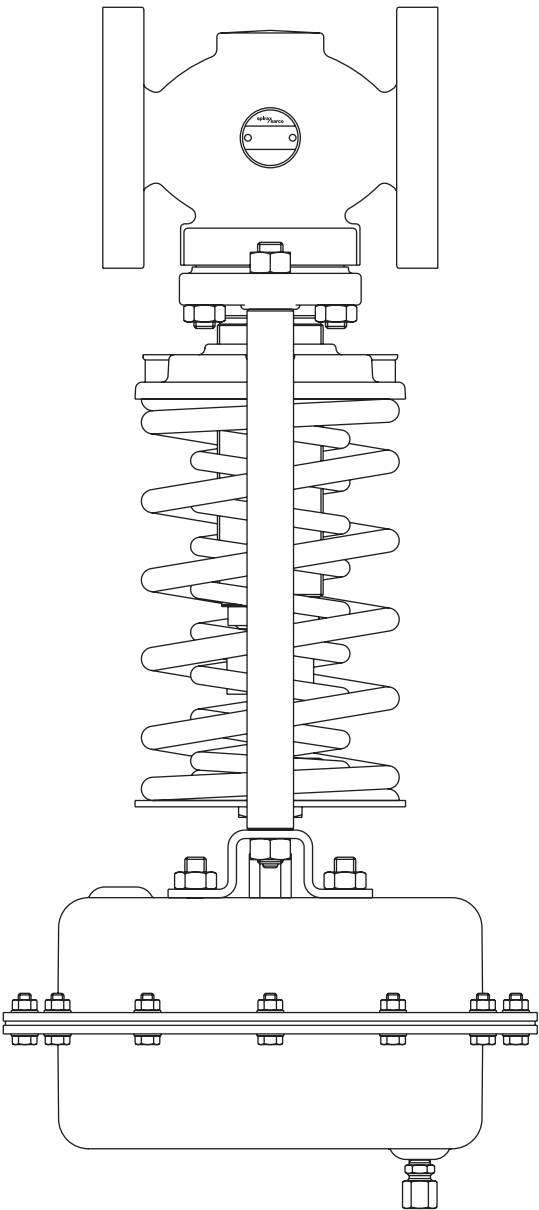


4.6

29

Control systems
Pressure reducing/surplussing valves

Pressure/temperature limits

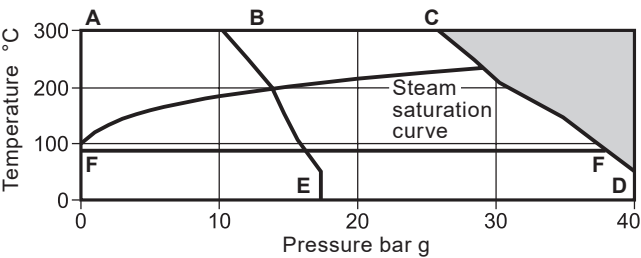

The product **must not** be used in this region.

A-C-D Flanged EN 1092 PN40 and ASME 300.


A-B-E Flanged ASME 150.

F-F The DRV4G is limited to 90 °C.


Body design conditions		PN40
Maximum design pressure		40 bar g @ 50 °C
Maximum design temperature	DRV4	300 °C @ 25.8 bar g
	DRV4G	90 °C @ 37.3 bar g
Minimum design temperature		0 °C
Maximum operating temperature	DRV4	300 °C @ 25.8 bar g
	DRV4G	90 °C @ 37.3 bar g
Minimum operating temperature		0 °C
Note: For lower operating temperatures consult Spirax Sarco		
Maximum differential pressure	DN15 - DN50	25 bar
	DN65 - DN100	20 bar
Designed for a maximum cold hydraulic test pressure of 60 bar g		
Note: With internals fitted, test pressure must not exceed 40 bar g		

Materials


No.	Part	Material	
1	Body	Cast steel	GP 240 GH
2	Bonnet	Cast steel	DIN 17425 GS C25
3	Valve seat	Stainless steel	BS 970 431 S29
4	Seat gasket	DN15	Stainless steel
		DN20 and DN25	Mild steel
		DN32 to DN50	Reinforced exfoliated graphite
5	Valve head	DRV4	Stainless steel BS 970 431 S29
		DRV4G (soft seated)	Stainless steel/Nitrile BS 970 431 S29
6	Valve head screw	DN15 and DN20	Stainless steel BS 6105 A2
7	Valve head seal	Arlon 1555	
8	Bush	DN15 and DN20	Stainless steel BS 970 431 S29
9	Bush (part of item 10)	DN25 to DN100	Stainless steel BS 970 431 S29
10	Balancing bellows assembly	DN25 to DN100	Stainless steel AISI 316 (L)
11	Balancing bellows gasket	DN25 to DN100	Reinforced exfoliated graphite
12	Bonnet gasket		Reinforced exfoliated graphite
13	Bonnet nuts		Steel DIN 267 Pt13 Gr. 8
14	Bonnet studs	DN15 to DN40 M10	Steel DIN 267 Pt13 Gr. 8.8
		DN50 and DN65 M12	
		DN80 and DN100 M16	
15	Pillars	Steel zinc plated	BS 970 230 M07
16	Pillars nuts	Steel zinc plated	BS 3693 Gr. 8
17	Spring adjuster	Cast iron zinc plated	DIN 1691 GG 25

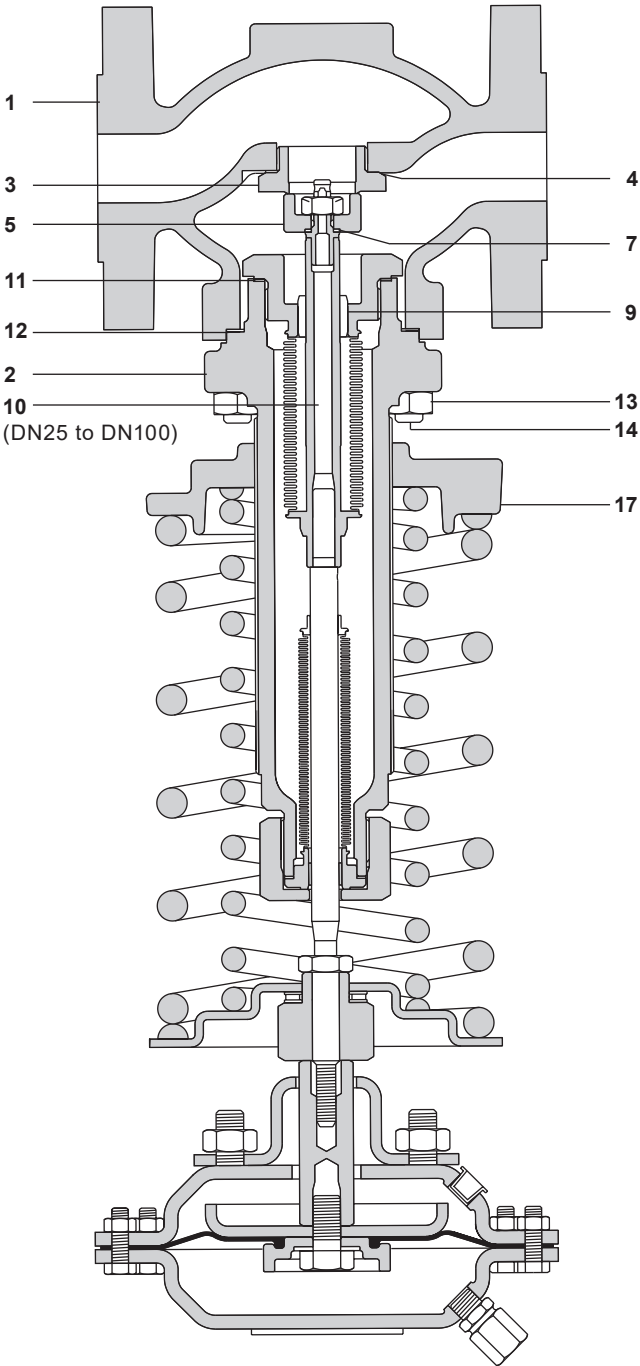

DN25 (parts 15 and 16 not shown)

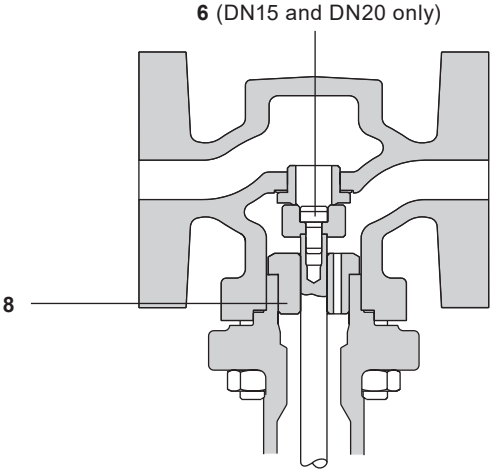

DN15 and DN20

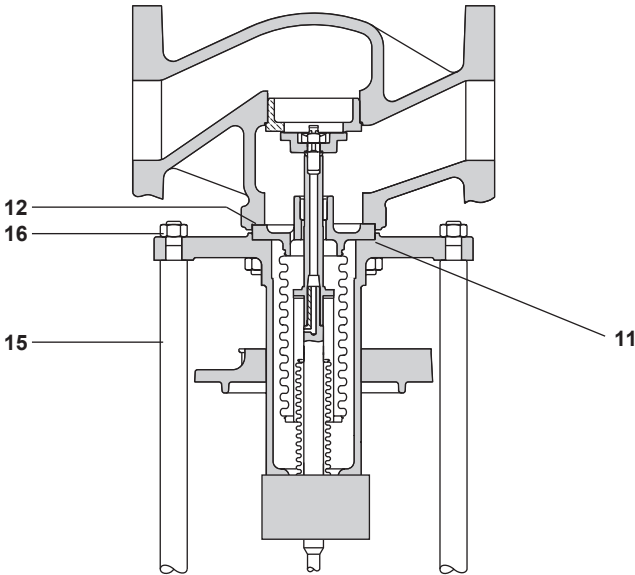

DN65 to DN100


For part numbers 18 to 46, please go to page 4

Control systems
Pressure reducing/surplussing valves


Materials

For part numbers 1 to 17, please go to page 2


No.	Part	Material
18	Spring(s)	Chrome Vanadium
19	Bush (part of 20)	PTFE/steel composite
20	Sealing bellows assembly	Stainless steel AISI 316(L)
21	Sealing bellows gasket	DN15 and DN20 Stainless steel 'S' type
		DN25 to DN100 Reinforced exfoiliated graphite
22	Clamp nut	DN25 to DN100 Steel zinc plated BS 970 230 M07
25	Lock-nut	DN32 to DN50 Steel zinc plated BS 970 230 M07
		DN15 to DN25, DN65 to DN100 Steel zinc plated BS 3692 Gr. 8
26	Spring plate	Steel zinc plated BS 1449 Pt1 HR14
27	Needle bearing	Steel
28	Setting nut	Steel zinc plated BS 970 230 M07
29	Bearing plate	DN32 to DN50 Steel zinc plated BS 1449 Pt1 HR14
30	Circlip	DN32 to DN50 Steel zinc plated
31	Mounting plate	Steel zinc plated BS 1449 Pt1 HR14
32	Housing	Types 1(N) to 4(N) Steel DIN 1514 St W24
33	Housing screws	Type 5(N) Steel BS EN 10025 S355 J2G3
		Types 1(N) Steel zinc plated BS 3692 Gr. 5.6
		Types 2(N), 3(N), 4(N) and 5(N) Steel zinc plated BS 3692 Gr. 8.8
34	Housing nuts	Types 1(N) Steel zinc plated BS 3692 Gr. 5
		Types 2(N), 3(N), 4(N) and 5(N) Steel zinc plated BS 3692 Gr. 8
35	Diaphragm	EPDM fabric reinforced
	Diaphragm suffix 'N'	Nitrile fabric reinforced
36	Hex. headed bolt	Stainless steel BS 6105 A2
37	Sealing washer	Fibre
38	Diaphragm clamp	Stainless steel ASTM A351 CF8M
39	Piston	Steel zinc plated BS 1449 Pt1 HR14
40	Spindle	Steel zinc plated BS 970 230 M07
41	Mounting nuts	Steel zinc plated BS 3692 Gr. 8
42	Coupling	Steel zinc plated
43	Thread insert	DN15 and DN20 Stainless steel DTD 734
44	Self-locking nut	DN25 to DN100 Stainless steel BS 6105 A2
45	Clamp plate	DN65 to DN100 Stainless steel ASTM A276 316L
46	Clamp plate gasket	DN65 to DN100 Reinforced exfoiliated graphite

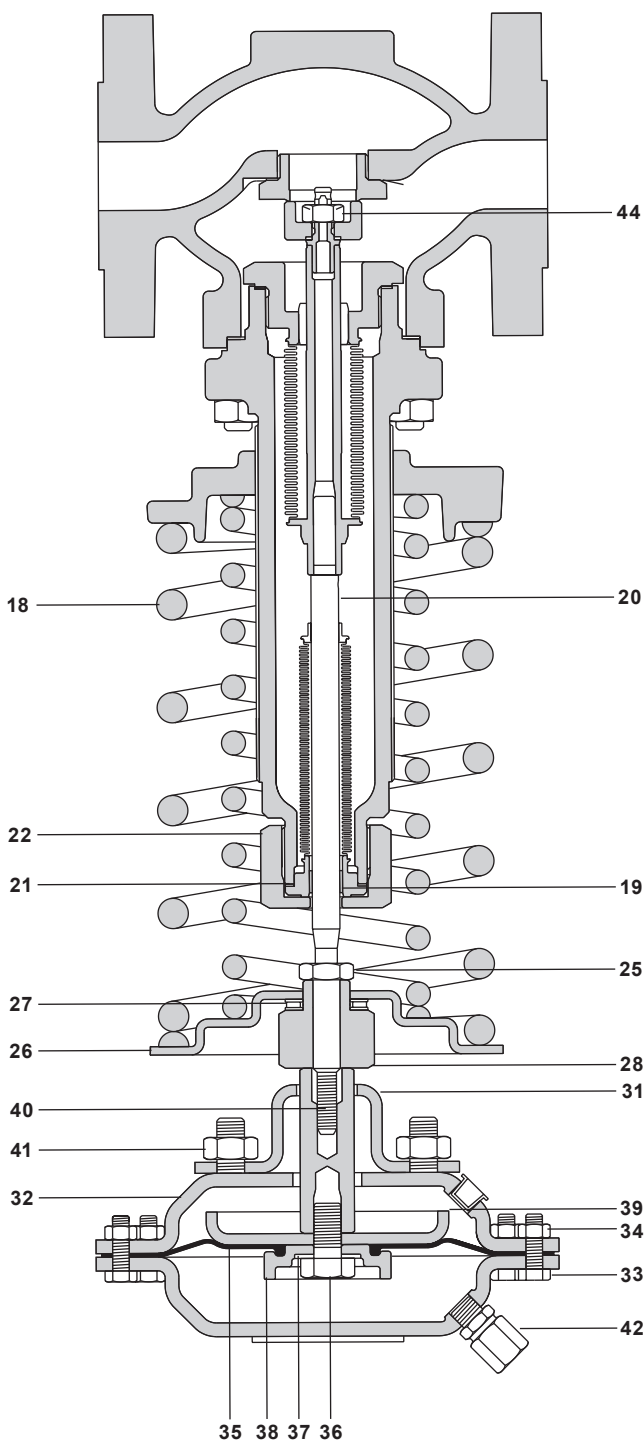



DN25 (parts 15 and 16 not shown)

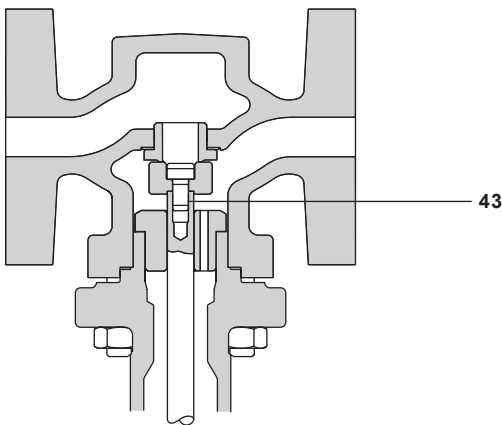

DN15 and DN20

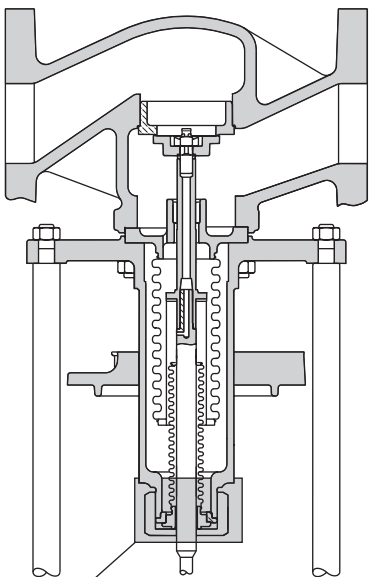

DN65 to DN100

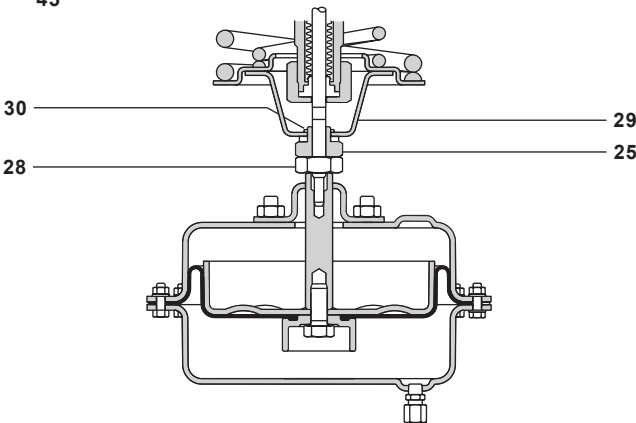

DN32 to DN50

Control systems

Pressure reducing/surplussing valves

Spare parts for the DN15 and DN20 valves

The spare parts available for sizes DN15 and DN20 valves are detailed below. No other parts are supplied as spares.

The listed parts are for the following valve types:

Valve assemblies	DRV4	Stainless steel seated
	DRV4G	Nitrile soft seated
Actuator assemblies	Types 1 to 5	EPDM diaphragm
	Types 1N to 5N	Nitrile diaphragm

Available spares

Coupling		A
Diaphragm set	Diaphragm and sealing washer.	B, C
Needle bearing		D
Sealing bellows set	Sealing bellows assembly, sealing bellows gasket and bonnet gasket.	E, F, G
Control spring(s)		I
Seat/head set	Seat, seat gasket, head, bonnet gasket and head seal.	J, K, L, G, H
Gasket set	Sealing bellows gasket, bonnet gasket and seat gasket.	F, G, K

How to order spares


Always order spares by using the description given in the column headed 'Available spares' and state the size and type of valve.

Example: 1 - Gasket set for a Spirax Sarco DN15 DRV4B1 pressure reducing valve.

How to fit spares

Full fitting instructions are given in the Installation and Maintenance Instructions supplied with the spare(s).

DN15 to DN20

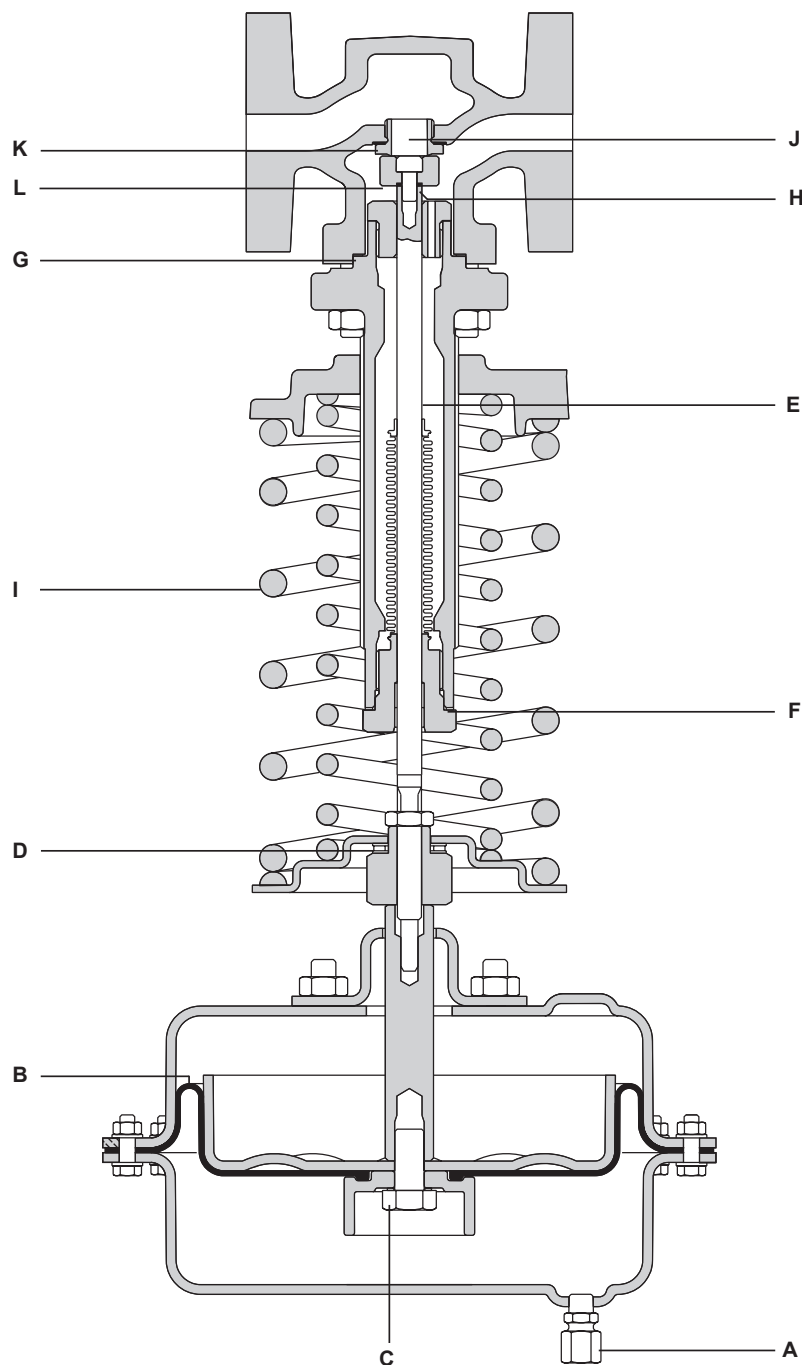

4.6

35

Control systems

Pressure reducing/surplussing valves

Spare parts for the DN25 to DN100 valves

The spare parts available for sizes DN25 to DN100 valves are detailed below. No other parts are supplied as spares.

The listed parts are for the following valve types:

Valve assemblies	DRV4	Stainless steel seated
	DRV4G	Nitrile soft seated
Actuator assemblies	Types 1 to 5	EPDM diaphragm
	Types 1N to 5N	Nitrile diaphragm

Available spares

Coupling			A
Diaphragm set		Diaphragm and sealing washer.	B, C
Needle bearing			D
Sealing bellows set DN65 to DN100.		Sealing bellows assembly, sealing bellows gasket, and clamp plate gasket	E, F, R
Control spring(s)			I
Seat/head set	DN25 to DN50	Seat, seat gasket, head, self-locking nut, head seal and bonnet gasket.	J, K, L, W, H, G
Head set	DN65 to DN100	Head, self-locking nut, head seal, bonnet gasket and balancing bellows gasket.	L, W, H, G, M
Balancing bellows set	DN25 to DN50	Balancing bellows assembly, balancing bellows gasket, bonnet gasket, head seal, self-locking nut, and sealing bellows gasket.	N, M, G, H, W, F
	DN65 to DN100	Balancing bellows assembly, balancing bellows gasket, bonnet gasket, self-locking nut and head seal.	N, M, G, W, H
Gasket set	DN25 to DN50	Sealing bellows gasket, bonnet gasket, seat gasket and balancing bellows gasket.	F, G, K, M
	DN65 to DN100	Sealing bellows gasket, bonnet gasket, balancing bellows gasket and clamp plate gasket.	F, G, M, R

How to order spares

Always order spares by using the description given in the column headed 'Available spares' and state the size and type of valve.



Example: 1 - Gasket set for a Spirax Sarco DN25 DRV4B1 pressure reducing valve.

How to fit spares


Full fitting instructions are given in the Installation and Maintenance Instructions supplied with the spare(s).

DN25 to DN50

DN65 to DN100

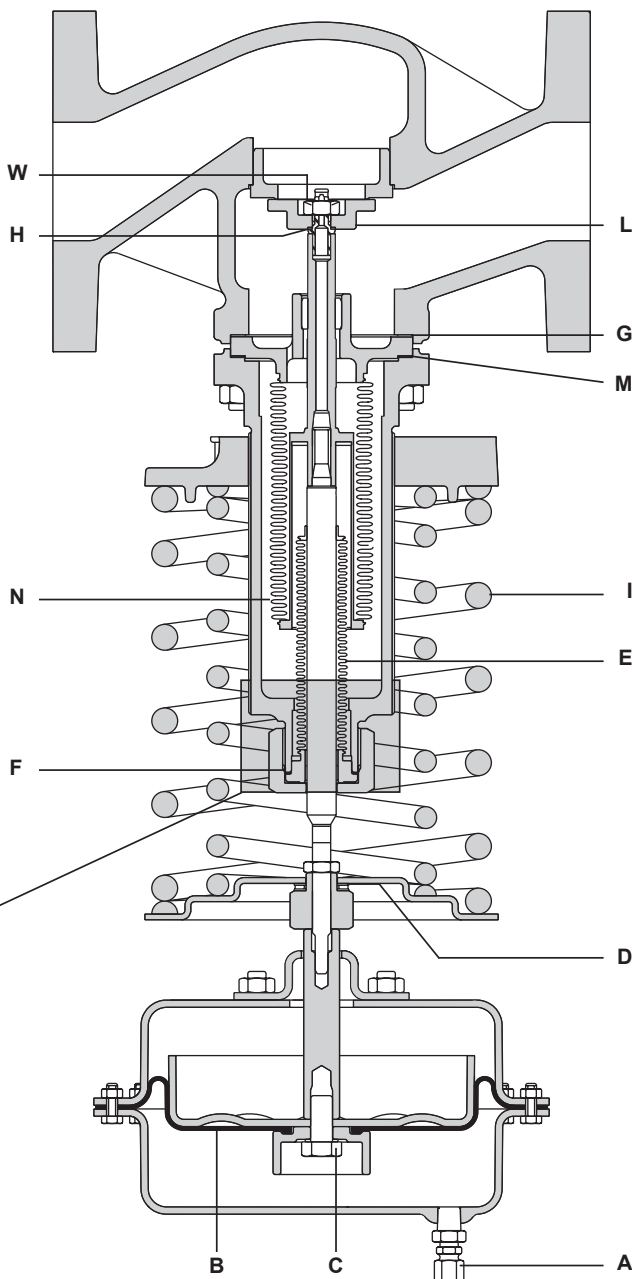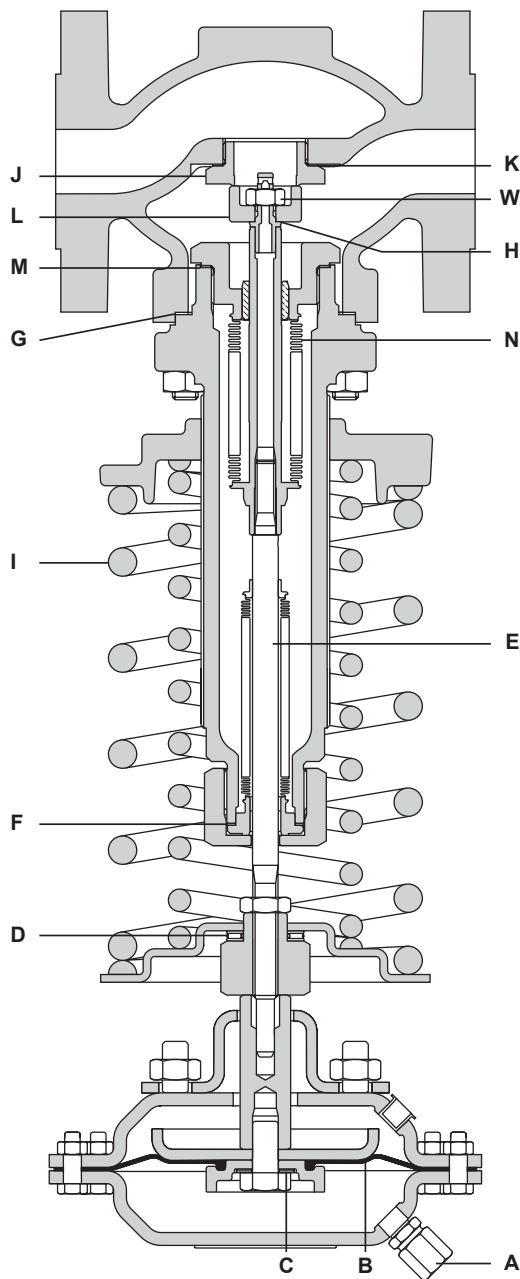

DN65 to DN100

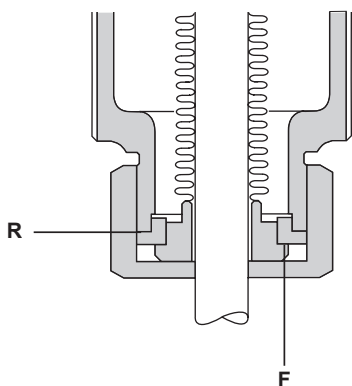



4.6

37


Control systems
Pressure reducing/surplussing valves

Dimensions (approximate) in millimetres

Size	Flanged			Actuator type									
	EN 1092 PN40 A1	ASME 300 A1	ASME 150 A1	1		2		3		4		5 + 6	
				B	C	B	C	B	C	B	C	B	C
DN15	130	130	127	537	305	511	250	426	208	426	168	411	143
DN20	150	150	143	537	305	511	250	426	208	426	168	411	143
DN25	160	162	153	546	305	520	250	435	208	435	168	420	143
DN32	180	181	176	608	305	582	250	497	208	497	168	482	143
DN40	200	203	198	608	305	582	250	497	208	497	168	482	143
DN50	230	233	229	611	305	585	250	500	208	500	168	485	143
DN65	290	297	295	633	305	607	250	522	208	522	168	507	143
DN80	310	319	314	639	305	613	250	528	208	528	168	513	143
DN100	350	366	350	744	305	718	250	633	208	633	168	618	143

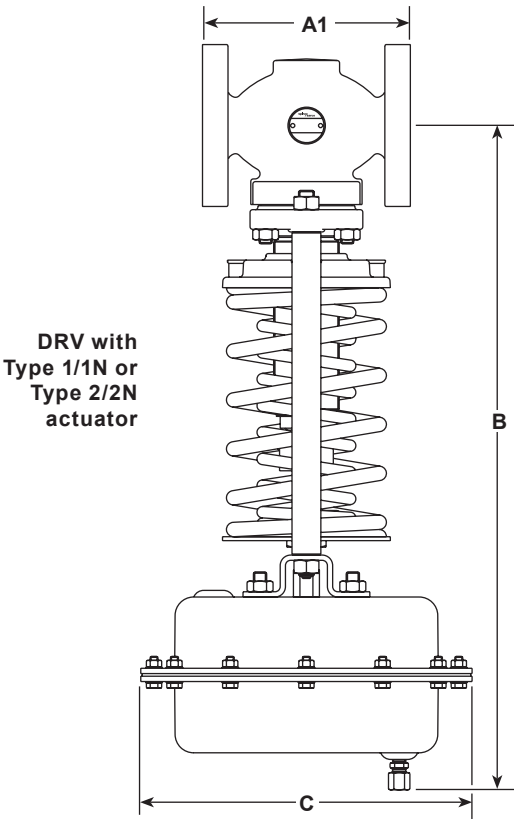

Type 3/3N and 4/4N actuator arrangement



Type 5/5N actuator arrangement

Valve weight (kg)

Valve size	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100
Yellow spring	11	12.4	14.6	19.8	21.2	25.2	35.5	41.3	58.3
Blue spring	11	12.4	14.6	19.8	21.2	25.2	35.5	41.3	58.3
Red spring	12	13.4	15.6	21.2	22.6	26.6	37.3	43.1	60.9

Actuator weight (kg)

Actuator type	1 or 1N	2 or 2N	3 or 3N	4 or 4N	5 or 5N
Weight	12.3	6.5	3.9	2.5	2.6

Note:
To calculate the total product weight add the valve and actuator weights together.

Safety information, installation and maintenance

For full details see the Installation and Maintenance Instructions (IM-S12-04) supplied with the product.

Installation note:
Caution - To protect the actuator diaphragm on steam applications a WS4 series water seal pot must be installed in the downstream pressure signal line to the actuator. Refer to TI-S12-03 for details.
The valve should be mounted vertically downwards in a horizontal pipeline with the direction of flow as indicated by the arrow on the valve body. For applications with downstream temperatures below 125 °C the valve can alternatively be mounted vertically upwards.

How to order

Example: 1 off Spirax Sarco DN40 DRV4B3 direct acting pressure reducing valve flanged PN40.
Note: Add suffix 'N' if the Nitrile rubber diaphragm is required. i.e. DRV4B3N.

