

POLEAS DENTADAS


Timing belt pulleys

Poulies dentées

L 050

Paso 3/8" (9,525 mm)
Pitch
Pas

Para correas de ancho 1/2" (12,7 mm)
For belt width
Pour courroies largeur

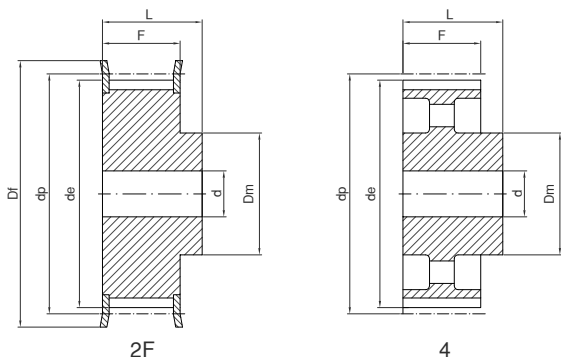

Ref.	Material	Z	dp	de	Df	Dm	F	L	d	Fig.	Kg.
10L050	St	10	30,32	29,56	36	20	19,0	28	8	2F	0,11
11L050	St	11	33,35	32,59	38	24	19,0	30	8	2F	0,14
12L050	St	12	36,38	35,62	42	24	19,0	30	8	2F	0,17
13L050	St	13	39,41	38,65	44	28	19,0	30	8	2F	0,21
14L050	St	14	42,44	41,68	48	28	19,0	30	8	2F	0,24
15L050	St	15	45,48	44,72	51	34	19,0	30	8	2F	0,29
16L050	St	16	48,51	47,75	54	36	19,0	32	8	2F	0,33
17L050	St	17	51,54	50,78	57	36	19,0	32	10	2F	0,38
18L050	St	18	54,57	53,81	60	40	19,0	32	10	2F	0,44
19L050	St	19	57,61	56,84	63	40	19,0	32	10	2F	0,47
20L050	St	20	60,64	59,88	66	40	19,0	32	10	2F	0,51
21L050	St	21	63,67	62,91	71	45	19,0	32	10	2F	0,60
22L050	St	22	66,70	65,94	75	45	19,0	32	10	2F	0,64
23L050	St	23	69,73	68,97	79	55	19,0	32	10	2F	0,78
24L050	St	24	72,77	72,00	79	55	19,0	32	10	2F	0,81
25L050	St	25	75,80	75,04	83	58	19,0	32	10	2F	0,89
26L050	St	26	78,83	78,07	87	58	19,0	32	12	2F	0,94
27L050	St	27	81,86	81,10	87	58	19,0	32	12	2F	0,99
28L050	St	28	84,89	84,13	91	58	19,0	32	12	2F	1,04
30L050	St	30	90,96	90,20	97	70	19,0	32	12	2F	1,17
32L050	St	32	97,03	96,26	103	70	19,0	32	12	2F	1,41
33L050	St	33	100,05	99,29	106	70	19,0	32	12	2F	1,49
34L050	St	34	103,08	102,32	111	70	19,0	32	12	2F	1,57
35L050	St	35	106,12	105,35	111	70	19,0	32	12	2F	1,62
36L050	St	36	109,15	108,39	115	70	19,0	32	12	2F	1,70
40L050	St	40	121,29	120,51	127	70	19,0	32	12	2F	2,03
42L050	St	42	127,34	126,58	135	70	19,0	32	12	2F	2,21
44L050	St	44	133,40	132,64	140	70	19,0	32	12	2F	2,38
45L050	St	45	136,44	135,67	143	70	19,0	32	12	2F	2,48
48L050	St	48	145,53	144,77	152	70	19,0	32	12	2F	2,78
50L050	GG	50	151,60	150,83		70	19,0	32	14	4	1,74
52L050	GG	52	157,66	156,90		70	19,0	32	14	4	1,80
56L050	GG	56	169,79	169,02		70	19,0	32	14	4	1,87
57L050	GG	57	172,82	172,06		70	19,0	32	14	4	1,88
60L050	GG	60	181,91	181,15		75	19,0	42	14	4	2,41
72L050	GG	72	218,29	217,53		75	19,0	42	14	4	2,82
84L050	GG	84	254,68	253,92		75	19,0	42	14	4	3,08
96L050	GG	96	291,06	290,30		75	19,0	42	14	4	3,42

Material: Acero/Steel/Acier (St)
Material: Fundición/Cast iron/Fonte (GG)


POLEAS DENTADAS

Timing belt pulleys
Poulies dentées

L 100

Paso 3/8" (9,525 mm)
Pitch
Pas

Para correas de ancho 1" (25,4 mm)
For belt width
Pour courroies largeur

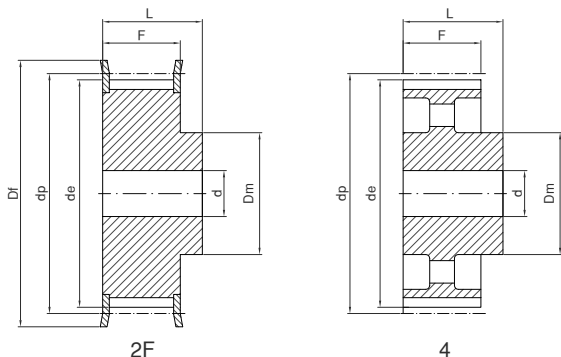

Ref.	Material	Z	dp	de	Df	Dm	F	L	d	Fig.	Kg.
10L100	St	10	30,32	29,56	36	20	31,8	45	8	2F	0,17
11L100	St	11	33,35	32,59	38	24	31,8	45	8	2F	0,22
12L100	St	12	36,38	35,62	42	24	31,8	45	8	2F	0,26
13L100	St	13	39,41	38,65	44	28	31,8	45	8	2F	0,32
14L100	St	14	42,44	41,68	48	28	31,8	45	10	2F	0,35
15L100	St	15	45,48	44,72	51	34	31,8	45	10	2F	0,43
16L100	St	16	48,51	47,75	54	36	31,8	45	10	2F	0,50
17L100	St	17	51,54	50,78	57	36	31,8	45	10	2F	0,56
18L100	St	18	54,57	53,81	60	40	31,8	45	10	2F	0,64
19L100	St	19	57,61	56,84	63	40	31,8	45	10	2F	0,70
20L100	St	20	60,64	59,88	66	40	31,8	45	10	2F	0,77
21L100	St	21	63,67	62,91	71	45	31,8	45	10	2F	0,88
22L100	St	22	66,70	65,94	75	45	31,8	45	12	2F	0,95
23L100	St	23	69,73	68,97	79	55	31,8	45	12	2F	1,11
24L100	St	24	72,77	72,00	79	55	31,8	45	12	2F	1,18
25L100	St	25	75,80	75,04	83	58	31,8	45	12	2F	1,30
26L100	St	26	78,83	78,07	87	58	31,8	45	12	2F	1,40
27L100	St	27	81,86	81,10	87	58	31,8	45	12	2F	1,47
28L100	St	28	84,89	84,13	91	58	31,8	45	12	2F	1,58
30L100	St	30	90,96	90,20	97	70	31,8	45	12	2F	1,78
32L100	St	32	97,03	96,26	103	70	31,8	45	12	2F	2,11
33L100	St	33	100,05	99,29	106	70	31,8	45	12	2F	2,23
34L100	St	34	103,08	102,32	111	70	31,8	45	12	2F	2,39
35L100	St	35	106,12	105,35	111	70	31,8	45	12	2F	2,45
36L100	St	36	109,15	108,39	115	70	31,8	45	12	2F	2,59
40L100	St	40	121,29	120,51	127	70	31,8	45	12	2F	3,13
42L100	St	42	127,34	126,58	135	70	31,8	45	12	2F	3,43
44L100	St	44	133,40	132,64	140	70	31,8	45	12	2F	3,72
45L100	St	45	136,44	135,67	143	70	31,8	45	12	2F	3,89
48L100	St	48	145,53	144,77	152	70	31,8	45	12	2F	4,38
50L100	GG	50	151,60	150,83		70	31,8	45	14	4	2,41
52L100	GG	52	157,66	156,90		70	31,8	45	14	4	2,55
56L100	GG	56	169,79	169,02		70	31,8	45	14	4	2,65
57L100	GG	57	172,82	172,06		70	31,8	45	14	4	2,71
60L100	GG	60	181,91	181,15		75	31,8	45	14	4	3,11
72L100	GG	72	218,29	217,53		75	31,8	45	14	4	3,65
84L100	GG	84	254,68	253,92		75	31,8	45	14	4	4,12
96L100	GG	96	291,06	290,30		75	31,8	45	14	4	4,60

Material: Acero/Steel/Acier (St)
Material: Fundición/Cast iron/Fonte (GG)

