





**\_size 0**

- 1\_ Integrated pressure gauge standard supplied
- 2\_ T-bracket for wall mounting
- 3\_ Manual exhaust
- 7\_ Metal thread
- 8\_ Panel ring nut standard supplied
- 9\_ Transparent dome and integrated regulation

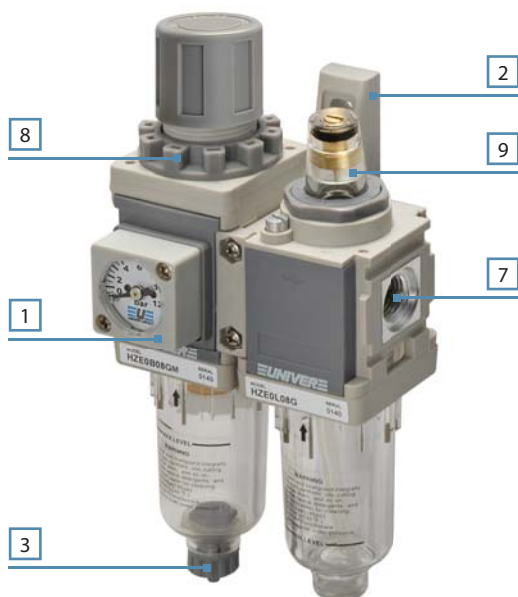

**\_size 1 - 2**

- 1\_ Integrated pressure gauge standard supplied
- 2\_ T-bracket for wall mounting
- 3\_ Manual exhaust
- 4\_ Bowl with guard standard supplied
- 5\_ Safety locking device
- 6\_ Metal body
- 8\_ Panel ring nut standard supplied
- 9\_ Transparent dome and integrated regulation

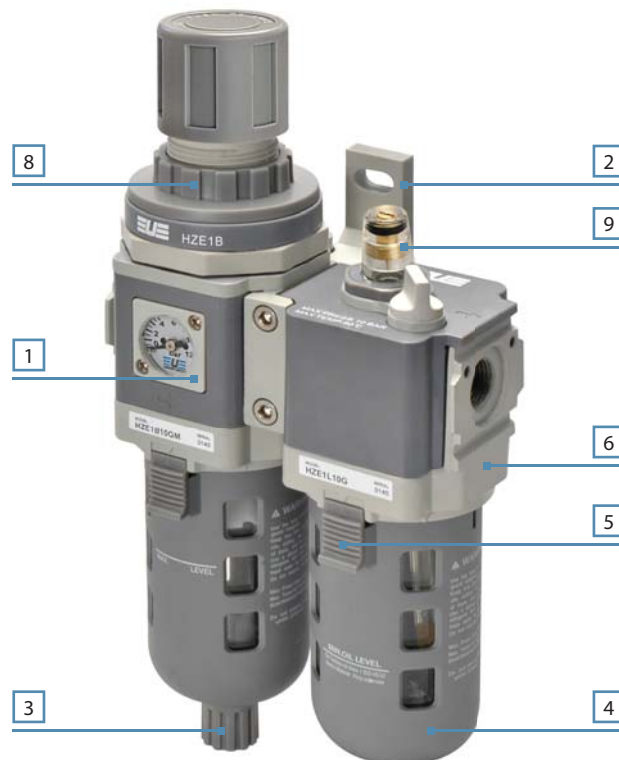

TYPE	SIZE	POSITION	PRESSURE ADJUSTMENT		LOCKABLE REGULATOR	FILTRATION RATING		BOWL PROTECTION	CONDENSATION DRAIN			PRESSURE GAUGE		
			0,5 ÷ 8,5 bar	Altro		5 µm	40 µm		Manual	Semi-auto	Auto	Square integrated	G1/8 adaptor	
D	FR+L	0	G1/4"	■	○	—	■	○	—	■	○	—	■	○
		1	G3/8"-G1/2"	■	○	○	■	○	■	■	○	○	■	■
		2	G1/2"	■	○	○	■	○	■	■	○	○	■	■
C	F+R+L	0	G1/4"	■	○	—	■	○	—	■	○	—	■	○
		1	G3/8"-G1/2"	■	○	○	■	○	■	■	○	○	■	■
		2	G1/2"	■	○	○	■	○	■	■	○	○	■	■
B	FR	0	G1/4"	■	○	—	■	○	—	■	○	—	■	○
		1	G3/8"-G1/2"	■	○	○	■	○	■	■	○	○	■	■
		2	G1/2"	■	○	○	■	○	■	■	○	○	■	■
F	F	0	G1/4"	—	—	—	■	○	—	■	○	—	—	—
		1	G3/8"-G1/2"	—	—	—	■	○	■	■	○	○	—	—
		2	G1/2"	—	—	—	■	○	■	■	○	○	—	—
R	R	0	G1/4"	■	○	—	—	—	—	■	○	—	■	○
		1	G3/8"-G1/2"	■	○	○	—	—	■	■	○	○	■	■
		2	G1/2"	■	○	○	—	—	■	■	○	○	■	■
L	L	0	G1/4"	—	—	—	—	—	—	—	—	—	—	—
		1	G3/8"-G1/2"	—	—	—	—	—	■	—	—	—	—	—
		2	G1/2"	—	—	—	—	—	■	—	—	—	—	—

■ = standard      ○ = upon request      — = not available



# HZE

## Air treatment units

New series available in 3 sizes

- HZE0 - G1/4" (40 mm)
- HZE1 - G3/8" (63 mm)
- HZE2 - G1/2" (80 mm)

Standard configurations

- Filter
- Regulator
- Lubricator
- Filter regulator (FR)
- Filter regulator + Lubricator (FR+L)
- Filter + Regulator + Lubricator (F+R+L)

Integrated square pressure gauge standard supplied (where foreseen)



## TECHNICAL CHARACTERISTICS

Ambient temperature	5 ÷ 60 °C
Fluid	compressed air, with or without lubrication
Working pressure	0 ÷ 10 bar
Max pressure	12 bar
Size	0 - 1 - 2

## CONSTRUCTIVE CHARACTERISTICS

Body	tecnopolymer with metal threaded elements (size 0) die-cast aluminium (size 1 - 2)
Knob	tecnopolymer
Ring nut	tecnopolymer
Bowl	polycarbonate
Bowl guard	tecnopolymer (size 1-2)
Filter element	synthetic fibre
Seals	nitrile rubber
Springs	steel
Diaphragm	fabric reinforced rubber

## CODIFICATION KEY

H	Z	E	0	B	0	8	G	M	
1	2	3	4	5	6				

1 Series	2 Size	3 Model
HZE	0 = small (G1/4") 1 = medium (G3/8" - G1/2") 2 = large (G1/2")	B = Filter regulator C = Filter+Regulator+Lubricator (F+R+L) D = Filter regulator+Lubricator (FR+L) F = Filter L = Lubricator R = Regulator

4 Port	5 Pressure gauge	6 Filtration
08G = G1/4" (tg.0) 10G = G3/8" (tg.1) 15G = G1/2" (tg.1 - 2)	blank = port G1/8 (upon request only for size 0) M = integrated square pressure gauge (standard)	blank = 5 micron (standard) su richiesta = other filtration ratings

Size 0: G1/8 thread optional (code HZE7Z480)

Size 1 - 2: G1/8 square adaptor included for round pressure gauge mounting

HZE\_4