


OGS

Original Groove System (OGS)

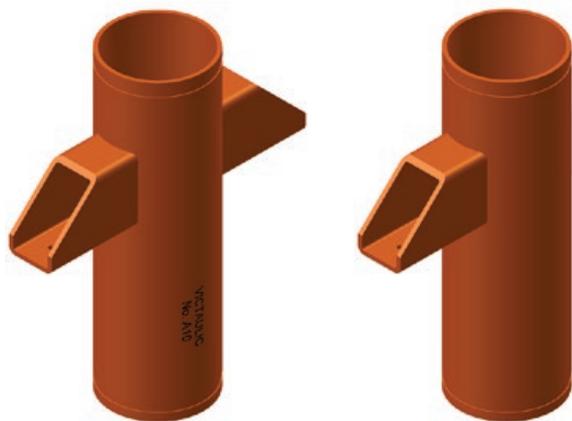

Pipe Anchor

NO. A10

NO. A40 for Tight Spaces

[Download publication 07.70](#) for No. A10

[Download publication 07.74](#) for No. A40

- Assists in directing pipe movement in piping system risers that are designed and installed exclusively with Victaulic Original Groove System (OGS) grooved products
- Sizes from 2–12" | DN50–DN300
- Pressures up to 500 psi | 3447 kPa | 34 bar

AGS

VBSP

Hole Cut

Plain End

Stainless Steel

Potable Water

Shouldered Steel

Ductile Iron

High Performance

Hydronic Balancing

HDPE

Aquamine™ PVC

CPVC/PVC

Specialty

Tools

Gaskets, Seals and O-Rings

Design Data

Reference Guide



Mover Expansion Joint

STYLE 150

[Download publication 09.04](#) for complete information

- Slip-type expansion joint providing up to 3" | 76 mm axial movement
- Sizes from 2–6" | DN50–DN150
- Pressures up to 350 psi | 2413 kPa | 24 bar



Expansion Joint

STYLE 155

[Download publication 09.05](#) for complete information

- Combination of flexible couplings and custom grooved pipe spools, joined in tandem to provide increased expansion
- Style 155 grooved expansion joints are rated to the working pressure of the coupling used
- Sizes from ¾–12" | DN20–DN300
- For AGS sizes 14–24" | DN350–DN600, [download publication 20.12](#) for information on Style W155