


VOSS

Racores con unión por brida cuadrada y anillo cortante, piezas

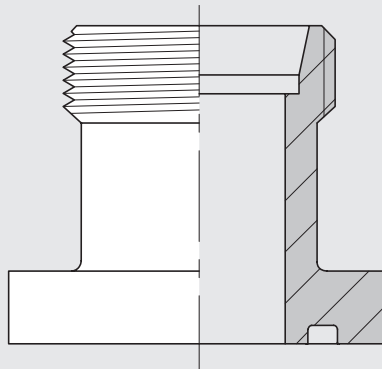


5

Adaptador de brida recto

Con unión por brida cuadrada y anillo cortante

Conexión de tubo: 24° según ISO 8434-1

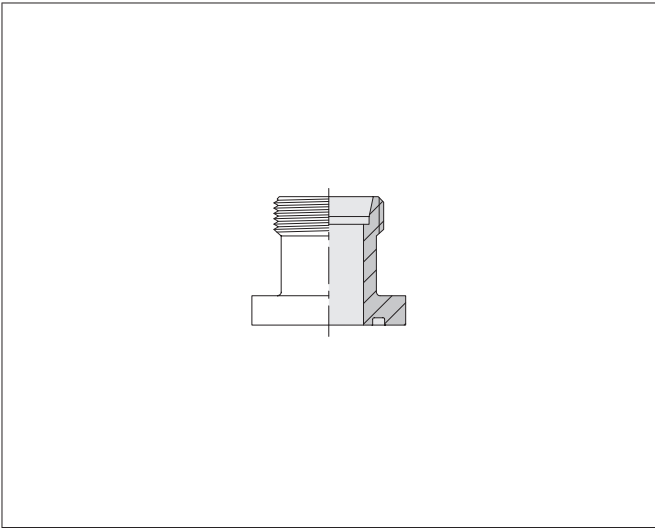

Serie diám. ext. tubo		PB	Diámetro taladro	kg/100 aprox.	Referencia	Designación
L	10	315	35	9,5	0795362000	F/24-QFFSX-L10-HC35-D6,4
L	12	315	35	9,7	0795372000	F/24-QFFSX-L12-HC35-D6,4
L	15	100	40	12,4	0795392000	F/24-QFFSX-L15-HC40-D6,4
L	15	250	35	10,2	0795382000	F/24-QFFSX-L15-HC35-D6,4
L	18	100	35	12,0	0796102000	F/24-QFFSX-L18-HC35-D6,4
L	18	100	40	12,2	0795402000	F/24-QFFSX-L18-HC40-D6,4
L	22	100	40	12,3	0795412000	F/24-QFFSX-L22-HC40-D6,4
L	28	100	40	15,9	0795142000	F/24-QFFSX-L28-HC40-D6,4
L	28	100	40	16,0	0795842000	F/24-QFFSX-L28-HC40-D6,4-LG55
L	28	100	55	30,4	0795902000	F/24-QFFSX-L28-HC55-D8,4
L	35	100	55	39,8	0795872000	F/24-QFFSX-L35-HC55-D8,4
S	16	315	35	16,4	0795102000	F/24-QFFSX-S16-HC35-D6,4
S	20	315	55	30,0	0795232000	F/24-QFFSX-S20-HC55-D8,4

Ver juntas tóricas
en el capítulo 3.


Ejemplo comparativo:
BFG10L/LK35CFX



Adaptador de brida acodado

Con unión por brida cuadrada y anillo cortante

Conexión de tubo: 24° según ISO 8434-1

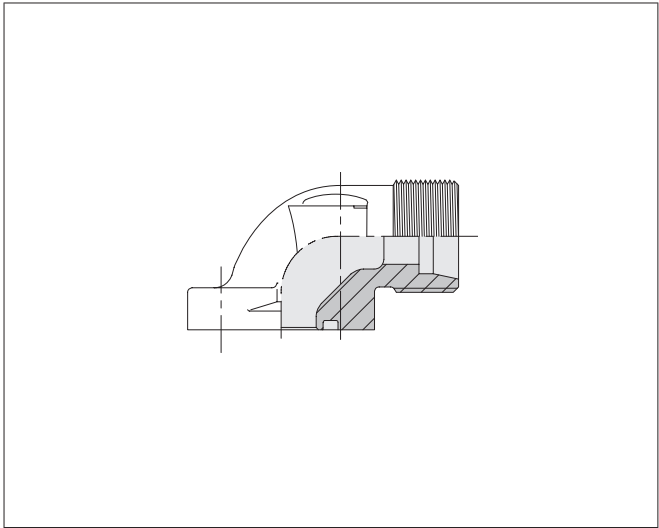

Serie diám. ext. tubo		PB	Diámetro taladro	kg/100 aprox.	Referencia	Designación
L	10	315	35	14,2	0795422000	F/24-QFFEX-L10-HC35-D6,4
L	12	315	35	15,7	0795622000	F/24-QFFEX-L12-HC35-D6,4
L	15	100	40	20,1	0795642000	F/24-QFFEX-L15-HC40-D6,4
L	15	250	35	19,0	7004709400	F/24-QFFEX-L15-HC35-D6,4
L	18	100	35	17,9	0795452000	F/24-QFFEX-L18-HC35-D6,4
L	18	100	40	16,9	0795432000	F/24-QFFEX-L18-HC40-D6,4
L	22	100	40	17,7	0795442000	F/24-QFFEX-L22-HC40-D6,4
L	28	100	40	26,0	0795152000	F/24-QFFEX-L28-HC40-D6,4
L	35	100	40	32,2	0795272000	F/24-QFFEX-L35-HC40-D6,4
L	35	100	55	46,6	0795172000	F/24-QFFEX-L35-HC55-D8,4
L	42	100	55	61,0	0795192000	F/24-QFFEX-L42-HC55-D8,4
S	12	315	35	27,1	0795882000	F/24-QFFEX-S12-HC35-D6,4
S	16	315	35	17,3	0795252000	F/24-QFFEX-S16-HC35-D6,4
S	20	250	40	20,2	0795132000	F/24-QFFEX-S20-HC40-D6,4
S	20	250	55	44,9	0795182000	F/24-QFFEX-S20-HC55-D8,4
S	20	315	35	22,3	0795112000	F/24-QFFEX-S20-HC35-D6,4
S	25	250	55	49,1	0795892000	F/24-QFFEX-S25-HC55-D8,4
S	30	250	55	49,8	0795242000	F/24-QFFEX-S30-HC55-D8,4

Ver juntas tóricas
en el capítulo 3.

Ejemplo comparativo:
BFW10L/LK35CFX