



VOSS

Racor union

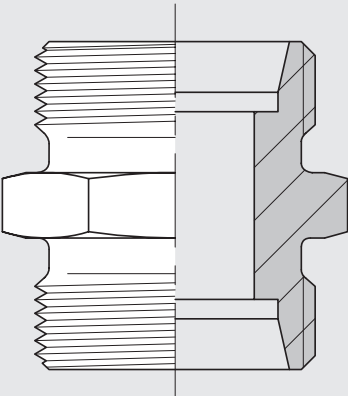

Racor recto de union

Conexión de tubo: 24° según ISO 8434-1

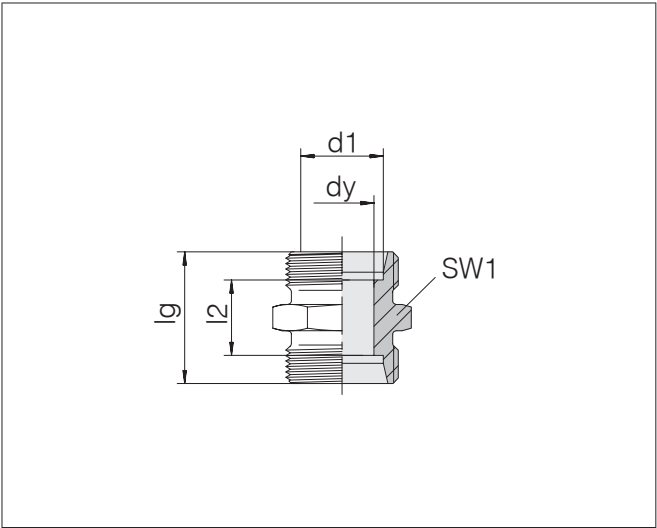

Serie diám. ext. tubo d1		Presión	dy	lg	l2	SW1	kg/100 aprox.	Referencia	Designación
LL	4	PN 100	3	20	12	9	0,5	0711002000	24-S-LL4
LL	5	PN 100	3,5	20	9	11	0,8	0711052000	24-S-LL5
LL	6	PN 100	4,5	20	9	11	0,7	0711102000	24-S-LL6
LL	8	PN 100	6	23	12	12	1,0	0711152000	24-S-LL8
L	6	PN 500	4	24	10	12	1,2	0712002000	24-S-L6
L	8	PN 500	6	25	11	14	1,6	0712052000	24-S-L8
L	10	PN 500	8	27	13	17	2,2	0712102000	24-S-L10
L	12	PN 400	10	28	14	19	2,8	0712152000	24-S-L12
L	15	PN 400	12	30	16	24	4,9	0712202000	24-S-L15
L	18	PN 400	15	31	16	27	6,7	0712252000	24-S-L18
L	22	PN 250	19	35	20	32	8,8	0712302000	24-S-L22
L	28	PN 250	24	36	21	41	13,6	0712352000	24-S-L28
L	35	PN 250	30	41	20	46	21,0	0712402000	24-S-L35
L	42	PN 250	36	43	21	55	29,4	0712452000	24-S-L42
S	6	PN 800	4	30	16	14	2,5	0712502000	24-S-S6
S	8	PN 800	5	32	18	17	3,7	0712552000	24-S-S8
S	10	PN 800	7	32	17	19	4,3	0712602000	24-S-S10
S	12	PN 630	8	34	19	22	5,9	0712652000	24-S-S12
S	14	PN 630	10	38	22	24	7,5	0712702000	24-S-S14
S	16	PN 630	12	38	21	27	8,7	0712752000	24-S-S16
S	20	PN 420	16	44	23	32	14,2	0712802000	24-S-S20
S	25	PN 420	20	50	26	41	25,0	0712852000	24-S-S25
S	30	PN 420	25	54	27	46	32,3	0712902000	24-S-S30
S	38	PN 420	32	61	29	55	53,8	0712952000	24-S-S38


Ejemplo comparativo:
G06LX
ISO 8434-1-S-L6-St





Racor recto reducido

Conexión de tubo: 24° según ISO 8434-1

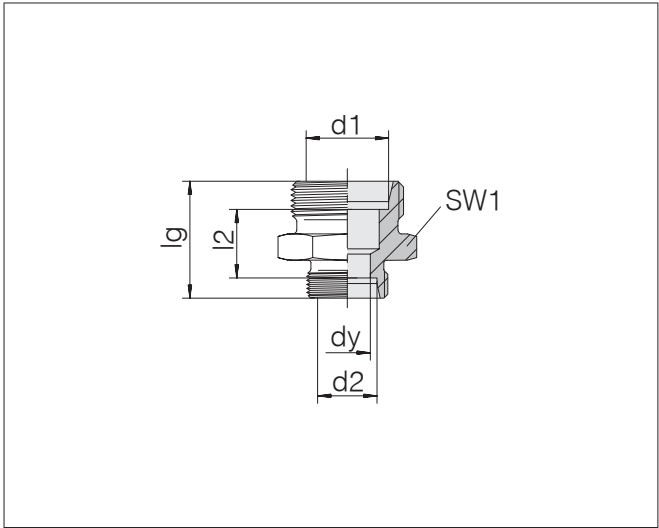

Serie diám. ext. tubo d1		Serie diám. ext. tubo d2		Presión	dy	lg	l2	SW1	kg/100 aprox.	Referencia	Designación
LL	6	LL	4	PN 100	3	20	10,5	11	0,7	0711122000	24-S-LL6-LL4
LL	8	LL	4	PN 100	3	22	12,5	12	0,9	0711182000	24-S-LL8-LL4
LL	8	LL	6	PN 100	4,5	22	11	12	1,1	0711192000	24-S-LL8-LL6
L	8	L	6	PN 500	4	25	11	14	1,5	0712062000	24-S-L8-L6
L	10	L	6	PN 500	4	26	12	17	2,0	0712122000	24-S-L10-L6
L	10	L	8	PN 500	6	26	12	17	2,1	0712112000	24-S-L10-L8
L	12	L	6	PN 400	4	27	13	19	2,5	0712182000	24-S-L12-L6
L	12	L	8	PN 400	6	27	13	19	2,6	0712172000	24-S-L12-L8
L	12	L	10	PN 400	8	28	14	19	2,7	0712162000	24-S-L12-L10
L	15	L	6	PN 400	4	28	14	24	3,8	0712242000	24-S-L15-L6
L	15	L	8	PN 400	6	28	14	24	4,0	0712232000	24-S-L15-L8
L	15	L	10	PN 400	8	29	15	24	4,1	0712222000	24-S-L15-L10
L	15	L	12	PN 400	10	29	15	24	4,2	0712212000	24-S-L15-L12
L	18	L	8	PN 400	6	29	14,5	27	6,0	0712292000	24-S-L18-L8
L	18	L	10	PN 400	8	30	15,5	27	5,6	0712282000	24-S-L18-L10
L	18	L	12	PN 400	10	30	15,5	27	5,7	0712272000	24-S-L18-L12
L	18	L	15	PN 400	12	31	16,5	27	6,1	0712262000	24-S-L18-L15
L	22	L	10	PN 250	8	32	17,5	32	7,5	0712342000	24-S-L22-L10
L	22	L	12	PN 250	10	32	17,5	32	7,6	0712332000	24-S-L22-L12
L	22	L	15	PN 250	12	33	18,5	32	8,1	0712322000	24-S-L22-L15
L	22	L	18	PN 250	15	33	18	32	8,6	0712312000	24-S-L22-L18
L	28	L	10	PN 250	8	33	18,5	41	12,2	0711822000	24-S-L28-L10
L	28	L	15	PN 250	12	34	19,5	41	12,2	0712382000	24-S-L28-L15
L	28	L	18	PN 250	15	34	19	41	12,3	0712372000	24-S-L28-L18
L	28	L	22	PN 250	19	36	21	41	13,2	0712362000	24-S-L28-L22
L	35	L	22	PN 250	19	39	21	46	19,0	0712422000	24-S-L35-L22
L	35	L	28	PN 250	24	39	21	46	19,0	0712412000	24-S-L35-L28
L	42	L	28	PN 250	24	41	22,5	55	26,8	0712472000	24-S-L42-L28
L	42	L	35	PN 250	30	43	21,5	55	29,3	0712462000	24-S-L42-L35


Ejemplo comparativo:
GR08/06LX
ISO 8434-1-RDS-L8xL6-St

Continuación en la página siguiente



Racor recto reducido

Conexión de tubo: 24° según ISO 8434-1

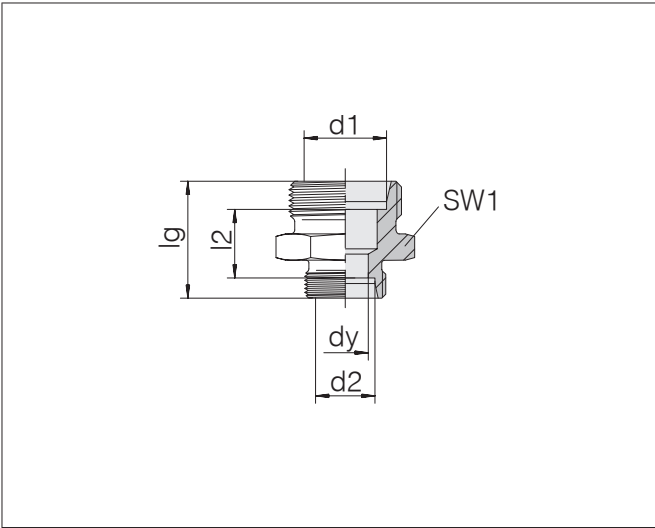


Serie diám. ext. tubo d1		Serie diám. ext. tubo d2		Presión	dy	lg	l2	SW1	kg/100 aprox.	Referencia	Designación
S	8	S	6	PN 800	4	32	18	17	3,4	0712562000	24-S-S8-S6
S	10	S	6	PN 800	4	32	17,5	19	4,0	0712622000	24-S-S10-S6
S	10	S	8	PN 800	5	32	17,5	19	4,2	0712612000	24-S-S10-S8
S	12	S	6	PN 630	4	34	19,5	22	5,4	0712682000	24-S-S12-S6
S	12	S	8	PN 630	5	34	19,5	22	5,6	0712672000	24-S-S12-S8
S	12	S	10	PN 630	7	34	19	22	5,8	0712662000	24-S-S12-S10
S	14	S	10	PN 630	7	36	20,5	24	6,9	0712722000	24-S-S14-S10
S	14	S	12	PN 630	8	36	20,5	24	7,0	0712712000	24-S-S14-S12
S	16	L	12	PN 400	10	35	19,5	27	7,7	0711982000	24-S-S16-L12
S	16	L	15	PN 400	12	36	20,5	27	7,9	0799632000	24-S-S16-L15
S	16	S	8	PN 630	5	36	20,5	27	7,8	0712792000	24-S-S16-S8
S	16	S	10	PN 630	7	36	20	27	7,9	0712782000	24-S-S16-S10
S	16	S	12	PN 630	8	36	20	27	8,0	0712772000	24-S-S16-S12
S	16	S	14	PN 630	10	38	21,5	27	8,7	0712762000	24-S-S16-S14
S	20	L	15	PN 400	12	40	22,5	32	13,9	0796222000	24-S-S20-L15
S	20	S	10	PN 420	7	40	22	32	12,2	0712842000	24-S-S20-S10
S	20	S	12	PN 420	8	40	22	32	12,5	0712832000	24-S-S20-S12
S	20	S	14	PN 420	10	42	23,5	32	12,9	0712822000	24-S-S20-S14
S	20	S	16	PN 420	12	42	23	32	12,9	0712812000	24-S-S20-S16
S	25	S	16	PN 420	12	46	25,5	41	22,0	0712872000	24-S-S25-S16
S	25	S	20	PN 420	16	48	25,5	41	23,2	0712862000	24-S-S25-S20
S	30	S	20	PN 420	16	50	26	46	29,4	0712922000	24-S-S30-S20
S	30	S	25	PN 420	20	52	26,5	46	31,1	0712912000	24-S-S30-S25
S	38	S	25	PN 420	20	57	29	55	48,2	0712972000	24-S-S38-S25
S	38	S	30	PN 420	25	59	29,5	55	48,8	0712962000	24-S-S38-S30



Codo union

Conexión de tubo: 24° según ISO 8434-1

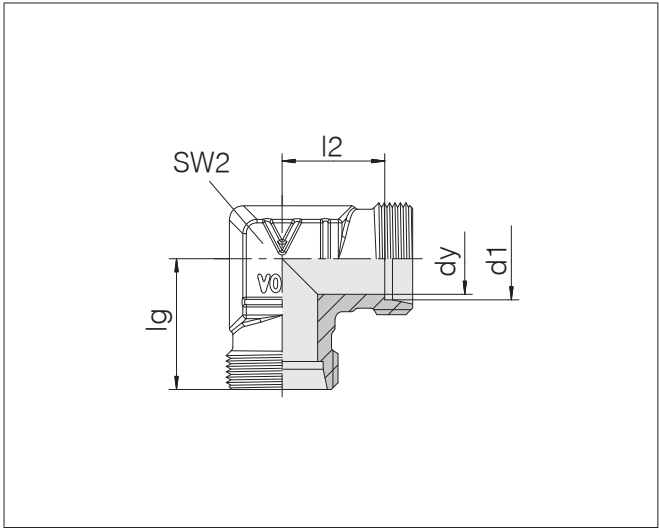


Serie diám. ext. tubo d1		Presión	dy	lg	l2	SW2	kg/100 aprox.	Referencia	Designación
LL	4	PN 100	3	15	11	9	1,3	0719002000	24-E-LL4-P
LL	6	PN 100	4,5	15	9,5	11	1,5	0719102000	24-E-LL6-P
LL	8	PN 100	6	17	11,5	12	2,3	0719152000	24-E-LL8-P
L	6	PN 500	4	19	12	12	2,8	0720002000	24-E-L6-P
L	8	PN 500	6	21	14	14	4,1	0720052000	24-E-L8-P
L	10	PN 500	8	22	15	17	5,6	0720102000	24-E-L10-P
L	12	PN 400	10	24	17	19	7,7	0720152000	24-E-L12-P
L	15	PN 400	12	28	21	19	7,4	0720202000	24-E-L15
L	18	PN 400	15	31	23,5	24	11,9	0720252000	24-E-L18
L	22	PN 250	19	35	27,5	27	15,2	0720302000	24-E-L22
L	28	PN 250	24	38	30,5	36	25,1	0720352000	24-E-L28
L	35	PN 250	30	45	34,5	41	43,1	0720402000	24-E-L35
L	42	PN 250	36	51	40	50	78,2	0720452000	24-E-L42
S	6	PN 800	4	23	16	14	5,1	0720502000	24-E-S6-P
S	8	PN 800	5	24	17	17	7,2	0720552000	24-E-S8-P
S	10	PN 800	7	25	17,5	19	9,8	0720602000	24-E-S10-P
S	12	PN 630	8	29	21,5	22	14,4	0720652000	24-E-S12-P
S	14	PN 630	10	30	22	19	10,4	0720702000	24-E-S14
S	16	PN 630	12	33	24,5	24	12,7	0720752000	24-E-S16
S	20	PN 420	16	37	26,5	27	20,5	0720802000	24-E-S20
S	25	PN 420	20	42	30	36	34,9	0720852000	24-E-S25
S	30	PN 420	25	49	35,5	41	58,8	0720902000	24-E-S30
S	38	PN 420	32	57	41	50	103,1	0720952000	24-E-S38

Ejemplo comparativo:
W06LX
ISO 8434-1-E-L6-St

T-union

Conexión de tubo: 24° según ISO 8434-1

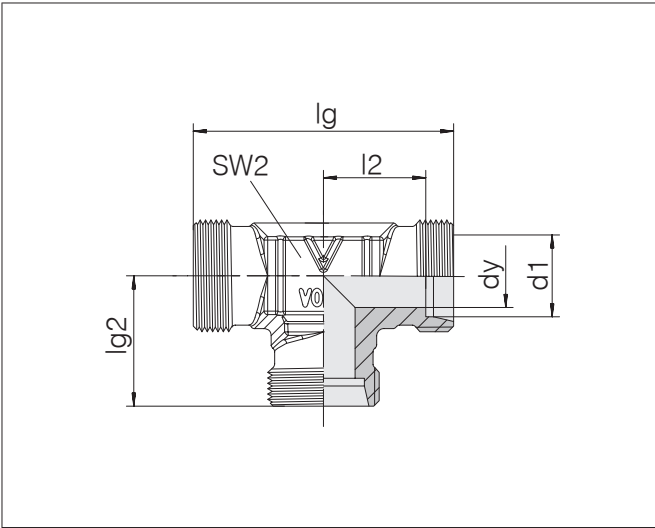

Serie diám. ext. tubo d1		Presión	dy	lg	lg2	l2	SW2	kg/100 aprox.	Referencia	Designación
LL	4	PN 100	3	30	15	11	9	1,1	0733002000	24-T-LL4
LL	5	PN 100	3,5	30	15	9,5	9	1,2	0733052000	24-T-LL5
LL	6	PN 100	4,5	30	15	9,5	9	1,0	0733102000	24-T-LL6
LL	8	PN 100	6	34	17	11,5	12	2,8	0733152000	24-T-LL8-P
L	6	PN 500	4	38	19	12	12	3,5	0734002000	24-T-L6-P
L	8	PN 500	6	42	21	14	14	5,1	0734052000	24-T-L8-P
L	10	PN 500	8	44	22	15	17	6,7	0734102000	24-T-L10-P
L	12	PN 400	10	48	24	17	19	9,1	0734152000	24-T-L12-P
L	15	PN 400	12	56	28	21	19	10,0	0734202000	24-T-L15
L	18	PN 400	15	62	31	23,5	24	15,0	0734252000	24-T-L18
L	22	PN 250	19	70	35	27,5	27	18,6	0734302000	24-T-L22
L	28	PN 250	24	76	38	30,5	36	29,9	0734352000	24-T-L28
L	35	PN 250	30	90	45	34,5	41	52,3	0734402000	24-T-L35
L	42	PN 250	36	102	51	40	50	91,5	0734452000	24-T-L42
S	6	PN 800	4	46	23	16	14	6,7	0734502000	24-T-S6-P
S	8	PN 800	5	48	24	17	17	9,1	0734552000	24-T-S8-P
S	10	PN 800	7	50	25	17,5	19	11,5	0734602000	24-T-S10-P
S	12	PN 630	8	58	29	21,5	22	17,3	0734652000	24-T-S12-P
S	14	PN 630	10	60	30	22	19	13,1	0734702000	24-T-S14
S	16	PN 630	12	66	33	24,5	24	16,5	0734752000	24-T-S16
S	20	PN 420	16	74	37	26,5	27	26,0	0734802000	24-T-S20
S	25	PN 420	20	84	42	30	36	43,6	0734852000	24-T-S25
S	30	PN 420	25	98	49	35,5	41	71,5	0734902000	24-T-S30
S	38	PN 420	32	114	57	41	50	125,8	0734952000	24-T-S38


Ejemplo comparativo:
T06LX
ISO 8434-1-T-L6-St





T-reducida

Conexión de tubo: 24° según ISO 8434-1

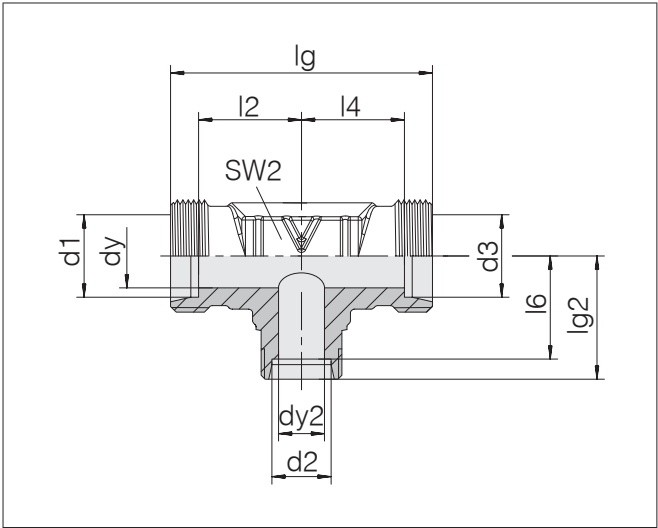

Serie diám. ext. tubo d1	d2	d3	Presión	dy	dy2	lg	lg2	l2	l4	l6	SW2	kg/100 aprox.	Referencia	Designación
L 6	6	8	6	PN 500	4	6	42	21	14	14	14	5,1	0799772000	24-T-L6-L8-L6-P
L 6	6	10	6	PN 500	4	8	44	22	15	15	17	6,6	0799562000	24-T-L6-L10-L6-P
L 8	8	6	8	PN 500	6	4	42	21	14	14	14	5,2	0734062000	24-T-L8-L6-L8-P
L 8	8	8	6	PN 500	4	6	42	21	14	14	14	5,0	0799592000	24-T-L8-L8-L6-P
L 8	8	10	8	PN 500	6	8	44	22	15	15	17	6,9	0799762000	24-T-L8-L10-L8-P
L 8	8	12	8	PN 400	6	10	48	24	17	17	17	9,7	0799512000	24-T-L8-L12-L8-P
L 10	10	6	10	PN 500	8	4	44	22	15	15	17	6,6	0734122000	24-T-L10-L6-L10-P
L 10	10	6	6	PN 500	4	4	44	22	15	15	14	6,5	0799572000	24-T-L10-L6-L6-P
L 10	10	8	10	PN 500	8	6	44	22	15	15	17	6,7	0734112000	24-T-L10-L8-L10-P
L 10	10	10	6	PN 500	4	8	44	22	15	15	17	6,5	0733542000	24-T-L10-L10-L6-P
L 10	10	12	10	PN 400	8	10	48	24	17	17	19	8,9	0799522000	24-T-L10-L12-L10-P
L 10	10	15	10	PN 400	8	11	56	28	21	21	19	10,5	0799462000	24-T-L10-L15-L10
L 12	12	6	12	PN 400	10	4	48	24	17	17	19	9,4	1794292000	24-T-L12-L6-L12
L 12	12	8	12	PN 400	10	6	48	24	17	17	19	9,3	0734172000	24-T-L12-L8-L12-P
L 12	12	8	8	PN 400	6	6	48	24	17	17	19	9,3	1794262000	24-T-L12-L8-L8
L 12	12	10	10	PN 400	8	8	48	24	17	17	19	9,2	0797322000	24-T-L12-L10-L10-P
L 12	12	10	12	PN 400	10	8	48	24	17	17	19	9,0	0734162000	24-T-L12-L10-L12-P
L 12	12	12	10	PN 400	8	10	48	24	17	17	19	9,1	0799552000	24-T-L12-L12-L10-P
L 12	12	12	8	PN 400	6	10	48	24	17	17	19	9,2	0799542000	24-T-L12-L12-L8-P
L 12	12	15	12	PN 400	10	12	56	28	21	21	19	9,9	0799472000	24-T-L12-L15-L12
L 12	12	18	12	PN 400	10	15	62	31	24	24	23,5	15,5	0799382000	24-T-L12-L18-L12
L 12	12	22	12	PN 250	10	19	70	35	28	28	27,5	23,5	0796532000	24-T-L12-L22-L12
L 15	15	6	15	PN 400	12	4	56	28	21	21	19	10,2	0734242000	24-T-L15-L6-L15
L 15	15	8	15	PN 400	12	6	56	28	21	21	19	10,2	0734232000	24-T-L15-L8-L15
L 15	15	10	10	PN 400	8	8	56	28	21	21	19	9,9	0799492000	24-T-L15-L10-L10
L 15	15	10	15	PN 400	12	8	56	28	21	21	19	9,8	0734222000	24-T-L15-L10-L15
L 15	15	12	12	PN 400	10	10	56	28	21	21	19	9,9	0797612000	24-T-L15-L12-L12
L 15	15	12	15	PN 400	12	10	56	28	21	21	19	9,9	0734212000	24-T-L15-L12-L15
L 15	15	15	10	PN 400	8	12	56	28	21	21	19	10,0	0799942000	24-T-L15-L15-L10
L 15	15	15	12	PN 400	10	12	56	28	21	21	19	9,9	0797732000	24-T-L15-L15-L12
L 15	15	18	15	PN 400	12	15	62	31	24	24	24	19,3	0799952000	24-T-L15-L18-L15


Ejemplo comparativo:
TR06/08/06LX

Continuación en la página siguiente



T-reducida

Conexión de tubo: 24° según ISO 8434-1

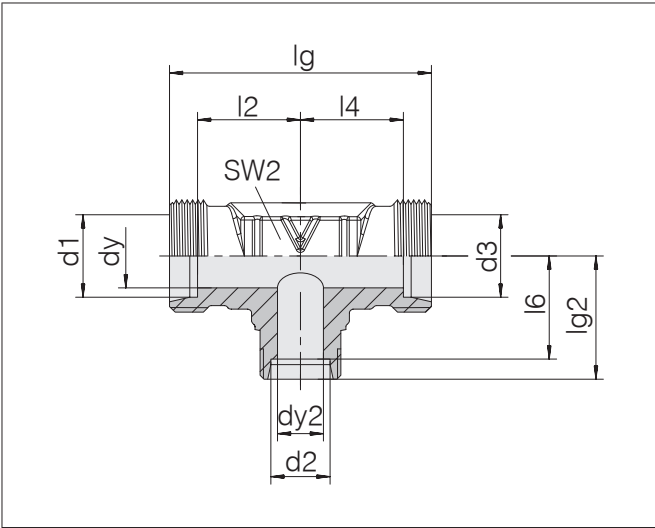

Serie	d2	d3	Presión	dy	dy2	lg	lg2	l2	l4	l6	SW2	kg/100 aprox.	Referencia	Designación
diám. ext. tubo d1														
L 15	22	15	PN 250	12	19	70	35	28	28	27,5	27	22,6	0799972000	24-T-L15-L22-L15
L 18	8	18	PN 400	15	6	62	31	23,5	23,5	24	24	19,0	0734292000	24-T-L18-L8-L18
L 18	10	10	PN 400	8	8	62	31	23,5	23,5	24	24	15,2	0799402000	24-T-L18-L10-L10
L 18	10	18	PN 400	15	8	62	31	23,5	23,5	24	24	15,4	0734282000	24-T-L18-L10-L18
L 18	12	18	PN 400	15	10	62	31	23,5	23,5	24	24	15,1	0734272000	24-T-L18-L12-L18
L 18	15	15	PN 400	12	12	62	31	23,5	23,5	24	24	18,9	0799412000	24-T-L18-L15-L15
L 18	15	18	PN 400	15	12	62	31	23,5	23,5	24	24	15,4	0734262000	24-T-L18-L15-L18
L 18	18	10	PN 400	8	15	62	31	23,5	23,5	23,5	24	15,1	0799422000	24-T-L18-L18-L10
L 18	18	15	PN 400	12	15	62	31	23,5	23,5	23,5	24	18,9	0799442000	24-T-L18-L18-L15
L 18	22	15	PN 250	12	19	70	35	27,5	27,5	27,5	27	23,3	0799742000	24-T-L18-L22-L15
L 18	22	18	PN 250	15	19	70	35	27,5	27,5	27,5	27	22,2	0799962000	24-T-L18-L22-L18
L 22	10	22	PN 250	19	8	70	35	27,5	27,5	28	27	20,4	0734342000	24-T-L22-L10-L22
L 22	12	22	PN 250	19	10	70	35	27,5	27,5	28	27	19,7	0734332000	24-T-L22-L12-L22
L 22	15	15	PN 250	12	12	70	35	28	27,5	28	27	21,2	0799362000	24-T-L22-L15-L15
L 22	15	22	PN 250	19	12	70	35	27,5	27,5	28	27	19,9	0734322000	24-T-L22-L15-L22
L 22	18	18	PN 250	15	15	70	35	27,5	27,5	27,5	27	21,2	0733562000	24-T-L22-L18-L18
L 22	18	22	PN 250	19	15	70	35	27,5	27,5	27,5	27	20,5	0734312000	24-T-L22-L18-L22
L 22	22	18	PN 250	15	19	70	35	27,5	27,5	27,5	27	19,8	0733652000	24-T-L22-L22-L18
L 22	28	22	PN 250	19	24	76	38	30,5	30,5	30,5	36	36,4	0796512000	24-T-L22-L28-L22
L 28	10	28	PN 250	24	8	76	38	30,5	30,5	31	36	31,8	0799312000	24-T-L28-L10-L28
L 28	12	28	PN 250	24	10	76	38	30,5	30,5	31	36	32,1	0734392000	24-T-L28-L12-L28
L 28	15	28	PN 250	24	12	76	38	30,5	30,5	31	36	32,3	0734382000	24-T-L28-L15-L28
L 28	18	28	PN 250	24	15	76	38	30,5	30,5	30,5	36	31,7	0734372000	24-T-L28-L18-L28
L 28	22	22	PN 250	19	19	76	38	30,5	30,5	30,5	36	32,3	0796352000	24-T-L28-L22-L22
L 28	22	28	PN 250	24	19	76	38	30,5	30,5	30,5	36	30,0	0734362000	24-T-L28-L22-L28
L 28	35	28	PN 250	24	30	90	45	37,5	37,5	34,5	41	61,8	1734082000	24-T-L28-L35-L28
L 28	42	28	PN 250	24	36	102	51	43,5	43,5	40	50	112,0	1734102000	24-T-L28-L42-L28
L 35	18	35	PN 250	30	15	90	45	34,5	34,5	37,5	41	60,0	0734432000	24-T-L35-L18-L35
L 35	28	28	PN 250	24	24	90	45	34,5	37,5	37,5	41	59,0	1734042000	24-T-L35-L28-L28
L 35	28	35	PN 250	30	24	90	45	34,5	34,5	37,5	41	54,0	0734412000	24-T-L35-L28-L35
L 35	42	35	PN 250	30	36	102	51	40,5	40,5	40	50	106,0	1734092000	24-T-L35-L42-L35


Continuación en la página siguiente





T-reducida


Conexión de tubo: 24° según ISO 8434-1

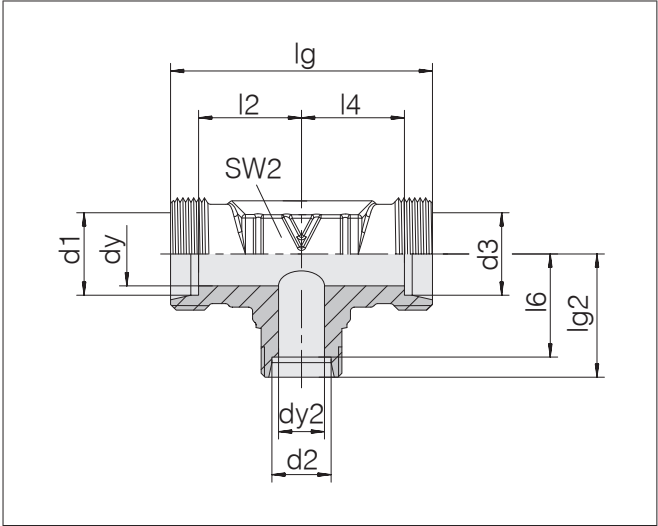

Serie	d2	d3	Presión	dy	dy2	lg	lg2	l2	l4	l6	SW2	kg/100 aprox.	Referencia	Designación
diám. ext. tubo d1														
L 42	18	42	PN 250	36	15	102	51	40	40	43,5	50	92,2	0734492000	24-T-L42-L18-L42
L 42	22	42	PN 250	36	19	102	51	40	40	43,5	50	101,6	0734482000	24-T-L42-L22-L42
L 42	28	42	PN 250	36	24	102	51	40	40	43,5	50	97,4	0734472000	24-T-L42-L28-L42
S 10	6	10	PN 800	7	4	50	25	17,5	17,5	18	19	11,7	0734622000	24-T-S10-S6-S10-P
S 12	8	12	PN 630	8	5	58	29	21,5	21,5	22	22	17,5	0734672000	24-T-S12-S8-S12-P
S 12	8	8	PN 630	5	5	58	29	21,5	21,5	22	22	16,9	0799302000	24-T-S12-S8-S8-P
S 12	10	12	PN 630	8	7	58	29	21,5	21,5	21,5	22	17,6	0734662000	24-T-S12-S10-S12-P
S 12	16	12	PN 630	8	12	66	33	24,5	24,5	24,5	24	17,7	0797822000	24-T-S12-S16-S12
S 16	6	16	PN 630	12	4	66	33	24,5	24,5	26	24	16,8	0799292000	24-T-S16-S6-S16
S 16	8	16	PN 630	12	5	66	33	24,5	24,5	26	24	17,1	0734792000	24-T-S16-S8-S16
S 16	10	16	PN 630	12	7	66	33	24,5	24,5	25,5	24	17,1	0734782000	24-T-S16-S10-S16
S 16	12	16	PN 630	12	8	66	33	24,5	24,5	25,5	24	16,9	0734772000	24-T-S16-S12-S16
S 16	20	16	PN 420	12	16	74	37	28,5	28,5	26,5	27	26,7	0799222000	24-T-S16-S20-S16
S 20	10	20	PN 420	16	7	74	37	26,5	26,5	29,5	27	26,4	0734842000	24-T-S20-S10-S20
S 20	12	20	PN 420	16	8	74	37	26,5	26,5	29,5	27	26,5	0734832000	24-T-S20-S12-S20
S 20	16	16	PN 420	12	12	74	37	26,5	28,5	28,5	27	25,3	0795972000	24-T-S20-S16-S16
S 20	16	20	PN 420	16	12	74	37	26,5	26,5	28,5	27	25,9	0734812000	24-T-S20-S16-S20
S 20	25	20	PN 420	16	20	84	42	31,5	31,5	30	36	45,3	0797452000	24-T-S20-S25-S20
S 25	12	25	PN 420	20	8	84	42	30	30	34,5	36	44,8	0734892000	24-T-S25-S12-S25
S 25	16	25	PN 420	20	12	84	42	30	30	33,5	36	44,5	0734872000	24-T-S25-S16-S25
S 25	18	25	PN 420	20	15	84	42	30	30	34,5	36	46,6	1796912000	24-T-S25-L18-S25
S 25	20	25	PN 420	20	16	84	42	30	30	31,5	36	43,4	0734862000	24-T-S25-S20-S25
S 25	25	20	PN 420	16	20	84	42	30	31,5	30	36	47,4	0733572000	24-T-S25-S25-S20
S 25	30	25	PN 420	20	25	98	49	37	37	35,5	41	77,8	0733982000	24-T-S25-S30-S25
S 30	16	30	PN 420	25	12	98	49	35,5	35,5	40,5	41	79,0	0734932000	24-T-S30-S16-S30
S 30	20	30	PN 420	25	16	98	49	35,5	35,5	38,5	41	71,0	0734922000	24-T-S30-S20-S30
S 38	16	38	PN 420	32	12	114	57	41	41	48,5	50	120,4	0734992000	24-T-S38-S16-S38
S 38	25	38	PN 420	32	20	114	57	41	41	45	50	118,3	0734972000	24-T-S38-S25-S38
S 38	38	25	PN 420	20	32	114	57	41	45	41	50	134,1	0733482000	24-T-S38-S38-S25

Cruz

Conexión de tubo: 24° según ISO 8434-1

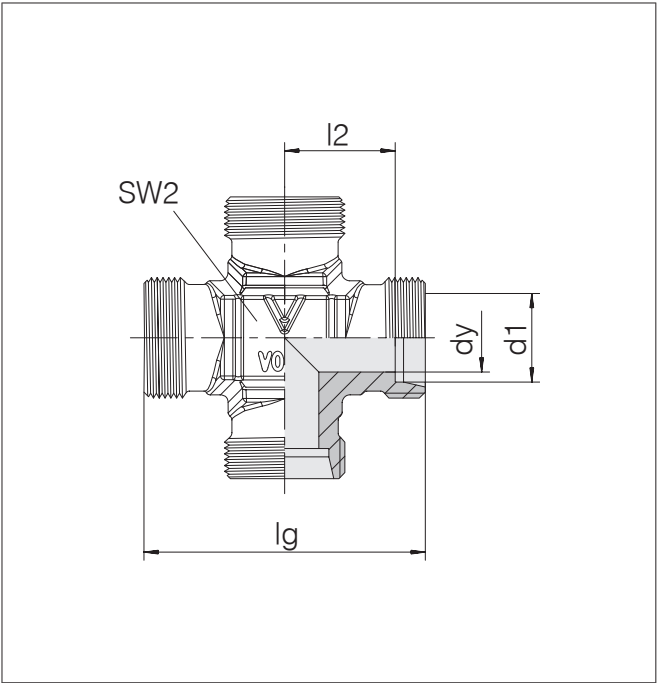

Serie	diám.	Presión	dy	lg	l2	SW2	kg/100	Referencia	Designación
ext. tubo	d1						aprox.		
LL	4	PN 100	3	30	11	12	2,1	0735002000	24-K-LL4
LL	6	PN 100	4,5	30	9,5	12	2,3	0735102000	24-K-LL6
LL	8	PN 100	6	34	11,5	12	2,7	0735152000	24-K-LL8
L	6	PN 315	4	38	12	12	3,9	0736002000	24-K-L6
L	8	PN 315	6	42	14	12	4,6	0736052000	24-K-L8
L	10	PN 315	8	44	15	14	5,2	0736102000	24-K-L10
L	12	PN 315	10	48	17	17	8,2	0736152000	24-K-L12
L	15	PN 315	12	56	21	19	12,7	0736202000	24-K-L15
L	18	PN 315	15	62	23,5	24	18,8	0736252000	24-K-L18
L	22	PN 160	19	70	27,5	27	21,0	0736302000	24-K-L22
L	28	PN 160	24	76	30,5	36	34,6	0736352000	24-K-L28
L	35	PN 160	30	90	34,5	41	62,3	0736402000	24-K-L35
L	42	PN 160	36	102	40	50	94,5	0736452000	24-K-L42
S	6	PN 630	4	46	16	12	6,6	0736502000	24-K-S6
S	8	PN 630	5	48	17	14	8,1	0736552000	24-K-S8
S	10	PN 630	7	50	17,5	17	10,7	0736602000	24-K-S10
S	12	PN 630	8	58	21,5	17	14,9	0736652000	24-K-S12
S	14	PN 630	10	60	22	19	15,8	0736702000	24-K-S14
S	16	PN 400	12	66	24,5	24	23,3	0736752000	24-K-S16
S	20	PN 400	16	74	26,5	27	29,4	0736802000	24-K-S20
S	25	PN 400	20	84	30	36	51,9	0736852000	24-K-S25
S	30	PN 400	25	98	35,5	41	89,0	0736902000	24-K-S30
S	38	PN 315	32	114	41	50	140,3	0736952000	24-K-S38

Ejemplo comparativo:
K06LX
ISO 8434-1-K-L6-St

