


# Cam followers FG (non separable inner and outer rings)

FG series without seals  
 FG...EE series with plastic seals  
 FG...EEM series with metal seals

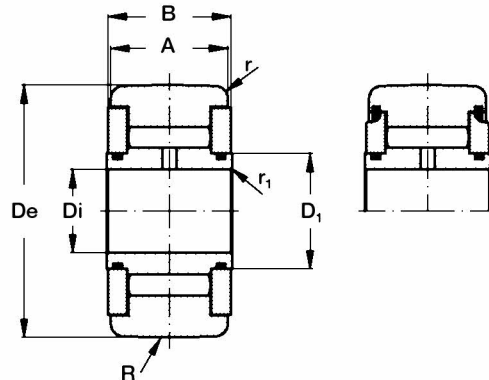

Type (1)	Dimensions (mm)									
	De	Di	A	B max	D <sub>1</sub>	M (2) min	r min	r <sub>1</sub> min	R	
(▶)										
FG 5 16	16	5	11	12	7.1	10	0.3	0.3	160	
FG 6 19	19	6	11	12	8.5	12	0.3	0.3	160	
FG 8 24 (6)	24	8	12	13	10.8	14.5	0.3	0.3	200	
FG 8 24 15	24	8	14	15	10.8	14.5	0.3	0.3	200	
FG 10 30	30	10	14	15	13.8	19.5	0.6	0.3	250	
FG 12 32	32	12	14	15	16	21.5	0.6	0.3	250	
FG 15 35	35	15	18	19	18.7	24	0.6	0.3	320	
FG 17 40	40	17	20	21	22	28	0.6	0.3	400	
FG 20 47	47	20	24	25	25.7	32.5	1	0.3	500	
FG 25 52	52	25	24	25	30.5	37	1	0.3	500	
FG 30 62	62	30	28	29	35.2	44	1	0.3	640	
FG 35 72	72	35	28	29	41	50	1	0.6	640	
FG 40 80	80	40	30	32	46.7	56	1	0.6	800	
FG 45 85	85	45	30	32	52.4	62	1	0.6	800	
FG 50 90	90	50	30	32	59.1	69	1	0.6	800	
FG 55 100	100	55	34	36	65	75	1.5	0.6	800	
FG 60 110	110	60	34	36.2	70	82	1.5	0.6	800	
FG 65 120	120	65	40	42	74	90	1.5	0.6	900	
FG 70 125	125	70	40	42	79	92	1.5	0.6	900	
FG 75 130*	130	75	40	42	84	96	1.5	0.6	900	
FG 80 140	140	80	46	48	92	105	2	1	1 000	
FG 85 150*	150	85	46	48	99	112	2	1	1 000	
FG 90 160	160	90	52	54	105	120	2	1	1 200	
FG 95 170*	170	95	52	54	110	125	2	1	1 200	
FG 100 180	180	100	63	65	116	135	2	1.5	1 400	
FG 110 200*	200	110	63	65	128	150	2	1.5	1 400	
FG 120 215	215	120	63	65	138	160	2	1.5	1 400	
FG 130 230*	230	130	75	78	147	170	3	1.5	1 600	
FG 140 250	250	140	75	78	158	180	3	1.5	1 600	
FG 150 270*	270	150	75	78	170.5	195	3	1.5	1 600	

\* On request.

▶ Series FG...EE with plastic seals on production up to type FG 50 90.