



ROTEX® Standard Flexible jaw couplings

Material steel

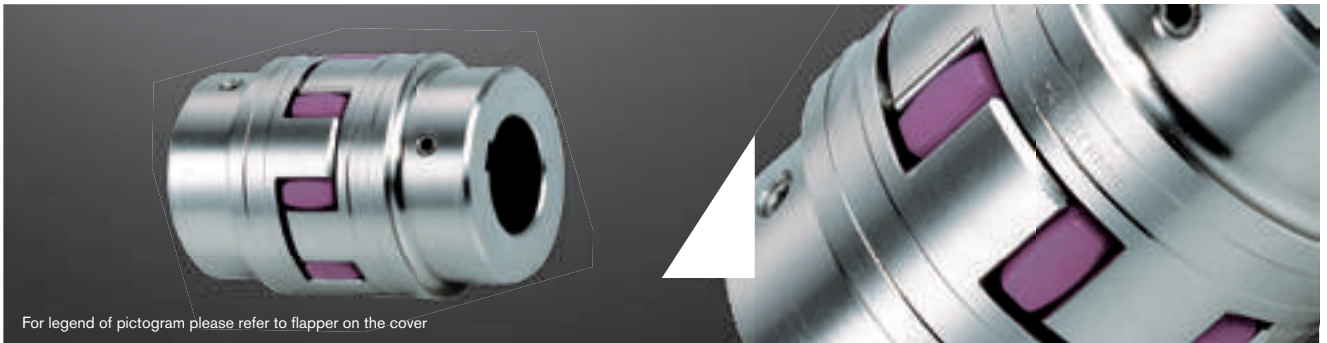

For legend of pictogram please refer to flapper on the cover



ROTEX® Steel (St)																	
Size	Component	Spider (part 2) rated torque [Nm]			Finish bore d (min-max)	Dimensions [mm]											
		92 Sh-A	98 Sh-A	64 Sh-D		General											
						L	l ₁ ; l ₂	E	b	s	D _H	d _H	D	N	Thread for setscrew		
G	t	T _A [Nm]															
14	1a	7,5	12,5	16	0-16	35	11	13	10	1,5	30	10	30	—	M4	5	1,5
	1b					50	18,5										
19	1a	10	17	21	0-25	66	25	16	12	2	40	18	40	—	M5	10	2
	1b					90	37										
24	1a	35	60	75	0-35	78	30	18	14	2	55	27	55	—	M5	10	2
	1b					118	50										
28	1a	95	160	200	0-40	90	35	20	15	2,5	65	30	65	—	M8	15	10
	1b					140	60										
38	1	190	325	405	0-48	114	45	24	18	3	80	38	70	27	M8	15	10
	1b					164	70						80	—			
42	1	265	450	560	0-55	126	50	26	20	3	95	46	85	28	M8	20	10
	1b					176	75						95	—			
48	1	310	525	655	0-62	140	56	28	21	3,5	105	51	95	32	M8	20	10
	1b					188	80						105	—			
55	1	410	685	825	0-74	160	65	30	22	4	120	60	110	37	M10	20	17
	1b					210	90						120	—			
65	1	625	940	1175	0-80	185	75	35	26	4,5	135	68	115	47	M10	20	17
	1b					235	100						135	—			
75	1	1280	1920	2400	0-95	210	85	40	30	5	160	80	135	53	M10	25	17
	1b					260	110						160	—			
90	1	2400	3600	4500	0-110	245	100	45	34	5,5	200	100	160	62	M12	30	40
	1b					295	125						200	—			
100	1	3300	4950	6185	0-115	270	110	50	38	6	225	113	180	89	M12	30	40
110	1	4800	7200	9000	0-125	295	120	55	42	6,5	255	127	200	96	M16	35	80
125	1	6650	10000	12500	60-145	340	140	60	46	7	290	147	230	112	M16	40	80
140	1	8550	12800	16000	60-160	375	155	65	50	7,5	320	165	255	124	M20	45	140
160	1	12800	19200	24000	80-185	425	175	75	57	9	370	190	290	140	M20	50	140
180	1	18650	28000	35000	85-200	475	195	85	64	10,5	420	220	325	156	M20	50	140

■ = If no material is specified in the order, it is stipulated in the calculation/order.

¹⁾ Maximum torque of coupling TK_{max} = rated torque of coupling TK rated x 2. For selection see page 10 et seqq.



Use in fire extinguisher pumps

ROTEX® couplings comply with the specifications of NFPA 20 standard for the installation of stationary pumps for fire protection and on completion of the necessary permanent tests they also comply with the specifications of UL 448A, flexible couplings and connection shafts for stationary fire extinguisher pumps.

Sizes available:



ROTEX® UL-Listed									
Size	Component	Material	Spider (part 2) Rated torque [Nm]	Dimensions [mm]					
				Finish bore d (min-max)	L	l ₁ ; l ₂	E	D _H	
									92 Sh-A
42	1	St	265	18-55	126	50	26	95	
55	1	St	410	24-74	160	65	30	120	
65	1	St	625	24-80	185	75	35	135	
75	1	St	1280	24-95	210	85	40	160	
90	1	St	2400	30-110	245	100	45	200	

* For complete dimensions see table on page 36

Ordering example:	ROTEX® 38	St	92 Sh-A	1 – Ø 45		1 – Ø 25	
	Coupling size	Material	Spider hardness	Component	Finish bore	Component	Finish bore