

DATA SHEET

Type 6013



Plunger valve 2/2 way direct-acting

- Direct-acting and compact valve up to diameter of DN 6.0
- Vibration-proof, bolted coil system
- Increased leak-tightness with welded plunger guide tube
- Explosion proof versions
- Energy-saving impulse versions



Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with



Type 1087
Timer



Type 2518
Cable Plug
DIN EN 175301-803 -
Form A



Type 2513
Cable plug according
to DIN EN 175301-803
connector shape A

Type description

Valve 6013 is a direct-acting plunger valve. The stopper and plunger guide tube are welded together to enhance pressure resistance and leak-tightness. Various seal material combinations are available depending on the application. A Bürkert-specific flange design (SFB) enables space-saving arrangement of valves on a manifold. The coils are moulded with polyamide or with chemically resistant epoxy. Pulse coils and 'Kick and Drop' electronics are available for overexcitation (plug 2511) for the reduction of electrical power consumption during operation. Optional manual actuation enables quick commissioning and easy maintenance.

Type 6013

bürkert

Table of contents

1. General technical data	4
2. Product versions	5
2.1. Analytical version.....	5
2.2. DVGW version.....	5
3. Circuit functions	5
4. Approvals	6
5. Materials	6
5.1. Chemical Resistance Chart – Bürkert resistApp.....	6
5.2. Material specifications	6
Standard version.....	6
ATEX/IECEX cable version	7
ATEX/IECEX version with junction box.....	8
6. Dimensions	9
6.1. Standard version.....	9
6.2. ATEX/IECEX cable version	10
6.3. ATEX/IECEX junction box version	11
6.4. Manifold mounting.....	12
Single manifold	12
Multiple manifold	12
7. Performance specifications	13
7.1. Power consumption.....	13
Circuit function A	13
Circuit function B	13
8. Product installation	14
8.1. Installation notes.....	14
Control for impulse version with polarity reversal control.....	14
Manifolds for block mounting.....	14
9. Product accessories	14
9.1. Cable glands for ATEX/IECEX terminal box	14
9.2. Special tool to turn the junction box	15
10. Ordering information	15
10.1. Bürkert eShop – Easy ordering and quick delivery.....	15
10.2. Bürkert product filter.....	15
10.3. Ordering chart.....	16
Standard version.....	16
Impulse version.....	17
Analytical version.....	18
DVGW version.....	18
10.4. Ordering chart ATEX/IECEX version.....	19
Cable versions	19
Junction box versions.....	19

Visit product website ►

2 | 22

Type 6013



10.5. Ordering chart accessories.....	20
Cable plug Type 2518, Form A according to DIN EN 175301 - 803	20
Cable plug Type 2513, form A acc. to DIN EN 175301 - 803	20
Cable glands for ATEX/IECEx terminal box	21
Sub-bases for block mounting	21

DTS 1000011032 EN Version: AF Status: RL (released | freigegeben | validé) printed: 28.03.2022

Visit product website ▶

Type 6013

bürkert

1. General technical data

Product properties	
Dimensions	Detailed information can be found in chapter "6. Dimensions" on page 9.
Material	
Seal	FKM, PTFE/Graphite (EPDM on request)
Body	Brass, stainless steel 1.4305
Orifice	DN 2.0...DN 6.0
Circuit function	A and B. Detailed information can be found in chapter "3. Circuit functions" on page 5.
Thermal insulation class of solenoid coil	Polyamide class B Epoxy class H
Performance data	
Duty cycle/single valve with block assembly on manifold	100 % continuous rating Intermittent operation 60 % (30 min) or with 5 W coil (on request)
Circuit function	
Electrical data	
Operating voltage	
Standard version	24 V DC, 24 V/50 Hz, 230 V/50 Hz
Analytical version	24 V DC, 230 V/50 Hz (other voltages on request)
Voltage tolerance	± 10%
Medium data	
Operating medium	
Standard version	Technical vacuum, neutral gases and liquids (e.g. compressed air, water, hydraulic oil)
Analytical version	Neutral medium, which does not attack the body and seal materials (see "5.1. Chemical Resistance Chart – Bürkert resistApp" on page 6)
Medium temperature	
With FKM	-10 °C...+100 °C (PA coil), -10 °C...+120 °C (Epoxy coil)
With PTFE/Graphite	-40 °C...+180 °C (see "5.1. Chemical Resistance Chart – Bürkert resistApp" on page 6)
With FKM, circuit function B	-10 °C...100 °C (AC),...10 °C...120 °C (DC)
Viscosity	Max. 21 mm ² /s
Process/Port connection & communication	
Electrical connection	Tag connector acc. to DIN EN 175301-803 Form A for cable plug Type 2518 (see "10.5. Ordering chart accessories" on page 20) ATEX/IECEx version with 3 m moulded cable
Port connection	
Standard version	G 1/8, G 1/4, G 3/8, sub-base (SFB)
Analytical version	G 1/8, G 1/4
Approvals and certificates	
Degree of protection	IP65 with cable plug, ATEX/IECEx junction box version and cable connection version
Environment and installation	
Installation position	As required, preferably with actuator upright
Installation instructions	No oils, fats or silicone to be used during installation
Ambient temperature (max.)	+ 55 °C

Type 6013

bürkert

2. Product versions

2.1. Analytical version

Solenoid valves for higher requirements

This version is particularly suitable for switching from extremely pure gaseous medium. All medium-affected parts are submitted to additional purification processes, so that the medium is not contaminated under any circumstances.

The tightness test takes place at the Helium leak detector from a min. of 10^{-4} mbar l/sec.

Product properties

Material

Seal Silicon, oil and fat free version
Tightness $< 10^{-4}$ mbar l/s

Body Brass, stainless steel 1.4305

Medium data

Operating medium Neutral medium, which does not attack the body and seal materials (see "5.1. Chemical Resistance Chart – Bürkert resistApp" on page 6)

Process/Port connection & communication

Electrical connection Tag connector acc. to DIN EN 175301-803 Form A for cable plug Type 2518 (see "10.5. Ordering chart accessories" on page 20)

Port connection G $\frac{1}{8}$, G $\frac{1}{4}$

Environment and installation

Installation instructions No oils, fats or silicone to be used during installation

2.2. DVGW version

The Type 6013 DVGW solenoid valve is designed primarily as an automatic safety shut-off valve for flammable gases. A strainer is installed in the inlet of the valve.

Product properties

Material

Seal NBR

Body Brass, stainless steel 1.4305

Circuit function A. Detailed information can be found in chapter "3. Circuit functions" on page 5.

Performance data

Operating pressure (max.) 0...5 bar

Medium data

Operating medium Flammable gases such as town gas, district gas, liquid gas, hydrogen (see "5.1. Chemical Resistance Chart – Bürkert resistApp" on page 6)

Medium temperature 0 °C...+80 °C

Approvals and certificates

Standards DIN EN 161:2013; DIN EN 13611:2015

Environment and installation

Ambient temperature (max.) 0 °C...+55 °C

3. Circuit functions

Circuit functions	Description
	Type: A, solenoid valve 2/2 way Direct-acting Normally closed
	Type: B, solenoid valve 2/2 way Direct-acting Normally open

Visit product website ►

5 | 22

Type 6013




4. Approvals

ATEX and IECEx approval for coils with fixed cable outlet	
ATEX: EPS 18 ATEX 1232 X II 2G Ex mb IIC T4 Gb II 2D Ex mb IIIC T130 °C Db	IECEx: IECEx EPS 18.0110X Ex mb IIC T4 Gb Ex mb IIIC T130 °C Db

5. Materials

5.1. Chemical Resistance Chart – Bürkert resistApp

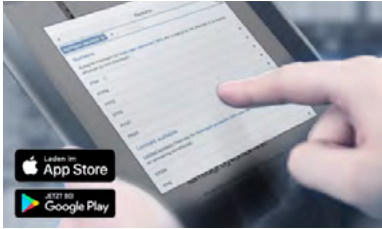


Bürkert resistApp – Chemical Resistance Chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

[Start Chemical Resistance Check](#)

5.2. Material specifications

Standard version

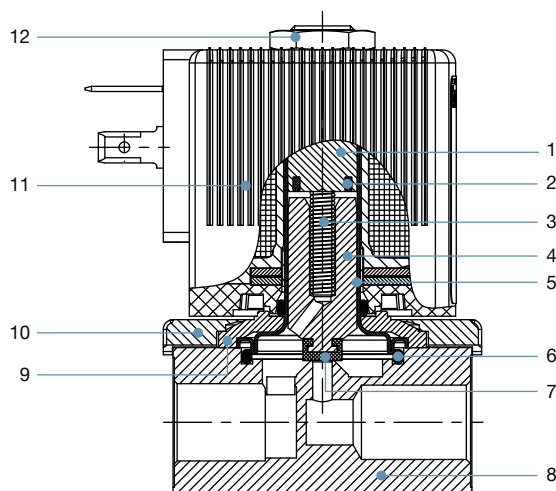


No.	Element	Material
1	Stopper	Stainless steel 1.4105
2	Shading ring	Cu (brass version) Ag (stainless steel version)
3	Spring	Stainless steel 1.4310
4	Magnetic core	Stainless steel 1.4105
5	Armature guide tube	Stainless steel 1.4303
6	Seal	FKM Graphite (high temp. version)
7	Armature seal	FKM PTFE (high temp. version)
8	Valve body	Brass Stainless steel 1.4305
9	Sub-base	Steel, surface finish thick-film passivated (brass version) Stainless steel 1.4301 (stainless steel version)
10	Cover	Polyamide
11	Coil	PA (polyamide) Epoxy (high temp. version)
12	Locknut	Steel, surface finish thick-film passivated (brass version) Stainless steel 1.4305 PTFE coated (stainless steel version)

Visit product website ▶

Type 6013

bürkert

ATEX/IECEx cable version

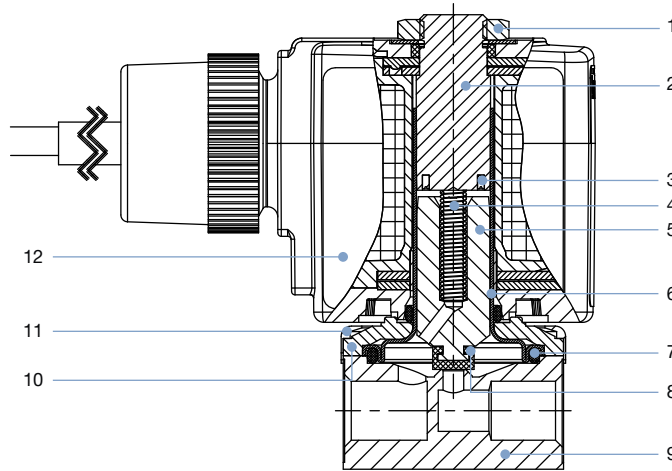

No.	Element	Material
1	Locknut	Steel, surface finish thick-film passivated (brass version) Stainless steel 1.4305 PTFE coated (stainless steel version)
2	Stopper	Stainless steel 1.4105
3	Shading ring	Cu (brass version) Ag (stainless steel version)
4	Spring	Stainless steel 1.4310
5	Magnetic core	Stainless steel 1.4105
6	Armature guide tube	Stainless steel 1.4303
7	Seal	FKM Graphite (high temp. version)
8	Armature seal	FKM PTFE (high temp. version)
9	Valve body	Brass Stainless steel 1.4305
10	Sub-base	Steel, surface finish thick-film passivated (brass version) Stainless steel 1.4301 (stainless steel version)
11	Cover	Polyamide
12	Coil	Epoxy

DTS 1000011032 EN Version: AF Status: RL (released | freigegeben | validé) printed: 28.03.2022


Visit product website ►

7 | 22

Type 6013

bürkert

ATEX/IECEx version with junction box

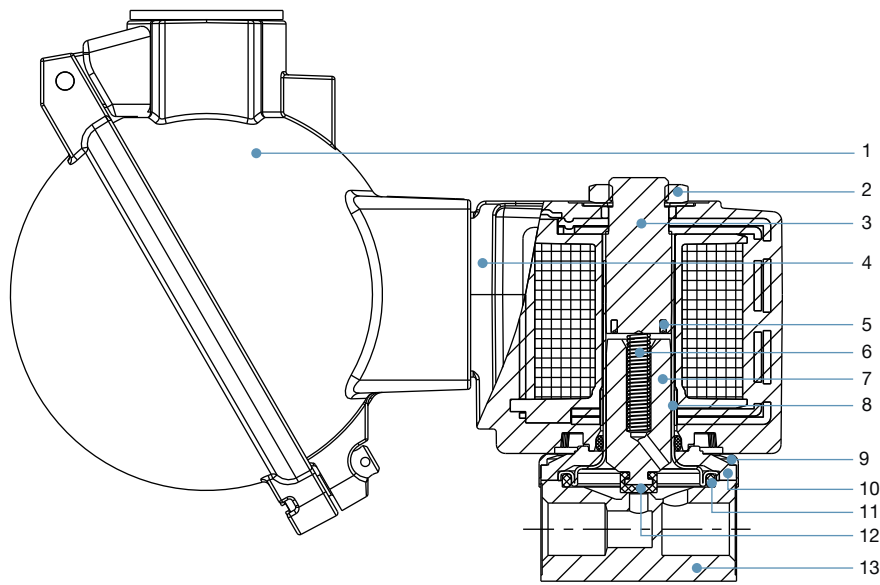

No.	Element	Material
1	Junction box	Aluminium
2	Locknut	Steel, surface finish thick-film passivated (brass version) Stainless steel 1.4305 PTFE coated (stainless steel version)
3	Stopper	Stainless steel 1.4105
4	Coil	Epoxy
5	Shading ring	Cu (brass version) Ag (stainless steel version)
6	Spring	Stainless steel 1.4310
7	Magnetic core	Stainless steel 1.4105
8	Armature guide tube	Stainless steel 1.4303
9	Cover	Polyamide
10	Sub-base	Steel, surface finish thick-film passivated (brass version) Stainless steel 1.4301 (stainless steel version)
11	Seal	FKM Graphite (high temp. version)
12	Armature seal	FKM PTFE (high temp. version)
13	Valve body	Brass Stainless steel 1.4305

DTS 1000011032 EN Version: AF Status: RL (released | freigegeben | validé) printed: 28.03.2022

Visit product website ►

8 | 22

Type 6013




6. Dimensions

6.1. Standard version

Note:

Dimensions in mm

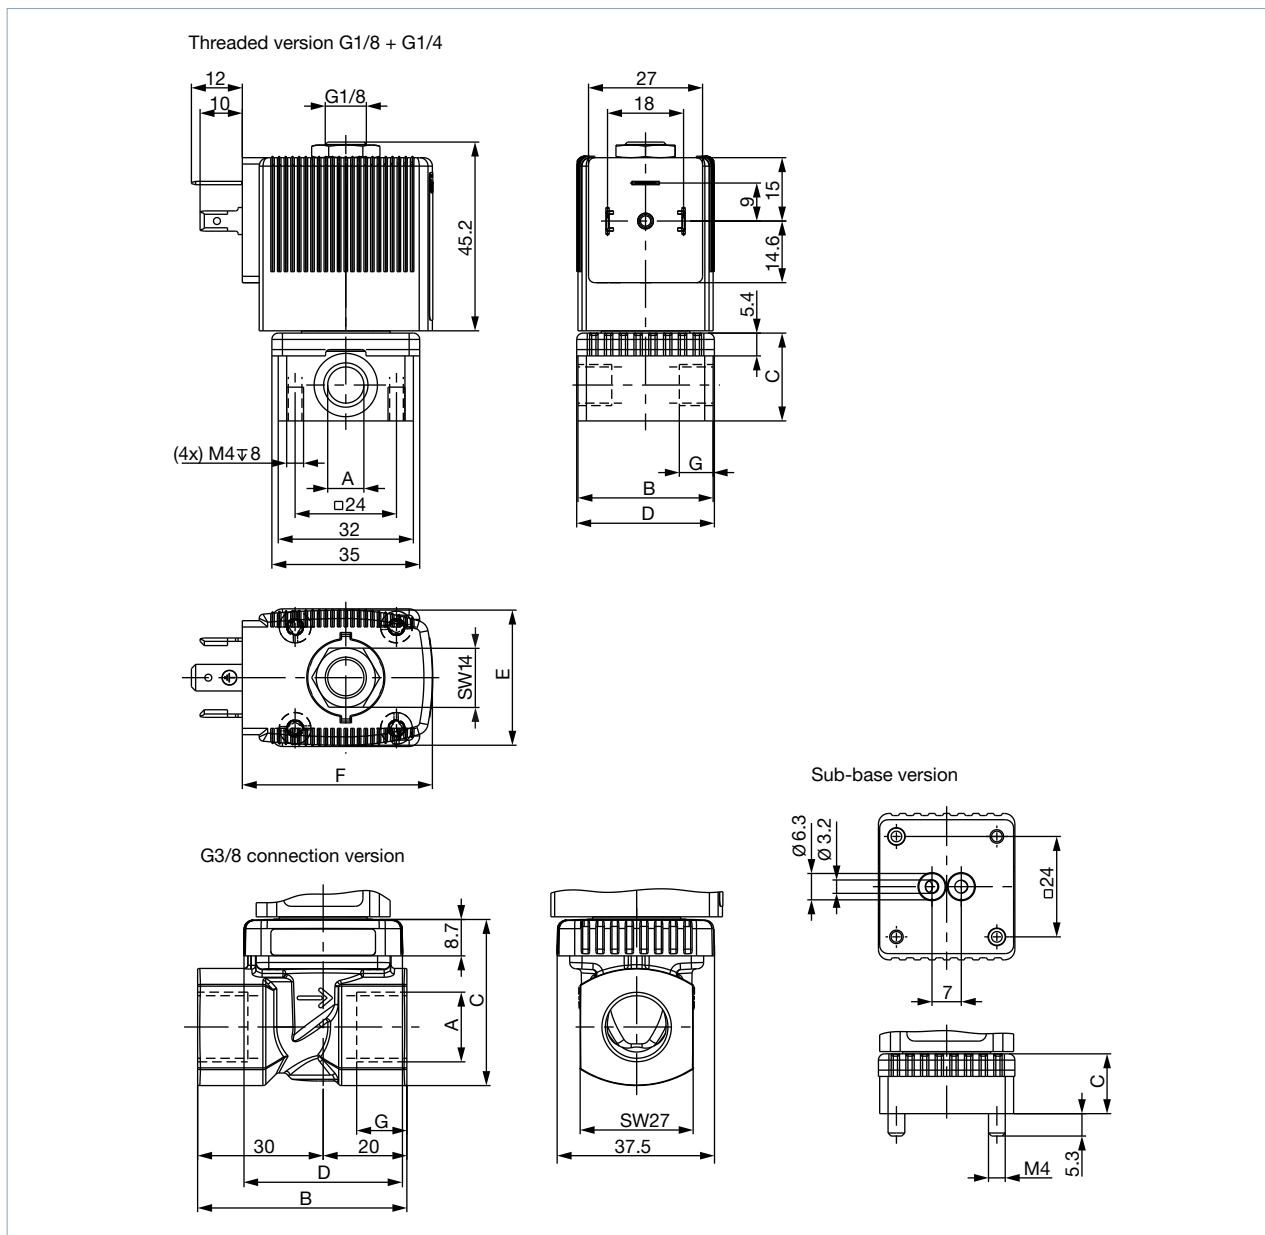

Port connection	A	B	C	D	G
	[inch]	[mm]	[mm]	[mm]	[mm]
Threaded version	G 1/8	32	20.8	32.6	8
	G 1/4	46	26.8	49	12
	G 3/8	50	39.8	38	12
Sub-base version	-	32	14.3	32.6	-

Coil size	E	F
	[mm]	[mm]
8	32	45
10	40	51

Visit product website ►


Type 6013

bürkert

6.2. ATEX/IECEx cable version

Note:

Dimensions in mm

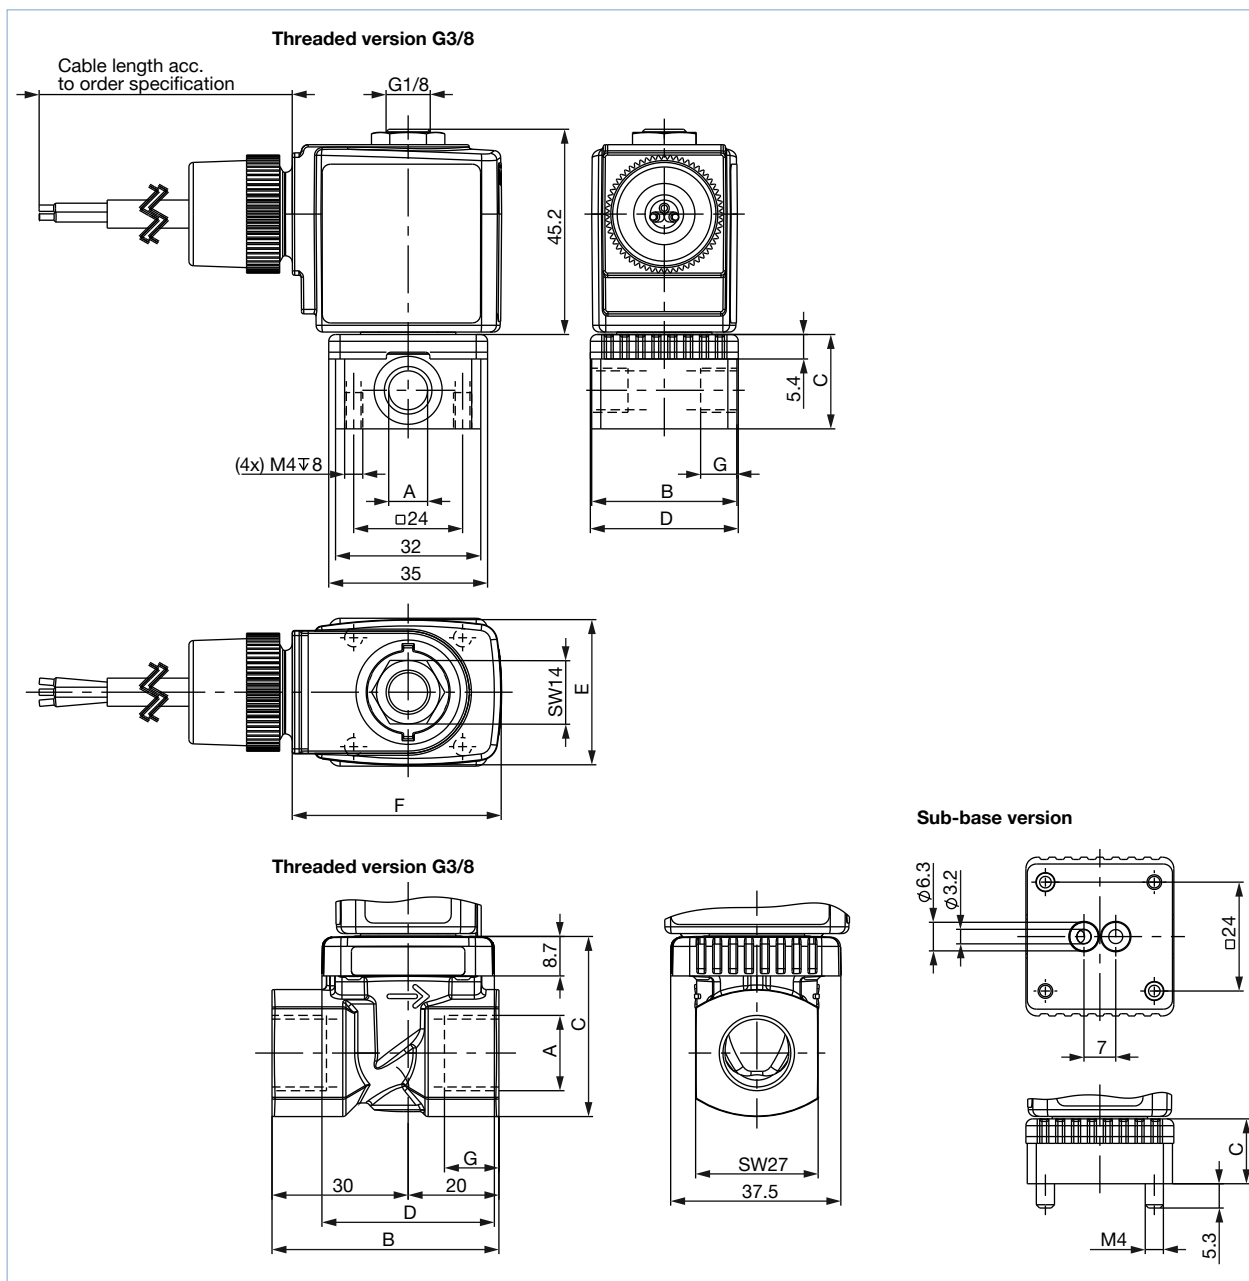

Port connection	A	B	C	D	G
	[inch]	[mm]	[mm]	[mm]	[mm]
Threaded version	G 1/8	32	20.8	32.6	8
	G 1/4	46	26.8	49	12
	G 3/8	50	39.8	38	12
Sub-base version	-	32	14.3	32.6	-

Coil size	E	F
	[mm]	[mm]
5	32	46
6	40	52

Visit product website ►


Type 6013

bürkert

6.3. ATEX/IECEx junction box version

Note:

Dimensions in mm

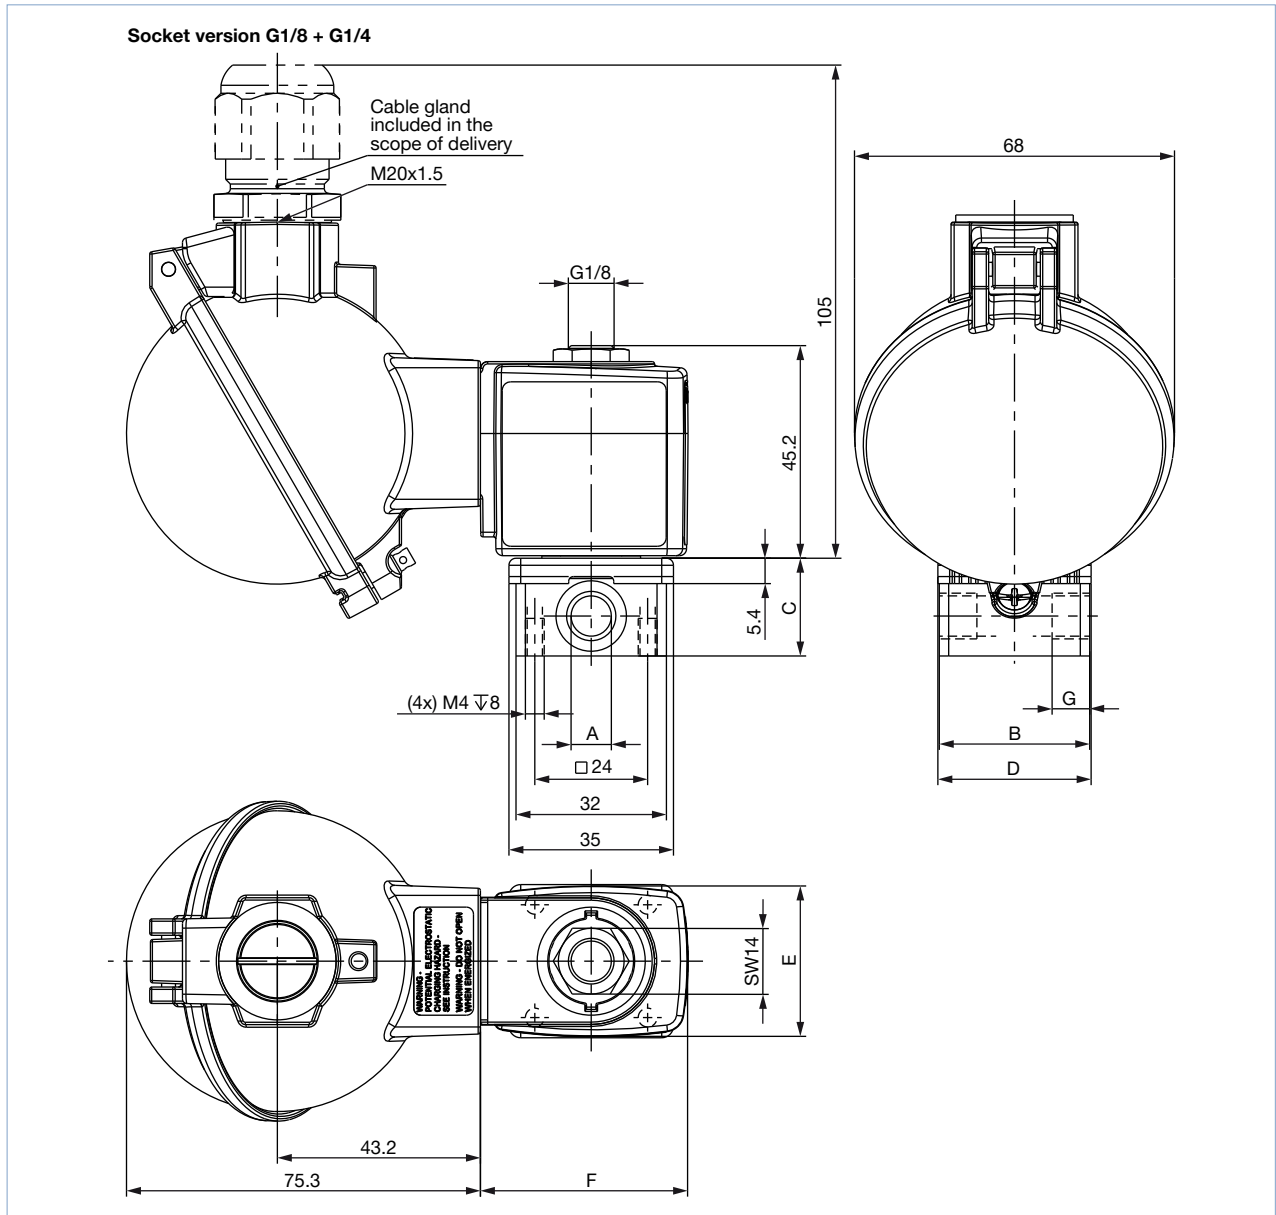

Port connection	A	B	C	D	H
	[inch]	[mm]	[mm]	[mm]	[mm]
Threaded version	G 1/8	32	20.8	32.6	8
	G 1/4	46	26.8	49	12
	G 3/8	50	39.8	38	12
Sub-base version	-	32	14.3	32.6	-

Coil size	E	F
	[mm]	[mm]
5	32	44
6	40	51

Visit product website ►

Type 6013




6.4. Manifold mounting

Single manifold

Note:


- Dimensions in mm
- For detailed information on the installation of manifolds, see “Manifolds for block mounting” on page 14.

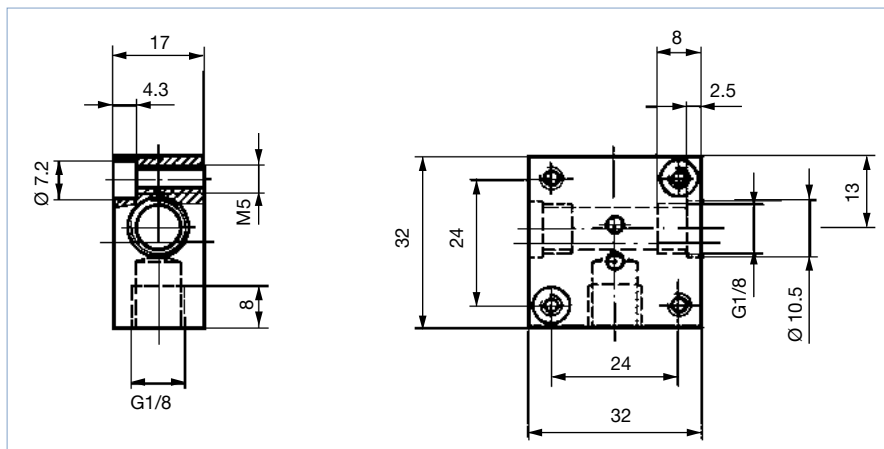

Multiple manifold

Note:

Dimensions in mm

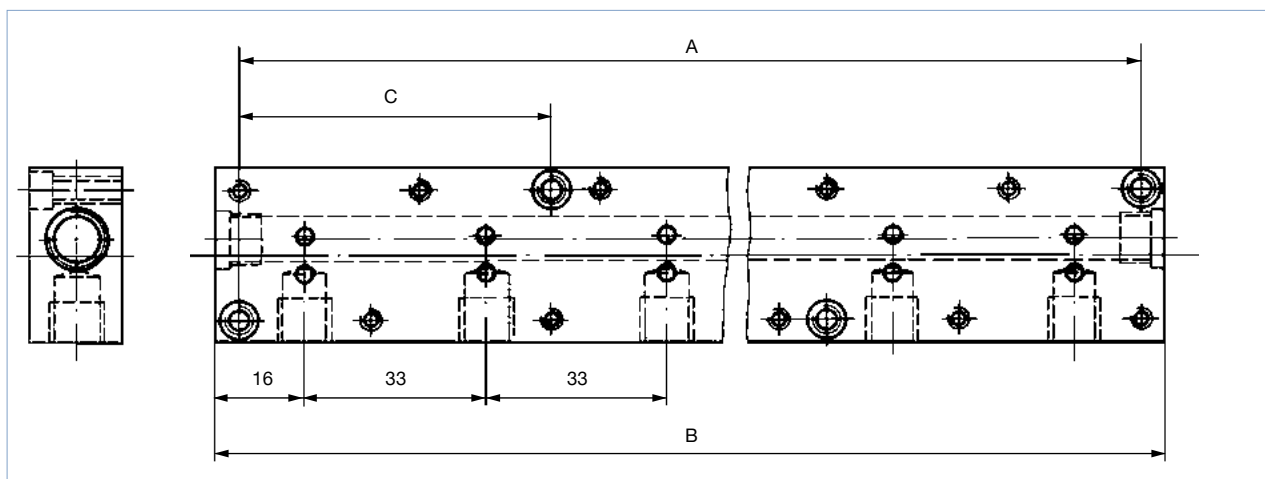

Accessory part	Quantity of valve places	Hole spacing A [mm]	Total length B [mm]	Hole spacing C [mm]	Article no.
Multiple manifold (in aluminium)	2	57	65	-	005023
	3	90	98	-	005286
	4	123	131	-	005287
	5	156	164	57	005035
	6	189	197	57	005038
	8	255	263	90	005386
	10	321	329	90	005764
Single manifold (in aluminium)					005020
Connector nipple with O-ring to connect from manifold					005040
Covering plate with screws and O-ring for locking unoccupied valve positions					005630

Visit product website

Type 6013

bürkert

7. Performance specifications

7.1. Power consumption

Circuit function A

Orifice [mm]	Port connection	K _v value water [m ³ /h]	Weight [g]	Power consumption ^{1.)} [W]	Electr. power		Coil size	Switching times	
					Inrush (AC)	Hold (AC)		Opening [ms]	Closing [ms]
2.0	G 1/8	0.12	325	8 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
2.0	G 1/4	0.12	465	8 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
2.0	Sub-base	0.12	290	8 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
2.5	G 1/8	0.16	325	8 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
2.5	G 1/4	0.16	465	8 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
3.0	G 1/8	0.23	325	8 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
3.0	G 1/4	0.23	465	8 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
3.0	G 3/8	0.23	550	10 W AC or 10 W DC (11)	30 VA	22 VA	6 (40 mm)	20	30
4.0	G 1/4	0.30	465	8 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
4.0	G 3/8	0.30	550	10 W AC or 10 W DC (11)	30 VA	22 VA	6 (40 mm)	20	30
6.0	G 1/4	0.55	465	8 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
6.0	G 3/8	0.55	550	10 W AC or 10 W DC (11)	30 VA	22 VA	6 (40 mm)	20	30

1.) Values in brackets correspond to a coil temperature of 20 °C.

Circuit function B

Orifice [mm]	Port connection	K _v value water [m ³ /h]	Weight [g]	Power consumption ^{1.)} [W]	Electr. power		Coil size	Switching times	
					Inrush (AC)	Hold (AC)		Opening [ms]	Closing [ms]
2.00	G 1/8	0.12	325	7 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
2.00	G 1/4	0.12	465	7 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
2.00	Sub-base	0.12	290	7 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
3.00	G 1/8	0.23	325	7 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
3.00	G 1/4	0.23	465	7 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
3.00	Sub-base	0.23	290	7 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
4.00	G 1/4	0.3	465	7 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30
6.00	G 1/4	0.55	465	7 W AC or 8 W DC (9)	24 VA	17 VA	5 (32 mm)	20	30

1.) Values in brackets correspond to a coil temperature of 20 °C.

Visit product website ►

13 | 22

Type 6013



8. Product installation

8.1. Installation notes

Control for impulse version with polarity reversal control

Note:

- Please use only the cable plug without electrical circuitry for the impulse version!
- Pulse duration at least 50 ms

Polarity (is marked on the coil with a label)	Features	Terminal connections
- switch ON +	valve open	(+) on terminal 2 and (-) on terminal 1 (see below)
+ switch OFF -	valve closed	(+) on terminal 1 and (-) on terminal 2 (see below)



Manifolds for block mounting

Note:

- Unused, open valve ports must be closed off with covering plates (see accessories).
- Manifold should be fixed on to a rail.
- For detailed information on dimensions “6.4. Manifold mounting” on page 12.

With manifold mounting, please comply with the permissible duty cycle (5 W models with 100 % continuous rating or standard 8 W model with 60 % duty cycle). The pressure port for the manifold is designated with P (R), and the outlet port with A (B). Only connect together ports with the same designation.

2/2 way valves of Type 6013 can be operated together on a manifold with 3/2 way valves of Type 6014, circuit function C (not D or T!) if the operating pressures matches according to the rating plates. The manifolds can also be expanded if the valve functions are taken into consideration. Connector nipples with O-rings are used to connect the P (R) ports.

9. Product accessories

9.1. Cable glands for ATEX/IECEX terminal box

Note:



- A cable gland in polyamide version is included in the delivery. A nickel-plated brass version can be ordered at a surcharge.
- This special tool is not supplied with the valve (see “10.5. Ordering chart accessories” on page 20).

Description	Ex approvals		Dimensions										
	Certification	Identification											
Ex cable gland, Brass, nickel-plated, 6...13 mm	PTB 04 ATEX 1112 X, IECEX PTB 13.0027X	II 2 G Ex e IIC Gb, II 2 D Ex tb IIIC Db IP68	<table border="1"> <tr> <td>TL</td> <td>29...37 mm</td> </tr> <tr> <td>L</td> <td>6 mm</td> </tr> <tr> <td>D</td> <td>20 mm</td> </tr> <tr> <td>SW</td> <td>24 mm</td> </tr> <tr> <td>E</td> <td>27 mm</td> </tr> </table>	TL	29...37 mm	L	6 mm	D	20 mm	SW	24 mm	E	27 mm
TL	29...37 mm												
L	6 mm												
D	20 mm												
SW	24 mm												
E	27 mm												

Visit product website ▶

Type 6013




Description	Ex approvals		Dimensions										
	Certification	Identification											
Ex cable gland, Polyamide, 7...13 mm 	PTB 13 ATEX 1015 X, IECEx PTB 13.0034X	II 2 G Ex e IIC Gb, II 2 D Ex tb IIIC Db IP68	 <table border="1"> <tr> <td>TL</td> <td>36...45 mm</td> </tr> <tr> <td>L</td> <td>10 mm</td> </tr> <tr> <td>D</td> <td>20 mm</td> </tr> <tr> <td>SW</td> <td>24 mm</td> </tr> <tr> <td>E</td> <td>28 mm</td> </tr> </table>	TL	36...45 mm	L	10 mm	D	20 mm	SW	24 mm	E	28 mm
TL	36...45 mm												
L	10 mm												
D	20 mm												
SW	24 mm												
E	28 mm												

9.2. Special tool to turn the junction box


Note:

- This special tool is not supplied with the valve (see "10.5. Ordering chart accessories" on page 20).
- This special tool can only be used with ATEX AC10 coils.

Description	Components of the set
Set SC02-AC10 	<ul style="list-style-type: none"> • Special wrench • Service manual

10. Ordering information

10.1. Bürkert eShop – Easy ordering and quick delivery




Bürkert eShop – Easy ordering and fast delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

10.2. Bürkert product filter



Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

Visit product website ▶

Type 6013





















































bürkert

10.3. Ordering chart

Standard version











Note:

Please note that the cable plug has to be ordered separately, see “10.5. Ordering chart accessories” on page 20 or separate datasheet **Type 2518** ▶.

Circuit function	Orifice	Port connection	K _v value water ¹⁾ [m ³ /h]	Coil power [W]	Pressure range ²⁾ [bar]	Voltage/ Frequency [V/Hz]	Article no. Brass body FKM Seal	Article no. Stainless steel body FKM Seal	
	[mm]								
With FKM seal, brass or stainless steel body (class B)									
A, solenoid valve 2/2 way Direct-acting Normally closed 	2.0	G 1/8	0.12	8	0...12	024/DC	134237 	134233 	
						0...25	024/50	132865 	134234 
						0...25	230/50	134239 	134236 
		G 1/4	0.12	8	0...12	024/DC	137537 	137533 	
						0...25	024/50	137538 	137534 
						0...25	230/50	137540 	137536 
		Sub-base (SFB)	0.12	8	0...12	024/DC	134244 	-	
						0...25	024/50	134245 	-
						0...25	230/50	20022979 	-
	2.5	G 1/8	0.16	8	0...10	024/DC	134240 	-	
						0...16	024/50	134241 	-
						0...16	230/50	134243 	-
	3.0	G 1/8	0.23	8	0...6	024/DC	126091 	126078 	
						0...10	024/50	126092 	126079 
						0...10	230/50	126094 	126081 
		G 1/4	0.23	8	0...6	024/DC	125301 	125317 	
						0...10	024/50	125302 	126082 
						0...10	230/50	125304 	126084 
		G 3/8	0.23	10	0...8	024/DC	134248 	-	
						0...14	024/50	134249 	-
						0...14	230/50	134251 	-
	4.0	G 1/4	0.30	8	0...1.5	024/DC	125306 	125318 	
						0...4	024/50	125307 	125319 
						0...4	230/50	125309 	125320 
G 3/8		0.30	10	0...2.5	024/DC	134252 	-		
					0...6	024/50	134253 	-	
					0...6	230/50	134255 	-	
6.0	G 1/4	0.55	8	0...0.5	024/DC	125311 	126086 		
					0...1.5	024/50	125312 	126087 	
					0...1.5	230/50	125314 	126089 	
	G 3/8	0.55	10	0...0.75	024/DC	134256 	-		
					0...2.5	024/50	134257 	-	
					0...2.5	230/50	134259 	-	












Type 6013

bürkert

Circuit function	Orifice	Port connection	K _v value water ^{1.)} [m ³ /h]	Coil power [W]	Pressure range ^{2.)} [bar]	Voltage/ Frequency [V/Hz]	Article no.	
	[mm]							
For high temperature applications (-40 °C...+180 °C), PTFE seat seal, brass body (class H)								
A, solenoid valve 2/2 way Direct-acting Normally closed 	2.0	G ¼	0.12	8	0...12	024/DC	136015 	
						0...25	024/50	136016 
						0...25	230/50	136018 
	3.0	G ¼	0.23	10	0...6	024/DC	136019 	
						0...10	024/50	136020 
						0...10	230/50	136022 
						0...8	024/DC	136023 
						0...14	024/50	136024 
0...14	230/50	136026 						

1.) Measured at +20 °C, 1 bar^{2.)} pressure at valve inlet and free outlet.

2.) Measured as overpressure to the atmospheric pressure.

Circuit function	Orifice	Port connection	K _v value water ^{1.)} [m ³ /h]	Coil power [W]	Pressure range ^{2.)} [bar]	Voltage/ Frequency [V/Hz]	Article no.					
	[mm]											
With FKM seal and brass body (class H)												
B, solenoid valve 2/2 way Direct-acting Normally opened 	2.0	G ⅜	0.12	8	0...16	24/DC	213543 					
						230/50	213550 					
	3.0	G ⅜	0.23	8	0...8	24/DC	213545 					
						230/50	213551 					
						G ¼	0.23	8	0...8	24/DC	213546 	
										230/50	213552 	
	4.0	G ¼	0.3	8	0...4	024/DC	213548 					
						230/50	213553 					
						6.0	G ¼	0.55	8	0...2	024/DC	213549 
											230/50	213554 














1.) Measured at +20 °C, 1 bar^{2.)} pressure at valve inlet and free outlet.

2.) Measured as overpressure to the atmospheric pressure.

Impulse version

Note:

Please note that the cable plug has to be ordered separately, see "10.5. Ordering chart accessories" on page 20 or separate datasheet **Type 2518** ▶.

Circuit function	Orifice	Port connection	K _v value water ^{1.)} [m ³ /h]	Pressure range ^{2.)} [bar]	Power consumption DC (hot/cold coil) [W]	Article no. per voltage [V]					
	[mm]					012/DC	024/DC				
With FKM seal and brass body (class H)											
A, solenoid valve 2/2 way Direct-acting Normally closed 	2.0	Sub-base (SFB)	0.12	0...16	7	209266 	209272 				
						2.5	0.16	0...10	7	209267 	209273 
						3.0	0.23	0...6	7	209268 	209274 
	2.0	G ⅜	0.12	0...16	7	209269 	209275 				
						2.5	0.16	0...10	7	209270 	209276 
						3.0	0.23	0...6	7	209271 	209277 

1.) Measured at +20 °C, 1 bar^{2.)} pressure at valve inlet and free outlet.

2.) Measured as overpressure to the atmospheric pressure.

Visit product website ▶

17 | 22



















Type 6013

bürkert

Analytical version

Note:








Please note that the cable plug has to be ordered separately, see "10.5. Ordering chart accessories" on page 20 or separate datasheet **Type 2518** ▶.

Circuit function	Orifice	Port connection	K _v value water ^{1.)}	Coil power	Pressure range ^{2.)}	Voltage/Frequency	Article no.	
	[mm]							
With FKM seal and brass body (class B)								
A, solenoid valve 2/2 way Direct-acting Normally closed 	2.0	G 1/8	0.12	8	0...12	24/DC	137826 	
						0...25	230/50	137827 
	2.5	G 1/8	0.16	8	0...10	24/DC	137828 	
						0...16	230/50	137829 
	3.0	G 1/4	0.23	8	0...6	24/DC	137830 	
						0...10	230/50	137831 
	4.0	G 1/4	0.30	8	0...1.5	24/DC	137832 	
						0...4	230/50	137833 
With FKM seal and stainless steel body (class B)								
A, solenoid valve 2/2 way Direct-acting Normally closed 	2.0	G 1/8	0.12	8	0...12	24/DC	137818 	
						0...25	230/50	137819 
	2.0	G 1/4	0.12	8	0...12	24/DC	137820 	
						0...25	230/50	137821 
	3.0	G 1/4	0.23	8	0...6	24/DC	137822 	
						0...10	230/50	137823 
	4.0	G 1/4	0.30	8	0...1.5	24/DC	137824 	
						0...4	230/50	137825 

1.) Measured at +20 °C, 1 bar^{2.)} pressure at valve inlet and free outlet.

2.) Measured as overpressure to the atmospheric pressure.

DVGW version

Circuit function	Orifice	Port connection	K _v value water ^{1.)}	Coil power	Pressure range ^{2.)}	Voltage/Frequency	Article no.	
	[mm]							
With NBR seal, brass body (class B)								
A, solenoid valve 2/2 way Direct-acting Normally closed 	3.0	G 1/4	0.23	8	0...5	24/DC	258362 	
						0...5	230/50	296548 
	4.0	G 1/4	0.3	8	0...1.5	24/DC	258361 	
						0...4	230/50	296549 
	6.0	G 1/4	0.55	8	0...0.5	24/DC	266293 	
					0...1.5	230/50	301072 	

1.) Measured at +20 °C, 1 bar^{2.)} pressure at valve inlet and free outlet.

2.) Measured as overpressure to the atmospheric pressure.

Visit product website ▶

18 | 22

Type 6013


























bürkert

10.4. Ordering chart ATEX/IECEX version

Cable versions

Note:

- The maximum fluid temperature must not in any case exceed the permissible temperature class (T4 135 °C, 100 °C T5, T6 85 °C), minus 5 K).
- With 3 m cable as standard. Other lengths on request.











Circuit function	Orifice	Port connection	K _v value water ¹⁾ [m ³ /h]	Coil power [W]	Pressure range ²⁾ [bar]	Voltage/ Frequency [V/Hz]	Article no.		
	[mm]						Brass body	Stainless steel body	
Ex m T4 approved, with FKM seal and molded cable (3 m), single mounting only									
A, solenoid valve 2/2 way Direct-acting Normally closed 	2.0	Sub-base (SFB)	0.11	7	0...6	24/UC	351923 	351915 	
		G 1/8	0.12	9	0...10	24/UC	364417 	x	
		G 1/4	0.12	9	0...10	24/UC	351895 	351900 	
						230/UC	x	351926 	
	2.5	G 1/8		0.16	9	0...8	24/UC	364430 	x
							230/UC	x	x
		G 1/4		0.23	9	0...5	24/UC	x	351933 
							230/UC	x	x
				0.23	9	0...5	24/UC	351896 	351899 
							230/UC	351925 	351936 
3.0	G 1/8		0.23	9	0...5	24/UC	351921 	364523 	
						230/UC	x	364528 	
	G 1/4		0.55	9	0...0.4	24/UC	351902 	351948 	
						230/UC	364517 	x	
4.0	G 1/4		0.30	9	0...1.2	24/UC	351921 	364523 	
						230/UC	x	364528 	
	6.0	G 1/4		0.55	9	0...0.4	24/UC	351902 	351948 
							230/UC	364517 	x

x: on request

Junction box versions

Note:

The maximum fluid temperature must not in any case exceed the permissible temperature class (T4 135 °C, 100 °C T5, T6 85 °C), minus 5 K.


Circuit function	Orifice	Port connection	K _v value water ¹⁾ [m ³ /h]	Coil power [W]	Pressure range ²⁾ [bar]	Voltage/ Frequency [V/Hz]	Article no.	
	[mm]						Brass body	Stainless steel body
Ex m T4 approved, with FKM seal and molded cable (3 m), single mounting only								
A, solenoid valve 2/2 way Direct-acting Normally closed 	1.5	Sub-base (SFB)	0.08	9	0...16	24/UC	364529 	x
	2	G 1/8	0.12	9	0...10	24/UC	351938 	351953 
						230/UC	364533 	364537 
		G 1/4				24/UC	351944 	351917 
						230/UC	364538 	351929 

Visit product website ►

19 | 22

Type 6013



Circuit function	Orifice	Port connection	K _v value water ¹⁾ [m ³ /h]	Coil power [W]	Pressure range ²⁾ [bar]	Voltage/ Frequency [V/Hz]	Article no.			
	[mm]						Brass body	Stainless steel body		
A, solenoid valve 2/2 way Direct-acting Normally closed 	3	G 1/8	0.23	9	0...5	24/UC	364540	x		
						230/UC	x	x		
		24/UC				x	351906			
		230/UC				x	364541			
	4	G 1/4	0.3	0...1.2	24/UC	351941	364544			
					230/UC	x	364548			
					6	0.55	0...0.4	24/UC	364551	364554
								230/UC	364555	364556


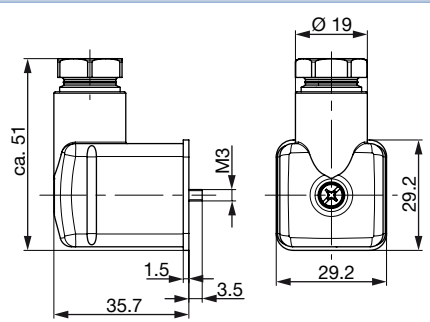
x: on request

10.5. Ordering chart accessories

Cable plug Type 2518, Form A according to DIN EN 175301 - 803

Note:



Further versions see data sheet **Type 2518** ▶

Cable plug	Dimensions	Version	Voltage	Article no.
		Without circuitry (AC/DC)	0...250 V AC/DC	314802
		With LED (AC/DC)	12...24 V AC/DC	314812
		With LED and varistor (AC/DC)	12...24 V AC/DC	314820
		With rectifier, LED and varistor	12...24 V AC/DC	314816

Cable plug Type 2513, form A acc. to DIN EN 175301 - 803

Note:

- The Cable plug Type 2513 meets the requirements of ATEX category 3 GD.
- For more information on the cable plug, see data sheet **Type 2513** ▶.

Cable plug	Circuit diagram	Cable length [mm]	Article no.
		12000	260893
		5000	260892
		3000	260891
		300	260890

Visit product website ▶




Type 6013

bürkert

Cable glands for ATEX/IECEx terminal box






Note:

- A polyamide cable gland version is included in the delivery. A nickel-plated brass version can be ordered at surcharge.
- For more information on Ex cable glands see “6.1. Cable glands for ATEX/IECEx terminal box” on page 12.
- For further information on the special key see “9.2. Special tool to turn the junction box” on page 15.

Description	Article no.
Ex cable gland, brass, nickel-plated, 6...13 mm ^{1.)}	773278 
Ex cable gland, polyamide, 7...13 mm ^{1.)}	773277 
Set SC02-AC10: Special wrench ^{2.)} incl. service manual	293488 

1.) Cable diameter

2.) Not included in the scope of delivery of the valve

Further versions on request	
 Approval <ul style="list-style-type: none"> • UL / UR / CSA • UL Hazloc Div 2 • FM Hazloc Div 1 • European gas approval Class A, Group 2 	 Pressure Variants with increased coil power for higher medium pressure
	 Process connection Threaded port NPT, Rc
 Material Seal material EPDM	 Voltage Further voltages

Sub-bases for block mounting

Note:

The ordering table for sub-plates can be found in chapter “6.4. Manifold mounting” on page 12.

Visit product website 

21 | 22

Bürkert – Close to You

For up-to-date addresses
please visit us at
www.burkert.com

DTS 1000011032 EN Version: AF Status: RL (released | freigegeben | validé) printed: 28.03.2022

- Austria
- Belgium
- Czech Republic
- Denmark
- Finland
- France
- Germany
- Italy
- Netherlands
- Norway
- Poland
- Spain
- Sweden
- Switzerland
- Turkey
- United Kingdom

Russia

Canada
USA

Brazil
Uruguay

South Africa

United
Arab
Emirates

Australia
New Zealand

China
Hong Kong
India
Japan
Korea
Malaysia
Philippines
Singapore
Taiwan

Credits, © and concept: Christian Bürkert GmbH & Co. KG | Photographs: Marc Eggmann Fotografie - 4051 Basel | Scanner GmbH - Werbeagentur Künzelsau - 74653 Künzelsau