



AIR TORQUE



AIR TORQUE S.p.A.




Model AT351 U
D/S - 90°

T.D.S. n° **AT351U-DM**
Issued on: 04/10 - Page 1/1

Dimensions in mm

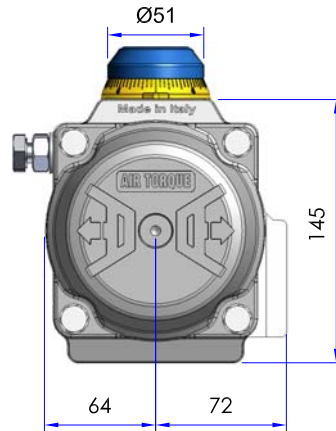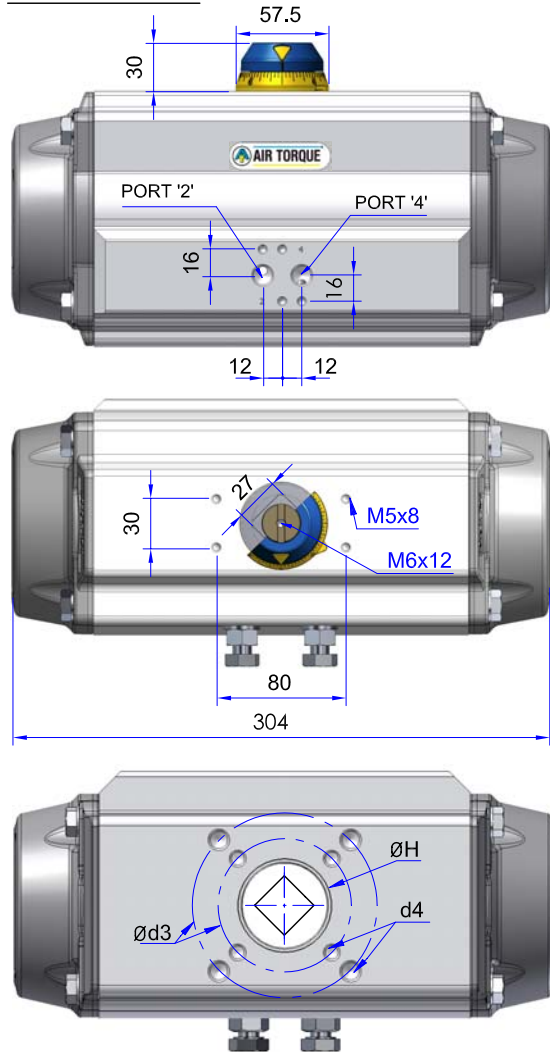


Optional Square:

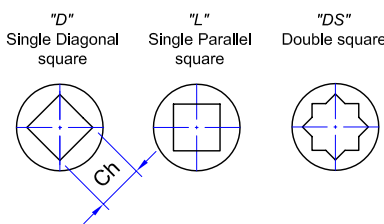

ISO 5211 Flange Dimensions Available


ISO 5211	STD		OPTIONAL
	F07 + F10	F10	
Ø d2	55	NA	70
Ø d3	70	102	102
d4	M8x12	M10x15	M10x15
Ø H	55		70
Ch x l min.	14x19 - 22x24		
	17x25 - 22x24		
h min.	1,5	1,5	1,5
h1	2	NA	2

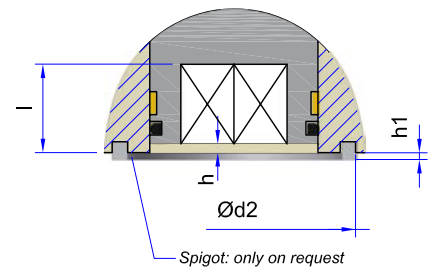

Connection / Attachment

Pressure connection: Port 2 and 4	G1/4"
Ancillary Attachment	AA2

Rotation and stroke adjustment

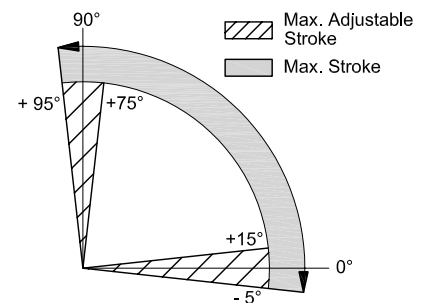

Output Torque

Pressure	OUTPUT TORQUE FOR DOUBLE ACTING IN Nm												APPROX. WEIGHT (Kg)	
	2,5 bar	3 bar	3,5 bar	4 bar	4,2 bar	4,5 bar	5 bar	5,5 bar	6 bar	7 bar	8 bar			
0° 90°	107	129	150	172	181	193	215	236	258	301	344	8,07		
D														

Pressure	OUTPUT TORQUE FOR SPRING RETURN IN Nm												Spring stroke		APPROX. WEIGHT (Kg)
	2,5 bar	3 bar	3,5 bar	4 bar	4,2 bar	4,5 bar	5 bar	5,5 bar	6 bar	7 bar	8 bar	90°	0°		
Spring Set	Start End	Start End	Start End	Start End	Start End	Start End	Start End	Start End	Start End	Start End	Start End	End	Start		
S 05	66,5 41,9	87,9 63,4	109 84,9	131 106	140 115	152 128	174 149					65,5	41	8,62	
S 06	58,3 28,8	79,7 50,3	101 71,8	123 93,3	131 102	144 115	166 136	187 158				78,6	49,2	8,73	
S 07		71,5 37,2	93 58,7	115 80,2	123 88,8	136 102	158 123	179 145	200 166			91,7	57,4	8,84	
S 08			84,8 45,6	106 67,1	115 75,7	128 88,6	149 110	171 132	192 153	235,3 196		105	65,6	8,95	
S 09				98,1 54	107 62,6	120 75,5	141 97	163 118	184 140	227,1 183	270 226	118	73,8	9,06	
S 10						111 62,4	133 83,9	154 105	176 127	218,9 170	262 213	131	82	9,17	
S 11							125 70,8	146 92,3	168 114	210,7 157	254 200	144	90,2	9,28	
S 12								138 79,2	159 101	202,5 144	245 187	157	98,4	9,39	

Technical Data

Max. Pressure	Rotation (For STD)	Screw stroke Adjustment	Chamber φ (mm)	Air Volume (L)		Moving Time (Sec.) (A)	
				Opening	Closing	Opening	Closing
8 bar	0° - 90°	For 1° adj. need 1/5 Turn	115	1,19	1,8	D 0,70 S 0,90	D 0,80 S 1,10

Operating Temperature Range

ST (standard)	Operating Temperature (°C) (B)	
	HT (high temperature)	LLT (Extreme low temperature)
-40 to +80	-15 to +150	-55 to +80

A) - The above indicated moving time of the actuator is obtained in the following test conditions: (1) Room Temperature, (2) Actuator Stroke 90°, (3) Solenoid Valve with Orifice of 4 mm and a flow capacity Qn 400 L/min., (4) Inside pipe diameter 8 mm, (5) Medium clean air, (6) Air supply pressure 5,5 bar (79,75 Psi), (7) Actuator without external resistance load. **Caution: obviously on the field applications when one or more of the above parameters are different, the moving time will be different.**

B) - Every temperature range option requires proper components and lubricant. See technical data-sheet N° T.D.S. U00501E.

Operating Medium:

The operating medium must be free of dust and oil. The maximum particle size must not exceed 30µ (ISO 8573 Part1, Class5). In order to prevent water condensation and/or solidification (ice when actuator works below 0°C), the operating medium must have a dew point equal to -20°C or at least 10°C below the ambient temperature (ISO 8573 Part1, Class3).

This data sheet is property of AIR TORQUE S.p.A. and all rights of use and reproduction are reserved. Due to continuous development product data is subject to change without prior notice.