



**INDUSTRIAL AIR-OPERATED PUMPS FOR GREASE AND VISCOUS MATERIALS Mod. 1270 FLANGED**  
**COMPRESSION RATIO R=70:1**      **DELIVERY = 6000 g/min**

**Art. 011-1270-050**


Air-operated industrial pump for grease R=70:1  
 Mod. 1270 flanged double effect  
 For frame lifter-press and cisterns (shank length 500 mm)  
 Polyurethane seals  
 For high viscosity grease and oil

**Art. 011-1270-074**

Air-operated industrial pump for grease R=70:1  
 Mod. 1270 flanged double effect  
 For drums of 50-60 kg (shank length 740 mm)  
 Polyurethane seals  
 For high viscosity grease and oil


**Art. 011-1270-094**

Air-operated industrial pump for grease R=70:1  
 Mod. 1270 flanged double effect  
 For drums of 180-220 kg (shank length 940 mm)  
 Polyurethane seals  
 For high viscosity grease and oil

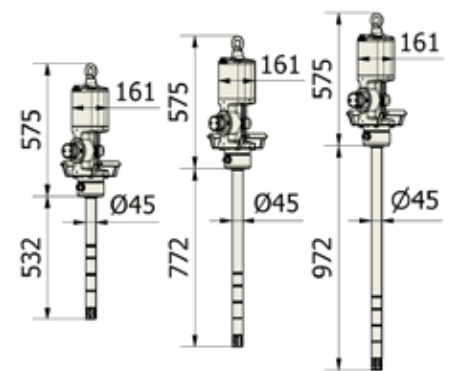

011-1270-050	22,900	0,045	1	
011-1270-074	28,500	0,060	1	
011-1270-094	30,200	0,070	1	

Technical data		011-1270-050	011-1270-074	011-1270-094
Compression ratio		70:1	70:1	70:1
Max supply pressure	bar	8	8	8
Air consumption 8 bar	m³/min	2,90	2,90	2,90
Air inlet connection	BSP	F 1/2" G	F 1/2" G	F 1/2" G
Grease outlet connection	BSP	F 1/2" G	F 1/2" G	F 1/2" G
Grease delivery capacity 6 bar g/min		6000	6000	6000
Noise	dB	80	80	80
Shank diameter	mm	45	45	45
Shank length	mm	500	740	940
For drums with capacity of	kg	CISTERN	50-60	180-220

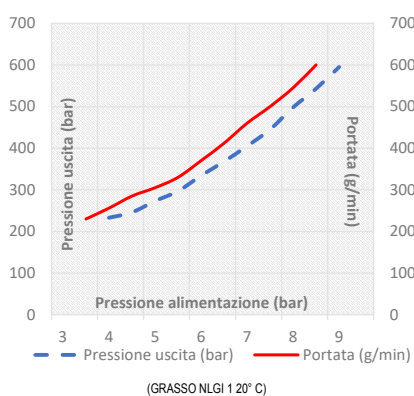

Suitable for high pressure transfer of high viscosity grease (maximum NLGI 3) over short and long distances. The double effect grants the supply of a constant and continuous flow. They are suitable for central distribution plants with multiple distribution points. The operating pressure of the pumps may vary between a minimum of 3 bar and a maximum of 8 bar. To optimize the efficiency and the life in time of our air operated pumps Meclube recommends to use filtered and lubricated air.