

Productsheet

CHAIN HOIST

MKO - MKT

500 KG - 1.000 KG



MITARI[®]
HIJSTECHNIEK BV

Chain Hoist | MKO - MKT 500 - 1.000 Kg



ALL STEEL CONSTRUCTION

- Impact resistant covers that provide durability and protection

POWDER COATING

- This process provides a long lasting finish in hostile environments.

POWDER COATING

- This enhances performance, safety, and reliability.


UNIQUE CURLING DESIGN

- This enhances performance, safety, and reliability.

THRUST BEARING

- Allows easy rotation of load while suspended & prevents load chain twisting.

- Forged alloy steel hooks cast steel safety latches
- With or without overload protection
- Stainless steel riveted nameplates

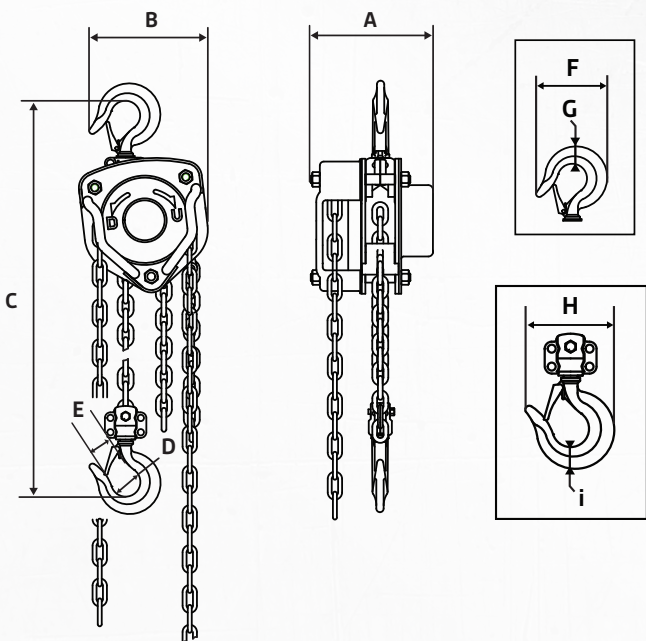

Falls of chain	1
Hoist chain	6x18mm Electro-Galvanized - T-hardened
Control chain	5x25m Electro-Galvanized
Norm hoist	NEN-EN-ISO 12100-1/2, NEN-EN 818-7, NEN 2138
Norm hoist chain	ISO 3077 EN 818-7
HS code	8425190000

Difference between MKO and MKT

The overload protection on MKO hoists prevents overloading. This saves you repair costs immediately, the hoist has a longer service life and you work more safely.



WLL kg	Chain mtr	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Lifting height m	Weight kg
500	6 x 18	137.5	137	270	35	28	69	17	68	18	3	5
1.000	6 x 18	146.5	155	317	35.5	28	82	25	82	24	3	7

MKO 560.005 - 560.010 - MKT 710.005 - 710.010

Copyright © 2020 Mitari

