


DIMENSIONS

4 Dimensions

4.1 Clamps with horizontal arm position (T-shape)

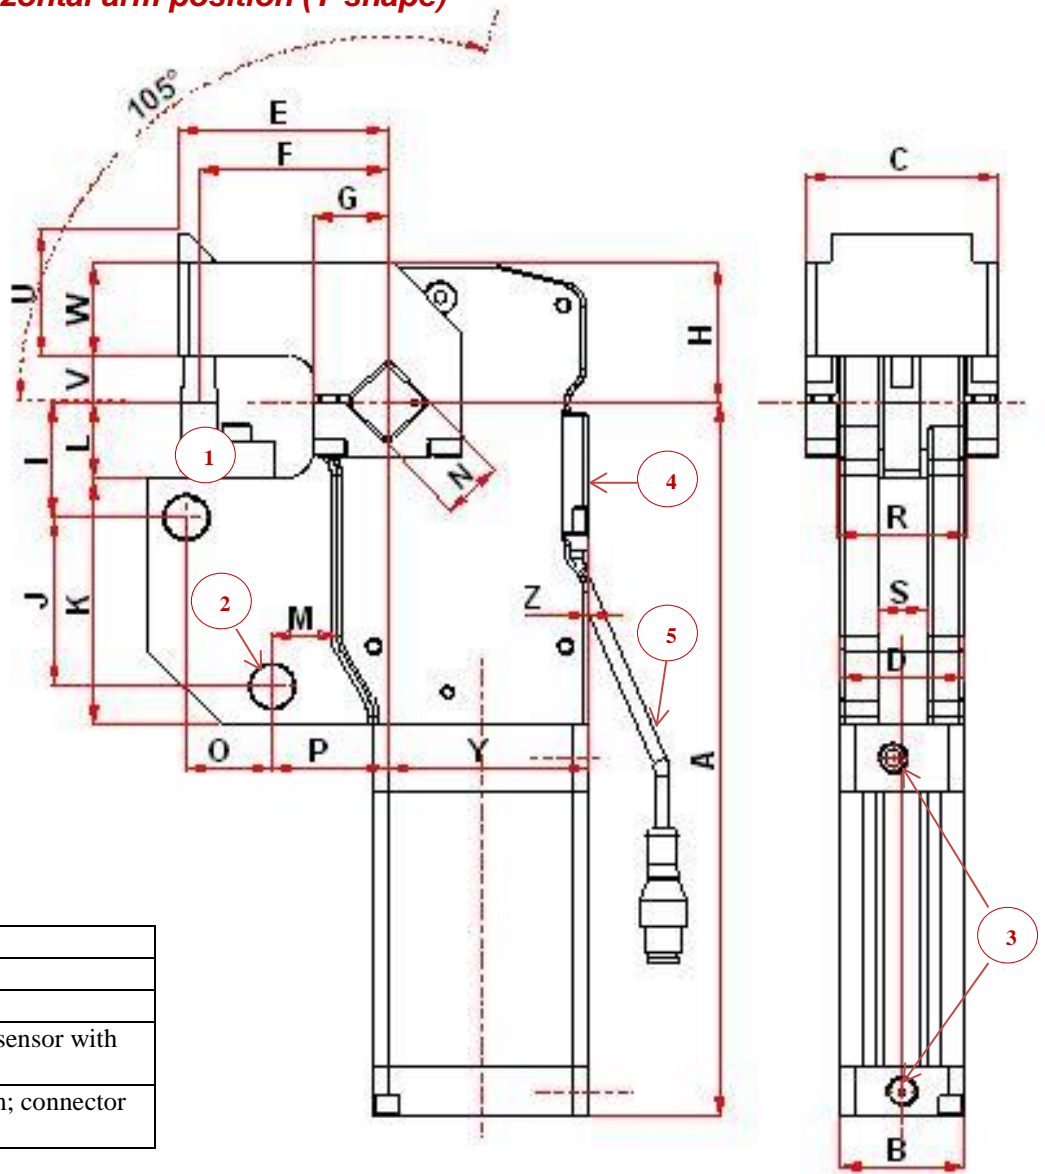


1	Removable stopper
2	2 bores Ø14H7
3	2x2 port G 1/8H
4	Removable inductive sensor with leds
5	Cable length = 200mm; connector 1xM12

Size	Weight*	A	B	C	D	E	F	G	H	I	J	K	L
040 :	1,5kg	195,0	30,0	44,0	25,0	65,0	60,	19,0	38,5	27,5	±0,01	50,0	15,0
110 :	3,1kg	223,5	40,0	62,0	40,0	68,0	61,0	24,0	45,0	37,5	55,0	80,0	25,0
110-200 :	3,3kg	233,5	40,0	62,0	40,0	68,0	61,0	24,0	45,0	37,5	55,0	80,0	25,0
200 :	5,5kg	263,0	51,0	85,0	51,0	82,0	74,0	30,0	52,0	37,5	55,0	80,0	25,0
Size	M**	N	O	P	Q	R	S	U	V	W	X	Y	Z
040 :	14,5	15,0	±0,01	27,5	66,5	28,0	12,0	25,0	8,0	25,0	63,0	52,0	7,0
110 :	19,0	20,0	28,0	37,5	78,0	42,0	16,0	40,0	15,0	30,0	70,0	65,5	0,0
110-200 :	19,0	20,0	28,0	37,5	78,0	42,0	16,0	40,0	15,0	30,0	94,0	77,5	12,3
200 :	18,4	25,0	28,0	37,5	78,0	55,0	16,0	45,0	15,0	30,0	95,0	78,0	10,9

* Weight with wishbone arm ** dimension at the bending radius

DIMENSIONS

4.2 Clamps with vertical arm position

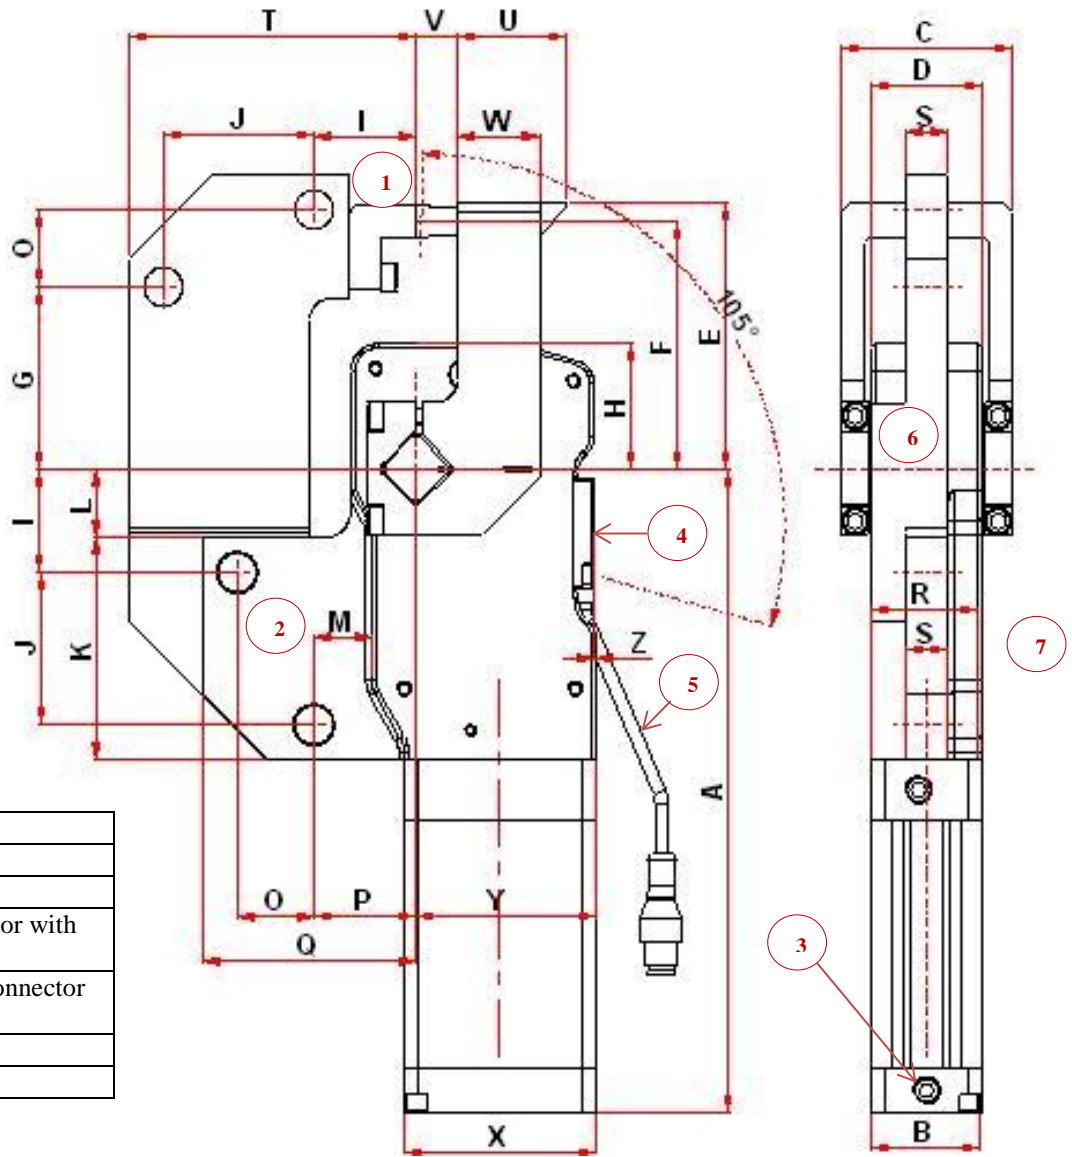

1	Removable stopper
2	2 bores Ø14H7
3	2x2 port G 1/8H
4	Removable inductive sensor with leds
5	Cable length = 200mm; connector 1xM12
6	Right adapting plate
7	Left adapting plate

Type	Weight *	A	B	C	D	E	F	G	H	I	J ±0,01	K	L
040 :	1,5kg	195,0	30,0	44,0	25,0	65,0	60,0	19,0	38,5	27,5	25,0	50,0	15,0
110 :	3,1kg	223,5	40,0	62,0	40,0	68,0	61,0	24,0	45,0	37,5	55,0	80,0	25,0
110-200 :	3,3kg	233,5	40,0	62,0	40,0	68,0	61,0	24,0	45,0	37,5	55,0	80,0	25,0
200 :	5,5kg	263,0	51,0	85,0	51,0	82,0	74,0	30,0	52,0	37,5	55,0	80,0	25,0

Type	M**	N	O ±0,01	P	Q	R	S	T	U	V	W	X	Y	Z
040 :	14,5	15,0	25,0	27,5	66,5	28,0	12,0	65,0	25,0	8,0	25,0	63,0	52,0	7,0
110 :	19,0	20,0	28,0	37,5	78,0	42,0	16,0	105,0	40,0	15,0	30,0	70,0	65,5	0,0
110-200 :	19,0	20,0	28,0	37,5	78,0	42,0	16,0	105,0	40,0	15,0	30,0	94,0	77,5	12,3
200 :	18,4	25,0	28,0	37,5	78,0	55,0	16,0	105,0	45,0	15,0	30,0	95,0	78,0	10,9

* Weight with wishbone arm and adapting plate / ** dimension at the bending radius