



DRIVE DESIGN
AND TECHNICAL MANUAL

**INDUSTRIAL VARIABLE SPEED
MOULDED COGGED RAW BELTS**

**DRIVE BELT
TECHNOLOGY .**

SECTION 1.1.7 | FRICTION V-BELTS | RUBBER BELT

IDIN 7719 - ISO R 1604 / IP 25 RMA-MPTA

INDUSTRIAL VARIABLE SPEED MOULDED COGGED RAW BELTS W16, W20, W25, W31.5, W40, W50, W63, W80, W100

FEATURES

Our Variable Speed Belt can cover 3 main family of applications:

Industrial variable speed belts (W16 to W100 sections, from 24 to 30 degrees...)	600 - 2000
Agriculture variable speed belts (HM, HL,...)	600 - 5600
Motor CVT (scooter, snow motor, ATV, UTC, small cars...)	800 - 2000

Length Range capacity in mm :



STRUCTURE DETAILS

Insulation Filler

The back rubber can be fabric and / or with top cog to ensure maximum flexibility.

Tensile cord

The cord is based on Aramid for low elongation and high power rate transmission.

Rubber base



Based on high resistance EPDM loaded with Aramid Fiber, it can resist up to 130C degrees temperature for high load and long load.

Fabric

The inside rubber is covered with fabric to deliver maximum tenacity and belt longevity, strong tensile strength.

Cogged


The cogged can be either circular cog or square cogged:

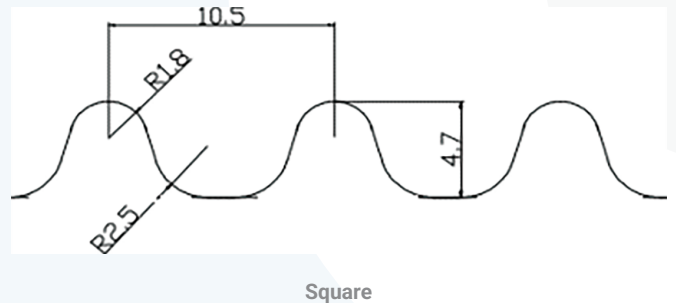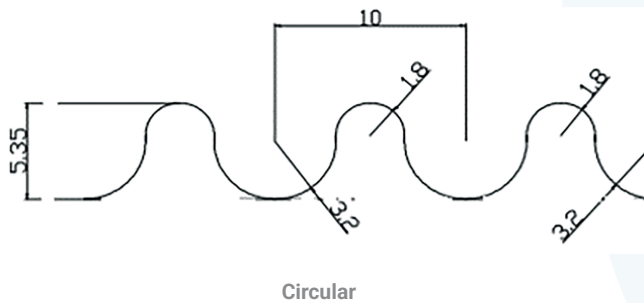

Compared with other CVT belt, our CMW PT variable speed belt features:

- High power transmission
- Easy maintenance
- No lubrication and cooling

Dimensions

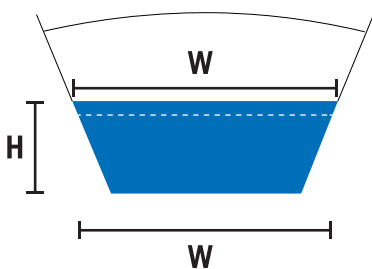

ISO 1604	W16	W20	W25	W31.5	W40	W50	W63	W80	W100
Section WxH (mm)	17x6	21x7	26x8	33x10	42x13	52x16	65x20	83x26	104x32
Datum Width (mm)	16	20	25	31.5	40	50	63	80	100
Max belt speed (m/s)	30	30	30	30	30	30	30	30	30
Min. Length (min)	500	560	710	900	1120	1400	1800	2240	2800
Max. Length (mm)	1000	1250	1600	2000	2500	3150	4000	5000	6300
Angle °	28	28	28	28	28	28	28	28	28

La : outside Length Li: Inside Length

1.1.7 INDUSTRIAL VARIABLE SPEED MOULDED COGGED RAW BELTS

Applications



Agriculture



Wood

Marking

CMW

W40 1600Ld


batch code/worker code + position in sleeve

Product Codification

Example

PP-W25-840-EPDM-K means	PP High Performance line	W25 Section W25 / 26x8mm	840 840mm in Ld	EPDM low temperature: -30°C high temperature: +140°C	K Aramid cord
PP-47x13x900-EPDM-K means	PP High Performance line	47x13 Section 47x13mm	900 900mm in Li	EPDM low temperature: -30°C high temperature: +140°C	K Aramid cord

1.1.7 INDUSTRIAL VARIABLE SPEED MOULDED COGGED RAW BELTS

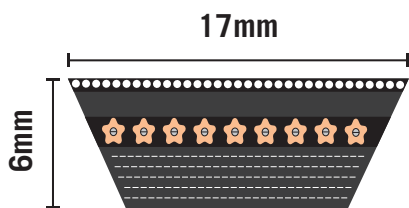

W16

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W13 x 6 x 468-EPDM-KEVLAR	3666445136741	468	506
PP-W13 x 6 x 475-EPDM-KEVLAR	3666445136734	475	513
PP-W13 x 6 x 500-EPDM-KEVLAR	3666445136727	500	538

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W17 x 6 x 476-EPDM-KEVLAR	3666445136710	476	514
PP-W17 x 6 x 536-EPDM-KEVLAR	3666445136703	536	574
PP-W17 x 6 x 570-EPDM-KEVLAR	3666445136697	570	608
PP-W17 x 6 x 606-EPDM-KEVLAR	3666445136680	606	644
PP-W17 x 6 x 630-EPDM-KEVLAR	3666445136673	630	668
PP-W17 x 6 x 776-EPDM-KEVLAR	3666445136666	776	814
PP-W17 x 6 x 876-EPDM-KEVLAR	3666445136659	876	914
PP-W17 x 6 x 976-EPDM-KEVLAR	3666445136642	976	1014

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W21 x 7 x 530-EPDM-KEVLAR	3666445136635	530	574
PP-W21 x 7 x 600-EPDM-KEVLAR	3666445136628	600	644
PP-W21 x 7 x 610-EPDM-KEVLAR	3666445136611	610	654
PP-W21 x 7 x 675-EPDM-KEVLAR	3666445136604	675	719
PP-W21 x 7 x 770-EPDM-KEVLAR	3666445136598	770	814
PP-W21 x 7 x 870-EPDM-KEVLAR	3666445136581	870	914
PP-W21 x 7 x 900-EPDM-KEVLAR	3666445136574	900	944
PP-W21 x 7 x 970-EPDM-KEVLAR	3666445136567	970	1014
PP-W21 x 7 x 1090-EPDM-KEVLAR	3666445136550	1090	1134


Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W22 x 7 x 535-EPDM-KEVLAR	3666445136543	535	579
PP-W22 x 8 x 485-EPDM-KEVLAR	3666445136536	485	535
PP-W22 x 8 x 525-EPDM-KEVLAR	3666445136529	525	575
PP-W22 x 8 x 550-EPDM-KEVLAR	3666445136512	550	600
PP-W22 x 8 x 575-EPDM-KEVLAR	3666445136505	575	625
PP-W22 x 8 x 600-EPDM-KEVLAR	3666445136499	600	650
PP-W22 x 8 x 610-EPDM-KEVLAR	3666445136482	610	660
PP-W22 x 8 x 650-EPDM-KEVLAR	3666445136475	650	700
PP-W22 x 8 x 675-EPDM-KEVLAR	3666445136468	675	725
PP-W22 x 8 x 700-EPDM-KEVLAR	3666445136451	700	750
PP-W22 x 8 x 750-EPDM-KEVLAR	3666445136444	750	800
PP-W22 x 8 x 800-EPDM-KEVLAR	3666445136437	800	850
PP-W22 x 8 x 850-EPDM-KEVLAR	3666445136420	850	900
PP-W22 x 8 x 900-EPDM-KEVLAR	3666445136413	900	950
PP-W22 x 8 x 950-EPDM-KEVLAR	3666445136406	950	1000
PP-W22 x 8 x 1000-EPDM-KEVLAR	3666445136390	1000	1050
PP-W22 x 8 x 1060-EPDM-KEVLAR	3666445136383	1060	1110
PP-W22 x 8 x 1120-EPDM-KEVLAR	3666445136376	1120	1170
PP-W22 x 8 x 1180-EPDM-KEVLAR	3666445136369	1180	1230
PP-W22 x 8 x 1250-EPDM-KEVLAR	3666445136352	1250	1300
PP-W22 x 8 x 1320-EPDM-KEVLAR	3666445136345	1320	1370
PP-W22 x 8 x 1400-EPDM-KEVLAR	3666445136338	1400	1450
PP-W22 x 8 x 1500-EPDM-KEVLAR	3666445136321	1500	1550
PP-W22 x 8 x 1800-EPDM-KEVLAR	3666445136314	1800	1850

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W23 x 10 x 760-EPDM-KEVLAR	3666445136307	760	823
PP-W23 x 10 x 813-EPDM-KEVLAR	3666445136291	813	876
PP-W23 x 10 x 833-EPDM-KEVLAR	3666445136284	833	896
PP-W23 x 10 x 865-EPDM-KEVLAR	3666445136277	865	928
PP-W23 x 10 x 935-EPDM-KEVLAR	3666445136260	935	998
PP-W23 x 10 x 1010-EPDM-KEVLAR	3666445136253	1010	1073


1.1.7 INDUSTRIAL VARIABLE SPEED MOULDED COGGED RAW BELTS

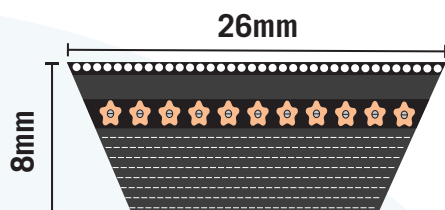

W25

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W26 x 8 x 525-EPDM-KEVLAR	3666445136246	525	575
PP-W26 x 8 x 630-EPDM-KEVLAR	3666445136239	630	680
PP-W26 x 8 x 655-EPDM-KEVLAR	3666445136222	655	705
PP-W26 x 8 x 672-EPDM-KEVLAR	3666445136215	672	722
PP-W26 x 8 x 680-EPDM-KEVLAR	3666445136208	680	730
PP-W26 x 8 x 710-EPDM-KEVLAR	3666445136192	710	760
PP-W26 x 8 x 750-EPDM-KEVLAR	3666445136185	750	800
PP-W26 x 8 x 762-EPDM-KEVLAR	3666445136178	762	812
PP-W26 x 8 x 800-EPDM-KEVLAR	3666445136161	800	850
PP-W26 x 8 x 850-EPDM-KEVLAR	3666445136154	850	900
PP-W26 x 8 x 862-EPDM-KEVLAR	3666445136147	862	912
PP-W26 x 8 x 900-EPDM-KEVLAR	3666445136130	900	950
PP-W26 x 8 x 962-EPDM-KEVLAR	3666445136123	962	1012
PP-W26 x 8 x 1000-EPDM-KEVLAR	3666445136116	1000	1050
PP-W26 x 8 x 1082-EPDM-KEVLAR	3666445136109	1082	1132
PP-W26 x 8 x 1212-EPDM-KEVLAR	3666445136093	1212	1262
PP-W26 x 8 x 1362-EPDM-KEVLAR	3666445136086	1362	1412
PP-W26 x 8 x 1562-EPDM-KEVLAR	3666445136079	1562	1612

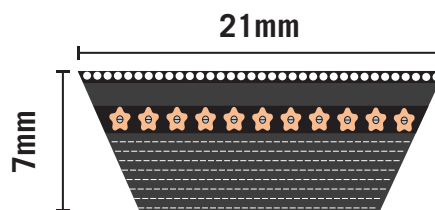

W20


Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W29,5 x 7 x 797-EPDM-KEVLAR	3666445135867	797	841
PP-W29,5 x 7 x 817-EPDM-KEVLAR	3666445135850	817	861
PP-W29,5 x 7 x 880-EPDM-KEVLAR	3666445135843	880	924
PP-W29,5 x 7 x 900-EPDM-KEVLAR	3666445135836	900	944
PP-W29,5 x 7 x 1057-EPDM-KEVLAR	3666445135829	1057	1101

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W28 x 8 x 525-EPDM-KEVLAR	3666445136062	525	575
PP-W28 x 8 x 700-EPDM-KEVLAR	3666445136055	700	750
PP-W28 x 8 x 750-EPDM-KEVLAR	3666445136048	750	800
PP-W28 x 8 x 800-EPDM-KEVLAR	3666445136031	800	850
PP-W28 x 8 x 850-EPDM-KEVLAR	3666445136024	850	900
PP-W28 x 8 x 900-EPDM-KEVLAR	3666445136017	900	950
PP-W28 x 8 x 950-EPDM-KEVLAR	3666445136000	950	1000
PP-W28 x 8 x 1000-EPDM-KEVLAR	3666445135997	1000	1050
PP-W28 x 8 x 1060-EPDM-KEVLAR	3666445135980	1060	1110
PP-W28 x 8 x 1120-EPDM-KEVLAR	3666445135973	1120	1170
PP-W28 x 8 x 1180-EPDM-KEVLAR	3666445135966	1180	1230
PP-W28 x 8 x 1250-EPDM-KEVLAR	3666445135959	1250	1300
PP-W28 x 8 x 1320-EPDM-KEVLAR	3666445135942	1320	1370
PP-W28 x 8 x 1400-EPDM-KEVLAR	3666445135935	1400	1450
PP-W28 x 8 x 1500-EPDM-KEVLAR	3666445135928	1500	1550
PP-W28 x 8 x 1600-EPDM-KEVLAR	3666445135911	1600	1650
PP-W28 x 8 x 1700-EPDM-KEVLAR	3666445135904	1700	1750
PP-W28 x 8 x 1800-EPDM-KEVLAR	3666445135898	1800	1850
PP-W28 x 8 x 2000-EPDM-KEVLAR	3666445135881	2000	2050
PP-W28 x 8 x 2240-EPDM-KEVLAR	3666445135874	2240	2290

1.1.7 INDUSTRIAL VARIABLE SPEED MOULDED COGGED RAW BELTS

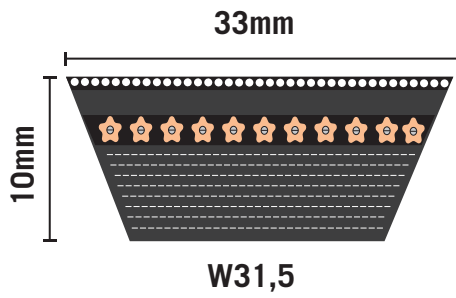

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W30 x 10 x 700-EPDM-KEVLAR	3666445135812	700	763
PP-W30 x 10 x 750-EPDM-KEVLAR	3666445135805	750	813
PP-W30 x 10 x 775-EPDM-KEVLAR	3666445135799	775	838
PP-W30 x 10 x 800-EPDM-KEVLAR	3666445135782	800	863
PP-W30 x 10 x 850-EPDM-KEVLAR	3666445135775	850	913
PP-W30 x 10 x 875-EPDM-KEVLAR	3666445135768	875	938
PP-W30 x 10 x 900-EPDM-KEVLAR	3666445135751	900	963
PP-W30 x 10 x 950-EPDM-KEVLAR	3666445135744	950	1013
PP-W30 x 10 x 1000-EPDM-KEVLAR	3666445135737	1000	1063
PP-W30 x 10 x 1035-EPDM-KEVLAR	3666445135720	1035	1098
PP-W30 x 10 x 1073-EPDM-KEVLAR	3666445135713	1073	1136
PP-W30 x 10 x 1120-EPDM-KEVLAR	3666445135706	1120	1183
PP-W30 x 10 x 1185-EPDM-KEVLAR	3666445135690	1185	1248
PP-W30 x 10 x 1340-EPDM-KEVLAR	3666445135683	1340	1403
PP-W30 x 10 x 1600-EPDM-KEVLAR	3666445135676	1600	1663

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W32 x 10 x 800-EPDM-KEVLAR	3666445135669	800	863
PP-W32 x 10 x 850-EPDM-KEVLAR	3666445135652	850	913
PP-W32 x 10 x 900-EPDM-KEVLAR	3666445135645	900	963
PP-W32 x 10 x 950-EPDM-KEVLAR	3666445135638	950	1013
PP-W32 x 10 x 1120-EPDM-KEVLAR	3666445135621	1120	1183
PP-W32 x 10 x 1600-EPDM-KEVLAR	3666445135614	1600	1663
PP-W32 x 10 x 1650-EPDM-KEVLAR	3666445135607	1650	1713
PP-W32 x 10 x 1700-EPDM-KEVLAR	3666445135591	1700	1763
PP-W32 x 10 x 1750-EPDM-KEVLAR	3666445135584	1750	1813

1.1.7 INDUSTRIAL VARIABLE SPEED MOULDED COGGED RAW BELTS

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W33 x 10 x 750-EPDM-KEVLAR	3666445135577	750	813
PP-W33 x 10 x 790-EPDM-KEVLAR	3666445135560	790	853
PP-W33 x 10 x 820-EPDM-KEVLAR	3666445135553	820	883
PP-W33 x 10 x 850-EPDM-KEVLAR	3666445135546	850	913
PP-W33 x 10 x 900-EPDM-KEVLAR	3666445135539	900	963
PP-W33 x 10 x 950-EPDM-KEVLAR	3666445135522	950	1013
PP-W33 x 10 x 1000-EPDM-KEVLAR	3666445135515	1000	1063
PP-W33 x 10 x 1073-EPDM-KEVLAR	3666445135508	1073	1136
PP-W33 x 10 x 1120-EPDM-KEVLAR	3666445135492	1120	1183
PP-W33 x 10 x 1180-EPDM-KEVLAR	3666445135485	1180	1243
PP-W33 x 10 x 1200-EPDM-KEVLAR	3666445135478	1200	1263
PP-W33 x 10 x 1250-EPDM-KEVLAR	3666445135461	1250	1313
PP-W33 x 10 x 1353-EPDM-KEVLAR	3666445135454	1353	1416
PP-W33 x 10 x 1553-EPDM-KEVLAR	3666445135447	1553	1616
PP-W33 x 10 x 1750-EPDM-KEVLAR	3666445135430	1750	1813
PP-W33 x 10 x 1953-EPDM-KEVLAR	3666445135423	1953	2016


Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W35,5 x 16 x 1370-EPDM-KEVLAR	3666445135416	1370	1433

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W37 x 10 x 800-EPDM-KEVLAR	3666445135409	800	863
PP-W37 x 10 x 850-EPDM-KEVLAR	3666445135393	850	913
PP-W37 x 10 x 900-EPDM-KEVLAR	3666445135386	900	963
PP-W37 x 10 x 950-EPDM-KEVLAR	3666445135379	950	1013
PP-W37 x 10 x 1000-EPDM-KEVLAR	3666445135362	1000	1063
PP-W37 x 10 x 1060-EPDM-KEVLAR	3666445135355	1060	1123
PP-W37 x 10 x 1120-EPDM-KEVLAR	3666445135348	1120	1183
PP-W37 x 10 x 1180-EPDM-KEVLAR	3666445135331	1180	1243
PP-W37 x 10 x 1250-EPDM-KEVLAR	3666445135324	1250	1313
PP-W37 x 10 x 1320-EPDM-KEVLAR	3666445135317	1320	1383
PP-W37 x 10 x 1400-EPDM-KEVLAR	3666445135300	1400	1463
PP-W37 x 10 x 1500-EPDM-KEVLAR	3666445135294	1500	1563
PP-W37 x 10 x 1600-EPDM-KEVLAR	3666445135287	1600	1663
PP-W37 x 10 x 1700-EPDM-KEVLAR	3666445135270	1700	1763
PP-W37 x 10 x 1800-EPDM-KEVLAR	3666445135263	1800	1863
PP-W37 x 10 x 2000-EPDM-KEVLAR	3666445135256	2000	2063
PP-W37 x 10 x 2240-EPDM-KEVLAR	3666445135249	2240	2303

1.1.7 INDUSTRIAL VARIABLE SPEED MOULDED COGGED RAW BELTS

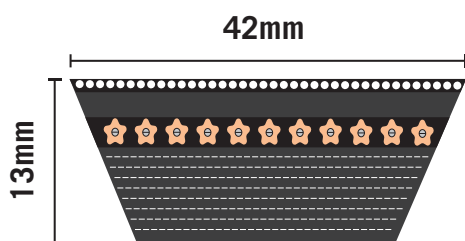

W40

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W42 x 13 x 925-EPDM-KEVLAR	3666445135232	925	1007
PP-W42 x 13 x 970-EPDM-KEVLAR	3666445135225	970	1052
PP-W42 x 13 x 1000-EPDM-KEVLAR	3666445135218	1000	1082
PP-W42 x 13 x 1040-EPDM-KEVLAR	3666445135201	1040	1122
PP-W42 x 13 x 1060-EPDM-KEVLAR	3666445135195	1060	1142
PP-W42 x 13 x 1120-EPDM-KEVLAR	3666445135188	1120	1202
PP-W42 x 13 x 1180-EPDM-KEVLAR	3666445135171	1180	1262
PP-W42 x 13 x 1250-EPDM-KEVLAR	3666445135164	1250	1332
PP-W42 x 13 x 1340-EPDM-KEVLAR	3666445135157	1340	1422
PP-W42 x 13 x 1440-EPDM-KEVLAR	3666445135140	1440	1522
PP-W42 x 13 x 1540-EPDM-KEVLAR	3666445135133	1540	1622
PP-W42 x 13 x 1600-EPDM-KEVLAR	3666445135126	1600	1682
PP-W42 x 13 x 1740-EPDM-KEVLAR	3666445135119	1740	1822
PP-W42 x 13 x 1940-EPDM-KEVLAR	3666445135102	1940	2022
PP-W42 x 13 x 2180-EPDM-KEVLAR	3666445135096	2180	2262


Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W47 x 13 x 900-EPDM-KEVLAR	3666445135089	900	982
PP-W47 x 13 x 950-EPDM-KEVLAR	3666445135072	950	1032
PP-W47 x 13 x 1000-EPDM-KEVLAR	3666445135065	1000	1082
PP-W47 x 13 x 1060-EPDM-KEVLAR	3666445135058	1060	1142
PP-W47 x 13 x 1120-EPDM-KEVLAR	3666445135041	1120	1202
PP-W47 x 13 x 1180-EPDM-KEVLAR	3666445135034	1180	1262
PP-W47 x 13 x 1250-EPDM-KEVLAR	3666445135027	1250	1332
PP-W47 x 13 x 1320-EPDM-KEVLAR	3666445135010	1320	1402
PP-W47 x 13 x 1400-EPDM-KEVLAR	3666445135003	1400	1482
PP-W47 x 13 x 1500-EPDM-KEVLAR	3666445134990	1500	1582
PP-W47 x 13 x 1600-EPDM-KEVLAR	3666445134983	1600	1682
PP-W47 x 13 x 1700-EPDM-KEVLAR	3666445134976	1700	1782
PP-W47 x 13 x 1800-EPDM-KEVLAR	3666445134969	1800	1882
PP-W47 x 13 x 2000-EPDM-KEVLAR	3666445134952	2000	2082
PP-W47 x 13 x 2240-EPDM-KEVLAR	3666445134945	2240	2322
PP-W47 x 13 x 2500-EPDM-KEVLAR	3666445134938	2500	2582

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W49 x 18 x 1700-EPDM-KEVLAR	3666445134921	1700	1813


1.1.7 INDUSTRIAL VARIABLE SPEED MOULDED COGGED RAW BELTS

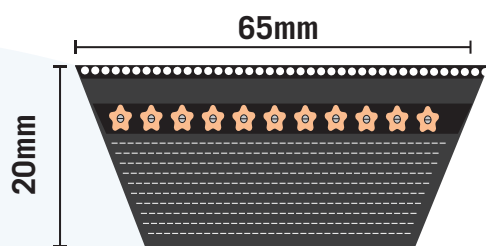

W63

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W52 x 16 x 1180-EPDM-KEVLAR	3666445134914	1180	1281
PP-W52 x 16 x 1250-EPDM-KEVLAR	3666445134907	1250	1351
PP-W52 x 16 x 1325-EPDM-KEVLAR	3666445134891	1325	1426
PP-W52 x 16 x 1400-EPDM-KEVLAR	3666445134884	1400	1501
PP-W52 x 16 x 1525-EPDM-KEVLAR	3666445134877	1525	1626
PP-W52 x 16 x 1600-EPDM-KEVLAR	3666445134860	1600	1701
PP-W52 x 16 x 1725-EPDM-KEVLAR	3666445134853	1725	1826
PP-W52 x 16 x 1800-EPDM-KEVLAR	3666445134846	1800	1901
PP-W52 x 16 x 1925-EPDM-KEVLAR	3666445134839	1925	2026
PP-W52 x 16 x 2425-EPDM-KEVLAR	3666445134822	2425	2526
PP-W52 x 16 x 2725-EPDM-KEVLAR	3666445134815	2725	2800
PP-W52 x 20 x 1804-EPDM-KEVLAR	3666445134808	1804	1930

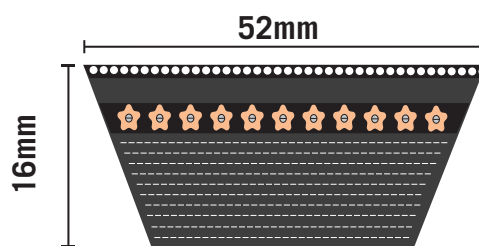

W50

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W55 x 16 x 1250-EPDM-KEVLAR	3666445134792	1250	1351
PP-W55 x 16 x 1400-EPDM-KEVLAR	3666445134785	1400	1501
PP-W55 x 16 x 1500-EPDM-KEVLAR	3666445134778	1500	1601
PP-W55 x 16 x 1700-EPDM-KEVLAR	3666445134761	1700	1801
PP-W55 x 16 x 1750-EPDM-KEVLAR	3666445134754	1750	1851
PP-W55 x 16 x 1800-EPDM-KEVLAR	3666445134747	1800	1901

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W67 x 15 x 1421-EPDM-KEVLAR	3666445134730	1421	1515

Standard Belt Range

CMW Product code	GTIN (EAN) code	Inside Length Li (mm)	Outside Length La (mm)
PP-W70 x 16 x 2240-EPDM-KEVLAR	3666445134723	2240	2341
PP-W70 x 18 x 1445-EPDM-KEVLAR	3666445134716	1445	1558



Your expert in DRIVE BELT TECHNOLOGY

CMW Power Transmission designs, manufactures and distributes rubber and polyurethane drive belts in wide variety of industrial and agricultural applications to become your favourite power transmission brand.

CMW Power Transmission SAS

21 Avenue de l'Industrie, 69960 Corbas, France
+33 4 28 29 29 82 | **email** info@cmwpt.com