




INSTALLATION DIMENSIONS - CARTRIDGE SEALS


SRC - BIG BORE DIMENSIONS

Size Code	Shaft Size (A)	Stuffing Box Bore (B)		Internal Length (C)	External Length (D)	Min. Depth (E)	Gland Bolt Circle (F)			
		Min.	Max.				3/8 Stud Min.	Gland OD Max.BC	1/2 Stud Min.	Slot Size
22	1-3/8	2.875	3.125	.81	1.38	.87	4	4-3/4 x 3-3/4 Elliptical Gland		7/16
28	1-3/4	3.500	3.750	.95	1.39	1.01	4-27/32	6-1/2	4-31/32	5/8
30	1-7/8	3.625	3.875	.89	1.45	.95	4-5/8	6	4-3/4	5/8
34	2-1/8	3.875	4.125	.95	1.39	1.01	5-1/4	7	5-3/8	3/4
40	2-1/2	4.500	4.750	.70	1.64	.76	6	8	6-1/8	3/4
42	2-5/8	4.625	4.750	.92	2.15	.98	-	7	6	5/8 Holes

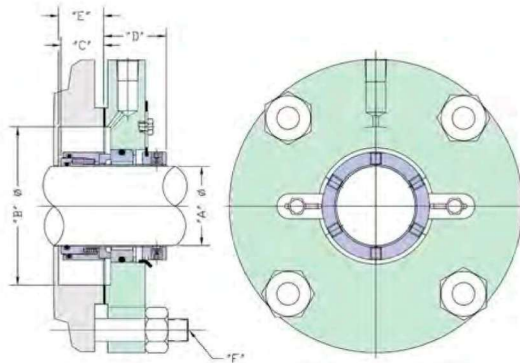

DTP - BIG BORE DIMENSIONS

Size Code	Shaft Size (A)	Stuffing Box Bore (B)		Internal Length (C)	External Length (D)	Min. Depth (E)	Gland Bolt Circle (F)			
		Min.	Max.				3/8 Stud Min.	Gland OD Max.BC	1/2 Stud Min.	Slot Size
22	1-3/8	2.875	3.000	1.14	2.05	1.20	4	4-3/4 x 3-3/4 Elliptical Gland		7/16
28	1-3/4	3.500	3.625	1.15	2.16	1.21	4-5/8	6	4-3/4	5/8
30	1-7/8	3.625	3.750	1.15	2.16	1.21	4-11/16	5-1/2	4-13/16	5/8
34	2-1/8	3.875	4.125	1.15	2.16	1.21	5-1/8	7	5-1/4	11/16
40	2-1/2	4.500	4.750	1.15	2.16	1.21	5-3/4	7-1/2	5-7/8	11/16
42	2-5/8	4.625	4.750	1.15	2.16	1.21	5-3/4	7-1/2	5-7/8	11/16

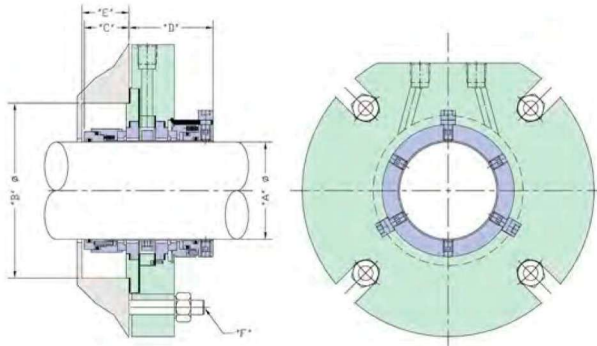

www.sepcosUSA.com

800-633-4770